SICStus Prolog User's Manual

Mats Carlsson et al.

RISE Research Institutes of Sweden AB
PO Box 1263
SE-164 29 Kista, Sweden

Release 4.10.2
October 2026

RISE Research Institutes of Sweden AB
sicstus-request@ri.se https://sicstus.sics.se/

Copyright © 1995-2026 RISE Research Institutes of Sweden AB

RISE Research Institutes of Sweden AB
PO Box 1263
SE-164 29 Kista, Sweden

Permission is granted to make and distribute verbatim copies of this manual provided the copyright notice and this permission notice are preserved on all copies.

Permission is granted to copy and distribute modified versions of this manual under the conditions for verbatim copying, provided that the entire resulting derived work is distributed under the terms of a permission notice identical to this one.

Permission is granted to copy and distribute translations of this manual into another language, under the above conditions for modified versions, except that this permission notice may be stated in a translation approved by SICS.

Table of Contents

Introduction 1

Acknowledgments 3

1 Notational Conventions 5
1.1 Keyboard Characters 5
1.2 Mode Spec 5
1.3 Development and Runtime Systems 5
1.4 Function Prototypes 5
1.5 ISO Compliance 6

2 Glossary 7

3 How to Run Prolog 23
3.1 Getting Started 23
3.2 Reading in Programs 23
3.3 Inserting Clauses at the Terminal 24
3.4 Queries and Directives 24
3.4.1 Queries 25
3.4.2 Directives 27
3.5 Syntax Errors 28
3.6 Undefined Predicates 29
3.7 Program Execution And Interruption 29
3.8 Exiting From The Top Level 30
3.9 Nested Executions—Break 30
3.10 Saving and Restoring Program States 30
3.11 SICStus Prolog IDE 32
3.12 Emacs Interface 34
3.12.1 Installation 35
3.12.1.1 Quick-Start 35
3.12.1.2 Customizing Emacs 35
3.12.1.3 Enabling Emacs Support for SICStus 35
3.12.1.4 Enabling Emacs Support for SICStus Documentation . . 36
3.12.2 Basic Configuration 37
3.12.3 Usage 37
3.12.4 Mode Line 40
3.12.5 Configuration 40
3.12.6 Tips 43
3.12.6.1 Font-locking 43
3.12.6.2 Auto-fill Mode 43
3.12.6.3 Speed 44
3.12.6.4 Changing Colors 44

4 The Prolog Language 47
4.1 Syntax 47
4.1.1 Overview 47
4.1.2 Terms 47
4.1.2.1 Overview 47
4.1.2.2 Integers 47
4.1.2.3 Floating-point Numbers 48
4.1.2.4 Atoms 48
4.1.2.5 Variables 48
4.1.2.6 Foreign Terms 49
4.1.3 Compound Terms 49
4.1.3.1 Lists 50
4.1.3.2 Strings As Lists 50
4.1.4 Character Escaping 51
4.1.5 Operators and their Built-in Predicates 51
4.1.5.1 Overview 51
4.1.5.2 Manipulating and Inspecting Operators 54
4.1.5.3 Syntax Restrictions 54
4.1.5.4 Built-in Operators 55
4.1.6 Commenting 56
4.1.7 Formal Syntax 56
4.1.7.1 Overview 56
4.1.7.2 Notation 57
4.1.7.3 Syntax of Sentences as Terms 57
4.1.7.4 Syntax of Terms as Tokens 59
4.1.7.5 Syntax of Tokens as Character Strings 60
4.1.7.6 Escape Sequences 64
4.1.7.7 Notes 64
4.1.8 Summary of Predicates 65
4.2 Semantics 65
4.2.1 Programs 65
4.2.2 Types of Predicates Supplied with SICStus Prolog 67
4.2.2.1 Hook Predicates 67
4.2.3 Control Structures 68
4.2.3.1 The Cut 68
4.2.3.2 Disjunction 70
4.2.3.3 If-Then-Else 71
4.2.3.4 Negation as Failure 72
4.2.3.5 Do Loops *since release 4.1* 72
4.2.3.6 Other Control Structures 78
4.2.4 Declarative and Procedural Semantics 78
4.2.5 Meta-Calls 81
4.2.6 Exceptions Related to Procedure Calls 81
4.2.7 Occurs Check 82
4.2.8 Summary of Control Predicates 82
4.3 Loading Programs 83
4.3.1 Overview 83
4.3.2 The Load Predicates 84

4.3.3 Redefining Procedures during Program Execution 86
4.3.4 Declarations and Initializations 87
4.3.4.1 Multifile Declarations 87
4.3.4.2 Dynamic Declarations 88
4.3.4.3 Volatile Declarations 88
4.3.4.4 Discontiguous Declarations 88
4.3.4.5 Block Declarations 88
4.3.4.6 Meta-Predicate Declarations 89
4.3.4.7 Module Declarations 89
4.3.4.8 Public Declarations 90
4.3.4.9 Mode Declarations 90
4.3.4.10 is/2 Declarations 90
4.3.4.11 Include Declarations 90
4.3.4.12 Initializations 91
4.3.5 Term and Goal Expansion 91
4.3.6 Conditional Compilation 92
4.3.6.1 Conditional Compilation Examples 94
4.3.7 Predicate List 95
4.4 Saving and Loading the Prolog Database 96
4.4.1 Overview of PO Files 96
4.4.2 Saved States 97
4.4.3 Selective Saving and Loading of PO Files 98
4.4.4 Predicate List 99
4.5 Files and Directories 99
4.5.1 The File Search Path Mechanism 99
4.5.1.1 Defining File Search Paths 100
4.5.1.2 Frequently Used File Specifications 102
4.5.1.3 Predefined File Search Paths 102
4.5.2 Syntactic Rewriting 103
4.5.3 List of Predicates 105
4.6 Input and Output 106
4.6.1 Introduction 106
4.6.2 About Streams 106
4.6.2.1 Programming Note 106
4.6.2.2 Stream Categories 106
4.6.3 Term Input 107
4.6.3.1 Reading Terms: The "Read" Predicates 107
4.6.3.2 Changing the Prompt 108
4.6.4 Term Output 108
4.6.4.1 Writing Terms: the “Write” Predicates 108
4.6.4.2 Common Characteristics 108
4.6.4.3 Distinctions Among the “Write” Predicates 109
4.6.4.4 Displaying Terms 110
4.6.4.5 Using the Portray Hook 110
4.6.4.6 Portraying a Clause 110
4.6.5 Byte and Character Input 111
4.6.5.1 Overview 111
4.6.5.2 Reading Bytes and Characters 111

4.6.5.3 Peeking ... 111
4.6.5.4 Skipping ... 111
4.6.5.5 Finding the End of Line and End of File ... 112
4.6.6 Byte and Character Output ... 112
4.6.6.1 Writing Bytes and Characters ... 112
4.6.6.2 New Line ... 112
4.6.6.3 Formatted Output ... 112
4.6.7 Stream and File Handling ... 113
4.6.7.1 Stream Objects ... 113
4.6.7.2 Exceptions Related to Streams ... 113
4.6.7.3 Suppressing Error Messages ... 114
4.6.7.4 Opening a Stream ... 114
4.6.7.5 Text Stream Encodings ... 115
4.6.7.6 Finding the Current Input Stream ... 116
4.6.7.7 Finding the Current Output Stream ... 117
4.6.7.8 Finding Out About Open Streams ... 117
4.6.7.9 Closing a Stream ... 118
4.6.7.10 Flushing Output ... 118
4.6.8 Reading the State of Opened Streams ... 118
4.6.8.1 Stream Position Information for Terminal I/O ... 119
4.6.9 Random Access to Files ... 119
4.6.10 Summary of Predicates and Functions ... 119
4.7 Arithmetic ... 123
4.7.1 Overview ... 123
4.7.2 Evaluating Arithmetic Expressions ... 123
4.7.3 Exceptions Related to Arithmetic ... 123
4.7.4 Arithmetic Comparison ... 124
4.7.5 Arithmetic Expressions ... 124
4.7.6 Predicate Summary ... 129
4.8 Looking at Terms ... 130
4.8.1 Meta-logical Predicates ... 130
4.8.1.1 Type Checking ... 130
4.8.1.2 Unification ... 130
4.8.2 Analyzing and Constructing Terms ... 131
4.8.3 Analyzing and Constructing Lists ... 132
4.8.4 Converting between Constants and Text ... 132
4.8.5 Atom Operations ... 133
4.8.6 Assigning Names to Variables ... 133
4.8.7 Copying Terms ... 133
4.8.8 Comparing Terms ... 134
4.8.8.1 Introduction ... 134
4.8.8.2 Standard Order of Terms ... 134
4.8.8.3 Sorting Terms ... 135
4.8.9 Mutable Terms ... 135
4.8.10 Summary of Predicates ... 136
4.9 Looking at the Program State ... 139
4.9.1 Overview ... 139
4.9.2 Associating Predicates with their Properties ... 139

4.9.3 Associating Predicates with Files 140
4.9.4 Prolog Flags 140
4.9.5 Load Context 147
4.9.6 Predicate Summary 147
4.10 Memory Use and Garbage Collection 148
4.10.1 Overview 148
4.10.1.1 Reclaiming Space 150
4.10.1.2 Displaying Statistics 150
4.10.2 Garbage Collection and Programming Style 156
4.10.3 Enabling and Disabling the Garbage Collector 158
4.10.4 Monitoring Garbage Collections 158
4.10.5 Interaction of Garbage Collection and Global Stack Expansion 159
4.10.6 Invoking the Garbage Collector Directly 160
4.10.7 Atom Garbage Collection 160
4.10.7.1 The Atom Garbage Collector User Interface 161
4.10.7.2 Protecting Atoms in Foreign Memory 162
4.10.7.3 Permanent Atoms 164
4.10.7.4 Details of Atom Registration 164
4.10.8 Summary of Predicates 165
4.11 Modules 165
4.11.1 Overview 165
4.11.2 Basic Concepts 166
4.11.3 Defining a Module 166
4.11.4 Converting Non-module Files into Module Files 167
4.11.5 Loading a Module 167
4.11.6 Visibility Rules 168
4.11.7 The Source Module 169
4.11.8 The Type-in Module 170
4.11.9 Creating a Module Dynamically 171
4.11.10 Module Prefixes on Clauses 171
4.11.10.1 Current Modules 172
4.11.11 Debugging Code in a Module 172
4.11.12 Name Clashes 172
4.11.13 Obtaining Information about Loaded Modules 173
4.11.13.1 Predicates Defined in a Module 173
4.11.13.2 Predicates Visible in a Module 174
4.11.14 Importing Dynamic Predicates 174
4.11.15 Module Name Expansion 175
4.11.16 The `meta_predicate` Declaration 175
4.11.17 Semantics of Module Name Expansion 177
4.11.18 Predicate Summary 180
4.12 Modification of the Database 180
4.12.1 Introduction 180
4.12.2 Dynamic and Static Procedures 181
4.12.3 Database References 182
4.12.4 Adding Clauses to the Database 183
4.12.5 Removing Clauses from the Database 183

4.12.5.1 A Note on Efficient Use of `retract/1` ... 184
4.12.6 Accessing Clauses ... 185
4.12.7 Modification of Running Code: Examples ... 185
4.12.7.1 Example: assertz ... 185
4.12.7.2 Example: retract ... 186
4.12.7.3 Example: abolish ... 187
4.12.8 The Internal Database ... 187
4.12.9 Blackboard Primitives ... 188
4.12.10 Summary of Predicates ... 189
4.13 Sets and Bags: Collecting Solutions to a Goal ... 190
4.13.1 Introduction ... 190
4.13.2 Collecting a Sorted List ... 191
4.13.2.1 Existential Quantifier ... 192
4.13.3 Collecting a Bag of Solutions ... 192
4.13.3.1 Collecting All Instances ... 192
4.13.4 Predicate Summary ... 193
4.14 Grammar Rules ... 193
4.14.1 Definite Clause Grammars ... 193
4.14.2 How to Use the Grammar Rule Facility ... 194
4.14.3 An Example ... 195
4.14.4 Semantics of Grammar Rules ... 196
4.14.5 Summary of Predicates ... 200
4.15 Errors and Exceptions ... 201
4.15.1 Overview ... 201
4.15.2 Throwing Exceptions ... 201
4.15.3 Handling Exceptions ... 202
4.15.3.1 Protecting a Particular Goal ... 202
4.15.3.2 Handling Unknown Predicates ... 203
4.15.4 Error Classes ... 204
4.15.4.1 Instantiation Errors ... 207
4.15.4.2 Uninstantiation Errors ... 207
4.15.4.3 Type Errors ... 208
4.15.4.4 Domain Errors ... 208
4.15.4.5 Evaluation Errors ... 209
4.15.4.6 Representation Errors ... 209
4.15.4.7 Existence Errors ... 210
4.15.4.8 Permission Errors ... 210
4.15.4.9 Context Errors ... 211
4.15.4.10 Consistency Errors ... 211
4.15.4.11 Syntax Errors ... 212
4.15.4.12 Resource Errors ... 212
4.15.4.13 System Errors ... 213
4.15.5 An Example ... 213
4.15.6 Legacy Predicates ... 214
4.15.7 Interrupting Execution ... 215
4.15.8 Summary of Predicates ... 215
4.16 Messages and Queries ... 216
4.16.1 Message Processing ... 216

4.16.1.1 Phases of Message Processing 217
4.16.1.2 Message Generation Phase 218
4.16.1.3 Message Printing Phase 219
4.16.2 Message Handling Predicates 219
4.16.3 Query Processing 220
4.16.3.1 Query Classes 220
4.16.3.2 Phases of Query Processing 221
4.16.3.3 Hooks in Query Processing 224
4.16.3.4 Default Input Methods 225
4.16.3.5 Default Map Methods 225
4.16.3.6 Default Query Classes 225
4.16.4 Query Handling Predicates 226
4.16.5 Predicate Summary 227
4.17 Other Topics 228
4.17.1 System Properties and Environment Variables 228
4.17.1.1 System Properties Set by SICStus Prolog 229
4.17.1.2 System Properties Affecting Initialization 230
4.17.1.3 Other System Properties 232

5 Debugging 235
5.1 The Procedure Box Control Flow Model 235
5.2 Basic Debugging Predicates 237
5.3 Plain Spypoints 239
5.4 Format of Debugging Messages 240
5.5 Commands Available during Debugging 241
5.6 Advanced Debugging — an Introduction 247
5.6.1 Creating Breakpoints 247
5.6.2 Processing Breakpoints 248
5.6.3 Breakpoint Tests 249
5.6.4 Specific and Generic Breakpoints 255
5.6.5 Breakpoint Actions 256
5.6.6 Advice points 262
5.6.7 Built-in Predicates for Breakpoint Handling 264
5.6.8 Accessing Past Debugger States 266
5.6.9 Storing User Information in the Backtrace 269
5.6.10 Hooks Related to Breakpoints 271
5.6.11 Programming Breakpoints 272
5.7 Breakpoint Handling Predicates 276
5.8 The Processing of Breakpoints 279
5.9 Breakpoint Conditions 281
5.9.1 Tests Related to the Current Goal 281
5.9.2 Tests Related to Source Information 282
5.9.3 Tests Related to the Current Port 283
5.9.4 Tests Related to the Break Level 284
5.9.5 Other Conditions 285
5.9.6 Conditions Usable in the Action Part 285
5.9.7 Options for Focusing on a Past State 286
5.9.8 Condition Macros 286

5.9.9 The Action Variables ... 286
5.10 Consulting during Debugging ... 289
5.11 Catching Exceptions ... 289
5.12 Predicate Summary ... 289

6 Mixing C/C++ and Prolog ... 293
6.1 Notes ... 294
6.2 Calling C from Prolog ... 295
6.2.1 Foreign Resources ... 295
6.2.2 Conversion Declarations ... 296
6.2.3 Conversions between Prolog Arguments and C Types ... 297
6.2.4 Interface Predicates ... 299
6.2.5 The Foreign Resource Linker ... 300
6.2.5.1 Customizing `splfr` ... 300
6.2.5.2 Creating Linked Foreign Resources Manually under UNIX ... 300
6.2.5.3 Windows-specific splfr issues ... 301
6.2.6 Init and Deinit Functions ... 301
6.2.7 Creating the Linked Foreign Resource ... 302
6.2.8 Foreign Code Examples ... 302
6.3 Calling C++ from Prolog ... 305
6.4 Support Functions ... 305
6.4.1 Creating and Manipulating SP_term_refs ... 305
6.4.2 Atoms in C ... 306
6.4.3 Creating Prolog Terms ... 307
6.4.4 Accessing Prolog Terms ... 308
6.4.5 Testing Prolog Terms ... 308
6.4.6 Unifying and Comparing Terms ... 309
6.4.7 Operating System Services ... 309
6.4.7.1 Memory Management ... 309
6.4.7.2 File System ... 310
6.4.7.3 Threads ... 310
6.5 Calling Prolog from C ... 310
6.5.1 Finding One Solution of a Call ... 311
6.5.2 Finding Multiple Solutions of a Call ... 311
6.5.3 Backtracking Loops ... 313
6.5.4 Calling Prolog Asynchronously ... 313
6.5.4.1 Signal Handling ... 314
6.5.5 Exception Handling in C ... 314
6.5.6 Reading a goal from a string ... 315
6.6 SICStus Streams ... 315
6.6.1 Prolog Streams ... 315
6.6.2 Defining a New Stream ... 317
6.6.2.1 Low Level I/O Functions ... 321
6.6.3 Hookable Standard Streams ... 321
6.6.3.1 Writing User-stream Hooks ... 322
6.6.3.2 Writing User-stream Post-hooks ... 322
6.7 Stand-Alone Executables ... 322

6.7.1 Runtime Systems ... 323
6.7.2 Runtime Systems on Target Machines ... 323
6.7.2.1 Runtime Systems on UNIX Target Machines ... 324
6.7.2.2 Runtime Systems on Windows Target Machines ... 325
6.7.3 The Application Builder ... 327
6.7.3.1 Customizing `spld` ... 327
6.7.3.2 All-in-one Executables ... 328
6.7.3.3 Setting up the C compiler on Windows ... 331
6.7.3.4 Extended Runtime Systems ... 332
6.7.3.5 Examples ... 332
6.7.4 User-defined Main Programs ... 334
6.7.4.1 Initializing the Prolog Engine ... 334
6.7.4.2 Loading Prolog Code ... 335
6.7.5 Generic Runtime Systems ... 335
6.8 Mixing C and Prolog Examples ... 335
6.8.1 Train Example (connections) ... 335
6.8.2 Building for a Target Machine ... 339
6.8.3 Exceptions from C ... 344
6.8.4 Stream Example ... 346
6.9 Debugging Runtime Systems ... 346
6.9.1 Locating the License Information ... 347
6.9.2 Customizing the Debugged Runtime System ... 347
6.9.3 Examples of Debugging Runtime Systems ... 348

7 Interfacing .NET and Java ... 351

8 Multiple SICStus Runtimes in a Process ... 353
8.1 Multiple SICStus Runtimes in Java ... 353
8.2 Multiple SICStus Runtimes in C ... 353
8.2.1 Using a Single SICStus Runtime ... 353
8.2.2 Using More than One SICStus Runtime ... 354
8.3 Foreign Resources and Multiple SICStus Runtimes ... 355
8.3.1 Foreign Resources Supporting Only One SICStus Runtime ... 355
8.3.2 Foreign Resources Supporting Multiple SICStus Runtimes ... 356
8.3.2.1 Full Support for Multiple SICStus Runtimes ... 356
8.4 Multiple Runtimes and Threads ... 358

9 Writing Efficient Programs ... 359
9.1 Overview ... 359
9.2 Execution Profiling ... 359
9.3 Coverage Analysis ... 360
9.4 The Cut ... 361
9.4.1 Overview ... 361
9.4.2 Making Predicates Determinate ... 361
9.4.3 Placement of Cuts ... 363
9.4.4 Terminating a Backtracking Loop ... 363
9.5 Indexing ... 364

9.5.1 Overview ... 364
9.5.2 Data Tables ... 364
9.5.3 Determinacy Detection ... 365
9.6 Last Clause Determinacy Detection ... 366
9.7 The Determinacy Checker ... 367
9.7.1 Using the Determinacy Checker ... 367
9.7.2 Declaring Nondeterminacy ... 368
9.7.3 Checker Output ... 368
9.7.4 Example ... 369
9.7.5 Options ... 370
9.7.6 What is Detected ... 371
9.8 Last Call Optimization ... 372
9.8.1 Accumulating Parameters ... 372
9.8.2 Accumulating Lists ... 373
9.9 Building and Dismantling Terms ... 374
9.10 Conditionals and Disjunction ... 377
9.11 Programming Examples ... 379
9.11.1 Simple List Processing ... 379
9.11.2 Family Example (descendants) ... 380
9.11.3 Association List Primitives ... 380
9.11.4 Differentiation ... 380
9.11.5 Use of Meta-Logical Predicates ... 381
9.11.6 Prolog in Prolog ... 381
9.11.7 Translating English Sentences into Logic Formulae ... 382
9.12 The Cross-Referencer ... 383
9.12.1 Introduction ... 383
9.12.2 Practice and Experience ... 383

10 The Prolog Library ... 385

10.1 An Aggregation Operator for Data-Base-Style Queries—`library(aggregate)` ... 390
10.2 Association Lists—`library(assoc)` ... 394
10.3 Attributed Variables—`library(atts)` ... 397
10.4 AVL Trees—`library(avl)` ... 405
10.5 Bags, or Multisets—`library(bags)` ... 409
10.6 Generating Integers—`library(between)` ... 413
10.7 Constraint Handling Rules—`library(chr)` ... 414
10.7.1 Introduction ... 414
10.7.2 Syntax and Semantics ... 414
10.7.2.1 Syntax ... 414
10.7.2.2 Semantics ... 415
10.7.3 CHR in Prolog Programs ... 417
10.7.3.1 Embedding in Prolog Programs ... 417
10.7.3.2 Constraint Declaration ... 417
10.7.3.3 Compilation ... 419
10.7.4 Debugging ... 419
10.7.4.1 Ports ... 419
10.7.4.2 Tracing ... 420

10.7.4.3 Debugging Predicates 420
10.7.5 Examples 421
10.7.6 Guidelines 422
10.8 Constraint Logic Programming over Booleans—`library(clpb)` . . 423
10.8.1 Introduction 423
10.8.2 Solver Interface 424
10.8.3 Examples 424
10.8.3.1 Example 1 424
10.8.3.2 Example 2 425
10.8.3.3 Example 3 425
10.8.3.4 Example 4 426
10.9 Constraint Logic Programming over Finite Domains—`library(clpfd)` 428
10.9.1 Introduction 428
10.9.1.1 Referencing this Software 428
10.9.1.2 Acknowledgments 429
10.9.2 Glossary 429
10.9.3 Desiderata of Propagators 432
10.9.4 Constraint and Predicate Annotations 432
10.9.5 Caveats and Limitations 433
10.9.6 Solver Interface 434
10.9.6.1 Posting Constraints 434
10.9.6.2 Forgetting Constraints 435
10.9.6.3 Constraint Satisfaction Problems 435
10.9.6.4 Reified Constraints 436
10.9.7 Available Constraints 437
10.9.7.1 Arithmetic Constraints 437
10.9.7.2 Membership Constraints 441
10.9.7.3 Propositional Constraints 442
10.9.7.4 Arithmetic-Logical Constraints 442
10.9.7.5 Extensional Constraints 448
10.9.7.6 Graph Constraints 454
10.9.7.7 Scheduling Constraints 456
10.9.7.8 Placement Constraints 459
10.9.7.9 Sequence Constraints 468
10.9.7.10 User-Defined Constraints 477
10.9.8 Enumeration Predicates 477
10.9.9 Statistics Predicates 486
10.9.10 Answer Constraints 487
10.9.11 Debugging 487
10.9.12 Defining Global Constraints 487
10.9.12.1 The Global Constraint Programming Interface 487
10.9.12.2 Reflection Predicates 490
10.9.12.3 FD Set Operations 491
10.9.12.4 Global Constraint Example 493
10.9.13 Defining Indexical Constraints 495
10.9.13.1 Indexicals 496
10.9.13.2 Domain Expressions 496

10.9.13.3 Term Expressions ... 497
10.9.13.4 Indexical Constraints ... 498
10.9.13.5 Compiled Indexicals ... 500
10.9.14 Coexisting with Attributes and Blocked Goals ... 501
10.9.15 Example Programs ... 501
10.9.15.1 Send More Money ... 501
10.9.15.2 N Queens ... 502
10.9.15.3 Cumulative Scheduling ... 503
10.9.15.4 Equation Solving ... 504
10.9.15.5 Mortgage Calculator ... 506
10.9.15.6 Rack Configuration ... 506
10.9.16 Syntax Summary ... 507
10.9.16.1 Syntax of Indexicals ... 508
10.9.16.2 Syntax of Range Expressions ... 509
10.9.16.3 Syntax of Integer Expressions ... 510
10.9.16.4 Syntax of Real Expressions ... 511
10.9.16.5 Operator Declarations ... 512
10.10 Constraint Logic Programming over Rationals or Reals—`library([clpq,clpr])` ... 513
10.10.1 Introduction ... 513
10.10.1.1 Referencing this Software ... 513
10.10.1.2 Acknowledgments ... 513
10.10.2 Solver Interface ... 513
10.10.2.1 Notational Conventions ... 514
10.10.2.2 Solver Predicates ... 514
10.10.2.3 Unification ... 518
10.10.2.4 Feedback and Bindings ... 519
10.10.3 Linearity and Nonlinear Residues ... 519
10.10.3.1 How Nonlinear Residues Are Made to Disappear ... 520
10.10.3.2 Isolation Axioms ... 521
10.10.4 Numerical Precision and Rationals ... 522
10.10.5 Projection and Redundancy Elimination ... 526
10.10.5.1 Variable Ordering ... 527
10.10.5.2 Turning Answers into Terms ... 528
10.10.5.3 Projecting Inequalities ... 528
10.10.6 Why Disequations ... 531
10.10.7 Monash Examples ... 533
10.10.8 A Mixed Integer Linear Optimization Example ... 534
10.10.9 Implementation Architecture ... 536
10.10.9.1 Fragments and Bits ... 536
10.10.9.2 Bugs ... 536
10.11 I/O on Lists of Character Codes—`library(codesio)` ... 538
10.12 I/O on Comma-Separated Values (CSV) Files and Strings—`library(csv)` ... 539
10.13 COM Client—`library(comclient)` ... 542
10.13.1 Preliminaries ... 542
10.13.2 Terminology ... 542
10.13.3 Predicate Reference ... 543

10.13.4 Examples 545
10.14 Finite Domain Constraint Debugger—`library(fdbg)` 547
10.14.1 Introduction 547
10.14.2 Concepts 547
10.14.2.1 Events 547
10.14.2.2 Labeling Levels 547
10.14.2.3 Visualizers 548
10.14.2.4 Names of Terms 548
10.14.2.5 Selectors 549
10.14.2.6 Name Auto-Generation 549
10.14.2.7 Legend 549
10.14.2.8 The `fdbg_output` Stream 550
10.14.3 Basics 550
10.14.3.1 FDBG Options 550
10.14.3.2 Naming Terms 551
10.14.3.3 Built-In Visualizers 552
10.14.3.4 New Debugger Commands 553
10.14.3.5 Annotating Programs 554
10.14.3.6 An Example Session 554
10.14.4 Advanced Usage 558
10.14.4.1 Customizing Output 558
10.14.4.2 Writing Visualizers 559
10.14.4.3 Writing Legend Printers 560
10.14.4.4 Showing Selected Constraints (simple version) 561
10.14.4.5 Showing Selected Constraints (advanced version) 562
10.14.4.6 Debugging Global Constraints 566
10.15 Accessing Files And Directories—`library(file_systems)` 571
10.16 The Gauge Profiling Tool—`library(gauge)` 577
10.17 Heap Operations—`library(heaps)` 580
10.18 Declaring determinacy attributes—`library(is_directives)` 582
10.18.1 Introduction 582
10.18.2 Available Determinacy Annotations 582
10.18.3 Syntax of Determinacy Declarations 583
10.18.3.1 Specifying Instantiation Patterns 584
10.18.3.2 Declaring Meta Predicate Determinacy 584
10.18.4 Using Determinacy Declarations 586
10.18.5 Accessing Determinacy Declarations at Runtime 586
10.19 Jasper Interface—`library(jasper)` 589
10.19.1 Jasper Overview 589
10.19.2 Getting Started 590
10.19.3 Calling Prolog from Java 590
10.19.3.1 Single Threaded Example 590
10.19.3.2 Multi Threaded Example 592
10.19.3.3 Another Multi Threaded Example (Prolog Top Level) 594
10.19.4 Jasper Package Class Reference 598
10.19.5 Java Exception Handling 601
10.19.6 SPTerm and Memory 601

10.19.6.1 Lifetime of SPTerms and Prolog Memory 601
10.19.6.2 Preventing SPTerm Memory Leaks 602
10.19.7 Java Threads 603
10.19.8 The Jasper Library 604
10.19.8.1 Jasper Method Call Example 604
10.19.8.2 Jasper Library Predicates 607
10.19.8.3 Conversion between Prolog Arguments and Java Types 610
10.19.8.4 Global vs. Local References 614
10.19.8.5 Handling Java Exceptions 615
10.19.8.6 Deprecated Jasper API 617
10.19.8.7 Deprecated Argument Conversions 617
10.19.8.8 Deprecated Jasper Predicates 617
10.20 JSON format serialization—`library(json)` 619
10.20.1 Options 620
10.20.2 Exported Predicates 622
10.21 JSON mediated process communication—`library('jsonrpc/jsonrpc_server')` 623
10.21.1 Requests 623
10.21.2 The Request Hook 624
10.21.3 Prolog-style Messages 624
10.21.3.1 Specifying the Term 625
10.21.3.2 The Call Hook 625
10.21.3.3 Single Solution Request 626
10.21.3.4 Multi-Solution Request 626
10.21.3.5 Backtracking 626
10.21.3.6 Cut 627
10.21.4 Responses 627
10.21.5 Predicates 628
10.22 Simpler use of JSON mediated process communication—`library('jsonrpc/simple_jsonrpc_server')` .. 630
10.23 Examples 632
10.23.1 Minimal Request Hook 633
10.23.2 Minimal Call Hook 634
10.24 Process Communication—`library(linda/[server,client])` .. 638
10.24.1 Linda Server 639
10.24.2 Linda Client 640
10.25 List Operations—`library(lists)` 643
10.26 External Storage of Terms (LMDB)—`library(lmdb)` 659
10.26.1 Basics 659
10.26.2 Current Limitations 659
10.26.3 Lightning Memory-Mapped Database Manager (LMDB) .. 659
10.26.4 The DB-Spec—Informal Description 659
10.26.5 Predicates 660
10.26.5.1 Conventions 660
10.26.5.2 Memory Leaks 661
10.26.5.3 The Predicates 661
10.26.6 Example Session 663

10.26.7 DB-Spec—Details ... 665
10.26.8 Exporting and Importing a Database ... 665
10.27 Dense Array Operations—`library(logarr)` ... 666
10.28 Mutable, Dense Array Operations—`library(mutarray)` ... 667
10.29 Mutable Dictionary Operations—`library(mutdict)` ... 669
10.30 The Objects Package—`library(objects)` ... 671
10.30.1 Introduction ... 671
10.30.1.1 Using SICStus Objects ... 671
10.30.1.2 Defining Classes ... 673
10.30.1.3 Using Classes ... 674
10.30.1.4 Looking Ahead ... 675
10.30.2 Simple Classes ... 675
10.30.2.1 Scope of a Class Definition ... 675
10.30.2.2 Slots ... 676
10.30.2.3 Methods ... 678
10.30.3 Inheritance ... 687
10.30.3.1 Single Inheritance ... 687
10.30.3.2 Multiple Inheritance ... 690
10.30.3.3 Asking About Classes and Objects ... 693
10.30.4 Term Classes ... 695
10.30.4.1 Simple Term Classes ... 696
10.30.4.2 Restricted Term Classes ... 696
10.30.4.3 Specifying a Term Class Essence ... 697
10.30.5 Technical Details ... 698
10.30.5.1 Syntax of Class Definitions ... 698
10.30.5.2 Limitations ... 700
10.30.6 Exported Predicates ... 701
10.30.6.1 `<-/2` ... 702
10.30.6.2 `<</2` ... 703
10.30.6.3 `>>/2` ... 704
10.30.6.4 `class/1` *declaration* ... 705
10.30.6.5 `class_ancestor/2` ... 708
10.30.6.6 `class_method/1` *declaration* ... 709
10.30.6.7 `class_superclass/2` ... 710
10.30.6.8 `class_of/2` ... 711
10.30.6.9 `create/2` ... 712
10.30.6.10 `current_class/1` ... 714
10.30.6.11 `debug_message/0` *declaration* ... 715
10.30.6.12 `define_method/3` ... 716
10.30.6.13 `descendant_of/2` ... 717
10.30.6.14 `destroy/1` ... 718
10.30.6.15 `direct_message/4` ... 719
10.30.6.16 `end_class/[0,1]` *declaration* ... 720
10.30.6.17 `fetch_slot/2` ... 721
10.30.6.18 `inherit/1` *declaration* ... 722
10.30.6.19 `instance_method/1` *declaration* ... 724
10.30.6.20 `message/4` ... 725
10.30.6.21 `nodebug_message/0` *declaration* ... 726

10.30.6.22 `pointer_object/2` ... 727
10.30.6.23 `store_slot/2` ... 728
10.30.6.24 `undefine_method/3` ... 729
10.30.6.25 `uninherit/1` *declaration* ... 730
10.30.7 Glossary ... 730
10.31 The ODBC Interface Library–`library(odbc)` ... 734
10.31.1 Overview ... 734
10.31.2 Examples ... 734
10.31.2.1 Example 1 ... 734
10.31.2.2 Example 2 ... 735
10.31.2.3 Example 3 ... 735
10.31.2.4 Example 4 ... 736
10.31.3 Datatypes ... 736
10.31.3.1 Reading from the database ... 736
10.31.3.2 Writing to the database ... 737
10.31.4 Exceptions ... 738
10.31.5 Predicates ... 739
10.32 Ordered Set Operations—`library(ordsets)` ... 744
10.33 The PiLLoW Web Programming Library—`library(pillow)` ... 747
10.34 Plunit Interface—`library(plunit)` ... 748
10.34.1 Introduction ... 748
10.34.2 A Unit Test Box ... 748
10.34.3 Writing the Test-Body ... 751
10.34.3.1 Determinate Tests ... 752
10.34.3.2 Nondeterminate Tests ... 752
10.34.3.3 Tests Expected to Fail ... 752
10.34.3.4 Tests Expected to Raise Exceptions ... 753
10.34.4 Running the Test-Suite ... 753
10.34.5 Tests and Production Systems ... 754
10.35 Process Utilities—`library(process)` ... 756
10.35.1 Examples ... 756
10.35.1.1 Microsoft Windows Shell ... 759
10.35.2 Quoting and Security ... 760
10.36 PrologBeans Interface—`library(prologbeans)` ... 766
10.36.1 Introduction ... 766
10.36.2 Features ... 768
10.36.3 A First Example ... 768
10.36.4 Prolog Server Interface ... 771
10.36.5 Java Client Interface ... 774
10.36.6 Java Examples ... 774
10.36.6.1 Embedding Prolog in Java Applications ... 774
10.36.6.2 Application Servers ... 775
10.36.6.3 Configuring Tomcat for PrologBeans ... 777
10.36.7 .NET Client Interface ... 778
10.36.8 .NET Examples ... 779
10.36.8.1 C# Examples ... 779
10.36.8.2 Visual Basic Example ... 780
10.37 Queue Operations —`library(queues)` ... 781

10.38 Random Number Generator—`library(random)` 784
10.39 Rem's Algorithm—`library(rem)` 786
10.40 Generic Sorting—`library(samsort)` 787
10.41 Unordered Set Operations—`library(sets)` 788
10.42 Socket I/O—`library(sockets)` 792
10.43 Statistics Functions—`library(statistics)` 796
10.44 The Structs Package—`library(structs)` 799
10.44.1 Foreign Types 799
10.44.1.1 Declaring Types 801
10.44.2 Checking Foreign Term Types 802
10.44.3 Creating and Destroying Foreign Terms 802
10.44.4 Accessing and Modifying Foreign Term Contents 802
10.44.5 Casting 803
10.44.6 Null Foreign Terms 803
10.44.7 Interfacing with Foreign Code 803
10.44.8 Examining Type Definitions at Run Time 804
10.44.9 Tips 805
10.44.10 Example 805
10.45 Operating System Utilities—`library(system)` 808
10.46 Tcl/Tk Interface—`library(tcltk)` 809
10.46.1 Introduction 809
10.46.1.1 What Is Tcl/Tk? 809
10.46.1.2 What Is Tcl/Tk Good For? 809
10.46.1.3 What Is Tcl/Tks Relationship to SICStus Prolog? .. 810
10.46.1.4 A Quick Example of Tcl/Tk in Action 810
10.46.1.5 Outline of This Tutorial 812
10.46.2 Tcl 813
10.46.2.1 Syntax 813
10.46.2.2 Variables 816
10.46.2.3 Commands 816
10.46.2.4 What We Have Left Out 831
10.46.3 Tk 832
10.46.3.1 Widgets 832
10.46.3.2 Types of Widget 832
10.46.3.3 Widgets Hierarchies 834
10.46.3.4 Widget Creation 836
10.46.3.5 Geometry Managers 844
10.46.3.6 Event Handling 857
10.46.3.7 Miscellaneous 860
10.46.3.8 What We Have Left Out 861
10.46.3.9 Example pure Tcl/Tk program 861
10.46.4 The Tcl/Tk Prolog Library 865
10.46.4.1 How it Works - An Overview 866
10.46.4.2 Basic Functions 867
10.46.4.3 Evaluation Functions 868
10.46.4.4 Event Functions 873
10.46.4.5 Servicing Tcl and Tk events 876
10.46.4.6 Passing Control to Tk 878

10.46.4.7 Housekeeping functions ... 878
10.46.4.8 Summary ... 879
10.46.5 Putting It All Together ... 881
10.46.5.1 Tcl The Coordinator, Prolog The Worker ... 881
10.46.5.2 Prolog The Coordinator, Tk The Worker ... 886
10.46.5.3 Prolog And Tcl Interact through Prolog Event Queue ... 889
10.46.5.4 The Whole 8-Queens Example ... 891
10.46.6 Quick Reference ... 897
10.46.6.1 Command Format Summary ... 897
10.46.6.2 Predicates for Prolog to Interact with Tcl Interpreters ... 899
10.46.6.3 Predicates for Prolog to Interact with Tcl Interpreters with Tk Extensions ... 899
10.46.6.4 Commands for Tcl Interpreters to Interact with The Prolog System ... 900
10.46.7 Resources ... 900
10.46.7.1 Web Sites ... 901
10.46.7.2 Manual Pages ... 901
10.47 Term Utilities—`library(terms)` ... 902
10.48 Meta-Call with Limit on Execution Time—`library(timeout)` ... 908
10.49 Dense Arrays as Binary Trees—`library(trees)` ... 909
10.50 Type Checking—`library(types)` ... 910
10.51 Unweighted Graph Operations—`library(ugraphs)` ... 913
10.52 An Inverse of numbervars/3—`library(varnumbers)` ... 916
10.53 Weighted Graph Operations—`library(wgraphs)` ... 918
10.54 Parsing and Generating XML—`library(xml)` ... 921
10.55 Zinc Interface—`library(zinc)` ... 923
10.55.1 Prerequisites ... 923
10.55.2 FlatZinc ... 923
10.55.2.1 Exported Predicates ... 924
10.55.3 MiniZinc ... 929
10.55.3.1 Exported Predicates ... 929
10.55.4 Options ... 932
10.55.5 Annotations ... 934
10.55.5.1 Solve Annotations ... 934
10.55.5.2 Constraint Annotations ... 936
10.55.5.3 Variable Annotations ... 936

11 Prolog Reference Pages ... 937

11.1 Reading the Reference Pages ... 937
11.1.1 Overview ... 937
11.1.2 Mode Annotations ... 937
11.1.3 Predicate Annotation ... 938
11.1.4 Argument Types ... 939
11.1.4.1 Simple Types ... 940
11.1.4.2 Extended Types ... 940
11.1.5 Exceptions ... 941

11.1.6 Other Fields ... 941
11.2 Topical List of Prolog Built-Ins ... 941
11.2.1 All Solutions ... 941
11.2.2 Arithmetic ... 942
11.2.3 Character I/O ... 942
11.2.4 Control ... 943
11.2.5 Database ... 945
11.2.6 Debugging ... 946
11.2.7 Errors and Exceptions ... 947
11.2.8 Filename Manipulation ... 948
11.2.9 File and Stream Handling ... 948
11.2.10 Foreign Interface ... 949
11.2.11 Grammar Rules ... 950
11.2.12 Hook Predicates ... 950
11.2.13 List Processing ... 951
11.2.14 Loading Programs ... 952
11.2.15 Memory ... 954
11.2.16 Messages and Queries ... 954
11.2.17 Modules ... 955
11.2.18 Program State ... 956
11.2.19 Saving Programs ... 956
11.2.20 Term Comparison ... 957
11.2.21 Term Handling ... 957
11.2.22 Term I/O ... 959
11.2.23 Type Tests ... 960
11.3 Built-In Predicates ... 960
11.3.1 `abolish/[1,2]` *ISO* ... 962
11.3.2 `abort/0` ... 964
11.3.3 `absolute_file_name/[2,3]` *hookable* ... 965
11.3.4 `acyclic_term/1` *ISO* ... 972
11.3.5 `add_breakpoint/2` *development* ... 973
11.3.6 `,/2` *ISO* ... 974
11.3.7 `append/3` ... 975
11.3.8 `arg/3` *ISO* ... 978
11.3.9 `ask_query/4` *hookable* ... 979
11.3.10 `assert/[1,2]` ... 981
11.3.11 `asserta/[1,2]` *ISO* ... 983
11.3.12 `assertz/[1,2]` *ISO* ... 985
11.3.13 `at_end_of_line/[0,1]` ... 987
11.3.14 `at_end_of_stream/[0,1]` *ISO* ... 988
11.3.15 `atom/1` *ISO* ... 990
11.3.16 `atom_chars/2` *ISO* ... 991
11.3.17 `atom_codes/2` *ISO* ... 992
11.3.18 `atom_concat/3` *ISO* ... 993
11.3.19 `atom_length/2` *ISO* ... 994
11.3.20 `atomic/1` *ISO* ... 995
11.3.21 `bagof/3` *ISO* ... 996
11.3.22 `bb_delete/2` ... 997

11.3.23 bb_get/2 998
11.3.24 bb_put/2 999
11.3.25 bb_update/3 1000
11.3.26 block/1 *declaration* 1001
11.3.27 break/0 *development* 1003
11.3.28 breakpoint_expansion/2 *hook*, *development* 1004
11.3.29 byte_count/2 1005
11.3.30 call/[1,2,...,255] *ISO* 1006
11.3.31 call_cleanup/2 1007
11.3.32 call_residue_vars/2 1009
11.3.33 callable/1 *ISO* 1010
11.3.34 catch/3 *ISO* 1011
11.3.35 char_code/2 *ISO* 1012
11.3.36 char_conversion/2 *ISO* 1013
11.3.37 character_count/2 1014
11.3.38 clause/[2,3] *ISO* 1015
11.3.39 close/[1,2] *ISO* 1017
11.3.40 compare/3 *ISO* 1019
11.3.41 compile/1 1020
11.3.42 compound/1 *ISO* 1021
11.3.43 consult/1 1022
11.3.44 copy_term/[2,3] *ISO* 1023
11.3.45 coverage_data/1 *development* 1025
11.3.46 create_mutable/2 1026
11.3.47 current_atom/1 1027
11.3.48 current_breakpoint/5 *development* 1028
11.3.49 current_char_conversion/2 *ISO* 1029
11.3.50 current_input/1 *ISO* 1030
11.3.51 current_key/2 1031
11.3.52 current_module/[1,2] 1032
11.3.53 current_op/3 *ISO* 1034
11.3.54 current_output/1 *ISO* 1035
11.3.55 current_predicate/[1,2] *ISO* 1036
11.3.56 current_prolog_flag/2 *ISO* 1038
11.3.57 current_stream/3 1039
11.3.58 !/0 *ISO* 1040
11.3.59 db_reference/1 1041
11.3.60 debug/0 *development* 1042
11.3.61 debugger_command_hook/2 *hook*, *development* 1043
11.3.62 debugging/0 *development* 1044
11.3.63 dif/2 1045
11.3.64 disable_breakpoints/1 *development* 1046
11.3.65 discontiguous/1 *declaration*, *ISO* 1047
11.3.66 display/1 1048
11.3.67 do/2 1049
11.3.68 dynamic/1 *declaration*, *ISO* 1051
11.3.69 enable_breakpoints/1 *development* 1052
11.3.70 ensure_loaded/1 *ISO* 1053

11.3.71 =:=/2 *ISO* 1054
11.3.72 erase/1 1055
11.3.73 error_exception/1 *hook*, *development* 1056
11.3.74 execution_state/[1,2] *development* 1057
11.3.75 ^/2 1058
11.3.76 expand_term/2 *hookable* 1059
11.3.77 fail/0 *ISO* 1060
11.3.78 false/0 *ISO* 1061
11.3.79 file_search_path/2 *hook* 1062
11.3.80 findall/[3,4] *ISO* 1064
11.3.81 float/1 *ISO* 1067
11.3.82 flush_output/[0,1] *ISO* 1068
11.3.83 foreign/[2,3] *hook* 1069
11.3.84 foreign_resource/2 *hook* 1070
11.3.85 format/[2,3] 1071
11.3.86 freeze/2 1077
11.3.87 frozen/2 1078
11.3.88 functor/3 *ISO* 1079
11.3.89 garbage_collect/0 1081
11.3.90 garbage_collect_atoms/0 1082
11.3.91 generate_message/3 *hook* 1083
11.3.92 generate_message_hook/3 *hook* 1085
11.3.93 get_byte/[1,2] *ISO* 1087
11.3.94 get_char/[1,2] *ISO* 1088
11.3.95 get_code/[1,2] *ISO* 1089
11.3.96 get_mutable/2 1090
11.3.97 goal_expansion/5 *hook* 1091
11.3.98 goal_source_info/3 1093
11.3.99 >/2 *ISO* 1094
11.3.100 ground/1 *ISO* 1095
11.3.101 halt/[0,1] *ISO* 1096
11.3.102 if/3 1097
11.3.103 ->/2 *ISO* 1098
11.3.104 include/1 *declaration*, *ISO* 1099
11.3.105 initialization/1 *declaration*, *ISO* 1100
11.3.106 instance/2 1101
11.3.107 integer/1 *ISO* 1102
11.3.108 is/2 *ISO* 1103
11.3.109 keysort/2 *ISO* 1105
11.3.110 leash/1 *development* 1106
11.3.111 length/2 1108
11.3.112 </2 *ISO* 1110
11.3.113 library_directory/1 *hook* 1111
11.3.114 line_count/2 1112
11.3.115 line_position/2 1113
11.3.116 listing/[0,1] 1114
11.3.117 load_files/[1,2] 1115
11.3.118 load_foreign_resource/1 *hookable* 1118

11.3.119 `member/2` ... 1120
11.3.120 `memberchk/2` ... 1121
11.3.121 `message_hook/3` *hook* ... 1122
11.3.122 `meta_predicate/1` *declaration* ... 1123
11.3.123 `mode/1` *declaration* ... 1125
11.3.124 `module/[2,3]` *declaration* ... 1126
11.3.125 `multifile/1` *declaration*, *ISO* ... 1128
11.3.126 `mutable/1` ... 1130
11.3.127 `name/2` *deprecated* ... 1131
11.3.128 `nl/[0,1]` *ISO* ... 1133
11.3.129 `nodebug/0` *development* ... 1134
11.3.130 `nonmember/2` ... 1135
11.3.131 `nonvar/1` *ISO* ... 1136
11.3.132 `nospy/1` *development* ... 1137
11.3.133 `nospyall/0` *development* ... 1138
11.3.134 `=\=/2` *ISO* ... 1139
11.3.135 `=</2` *ISO* ... 1140
11.3.136 `>=/2` *ISO* ... 1141
11.3.137 `\+/1` *ISO* ... 1142
11.3.138 `\=/2` *ISO* ... 1143
11.3.139 `notrace/0` *development* ... 1144
11.3.140 `nozip/0` *development* ... 1145
11.3.141 `number/1` *ISO* ... 1146
11.3.142 `number_chars/2` *ISO* ... 1147
11.3.143 `number_codes/2` *ISO* ... 1148
11.3.144 `numbervars/3` ... 1150
11.3.145 `on_exception/3` *deprecated* ... 1151
11.3.146 `once/1` *ISO* ... 1152
11.3.147 `op/3` *ISO* ... 1153
11.3.148 `open/[3,4]` *ISO* ... 1154
11.3.149 `open_null_stream/1` ... 1159
11.3.150 `;/2` *ISO* ... 1160
11.3.151 `otherwise/0` ... 1161
11.3.152 `peek_byte/[1,2]` *ISO* ... 1162
11.3.153 `peek_char/[1,2]` *ISO* ... 1163
11.3.154 `peek_code/[1,2]` *ISO* ... 1164
11.3.155 `phrase/[2,3]` ... 1165
11.3.156 `portray/1` *hook* ... 1167
11.3.157 `portray_clause/[1,2]` ... 1168
11.3.158 `portray_message/2` *hook* ... 1170
11.3.159 `predicate_property/2` ... 1171
11.3.160 `print/[1,2]` *hookable* ... 1173
11.3.161 `print_coverage/[0,1]` *development* ... 1174
11.3.162 `print_message/2` *hookable* ... 1176
11.3.163 `print_message_lines/3` ... 1178
11.3.164 `print_profile/[0,1]` *development* ... 1179
11.3.165 `profile_data/1` *development* ... 1180
11.3.166 `profile_reset/0` *development* ... 1181

11.3.167 prolog_flag/[2,3] 1182
11.3.168 prolog_load_context/2 1184
11.3.169 prompt/2 1185
11.3.170 public/1 *declaration* 1186
11.3.171 put_byte/[1,2] *ISO* 1187
11.3.172 put_char/[1,2] *ISO* 1188
11.3.173 put_code/[1,2] *ISO* 1189
11.3.174 query_abbreviation/3 *hook* 1190
11.3.175 query_class/5 *hook* 1191
11.3.176 query_class_hook/5 *hook* 1192
11.3.177 query_hook/6 *hook* 1193
11.3.178 query_input/3 *hook* 1194
11.3.179 query_input_hook/3 *hook* 1195
11.3.180 query_map/4 *hook* 1196
11.3.181 query_map_hook/4 *hook* 1197
11.3.182 raise_exception/1 *deprecated* 1198
11.3.183 read/[1,2] *ISO* 1199
11.3.184 read_line/[1,2] 1201
11.3.185 read_term/[2,3] *ISO* 1202
11.3.186 reconsult/1 1205
11.3.187 recorda/3 1206
11.3.188 recorded/3 1207
11.3.189 recordz/3 1208
11.3.190 remove_breakpoints/1 *development* 1209
11.3.191 repeat/0 *ISO* 1210
11.3.192 restore/1 1212
11.3.193 retract/1 *ISO* 1213
11.3.194 retractall/1 *ISO* 1215
11.3.195 runtime_entry/1 *hook* 1216
11.3.196 save_files/2 1217
11.3.197 save_modules/2 1218
11.3.198 save_predicates/2 1219
11.3.199 save_program/[1,2] 1220
11.3.200 see/1 1222
11.3.201 seeing/1 1223
11.3.202 seek/4 1225
11.3.203 seen/0 1227
11.3.204 set_input/1 *ISO* 1228
11.3.205 set_module/1 1229
11.3.206 set_output/1 *ISO* 1230
11.3.207 set_prolog_flag/2 *ISO* 1231
11.3.208 set_stream_position/2 *ISO* 1232
11.3.209 setof/3 *ISO* 1233
11.3.210 simple/1 1235
11.3.211 skip_byte/[1,2] 1236
11.3.212 skip_char/[1,2] 1237
11.3.213 skip_code/[1,2] 1238
11.3.214 skip_line/[0,1] 1239

11.3.215 `sort/2` *ISO* ... 1240
11.3.216 `source_file/[1,2]` ... 1241
11.3.217 `spy/[1,2]` *development* ... 1243
11.3.218 `statistics/[0,2]` ... 1244
11.3.219 `stream_code/2` ... 1245
11.3.220 `stream_position/2` ... 1246
11.3.221 `stream_position_data/3` ... 1247
11.3.222 `stream_property/2` *ISO* ... 1248
11.3.223 `sub_atom/5` *ISO* ... 1251
11.3.224 `subsumes_term/2` *ISO* ... 1253
11.3.225 `tell/1` ... 1255
11.3.226 `telling/1` ... 1256
11.3.227 `==/2` *ISO* ... 1258
11.3.228 `term_expansion/6` *hook* ... 1259
11.3.229 `@>/2` *ISO* ... 1261
11.3.230 `@</2` *ISO* ... 1262
11.3.231 `\==/2` *ISO* ... 1263
11.3.232 `@=</2` *ISO* ... 1264
11.3.233 `@>=/2` *ISO* ... 1265
11.3.234 `?=/2` ... 1266
11.3.235 `term_variables/2` *ISO* ... 1267
11.3.236 `throw/1` *ISO* ... 1268
11.3.237 `told/0` ... 1269
11.3.238 `trace/0` *development* ... 1270
11.3.239 `trimcore/0` ... 1271
11.3.240 `true/0` *ISO* ... 1272
11.3.241 `=/2` *ISO* ... 1273
11.3.242 `unify_with_occurs_check/2` *ISO* ... 1274
11.3.243 `=../2` *ISO* ... 1275
11.3.244 `unknown/2` *development* ... 1277
11.3.245 `unknown_predicate_handler/3` *hook* ... 1278
11.3.246 `unload_foreign_resource/1` *hookable* ... 1279
11.3.247 `update_mutable/2` ... 1280
11.3.248 `use_module/[1,2,3]` ... 1281
11.3.249 `var/1` *ISO* ... 1284
11.3.250 `volatile/1` *declaration* ... 1285
11.3.251 `when/2` ... 1286
11.3.252 `write/[1,2]` *ISO* ... 1287
11.3.253 `write_canonical/[1,2]` *ISO* ... 1288
11.3.254 `write_term/[2,3]` *hookable*, *ISO* ... 1289
11.3.255 `writeq/[1,2]` *ISO* ... 1292
11.3.256 `zip/0` *development* ... 1293

12 C Reference Pages 1295

12.1 Return Values and Errors 1295
12.2 Topical List of C Functions 1295
12.2.1 C Errors 1295
12.2.2 I/O 1295
12.2.3 Exceptions 1296
12.2.4 Files and Streams 1296
12.2.5 Foreign Interface 1296
12.2.6 Initialization 1299
12.2.7 Memory Management 1299
12.2.8 Signal Handling 1300
12.2.9 Terms in C 1300
12.2.10 Type Tests 1300
12.3 API Functions 1301
12.3.1 `SP_atom_from_string()` 1302
12.3.2 `SP_atom_length()` 1303
12.3.3 `SP_calloc()` 1304
12.3.4 `SP_close_query()` 1305
12.3.5 `SP_compare()` 1306
12.3.6 `SP_cons_functor()` 1307
12.3.7 `SP_cons_functor_array()` 1308
12.3.8 `SP_cons_list()` 1309
12.3.9 `SP_create_stream()` 1310
12.3.10 `SP_cut_query()` 1312
12.3.11 `SP_define_c_predicate()` 1313
12.3.12 `SP_deinitialize()` 1315
12.3.13 `SP_error_message()` 1316
12.3.14 `SP_event()` 1317
12.3.15 `SP_exception_term()` 1320
12.3.16 `SP_expand_file_name()` 1321
12.3.17 `SP_fail()` 1323
12.3.18 `SP_fclose()` 1324
12.3.19 `SP_flush_output()` 1326
12.3.20 `SP_fopen()` 1328
12.3.21 `SP_foreign_stash()` *macro* 1330
12.3.22 `SP_fprintf()` 1331
12.3.23 `SP_free()` 1332
12.3.24 `SP_get_address()` 1333
12.3.25 `SP_get_arg()` 1334
12.3.26 `SP_get_atom()` 1335
12.3.27 `SP_get_byte()` 1336
12.3.28 `SP_get_code()` 1337
12.3.29 `SP_get_current_dir()` 1338
12.3.30 `SP_get_dispatch()` 1339
12.3.31 `SP_get_float()` 1340
12.3.32 `SP_get_functor()` 1341
12.3.33 `SP_get_integer()` 1342
12.3.34 `SP_get_integer_bytes()` 1343

12.3.35 SP_get_list() 1345
12.3.36 SP_get_list_codes() 1346
12.3.37 SP_get_list_n_bytes() 1347
12.3.38 SP_get_list_n_codes() 1348
12.3.39 SP_get_number_codes() 1349
12.3.40 SP_get_stream_counts() 1350
12.3.41 SP_get_stream_user_data() 1352
12.3.42 SP_get_string() 1354
12.3.43 SP_getenv() 1355
12.3.44 SP_initialize() *macro* 1356
12.3.45 SP_is_atom() 1358
12.3.46 SP_is_atomic() 1359
12.3.47 SP_is_compound() 1360
12.3.48 SP_is_float() 1361
12.3.49 SP_is_integer() 1362
12.3.50 SP_is_list() 1363
12.3.51 SP_is_number() 1364
12.3.52 SP_is_variable() 1365
12.3.53 SP_load() 1366
12.3.54 SP_load_sicstus_run_time() 1367
12.3.55 SP_malloc() 1368
12.3.56 SP_mutex_lock() 1369
12.3.57 SP_mutex_unlock() 1370
12.3.58 SP_new_term_ref() 1371
12.3.59 SP_next_solution() 1372
12.3.60 SP_next_stream() 1373
12.3.61 SP_open_query() 1374
12.3.62 SP_pred() 1375
12.3.63 SP_predicate() 1376
12.3.64 SP_printf() 1377
12.3.65 SP_put_address() 1378
12.3.66 SP_put_atom() 1379
12.3.67 SP_put_byte() 1380
12.3.68 SP_put_bytes() 1381
12.3.69 SP_put_code() 1382
12.3.70 SP_put_codes() 1383
12.3.71 SP_put_encoded_string() 1384
12.3.72 SP_put_float() 1385
12.3.73 SP_put_functor() 1386
12.3.74 SP_put_integer() 1387
12.3.75 SP_put_integer_bytes() 1388
12.3.76 SP_put_list() 1389
12.3.77 SP_put_list_codes() 1390
12.3.78 SP_put_list_n_bytes() 1391
12.3.79 SP_put_list_n_codes() 1392
12.3.80 SP_put_number_codes() 1393
12.3.81 SP_put_string() 1394
12.3.82 SP_put_term() 1395

12.3.83 SP_put_variable() ... 1396
12.3.84 SP_query() ... 1397
12.3.85 SP_query_cut_fail() ... 1398
12.3.86 SP_raise_exception() ... 1399
12.3.87 SP_read_from_string() ... 1400
12.3.88 SP_realloc() ... 1402
12.3.89 SP_register_atom() ... 1403
12.3.90 SP_restore() ... 1404
12.3.91 SP_set_argv() ... 1405
12.3.92 SP_set_current_dir() ... 1407
12.3.93 SP_set_user_stream_hook() *preinit* ... 1408
12.3.94 SP_set_user_stream_post_hook() *preinit* ... 1409
12.3.95 SP_signal() ... 1410
12.3.96 SP_strdup() ... 1412
12.3.97 SP_string_from_atom() ... 1413
12.3.98 SP_term_type() ... 1414
12.3.99 SP_unget_byte() ... 1415
12.3.100 SP_unget_code() ... 1416
12.3.101 SP_unify() ... 1417
12.3.102 SP_unregister_atom() ... 1418
12.3.103 SU_initialize() *hook* ... 1419
12.3.104 user_close() ... 1420
12.3.105 user_flush_output() ... 1422
12.3.106 user_read() ... 1424
12.3.107 user_write() ... 1426

13 Command Reference Pages ... 1429

13.1 sicstus — SICStus Prolog Development System ... 1430
13.2 mzn-sicstus — Shortcut for MiniZinc with SICStus back-end ... 1432
13.3 spfz — FlatZinc Interpreter ... 1433
13.4 spdet — Determinacy Checker ... 1434
13.5 spld — SICStus Prolog Application Builder ... 1435
13.6 splfr — SICStus Prolog Foreign Resource Linker ... 1442
13.7 splm — SICStus Prolog License Manager ... 1446
13.8 spxref — Cross Referencer ... 1447

References ... 1449

Predicate Index ... 1453

Keystroke Index ... 1467

Book Index ... 1469

Introduction

Prolog is a simple but powerful programming language developed at the University of Marseille [Roussel 75], as a practical tool for programming in logic [Kowalski 74]. From a user's point of view the major attraction of the language is ease of programming. Clear, readable, concise programs can be written quickly with few errors.

For an introduction to programming in Prolog, readers are recommended to consult [Sterling & Shapiro 86]. However, for the benefit of those who do not have access to a copy of this book, and for those who have some prior knowledge of logic programming, we include a summary of the language. For a more general introduction to the field of Logic Programming see [Kowalski 79]. See Chapter 4 [Prolog Intro], page 47.

This manual describes a Prolog system developed at the Swedish Institute of Computer Science. Parts of the system were developed by the project "Industrialization of SICStus Prolog" in collaboration with Ericsson Telecom AB, NobelTech Systems AB, Infologics AB and Televerket. The system consists of a *WAM* emulator written in C, a library and runtime system written in C and Prolog and an interpreter and a compiler written in Prolog. The Prolog engine is a Warren Abstract Machine (WAM) emulator [Warren 83]. Two modes of compilation are available: in-core i.e. incremental, and file-to-file. When compiled, a predicate will run about 8 times faster and use memory more economically. Implementation details can be found in [Carlsson 90] and in several technical reports available from SICS.

SICStus Prolog follows the mainstream Prolog tradition in terms of syntax and built-in predicates. As of release 4, SICStus Prolog is fully compliant with the International Standard ISO/IEC 13211-1 (PROLOG: Part 1—General Core) and the subsequent Technical Corrigenda 1, 2 and 3.

Acknowledgments

The following people have contributed to the development of SICStus Prolog:

> Jonas Almgren, Johan Andersson, Stefan Andersson, Nicolas Beldiceanu, Tamás Benkő, Kent Boortz, Dave Bowen, Per Brand, Göran Båge, Vicki Carleson, Mats Carlsson, Per Danielsson, Joakim Eriksson, Jesper Eskilson, Niklas Finne, Lena Flood, György Gyaraki, Dávid Hanák, Seif Haridi, Ralph Haygood, Christian Holzbaur, Tom Howland, Key Hyckenberg, Péter László, Per Mildner, Richard O'Keefe, Greger Ottosson, Dan Sahlin, Peter Schachte, Rob Scott, Thomas Sjöland, Péter Szeredi, Tamás Szeredi, Peter Van Roy, David Warren, Johan Widén, Magnus Ågren, and Emil Åström.

The Industrialization of SICStus Prolog (1988-1991) was funded by

> Ericsson Telecom AB, NobelTech Systems AB, Infologics AB, and Televerket, under the National Swedish Information Technology Program IT4.

The development of release 3 (1991-1995) was funded in part by

> Ellemtel Utvecklings AB

This manual is based in part on DECsystem-10 Prolog User's Manual by

> D.L. Bowen, L. Byrd, F.C.N. Pereira, L.M. Pereira, D.H.D. Warren

See Section 10.7 [lib-chr], page 414, for acknowledgments relevant to the CHR constraint solver.

See Section 10.10 [lib-clpqr], page 513, for acknowledgments relevant to the clp(Q,R) constraint solver.

UNIX is a registered trademark of The Open Group. Windows is a registered trademark of Microsoft Corp.

1 Notational Conventions

1.1 Keyboard Characters

When referring to keyboard characters, printing characters are written thus: `a`, while control characters are written like this: `^A`. Thus `^C` is the character you get by holding down the `CTL` key while you type `c`. Finally, the special control characters carriage-return, line-feed and space are often abbreviated to `RET`, `LFD` and `SPC` respectively.

Throughout, we will assume that `^D` is the EOF character (it is usually `^Z` under Windows) and that `^C` is the interrupt character. In most contexts, the term `end_of_file` terminated by a full stop (`.`) can be typed instead of the EOF character.

1.2 Mode Spec

When describing a predicate, we present its usage with a *mode spec*, which has the form *name(arg, ..., arg)*, where each *arg* denotes how that argument is used by the predicate, and has one of the following forms:

:ArgName The argument is used as a term denoting a goal or a clause or a predicate name, or that otherwise needs special handling of module prefixes. It is subject to *module name expansion* (see Section 4.11.15 [ref-mod-mne], page 175).

+ArgName
: The argument is an input argument. Usually, but not always, this implies that the argument should be instantiated.

-ArgName The argument is an output argument. Usually, but not always, this implies that the argument should be uninstantiated.

?ArgName
: The argument may be used for both input and output.

Please note: The reference pages for built-in predicate use slightly different mode specs.

1.3 Development and Runtime Systems

The full Prolog system with top level, compiler, debugger etc. is known as the *development system*.

It is possible to link user-written C code with a subset of SICStus Prolog to create *runtime systems*. When introducing a built-in predicate, any limitations on its use in runtime systems will be mentioned.

1.4 Function Prototypes

Whenever this manual documents a C function as part of SICStus Prolog's foreign language interface, the function prototype will be displayed in ANSI C syntax.

1.5 ISO Compliance

SICStus Prolog is fully compliant with the International Standard ISO/IEC 13211-1 (PROLOG: Part 1—General Core) as augmented by Technical Corrigenda 1, 2 and 3.

To aid programmers who wish to write standard compliant programs, built-in predicates and arithmetic functors that are part of the ISO Prolog Standard are annotated with *[ISO]* in this manual.

2 Glossary

abolish To abolish a predicate is to retract all the predicate's clauses and to remove all information about it from the Prolog system, to make it as if that predicate had never existed.

advice point
A special case of breakpoint, the advice breakpoint. It is distinguished from spypoints in that it is intended for non-interactive debugging, such as checking of program invariants, collecting information, profiling, etc.

alphanumeric
An alphanumeric character is any of the lowercase characters from '`a`' to '`z`', the uppercase characters from '`A`' to '`Z`', the numerals from '`0`' to '`9`', or underscore ('`_`').

ancestors An ancestor of a goal is any goal that the system is trying to solve when it calls that goal. The most distant ancestor is the goal that was typed at the top-level prompt.

anonymous variable
An anonymous variable is one that has no unique name, and whose value is therefore inaccessible. An anonymous variable is denoted by an underscore ('`_`').

answer constraint
The answer to a query as shown by the top level. The answer constraint usually consists of the values that were assigned to the variables in the query. In the context of blocked goals, coroutines, attributes, and constraint solvers, the answer constraint may include other information, related to unbound variables.

argument See predicate, structure, and arity.

arity The arity of a structure is its number of arguments. For example, the structure `customer(jones,85)` has an arity of 2.

atom A character sequence used to uniquely denote some entity in the problem domain. A number is *not* an atom. Examples of legal atoms are:

```
hello   *   :=   '#$%'   'New York'   'don\'t'
```

See Section 4.1.2.4 [ref-syn-trm-ato], page 48. Atoms are recognized by the built-in predicate `atom/1`. Each Prolog atom is represented internally by a unique integer, represented in C as an `SP_atom`.

atomic term
Synonym for constant.

backtrace A collection of information on the control flow of the program, gathered by the debugger. Also the display of this information produced by the debugger. The backtrace includes data on goals that were called but not exited and also on goals that exited nondeterminately.

backtracking
The process of reviewing the goals that have been satisfied and attempting to resatisfy these goals by finding alternative solutions.

binding The process of assigning a value to a variable; used in unification.

blocked goal
A goal that is suspended because it is not instantiated enough.

body The body of a clause consists of the part of a Prolog clause following the '`:-`' symbol.

breakpoint
A description of certain invocations in the program where the user wants the debugger to stop, or to perform some other actions. A breakpoint is specific if it applies to the calls of a specific predicate, possibly under some conditions; otherwise, it is generic. Depending on the intended usage, breakpoints can be classified as debugger breakpoints, also known as spypoints, or advice breakpoints, also called advice points; see Section 5.6 [Advanced Debugging], page 247.

breakpoint specification
A term describing a breakpoint. Composed of a test part, specifying the conditions under which the breakpoint should be applied, and an action part, specifying the effects of the breakpoint on the execution.

byte list A byte list is a list of bytes, i.e. integers in [0,. . .,255].

buffer A temporary workspace in Emacs that contains a file being edited.

built-in predicate
A predicate that comes with the system and that does not have to be explicitly loaded before it is used.

callable term
A callable term is either a compound term or an atom. Callable terms are recognized by the built-in predicate `callable/1`.

char list A char list is a list of chars, i.e. atoms made up of a single character.

character code
An integer that is the numeric representation of a character in the character code set.

character code set
A subset of the set {0, . . . , 2^31-1} that can be handled in input/output. SICStus Prolog fixes the character code set to a superset of Unicode, which includes the ASCII code set, i.e. codes 0..127, and these codes are interpreted as ASCII characters

character-conversion mapping
SICStus Prolog maintains a character-conversion mapping, which is used while reading terms and programs. Initially, the mapping prescribes no character conversions. It can be modified by the built-in predicate `char_conversion(`*`In`*`,` *`Out`*`)`, following which *In* will be converted to *Out*. Character conversion can be switched off by the `char_conversion` Prolog flag.

Please note: the mapping is *global*, as opposed to being local to the current module, Prolog text, or otherwise.

character-type mapping
: A function mapping each element of the character code set to one of the character categories (whitespace, letter, symbol-char, etc.), required for parsing tokens.

choicepoints
: A memory block representing outstanding choices for some goals or disjunctions.

clause
: A fact or a rule. A rule comprises a *head* and a body. A fact consists of a head only, and is equivalent to a rule with the body `true`.

code list
: A code list is a list of character codes.

conditional compilation
: Conditionally including or excluding parts of a file at compile time.

compactcode
: Virtual code representation of compiled code. A reasonable compromise between performance and space requirement. A valid value for the `compiling` Prolog flag.

compile
: To load a program (or a portion thereof) into Prolog through the compiler. Compiled code runs more quickly than interpreted code, and provides better precision for execution profiling and coverage analysis. On the other hand, you cannot debug compiled code in as much detail as interpreted code.

compound term
: A compound term is a term that is an atom together with one or more arguments. For example, in the term `father(X)`, `father` is the name, and `X` is the first and only argument. The argument to a compound term can be another compound term, as in `father(father(X))`. Compound terms are recognized by the built-in predicate `compound/1`.

conjunction
: A series of goals connected by the connective "and" (that is, a series of goals whose principal operator is '`,`').

console-based executable
: An executable that inherits the standard streams from the process that invoked it, e.g. a UNIX shell or a DOS-prompt.

constant
: An integer (for example: 1, 20, -10), a floating-point number (for example: 12.35), or an atom. Constants are recognized by the built-in predicate `atomic/1`.

consult
: To load a program (or a portion thereof) into Prolog through the interpreter. Interpreted code runs more slowly than compiled code, and does not provide as good precision for execution profiling and coverage analysis. On the other hand, you can debug interpreted code in more detail than compiled code.

control structure
: A built-in predicate that is "part of the language" in the sense that it is treated specially in certain language features. The set of such control structures and language features is enumerated in Section 4.2.3 [ref-sem-ctr], page 68.

creep What the debugger does in trace mode, also known as single-stepping. It goes to the next port of a procedure box and prints the goal, then prompts you for input. See Section 5.2 [Basic Debug], page 237.

cursor The point on the screen at which typed characters appear. This is usually highlighted by a line or rectangle the size of one space, which may or may not blink.

cut Written as `!`. A built-in predicate that succeeds when encountered; if backtracking should later return to the cut, then the goal that matched the head of the clause containing the cut fails immediately.

database The Prolog database comprises all of the clauses that have been loaded or asserted into the Prolog system or that have been asserted, except those clauses that have been retracted or abolished.

db_reference
A compound term denoting a unique reference to a dynamic clause. Recognized by the built-in predicate `db_reference/1`.

debug A mode of program execution in which the debugger stops to print the current goal only at predicates that have spypoints set on them (see leap).

debugcode
Interpreted representation of compiled code. A valid value for the `compiling` Prolog flag.

declaration
A declaration looks like a directive, but is not executed but rather conveys information about predicates about to be loaded.

deinit function
A function in a foreign resource that is called prior to unloading the resource.

determinate
A predicate is determinate if it can supply only one answer.

development system
A stand-alone executable with the full programming environment, including top level, compiler, debugger etc. The default `sicstus` executable is a development system; new development systems containing prelinked foreign resources can also be created.

directive A directive is a goal preceded by the prefix operator '`:-`', whose intuitive meaning is "execute this as a query, but do not print out any variable bindings."

disjunction
A series of goals connected by the connective "or" (that is, a series of goals whose principal operator is '`;`').

do loop A control structure of the form `(`*`Iterators`* `do` *`Body`*`)`. It expresses a simple iteration. See Section 4.2.3.5 [ref-sem-ctr-dol], page 72.

dynamic predicate
A predicate that can be modified while a program is running. The semantics of such updates is described in Section 4.12.1 [ref-mdb-bas], page 180. A predicate

must explicitly be declared to be dynamic or it must be added to the database via one of the assertion predicates.

encoded string
A sequence of bytes representing a sequence of possibly wide character codes, using the UTF-8 encoding.

escape sequence
A sequence of characters beginning with '\' inside certain syntactic tokens (see Section 4.1.7.6 [ref-syn-syn-esc], page 64).

export A module exports a predicate so that other modules can import it.

extended runtime system
A stand-alone executable. In addition to the normal set of built-in runtime system predicates, extended runtime systems include the compiler. Extended runtime systems require the extended runtime library, available from RISE as an add-on product.

fact A clause with no conditions—that is, with an empty body. A fact is a statement that a relationship exists between its arguments. Some examples, with possible interpretations, are:

```
king(louis, france).   % Louis was king of France.
have_beaks(birds).     % Birds have beaks.
employee(nancy, data_processing, 55000).
                       % Nancy is an employee in the
                       % data processing department.
```

file specification
An atom or a compound term denoting the name of a file. The rules for mapping such terms to absolute file names are described in Section 4.5 [ref-fdi], page 99.

floundered query
A query where all unsolved goals are blocked.

foreign predicate
A predicate that is defined in a language other than Prolog, and explicitly bound to Prolog predicates by the Foreign Language Interface.

foreign resource
A named set of foreign predicates.

functor The functor of a compound term is its name and arity. For example, the compound term `foo(a,b)` is said to have "the functor `foo` of arity two", which is generally written `foo/2`.

The functor of a constant is the term itself paired with zero. For example, the constant `nl` is said to have "the functor `nl` of arity zero", which is generally written `nl/0`.

garbage collection
The freeing up of space for computation by making the space occupied by terms that are no longer available for use by the Prolog system.

generalized predicate specification
: A generalized predicate specification corresponds to the argument type *pred_spec_tree* (see Section 11.1.4.2 [mpg-ref-aty-ety], page 940) and is a term of one of the following forms. It is always interpreted wrt. a given module context:

  Name
  : all predicates called *Name* no matter what arity, where *Name* is an atom for a specific name or a variable for all names, or

  Name/Arity
  : the predicate of that name and arity, or

  Module:Spec
  : specifying a particular module *Module* instead of the default module, where *Module* is an atom for a specific module or a variable for all modules, or

  [Spec,. . .,Spec]
  : the set of all predicates covered by the *Specs*.

glue code
: Interface code between the Prolog engine and foreign predicates. Automatically generated by the foreign language interface as part of building a linked foreign resource.

goal
: A simple goal is a predicate call. When called, it will either succeed or fail.

  A compound goal is a formula consisting of simple goals connected by connectives such as "and" (‘`,`’) or "or" (‘`;`’).

  A goal typed at the top level is called a query.

ground
: A term is ground when it is free of (unbound) variables. Ground terms are recognized by the built-in predicate `ground/1`.

guarded clause
: A clause of the form

  ```
  Head :- Goals, !, Goals.
  ```

head
: The head of a clause is the single goal, which will be satisfied if the conditions in the body (if any) are true; the part of a rule before the ‘`:-`’ symbol. The head of a list is the first element of the list.

hook predicate
: A hook predicate is a predicate that somehow alters or customizes the behavior of a hookable predicate. Typically, it is undefined initially, belongs to the `user` module, and if defined by the user, it is best defined as multifile, so that new clauses can be added by different software modules. **Please note**: unless documented otherwise, any exception thrown by a hook predicate is caught locally. Then it is either printed as an error message, or merely ignored.

hookable predicate
: A hookable predicate is a built-in predicate whose behavior is somehow altered or customized by a hook predicate.

interactive stream
: A stream with the `interactive` stream property. Certain behavior of interactive streams are optimized for the case where a human is at the other end of the stream.

import
: Exported predicates in a module can be imported by other modules. Once a predicate has been imported by a module, it can be called, or exported, as if it were defined in that module.

  There are two kinds of importation: predicate importation, in which only specified predicates are imported from a module; and module importation, in which all the predicates exported by a module are imported.

indexing
: The process of filtering a set of potentially matching clauses of a predicate given a goal.

  For both interpreted and compiled code, indexing is done on the principal functor of the first argument. Additionally, for interpreted code only, principal functor filtering is done on each argument, but the filtering done for the first argument is more efficient.

init function
: A function in a foreign resource that is called upon loading the resource.

initialization
: An initialization is a goal that is executed when the file in which the initialization is declared is loaded. An initialization is declared as a directive `:- initialization` *`Goal`*. They are executed in input order.

instantiation
: A variable is instantiated if it is bound to a non-variable term; that is, to an atomic term or a compound term.

interpret
: Load a program or set of clauses into Prolog through the interpreter (also known as consulting). Interpreted code runs more slowly than compiled code, does not provide as good precision for execution profiling and coverage analysis. On the other hand, more extensive facilities are available for debugging interpreted code.

invocation box
: Same as procedure box.

iterator
: A compound term expressing how a do loop should be iterated. See Section 4.2.3.5 [ref-sem-ctr-dol], page 72.

large integer
: An integer that is not a small integer.

layout term
: In the context of handling line number information for source code, a source term *Source* gets associated to a layout term *Layout*, which is one of the following:

  - `[]`, if no line number information is available for *Source*.

- If *Source* is a simple term, then *Layout* is the number of the line where *Source* occurs.
- If *Source* is a compound term, then *Layout* is a list whose head is the number of the line where the first token of *Source* occurs, and whose remaining elements are the layouts of the arguments of *Source*.

leap What the debugger does in debug mode. The debugger shows only the ports of predicates that have spypoints on them. It then normally prompts you for input, at which time you may leap again to the next spypoint (see trace).

leashing Determines how frequently the debugger will stop and prompt you for input when you are tracing. A port at which the debugger stops is called a "leashed port".

linked foreign resource
A foreign resource that is ready to be installed in an atomic operation, normally represented as a shared object or DLL.

list

A *partial list* is either a variable, or a compound term whose principal functor is the *list constructor* (`'.'/2`) and whose second argument is a partial list. Often it is implied that the partial list is not a variable.

A *proper list* is either the *empty list*, i.e. the atom `[]`, or a compound term whose principal functor is the list constructor (`'.'/2`) and whose second argument is a proper list.

A partial list or a proper list that is a compound term is said to be *non-empty*.

In many cases *list* is used to denote both the case of a proper list and the case of a, most often non-variable, partial list.

A *cyclic list* is a compound term whose principal functor is the list constructor (`'.'/2`) and whose second argument is a cyclic list, e.g. what could be constructed using `L='.'(a,L)`, or `L=[a,b|L]`. Passing a cyclic list as an argument to a predicate that expects a partial or proper list should be avoided as not all predicates are prepared to handle such input.

A list is often written using *list syntax*, e.g. using `[a,b]` to denote the (proper) list `'.'(a,'.'(b,[]))`, or using `[a,b|End]` to denote the (partial) list `'.'(a,'.'(b,End))`.

load To load a Prolog clause or set of clauses, in source or binary form, from a file or set of files.

meta-call The process of interpreting a callable term as a goal. This is done e.g. by the built-in predicate `call/1`.

meta-logical predicate
A predicate that performs operations that require reasoning about the current instantiation of terms or decomposing terms into their constituents. Such operations cannot be expressed using predicate definitions with a finite number of clauses.

meta-predicate
: A meta-predicate is one that calls one or more of its arguments; more generally, any predicate that needs to assume some module in order to operate is called a meta-predicate. Some arguments of a meta-predicate are subject to module name expansion.

module
: Every predicate belongs to a module. The name of a module is an atom. Some predicates in a module are exported. The default module is `user`.

module name expansion
: The process by which certain arguments of meta-predicates get prefixed by the source module. See Section 4.11.15 [ref-mod-mne], page 175.

module file
: A module file is a file that is headed with a module declaration of the form:

```
:- module(ModuleName, ExportedPredList).
```

which must appear as the first term in the file. When a module file or its corresponding object file is loaded, all predicates defined in the module are removed, and all predicate imported into the module are unimported.

multifile predicate
: A predicate whose definition is to be spread over more than one file. Such a predicate must be preceded by an explicit multifile declaration in all files containing clauses for it.

mutable term
: A special form of compound term subject to destructive assignment. See Section 4.8.9 [ref-lte-mut], page 135. Mutable terms are recognized by the built-in predicate `mutable/1`.

name clash
: A name clash occurs when a module attempts to define or import a predicate that it has already defined or imported.

nondeterminate
: A predicate is determinate if it can supply more than one answer.

occurs check
: A test to ensure that binding a variable does not bind it to a term where that variable occurs.

one-char atom
: An atom that consists of a single character.

operator
: A notational convenience that allows you to express any compound term in a different format. For example, if `likes` in

```
| ?- likes(sue, cider).
```

is declared an infix operator, then the query above could be written:

```
| ?- sue likes cider.
```

An operator does not have to be associated with a predicate. However, certain built-in predicates are declared as operators. For example,

```
| ?- =..(X, Y).
```

can be written as

```
| ?- X =.. Y.
```

because `=..` has been declared an infix operator.

Those predicates that correspond to built-in operators are written using infix notation in the list of built-in predicates at the beginning of the part that contains the reference pages.

Some built-in operators do *not* correspond to built-in predicates; for example, arithmetic operators. See Section 4.1.5.4 [ref-syn-ops-bop], page 55, for a list of built-in operators.

pair A compound term *`K-V`*. Pairs are used by the built-in predicate `keysort/2` and by many library modules.

parent The parent of the current goal is a goal that, in its attempt to obtain a successful solution to itself, is calling the current goal.

port One of the seven key points of interest in the execution of a Prolog predicate. See Section 5.1 [Procedure Box], page 235, for a definition.

prelinked foreign resource
A linked foreign resource that is linked into a stand-alone executable as part of building the executable.

precedence
A number associated with each Prolog operator, which is used to disambiguate the structure of the term represented by an expression containing a number of operators. Operators of lower precedence are applied before those of higher precedence; the operator with the highest precedence is considered the principal functor of the expression. To disambiguate operators of the same precedence, the associativity type is also necessary. See Section 4.1.5 [ref-syn-ops], page 51.

predicate A functor that specifies some relationship existing in the problem domain. For example, `< /2` is a built-in predicate specifying the relationship of one number being less than another. In contrast, the functor `+ /2` is not (normally used as) a predicate.

A predicate is either built-in or is implemented by a procedure.

predicate specification
A compound term *`name/arity`* or *`module`*`:`*`name/arity`* denoting a predicate.

procedure A set of clauses in which the head of each clause has the same predicate. For instance, a group of clauses of the following form:

```
connects(san_francisco, oakland, bart_train).
connects(san_francisco, fremont, bart_train).
connects(concord, daly_city, bart_train).
```

is identified as belonging to the predicate `connects/3`.

procedure box
A way of visualizing the execution of a Prolog procedure, A procedure box is entered and exited via ports.

profiling The process of gathering execution statistics of the program, essentially counting the number of times selected program points have been reached.

program A set of procedures designed to perform a given task.

PO file A PO (Prolog object) file contains a binary representation of a set of modules, predicates, clauses and directives. They are portable between different platforms, except between 32-bit and 64-bit platforms. They are created by `save_files/2`, `save_modules/2`, and `save_predicates/2`.

query A query is a question put by the user to the Prolog system. A query is written as a goal followed by a full stop in response to the top-level prompt. For example,

```
| ?- father(edward, ralph).
```

refers to the predicate `father/2`. If a query has no variables in it, then the system will respond either '`yes`' or '`no`'. If a query contains variables, then the system will try to find values of those variables for which the query is true. For example,

```
| ?- father(edward, X).
X = ralph
```

After the system has found one answer, the user can direct the system to look for additional answers to the query by typing `;`.

recursion The process in which a running predicate calls itself, presumably with different arguments and for the purpose of solving some subset of the original problem.

region The text between the cursor and a previously set mark in an Emacs buffer.

rule A clause with one or more conditions. For a rule to be true, all of its conditions must also be true. For example,

```
has_stiff_neck(ralph) :-
   hacker(ralph).
```

This rule states that if the individual `ralph` is a hacker, then he must also have a stiff neck. The constant `ralph` is replaced in

```
has_stiff_neck(X) :-
   hacker(X).
```

by the variable `X`. `X` unifies with anything, so this rule can be used to prove that any hacker has a stiff neck.

runtime kernel
A shared object or DLL containing the SICStus virtual machine and other runtime support for stand-alone executables.

runtime system
A stand-alone executable with a restricted set of built-in predicates and no top level. Stand-alone applications containing debugged Prolog code and destined for end-users are typically packaged as runtime systems.

saved state
A snapshot of the state of Prolog saved in a file by `save_program/[1,2]`.

semantics The relation between the set of Prolog symbols and their combinations (as Prolog terms and clauses), and their meanings. Compare syntax.

sentence A clause or directive.

side effect A predicate that produces a side effect is one that has any effect on the "outside world" (the user's terminal, a file, etc.), or that changes the Prolog database.

simple term
A simple term is a constant or a variable. Simple terms are recognized by the built-in predicate `simple/1`.

skeletal goal
A compound term *`name`*`(`*`arg`*`, ..., `*`arg`*`)` or *`module`*`:`*`name`*`(`*`arg`*`, ..., `*`arg`*`)` denoting a predicate.

small integer
An integer in the range `[-2^28,2^28-1]` on 32-bit platforms, or `[-2^60,2^60-1]` on 64-bit platforms. The start and end of this range is available as the value of the Prolog flags `min_tagged_integer` and `max_tagged_integer`, respectively.

source code
The human-readable, as opposed to the machine-executable, representation of a program.

source module
The module that is the context of a file being loaded. For module files, the source module is named in the file's module declaration. For other files, the source module is inherited from the context.

SP_atom *since release 4.3*
A C type for the internal representation of Prolog atoms. Used in SICStus API functions.

SP_integer *since release 4.3*
A C type denoting an integer that is large enough to hold a pointer. Used in SICStus API functions.

SP_term_ref
A C type denoting a "handle" object providing an interface from C to Prolog terms. Used in SICStus API functions.

spypoint A special case of breakpoint, the *debugger breakpoint*, intended for interactive debugging. Its simplest form, the *plain spypoint* instructs the debugger to stop at all ports of all invocations of a specified predicate. *Conditional spypoints* apply to a single predicate, but are more selective: the user can supply applicability *tests* and prescribe the *actions* to be carried out by the debugger. A *generic spypoint* is like a conditional spypoint, but not restricted to a single predicate. See Section 5.6 [Advanced Debugging], page 247.

stand-alone executable
A binary program that can be invoked from the operating system, containing the SICStus runtime kernel. A stand-alone executable is a development system

(e.g. the default `sicstus` executable), or a runtime system. Both kinds are created by the application builder. A stand-alone executable does not itself contain any Prolog code; all Prolog code must be loaded upon startup.

static predicate
: A predicate that can be modified only by being reloaded or by being abolished. See dynamic predicate.

steadfast
: A predicate is steadfast if it refuses to give the wrong answer even when the query has an unexpected form, typically with values supplied for arguments intended as output.

stream
: An input/output channel. See Section 4.6 [ref-iou], page 106.

stream alias
: A name assigned to a stream at the time of opening, which can be referred to in I/O predicates. Must be an atom. There are also three predefined aliases for the standard streams: `user_input`, `user_output` and `user_error`. Although not a stream alias proper, the atom `user` also stands for the standard input or output stream, depending on context.

stream object
: A term denoting an open Prolog stream. See Section 4.6 [ref-iou], page 106.

stream position
: A term representing the current position of a stream. This position is determined by the current byte, character and line counts and line position. Standard term comparison on stream position terms works as expected. When `SP1` and `SP2` refer to positions in the same stream, `SP1@<SP2` if and only if `SP1` is before `SP2` in the stream. You should not otherwise rely on their internal representation.

stream property
: A term representing the property of an open Prolog stream. The possible forms of this term are defined in Section 4.6.7.8 [ref-iou-sfh-bos], page 117.

string
: A special syntactic notation, which, by default, denotes a code list, e.g.:

```
"SICStus"
```

By setting the Prolog flag `double_quotes`, the meaning of strings can be changed. With an appropriate setting, a string can be made to denote a char list, or an atom. Strings are *not* a separate data type.

subterm selector
: A list of argument positions selecting a subterm within a term (i.e. the subterm can be reached from the term by successively selecting the argument positions listed in the selector). Example: within the term `q, (r, s; t)` the subterm `s` is selected by the selector `[2, 1, 2]`.

syntax
: The part of Prolog grammar dealing with the way in which symbols are put together to form legal Prolog terms. Compare semantics.

system property
: SICStus Prolog stores some information in named variables called system properties. System properties are used as of release 4.1, where previous releases used environment variables.

  The default value for a system property is taken from the corresponding environment variable. Any exceptions to this rule is explicitly mentioned in the documentation. See Section 4.17.1 [System Properties and Environment Variables], page 228, for more information.

term
: A basic data object in Prolog. A term can be a constant, a variable, or a compound term.

trace
: A mode of program execution in which the debugger creeps to the next port and prints the goal.

type-in module
: The module that is the context of queries.

unblocked goal
: A goal that is not blocked any more.

unbound
: A variable is unbound if it has not yet been instantiated.

unification
: The process of matching a goal with the head of a clause during the evaluation of a query, or of matching arbitrary terms with one another during program execution.

  The rules governing the unification of terms are:

  - Two constants unify with one another if they are identical.
  - A variable unifies with a constant or a compound term. As a result of the unification, the variable is instantiated to the constant or compound term.
  - A variable unifies with another variable. As a result of the unification, they become the same variable.
  - A compound term unifies with another compound term if they have the same functor and if all of the arguments can be unified.

unit clause
: See fact.

variable
: A logical variable is a name that stands for objects that may or may not be determined at a specific point in a Prolog program. When the object for which the variable stands is determined in the Prolog program, the variable becomes instantiated. A logical variable may be unified with a constant, a compound term, or another variable. Variables become uninstantiated when the predicate they occur in backtracks past the point at which they were instantiated.

  Variables may be written as any sequence of alphanumeric characters starting with either a capital letter or '_'; e.g.:

  ```
  X   Y   Z   Name   Position   _c   _305  One_stop
  ```

  See Section 4.1.2.5 [ref-syn-trm-var], page 48.

volatile
: Predicate property. The clauses of a volatile predicate are not saved in saved states.

windowed executable
: An executable that pops up its own window when run, and that directs the standard streams to that window.

zip
: Same as debug mode, except no debugging information is collected while zipping.

3 How to Run Prolog

SICStus Prolog offers the user an interactive programming environment with tools for incrementally building programs, debugging programs by following their executions, and modifying parts of programs without having to start again from scratch.

The source text of a Prolog program is normally created in a file or a number of files, using the SPIDER IDE (see Section 3.11 [SPIDER], page 32) or GNU Emacs (see Section 3.12 [Emacs Interface], page 34). Other text editors can also be used but will typically not contain any Prolog-specific functionality.

SICStus can then be instructed to load the program from these source files; typically by *compiling* the file, i.e. converting the file to an efficient internal representation. Alternatively, the Prolog interpreter can be instructed to read in programs from these files without such conversion; this is called *consulting* the file (sometimes "consulting" is used to denote both these ways of loading program from its source files).

3.1 Getting Started

Under UNIX, SICStus Prolog can be started from one of the shells. On other platforms, it is normally started by clicking on an icon. However, it is often convenient to run SICStus Prolog under GNU Emacs or the SPIDER IDE (see Section 3.11 [SPIDER], page 32), instead. A GNU Emacs interface for SICStus Prolog is described later (see Section 3.12 [Emacs Interface], page 34). From a UNIX or Windows shell, SICStus Prolog can be started by invoking the `sicstus` command-line tool, using the full path to `sicstus` unless its location has been added to the shell's path.

The development system checks that a valid SICStus license exists and, unless the `--nologo` option was used, responds with a message of identification and the prompt '`| ?- `' as soon as it is ready to accept input, thus:

```
SICStus 4.10.2 ...
Licensed to SICS
| ?-
```

At this point the top level is expecting input of a *query*. You cannot type in clauses or directives immediately (see Section 3.3 [Inserting Clauses], page 24). While typing in a query, the prompt (on following lines) becomes ' '. That is, the '`| ?- `' appears only for the first line of the query, and subsequent lines are indented.

3.2 Reading in Programs

A program is made up of a sequence of clauses and directives. The clauses of a predicate do not have to be immediately consecutive, but remember that their relative order may be important (see Section 4.2 [ref-sem], page 65).

To input a program from a file *file*, issue a query of the form:

```
| ?- compile(file).
```

or the equivalent but shorter form

```
| ?- [file].
```

This instructs the system to read in (compile) the program. Note that it may be necessary to enclose the filename *file* in single quotes to make it a legal Prolog atom; e.g.:

```
| ?- compile('myfile.pl').

| ?- ['/usr/prolog/somefile'].
```

The specified file is then read in. Clauses in the file are stored so that they can later be run, while any directives are obeyed as they are encountered. When the end of the file is found, the system displays on the standard error stream the time spent. This indicates the completion of the query.

Predicates that expect the name of a Prolog source file, or more generally a file specification, use the facilities described in Section 4.5 [ref-fdi], page 99, to resolve the file name. File extensions are optional. There is also support for libraries.

This query can also take a list of filenames, such as:

```
| ?- [myprog,extras,tests].
```

or

```
| ?- compile([myprog,extras,tests]).
```

In this case all three files would be loaded. The clauses for all the predicates in the loaded files will replace any existing clauses for those predicates, i.e. any such previously existing clauses in the database will be deleted.

3.3 Inserting Clauses at the Terminal

Clauses may also be typed in directly at the terminal, although this is only recommended if the clauses will not be needed permanently, and are few in number. To enter clauses at the terminal, you load the code from the special file `user`:

```
| ?- [user].
|
```

and the new prompt '`| `' shows that the system is now in a state where it expects input of clauses or directives. To return to top level, type `^D` if in a terminal, or `end_of_file.` followed by `RET`. The system responds thus:

```
% compiled user in module user, 20 msec 200 bytes
```

3.4 Queries and Directives

Queries and directives are ways of directing the system to execute some goal or goals.

In the following, suppose that list membership has been defined by loading the following clauses from a file:

```
memb(X, [X|_]).
memb(X, [_|L]) :- memb(X, L).
```

(Notice the use of anonymous variables written '_'.)

This is similar to how the builtin `member/2` is defined.

3.4.1 Queries

The full syntax of a query is '`?-`' followed by a sequence of goals. The top level expects queries. This is signaled by the initial prompt '`| ?- `'. Thus a query at top level looks like:

```
| ?- memb(X, [a,b,c]).
```

Remember that Prolog terms must terminate with a full stop ('`.`', possibly followed by whitespace), and that therefore Prolog will not execute anything until you have typed the full stop (and then `RET`) at the end of the query.

If some query variables not beginning with '_' were bound, as in this example, then the final value of each variable is displayed. Thus the above query would be answered by:

```
X = a ?
```

At this point, the development system accepts one-letter commands corresponding to certain actions. To execute an action simply type the corresponding character followed by `RET`. The available commands in development systems are:

`RET`
`y` "accepts" the solution; the query is terminated and the development system responds with '`yes`'.

`;`
`n` "rejects" the solution; the development system backtracks (see Section 4.2 [refsem], page 65) looking for alternative solutions. If no further solutions can be found, then it outputs '`no`'.

`b` invokes a recursive top level.

`<` In the top level, a global *printdepth* is in effect for limiting the subterm nesting level when printing bindings. The limit is initially 10.

This command, without arguments, resets the printdepth to 10. With an argument of *n*, the printdepth is set to *n*, treating 0 as infinity. This command works by changing the value of the `toplevel_print_options` Prolog flag.

`^` A local *subterm selector*, initially `[]`, is maintained. The subterm selector provides a way of zooming in to some subterm of each binding. For example, the subterm selector `[2,3]` causes the 3rd subterm of the 2nd subterm of each binding to be selected.

This command, without arguments, resets the subterm selector to `[]`. With an argument of 0, the last element of the subterm selector is removed. With an argument of *n* (> 0), *n* is added to the end of the subterm selector. With multiple arguments separated by whitespace, the arguments are applied from left to right. n

h
? lists available commands.

While the variable bindings are displayed, all variables occurring in the values are replaced by friendlier variable names. Such names come out as a sequence of letters and digits preceded by '_'. The outcome of some queries is shown below.

```
| ?- memb(X, [tom,dick,harry]).

X = tom ;
X = dick ;
X = harry ;

no
| ?- memb(X, [a,b,f(Y,c)]), memb(X, [f(b,Z),d]).

X = f(b,c),
Y = b,
Z = c

| ?- memb(X, [f(_),g]).

X = f(_A)
```

If the goal(s) specified in a query can be satisfied, and if no variables not beginning with '_' were bound, then no variable bindings will be displayed. In this case there are two possible answers.

In the simplest case, when the system can determine that there cannot be any more solutions, then the system answers:

```
yes
```

and execution of the query terminates.

Alternatively, if there are potentially more answers[1], the system instead answers:

```
true ?
```

and waits for the usual one-letter commands, as described above.

[1] I.e. there are pending choicepoints.

This example shows what happens when there are multiple solutions, but when no variable binding is shown:

```
| ?- memb(_X, [a,b,c]).
true ?
```

here there are three possible solutions, binding the variable *_X* to '`a`', '`b`' and '`c`', respectively. But, as the variable name starts with '`_`', its bindings will not be displayed. Since there are more solutions after the first solution, the system prompts for a one-letter command even though there are no variable bindings to display.

The following example illustrates a difference in behavior when using the `memb/2` as defined above, and the builtin `member/2`, when there is only one solution:

```
memb(c, [a,b,c]).
true ?
```

here '`c`' is the last element, but the system *cannot* determine that this is the last solution. Therefore, the system answers '`true`' and waits for a one-letter command.

```
| ?- member(c, [a,b,c]).
yes
```

in this case too '`c`' is the last element, but the system *can* determine that this is the last solution. Since there are also no variable bindings to display, the system answers '`yes`' and the execution of the query terminates without waiting for a one-letter command.

The difference in behavior is because the builtin `member/2` is carefully constructed to ensure that no useless alternatives (i.e. choicepoints) are created. This makes `member/2` more efficient than the naive implementation of `memb/2`. See Section 9.5 [Indexing], page 364, for more on this.

3.4.2 Directives

Directives are like queries except that:

1. Variable bindings are not displayed if and when the directive succeeds.
2. You are not given the chance to backtrack through other solutions.
3. Some directives are special in that they are not valid as queries.

Directives start with the symbol '`:-`'. Any required output must be programmed explicitly; e.g. the directive:

```
:- memb(3, [1,2,3]), write(ok).
```

asks the system to check whether `3` belongs to the list `[1,2,3]`. Execution of a directive terminates when all the goals in the directive have been successfully executed. Other alternative solutions are not sought. If no solution can be found, then the system prints:

```
* Goal - goal failed
```

as a warning.

The principal use for directives (as opposed to queries) is to allow files to contain directives that call various predicates, but for which you do not want to have the answers printed out. In such cases you only want to call the predicates for their effect, i.e. you do not want terminal interaction in the middle of loading the file. A useful example would be the use of a directive in a file that loads a whole list of other files, e.g.:

```
:- ensure_loaded([ bits, bobs, main, tests, data, junk ]).
```

(`ensure_loaded/1` is yet another way that Prolog code can be loaded.)

If a directive like this were contained in the file `myprog`, then typing the following at top level would be a quick way of reading in your entire program:

```
| ?- [myprog].
```

When simply interacting with the top level, this distinction between queries and directives is not normally very important. At top level you should just type queries normally. In a file, queries are in fact treated as clauses, i.e. if you wish to execute some goals, then the directive in the file must be preceded by '`:-`' or '`?-`'; otherwise, it would be treated as a clause.

3.5 Syntax Errors

Syntax errors are detected during reading[2]. Each clause, directive or, in general, any term read in by the built-in predicate `read/1` that fails to comply with syntax requirements is displayed on the standard error stream as soon as it is read, along with its position in the input stream and a mark indicating the point in the string of symbols where the parser has failed to continue analysis, e.g.:

```
| memb(X, X$L).
! Syntax error
! , or ) expected in arguments
! in line 5
! memb ( X , X
! <<here>>
! $ L ) .
```

if '`$`' has not been declared as an infix operator.

Note that any comments in the faulty line are not displayed with the error message. If you are in doubt about which clause was wrong, then you can use `consult/1`[3] to load the code

[2] The SICStus Prolog IDE (see Section 3.11 [SPIDER], page 32) will show syntax errors and many other programming errors directly in the editor, while the code is edited, without loading the code.

[3] By default, e.g. when using `[myprog]`, code is *compiled*. Compiled code cannot be listed with `listing/1`. Using `consult([myprog])` ensures that the code is *interpreted*, making it available for listing with `listing/1`.

and then use the `listing/1` predicate to list all the clauses that were successfully read in, e.g.:

```
| ?- listing(memb/2).
```

Please note: The built-in predicates `read/[1,2]` normally raise an exception on syntax errors (see Section 4.15 [ref-ere], page 201). The behavior is controlled by the Prolog flag `syntax_errors`.

3.6 Undefined Predicates

There is a difference between predicates that have no definition and predicates that have no clauses. The latter case is meaningful e.g. for dynamic predicates (see Section 4.3.4 [ref-lod-dcl], page 87) that clauses are being added to or removed from. There are good reasons for treating calls to undefined predicates as errors, as such calls easily arise from typing errors.

The system can optionally catch calls to predicates that have no definition. First, the user defined predicate `user:unknown_predicate_handler/3` (see Section 4.15 [ref-ere], page 201) is called. If undefined or if the call fails, then the action is governed by the state of the `unknown` Prolog flag; see Section 4.9.4 [ref-lps-flg], page 140. Calls to predicates that have no clauses are not caught. See Section 11.3.245 [mpg-ref-unknown_predicate_handler], page 1278. Two development system predicates are handy in this context:

```
| ?- unknown(X,error).
% Undefined predicates will raise an exception (error)
X = error
```

This sets the flag and prints a message about the new value.

```
| ?- debugging.
The debugger is switched off
Using leashing stopping at [call,exit,redo,fail,exception] ports
Undefined predicates will raise an exception (error)
There are no breakpoints
```

This prints a message about the current value, as well as information about the state of the debugger.

3.7 Program Execution And Interruption

Execution of a program is started by giving the system a query that contains a call to one of the program's predicates.

Only when execution of one query is complete does the system become ready for another query. However, one may interrupt the normal execution of a query. If running in a terminal this is done by typing `^C`; if running in SPIDER or GNU Emacs there are special commands for this. This interruption has the effect of suspending the execution, and the following message is displayed:

```
Prolog interruption (h or ? for help) ?
```

At this point, the development system accepts one-letter commands corresponding to certain actions. To execute an action simply type the corresponding character followed by `RET`. The available commands in development systems are:

`a` aborts the current computation.

`c` continues the execution.

`e` exits from SICStus Prolog, closing all files.

`h`
`?` lists available commands.

`b` invokes a recursive top level.

`d`
`z`
`t` switch on the debugger. See Chapter 5 [Debug Intro], page 235.

3.8 Exiting From The Top Level

To exit from the top level and return to the shell, either type `^D` at the top level, or call the built-in predicate `halt/0`, or use the `e` (exit) command following a `^C`[4] interruption.

3.9 Nested Executions—Break

The Prolog system provides a way to suspend the execution of your program and to enter a new incarnation of the top level where you can issue queries to solve goals etc. This is achieved by issuing the query (see Section 3.7 [Execution], page 29):

```
| ?- break.
```

This invokes a recursive top level, indicated by the message:

```
% Break level 1
```

You can now type queries just as if you were at top level.

If another call of `break/0` is encountered, then it moves up to level 2, and so on. To close the break and resume the execution that was suspended, type `^D` or equivalent. The debugger state and current input and output streams will be restored, and execution will be resumed at the predicate call where it had been suspended after printing the message:

```
% End break
```

3.10 Saving and Restoring Program States

Once a program has been read, the system will have available all the information necessary for its execution. This information is called a *program state*.

[4] As noted above, `^D` and `^C` only works if running in a terminal or similar. If you are running inside SPIDER or GNU Emacs they have other ways to achieve the same effects.

The saved state of a program may be saved on disk for future execution. To save a program into a file *File*, type the following query.

```
| ?- save_program(File).
```

You can also specify a goal to be run when a saved program is restored. This is done by:

```
| ?- save_program(File, start).
```

where `start/0` is the predicate to be called.

Under UNIX, e.g. like macOS or Linux, a saved state *file* can be executed directly by typing:

```
% file argument...
```

This is equivalent to:

```
% sicstus -r file -- argument...
```

Please note: saved states do not store the complete path of the binary `sicstus`. Instead, they call the main executable using the version specific name `sicstus-4.10.2`, which is assumed to be found in the shell's path. If there are several versions of SICStus installed, then it is up to the user to make sure that the correct start-script is found.

Notice that the flags are not available when executing saved states—all the command-line arguments are treated as Prolog arguments.

Once a program has been saved into a file *File*, the following query will restore the system to the saved state:

```
| ?- restore(File).
```

If a saved state has been moved or copied to another machine, or if it is a symbolic link, then the path names of foreign resources and other files needed upon restore are typically different at restore time from their save time values. To solve this problem, certain atoms will be renamed during restore as follows:

- Atoms that had `$SP_PATH/library` (the name of the directory containing the Prolog Library) as prefix at save time will have that prefix replaced by the corresponding restore time value.

- Atoms that had the name of the directory containing *File* as prefix at save time will have that prefix replaced by the corresponding restore time value.

The purpose of this procedure is to be able to build and deploy an application consisting of a saved state and other files as a directory tree with the saved state at the root: as long as the other files maintain their relative position in the deployed copy, they can still be found upon restore. See Section 6.8.2 [Building for a Target Machine], page 339, for an example.

> **Please note**: When creating a saved state with `save_program/[1,2]`, the names and paths of foreign resources, are included in the saved state. After restoring a saved state, this information is used to reload the foreign resources again.
>
> The state of the foreign resource in terms of global C variables and allocated memory is thus not preserved. Foreign resources may define init and deinit functions to take special action upon loading and unloading; see Section 6.2.6 [Init and Deinit Functions], page 301.

Partial saved states corresponding to a set of source files, modules, and predicates can be created by the built-in predicates `save_files/2`, `save_modules/2`, and `save_predicates/2` respectively. These predicates create files in a binary format, by default with the suffix '`.po`' (for Prolog object), which can be loaded by `load_files/[1,2]`. In fact, PO files use exactly the same binary format as saved states, and are subject to the same above-mentioned atom renaming rules. For example, to compile a program split into several source files into a single PO file, type:

```
| ?- compile(Files), save_files(Files, Object).
```

For each filename given, the first goal will try to locate a source file and compile it into memory. The second goal will save the program just compiled into a PO file whose default suffix is '`.po`'. Thus the PO file will contain a partial memory image.

> **Please note**: PO files can be created with any suffix, but cannot be loaded unless the suffix is '`.po`'!

3.11 SICStus Prolog IDE

SICStus Prolog IDE, also known as SPIDER, is an Eclipse-based development environment for SICStus with many powerful features.

SPIDER was added in release 4.1 and is described on its own site, `https://sicstus.sics.se/spider/`.

Some of the features of SPIDER are:

Semantic Highlighting
: Code is highlighted based on semantic properties such as singleton variables, ...

On-the-fly warnings
: The editor flags things like calls to undefined predicates, incorrect use of directives, missing declarations, ...

Pop-up documentation
: Predicate documentation is parsed on-the-fly and shown when the mouse is hovering over a call. This works for both built-in and user-defined predicates.

Open Definition
: Clicking on a called predicate can bring up its source code.

Call Hierarchy
: Show callers and other references to a predicate or file.

Profiling
: Show profiling data

Source Code Coverage
: Show source code coverage, both as margin annotations and in various tabular forms.

File outline
: The predicates in a file are shown in an outline. They can be alphabetically sorted and non-exported predicates can be hidden from the outline.

Variable Bindings in Debugger
: The debugger shows the names and values of variables.

Debugger Backtrace
: Backtrace is shown and there are buttons for common debugger actions (Step Over, Step Out, Redo, . . .).

Source Code Debugging
: Source-linked debugging. Works also for code that has no recorded source info, like the SICStus library.

Prolog Toplevel
: The ordinary toplevel is still available, including the traditional debugger interface.

Attach to embedded code
: SPIDER can attach to a SICStus runtime embedded in some other program.

Works With Existing Code
: No need to reorganize your code, SPIDER can work with your existing folder structure.

Powered by Eclipse
: Eclipse provides many features for free, like support for other programming languages, revision control, and much more.

Some of these features can be seen in the following screen shot:

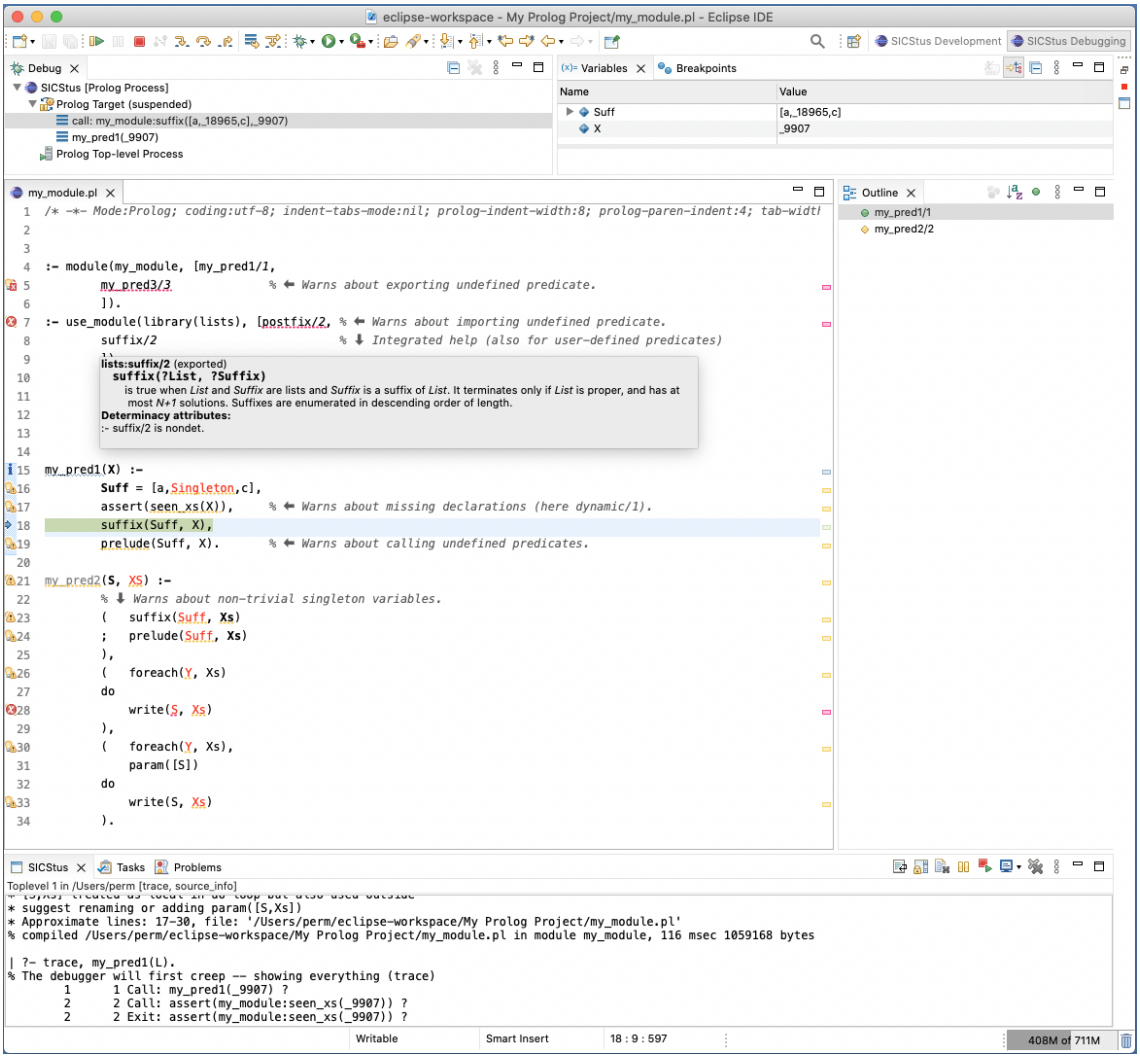

Some Features of SPIDER

3.12 Emacs Interface

This section explains how to use the GNU Emacs interface for SICStus Prolog, and how to customize your GNU Emacs environment for it. Note that the SPIDER IDE (see Section 3.11 [SPIDER], page 32) has many more features than the GNU Emacs interface.

Emacs is a powerful programmable editor especially suitable for program development. It is available for free for many platforms, including various UNIX dialects, Windows and macOS. For information about GNU Emacs, see `https://www.gnu.org/software/emacs/` .

The advantages of using SICStus in the Emacs environment are source-linked debugging, auto indentation, syntax highlighting, help on predefined predicates (requires the SICStus info files to be installed), loading code from inside Emacs, auto-fill mode, and more.

The Emacs interface is not part of SICStus Prolog proper, but is included in the distribution for convenience. It was written by Emil Åström and Milan Zamazal, based on an earlier version of the mode written by Masanobu Umeda. Contributions have also been made by Johan Andersson, Peter Olin, Mats Carlsson, Johan Bevemyr, Stefan Andersson, Per Danielsson, Per Mildner, Henrik Båkman, and Tamás Rozmán. Some ideas and also a few lines of code have been borrowed (with permission) from `Oz.el`, by Ralf Scheidhauer and Michael Mehl, the Emacs major mode for the Oz programming language.

3.12.1 Installation

See Section "The Emacs Interface" in *SICStus Prolog Release Notes* for more information about installing the Emacs interface.

3.12.1.1 Quick-Start

Assuming the Emacs interface for SICStus Prolog has been installed in the default location, inserting a single line in your `~/.emacs` will make Emacs use the SICStus Prolog mode automatically when editing files with a '`.pro`' or '`.pl`' extension. It will also ensure Emacs can find the SICStus executables and on-line documentation, etc.

Note to Windows users: `~/.emacs` denotes a file `.emacs` in whatever Emacs considers to be your *home* directory. See '`GNU Emacs FAQ For MS Windows`' at `https://www.gnu.org/software/emacs/windows/ntemacs.html` for details.

Under UNIX, assuming SICStus 4.10.2 was installed in `/usr/local/sicstus4.10.2/`, add the following line:

```
(load "/usr/local/sicstus4.10.2/lib/sicstus-4.10.2/emacs/sicstus_emacs_init")
```

Under Windows, assuming SICStus 4.10.2 was installed in `C:\Program Files\SICStus Prolog VC16 4.10.2\`, add the following line:

```
(load "C:/Program Files/SICStus Prolog VC16
4.10.2/emacs/sicstus_emacs_init")
```

No other configuration should be needed to get started. If you want to customize things, then look in the `sicstus_emacs_init.el` file and the rest of this section.

3.12.1.2 Customizing Emacs

Version 20 of GNU Emacs introduced a new method for editing and storing user settings. This feature is available from the menu bar as '`Customize`' and particular Emacs variables can be customized with *`M-x customize-variable`*. Using '`Customize`' is the preferred way to modify the settings for Emacs and the appropriate customize commands will be indicated below, sometimes together with the old method of directly setting Emacs variables.

3.12.1.3 Enabling Emacs Support for SICStus

This section is for reference only, **it can safely be skipped**; it will let you understand the setup that is performed by the `sicstus_emacs_init.el` file.

Assuming the Emacs interface for SICStus Prolog has been installed in the default location, inserting the following lines in your `~/.emacs` will make Emacs use this mode automatically when editing files with a '`.pro`' or '`.pl`' extension:

```
(setq load-path
   (cons (expand-file-name "/usr/local/sicstus4.10.2/lib/sicstus-4.10.2/emacs")
         load-path))
(autoload 'run-prolog "prolog" "Start a Prolog sub-process." t)
(autoload 'prolog-mode "prolog" "Major mode for editing Prolog programs." t)
(setq prolog-use-sicstus-sd t)
(setq auto-mode-alist (append '(("\\.pro$" . prolog-mode)
                                ("\\.pl$" . prolog-mode))
                              auto-mode-alist))
```

where the path in the first line is the file system path to `prolog.el` (the generic Prolog mode) and `sicstus-support.el` (SICStus specific code). For example, `~/emacs` means that the file is in the user's home directory, in directory emacs. Windows paths can be written like `C:/Program Files/SICStus Prolog VC16 4.10.2/emacs`.

The last line above makes sure that files ending with '`.pro`' or '`.pl`' are assumed to be Prolog files and not Perl, which is the default Emacs setting for '`.pl`'. If this is undesirable, then remove that line. It is then necessary for the user to manually switch to Prolog mode by typing *`M-x prolog-mode`* after opening a Prolog file; for an alternative approach, see Section 3.12.4 [Mode Line], page 40.

If the shell command `sicstus` is not available in the default path, then it is necessary to set the value of the environment variable `EPROLOG` to a shell command to invoke SICStus Prolog. This is an example for the UNIX standard shell:

```
% EPROLOG='/usr/local/sicstus4.10.2/bin/sicstus'; export EPROLOG
```

3.12.1.4 Enabling Emacs Support for SICStus Documentation

If you follow the steps in Section Quick Start above, then you can skip this section.

It is possible to look up the documentation for any built-in or library predicate from within Emacs (using *`C-c ?`* or the menu). For this to work Emacs must be told about the location of the '`info`'-files that make up the documentation.

The default location for the '`info`'-files are `<prefix>/lib/sicstus-4.10.2/doc/info/` on UNIX platforms and `C:/Program Files/SICStus Prolog VC16 4.10.2/doc/info/` under Windows.

Add the following to your `~/.emacs` file, assuming INFO is the path to the info files, e.g. `C:/Program Files/SICStus Prolog VC16 4.10.2/doc/info/`

```
(setq Info-default-directory-list
   (append Info-default-directory-list '("INFO")))
```

You can also use *M-x customize-group RET info RET*. You may have to quit and restart Emacs for these changes to take effect.

3.12.2 Basic Configuration

If the following lines are not present in `~/.emacs`, then we suggest they are added, so that the font-lock mode (syntax coloring support) is enabled for all major modes in Emacs that support it.

```
(global-font-lock-mode t)
(setq font-lock-maximum-decoration t)
```

These settings and more are also available through *M-x customize-group* RET *font-lock*.

If one wants to add font-locking only to the Prolog mode, then the two lines above could be replaced by:

```
(add-hook 'prolog-mode-hook 'turn-on-font-lock)
```

Similarly, to turn it off only for Prolog mode use:

```
(add-hook 'prolog-mode-hook 'turn-off-font-lock)
```

3.12.3 Usage

A Prolog process can be started by choosing `Run Prolog` from the `Prolog` menu, by typing *C-c RET*, or by typing *M-x run-prolog*. It is however not strictly necessary to start a Prolog process manually since it is automatically done when consulting or compiling, if needed. The process can be restarted (i.e. the old one is killed and a new one is created) by typing *C-u C-c RET*, in this case Emacs will also prompt for a Lisp list of extra parameters to pass on the command line.

Programs are run and debugged in the normal way, with terminal I/O via the `*prolog*` buffer. The most common debugging predicates are available from the menu or via key-bindings.

A particularly useful feature under the Emacs interface is source-linked debugging. This is enabled or disabled using the `Prolog/Source-linked debugging` menu entry. It can also be enabled by setting the Emacs variable `prolog-use-sicstus-sd` to `t` in `~/.emacs`. Both these methods set the Prolog flag `source_info` to `emacs`. Its value should be `emacs` while loading the code to be debugged and while debugging. If so, then the debugger will display the source code location of the current goal when it prompts for a debugger command, by highlighting the current line. If `source_info` was `off` when the code was loaded, or if it was asserted or loaded from `user`, then the current goal will still be shown but out of context.

Note that if the code has been modified since it was last loaded, then Prolog's line number information may be invalid. If this happens, then just reload the relevant buffer.

Another useful feature which is available for code loaded with `source_info` switched on is that the debugger can show the variable bindings for the current goal, its ancestors, and

the clauses they occur in. The bindings are shown in a separate `*Prolog Bindings*` buffer. This is enabled by the *C-c C-g* command and disabled by the *C-u C-c C-g* command.

Yet another feature which is available for compiled code loaded with `source_info` switched on is code coverage highlighting (see Section 9.3 [Coverage Analysis], page 360). Highlighting of the current buffer is refreshed by the *C-c C-o* command and cleared by the *C-u C-c C-o* command.

Consultation and compilation is either done via the menu or with the following key-bindings:

C-c C-f Consult file.

C-c C-b Consult buffer.

C-c C-r Consult region.

C-c C-p Consult predicate.

C-c C-c f Compile file.

C-c C-c b Compile buffer.

C-c C-c r Compile region.

C-c C-c p Compile predicate.

The boundaries used when consulting and compiling predicates are the first and last clauses of the predicate the cursor is currently in.

Other useful key-bindings are:

M-a Go to beginning of clause. Go to the previous clause if already at the beginning.

M-e Go to end of clause. Go to the next clause if already at the end.

C-M-c Mark clause.

C-M-a Go to beginning of predicate.

C-M-e Go to end of predicate.

C-M-h Mark predicate.

M-{ Go to the previous paragraph (i.e. empty line).

M-} Go to the next paragraph (i.e. empty line).

M-h Mark paragraph.

C-M-n Go to matching right parenthesis.

C-M-p Go to matching left parenthesis.

M-; Creates a comment at `comment-column`. This comment will always stay at this position when the line is indented, regardless of changes in the text earlier on the line, provided that `prolog-align-comments-flag` is set to `t`.

C-c C-t
C-u C-c C-t
: Enable and disable creeping, respectively.

C-c C-d
C-u C-c C-d
: Enable and disable leaping, respectively.

C-c C-z
C-u C-c C-z
: Enable and disable zipping, respectively.

C-c C-g *since release 4.2*
C-u C-c C-g *since release 4.2*
: Enable and disable bindings window, respectively. When enabled, SICStus will endeavor to show the variable bindings of the clause containing the current goal. *C-c C-g* splits the `*prolog*` window vertically and inserts the `*Prolog Bindings*` window, which shows the bindings and is updated upon every debugger command. *C-u C-c C-g* deletes the `*Prolog Bindings*` window.

C-c < *since release 4.3.2*
: Set the print depth for the bindings window as well as for the top level. Prompts for an integer value. Equivalent to the `<` top-level command; see Section 3.4.1 [Queries], page 25.

C-c C-o *since release 4.2*
C-u C-c C-o *since release 4.2*
: Refresh and clear coverage highlighting for the current buffer, respectively. Lines containing coverage sites (see Section 9.3 [Coverage Analysis], page 360) will be highlighted in face `pltrace-face-reached-det` (defaults to green) if they were hit at least once and made no nondet calls with the execution profiler switched on; in face `pltrace-face-reached-nondet` (defaults to yellow) if they were hit at least once and made one or more nondet calls with the execution profiler switched on; otherwise, they will be highlighted in face `pltrace-face-reached-not` (defaults to red). Lines not containing coverage sites are not highlighted.

C-x SPC
C-u C-x SPC
: Set and remove a line breakpoint. This uses the advanced debugger features; see Section 5.6 [Advanced Debugging], page 247.

C-c C-s Insert the *PredSpec* of the current predicate into the code.

C-c C-n Insert the template of the current predicate (name, parentheses, commas) into the code.

M-RET *since release 4.2*
: Insert a line break followed by the template of the current predicate into the code. This can be useful when writing recursive predicates or predicates with several clauses. See also the `prolog-electric-dot-flag` variable below.

C-c C-v a Convert all variables in a region to anonymous variables. See also the `prolog-electric-underscore-flag` Emacs variable.

C-c ? Help on predicate. This requires the SICStus info files to be installed. If the SICStus info files are installed in a nonstandard way, then you may have to change the Emacs variable `prolog-info-predicate-index`.

C-c RET *since release 4.2*
C-u C-c RET *since release 4.2*
Run Prolog. With the second variant, Emacs will prompt for a Lisp list of extra parameters to pass on the command line.

C-c C-c *since release 4.2*
Interrupt Prolog. The same as typing *^C* in a shell.

C-c C- *since release 4.2*
Kill Prolog. Immediately kills the process.

3.12.4 Mode Line

If working with an application split into several modules, then it is often useful to let files begin with a "mode line":

```
%%% -*- Mode: Prolog; Module: ModuleName; -*-
```

The Emacs interface will look for the mode line and notify the SICStus Prolog module system that code fragments being incrementally reconsulted or recompiled should be imported into the module *ModuleName*. If the mode line is missing, then the code fragment will be imported into the type-in module. An additional benefit of the mode line is that it tells Emacs that the file contains Prolog code, regardless of the setting of the Emacs variable `auto-mode-alist`. A mode line can be inserted by choosing `Insert/Module modeline` in the `Prolog` menu.

3.12.5 Configuration

The behavior of the Emacs interface can be controlled by a set of user-configurable settings. Some of these can be changed on the fly, while some require Emacs to be restarted. To set a variable on the fly, type *M-x set-variable RET VariableName RET Value RET*. Note that variable names can be completed by typing a few characters and then pressing `TAB`.

To set a variable so that the setting is used every time Emacs is started, add lines of the following format to `~/.emacs`:

```
(setq VariableName Value)
```

Note that the Emacs interface is presently not using the '`Customize`' functionality to edit the settings.

The available settings are:

`prolog-system`
The Prolog system to use. Defaults to `'sicstus`, which will be assumed for the rest of this chapter. See the on-line documentation for the meaning of

other settings. For other settings of `prolog-system` the variables below named `sicstus-`*`something`* will not be used, in some cases corresponding functionality is available through variables named `prolog-`*`something`*.

`sicstus-version`
: The version of SICStus that is used. Defaults to `'(4 . 2)`. Note that the spaces are significant!

`prolog-use-sicstus-sd`
: Set to `t` (the default) to enable the source-linked debugging extensions by default. The debugging can be enabled via the `Prolog` menu even if this variable is `nil`. Note that the source-linked debugging only works if `sicstus-version` is set correctly.

`prolog-indent-width`
: How many positions to indent the body of a clause. Defaults to `tab-width`, normally 8.

`prolog-paren-indent`
: The number of positions to indent code inside grouping parentheses. Defaults to 4, which gives the following indentation.

```
p :-
        (   q1
        ;   q2,
            q3
        ).
```

Note that the spaces between the parentheses and the code are automatically inserted when `TAB` is pressed at those positions.

`prolog-align-comments-flag`
: Set to `nil` to prevent single `%`-comments from being automatically aligned. Defaults to `t`.

Note that comments with one `%` are indented to comment-column, comments with two `%` to the code level, and that comments with three `%` are never changed when indenting.

`prolog-indent-mline-comments-flag`
: Set to `nil` to prevent indentation of text inside `/* ... */` comments. Defaults `t`.

`sicstus-keywords`
: This is a list with keywords that are highlighted in a special color when used as directives (i.e. as `:-` *`keyword`*). Defaults to

```
'("block" "discontiguous" "dynamic" "initialization"
  "meta_predicate" "mode" "module" "multifile" "public" "volatile"
  "det" "nondet"                        ; for spdet
  )
```

`prolog-electric-newline-flag`
: Set to `nil` to prevent Emacs from automatically indenting the next line when pressing `RET`. Defaults to `t`.

`prolog-hungry-delete-key-flag`
: Set to `t` to enable deletion of all whitespace before the cursor when pressing `DEL` (unless inside a comment, string, or quoted atom). Defaults to `nil`.

`prolog-electric-dot-flag`
: Set to `t` to enable the electric dot function. If enabled, then pressing `.` at the end of a non-empty line inserts a dot and a newline. When pressed at the beginning of a line, a new head of the last predicate is inserted. When pressed at the end of a line with only whitespace, a recursive call to the current predicate is inserted. The function respects the arity of the predicate and inserts parentheses and the correct number of commas for separation of the arguments. Defaults to `nil`.

`prolog-electric-underscore-flag`
: Set to `t` to enable the electric underscore function. When enabled, pressing underscore (`_`) when the cursor is on a variable, replaces the variable with the anonymous variable. Defaults to `nil`.

`prolog-use-prolog-tokenizer-flag`
: Set to `nil` to use built-in functions of Emacs for parsing the source code when indenting. This is faster than the default but does not handle some of the syntax peculiarities of Prolog. Defaults to `t`.

`prolog-parse-mode`
: What position the parsing is done from when indenting code. Two possible settings: `'beg-of-line` and `'beg-of-clause`. The first is faster but may result in erroneous indentation in `/* ... */` comments. The default is `'beg-of-line`.

`prolog-imenu-flag`
: Set to `t` to enable a new `Predicate` menu that contains all predicates of the current file. Choosing an entry in the menu moves the cursor to the start of that predicate. Defaults to `nil`.

`prolog-info-predicate-index`
: The info node for the SICStus predicate index. This is important if the online help function is to be used (by pressing *`C-c ?`*, or choosing the `Prolog/Help on predicate` menu entry). The default setting is `"(sicstus)Predicate Index"`.

`prolog-underscore-wordchar-flag`
: Set to `nil` to not make underscore (`_`) a word-constituent character. Defaults to `t`.

Font-locking uses a number of "faces", which can be customized with regular Emacs commands, for instance *`M-x describe-face RET FaceName RET`*. The following faces are relevant:

`highlight` *since release 4.2*
: Source code highlight at debug ports.

`pltrace-face-reached-det` *since release 4.2*
: Highlight for a line of code reached by coverage analysis with no nondet calls made from that line of code.

`pltrace-face-reached-nondet` *since release 4.2*
: Highlight for a line of code reached by coverage analysis with one or more nondet calls made from that line of code.

`pltrace-face-reached-not` *since release 4.2*
: Highlight for a line of code not reached by coverage analysis.

`prolog-warning-face` *since release 4.2*
: Face used in warning messages.

`prolog-informational-face` *since release 4.2*
: Face used in informational messages.

`prolog-exception-face` *since release 4.2*
: Face used in the first line of an error exception message, as well as to highlight Exception port displays.

`prolog-error-face` *since release 4.2*
: Face used in other lines of exception messages.

`prolog-call-face` *since release 4.2*
: Face used to highlight Call port displays.

`prolog-exit-face` *since release 4.2*
: Face used to highlight Exit port displays.

`prolog-redo-face` *since release 4.2*
: Face used to highlight Redo port displays.

`prolog-fail-face` *since release 4.2*
: Face used to highlight Fail port displays.

`prolog-builtin-face` *since release 4.2*
: Face used to highlight keywords used in directives (see `sicstus-keywords`).

3.12.6 Tips

Some general tips and tricks for using the SICStus mode and Emacs in general are given here. Some of the methods may not work in all versions of Emacs.

3.12.6.1 Font-locking

When editing large files, it might happen that font-locking is not done because the file is too large. Typing *M-x lazy-lock-mode*, which is much faster, results in only the visible parts of the buffer being highlighted; see its Emacs on-line documentation for details.

If the font-locking seems to be incorrect, then choose `Fontify Buffer` from the `Prolog` menu.

3.12.6.2 Auto-fill Mode

Auto-fill mode is enabled by typing *M-x auto-fill-mode*. This enables automatic line breaking with some features. For example, the following multiline comment was created by typing *M-;* followed by the text. The second line was indented and a '`%`' was added automatically.

```
dynamics([]).       % A list of pit furnace
                    % dynamic instances
```

3.12.6.3 Speed

There are several things to do if the speed of the Emacs environment is a problem:

- First of all, make sure that `prolog.el` and `sicstus-support.el` are compiled, i.e. that there is a `prolog.elc` and a `sicstus-support.elc` file at the same location as the original files. To do the compilation, start Emacs and type *`M-x byte-compile-file RET path RET`*, where *path* is the path to the '`*.el`' file. Do Not be alarmed if there are a few warning messages as this is normal. If all went well, then there should now be a compiled file, which is used the next time Emacs is started.
- The next thing to try is changing the setting of `prolog-use-prolog-tokenizer-flag` to `nil`. This means that Emacs uses built-in functions for some of the source code parsing, thus speeding up indentation. The problem is that it does not handle all peculiarities of the Prolog syntax, so this is a trade-off between correctness and speed.
- The setting of the `prolog-parse-mode` variable also affects the speed, `'beg-of-line` being faster than `'beg-of-clause`.
- Font locking may be slow. You can turn it off using customization, available through *`M-x customize-group`* `RET` *`font-lock`* `RET`. An alternative is to enable one of the lazy font locking modes. You can also turn it off completely; see Section 3.12.2 [Basic Configuration], page 37.

3.12.6.4 Changing Colors

The Prolog mode uses the default Emacs colors for font-locking as far as possible. The only custom settings are in the Prolog process buffer. The default settings of the colors may not agree with your preferences, so here is how to change them.

If your Emacs supports it, then use '`Customize`'. *`M-x customize-group`* `RET` *`font-lock`* `RET` will show the '`Customize`' settings for font locking and also contains pointers to the '`Customize`' group for the font lock (type)faces. The rest of this section outlines the more involved methods needed in older versions of Emacs.

First of all, list all available faces (a face is a combined setting of foreground and background colors, font, boldness, etc.) by typing *`M-x list-faces-display`*.

There are several functions that change the appearance of a face, the ones you will most likely need are:

- `set-face-foreground`
- `set-face-background`
- `set-face-underline-p`
- `make-face-bold`
- `make-face-bold-italic`
- `make-face-italic`
- `make-face-unbold`

- `make-face-unitalic`

These can be tested interactively by typing *`M-x function-name`*. You will then be asked for the name of the face to change and a value. If the buffers are not updated according to the new settings, then refontify the buffer using the `Fontify Buffer` menu entry in the `Prolog` menu.

Colors are specified by a name or by RGB values. Available color names can be listed with *`M-x list-colors-display`*.

To store the settings of the faces, a few lines must be added to `~/.emacs`. For example:

```
;; Customize font-lock faces
(add-hook 'font-lock-mode-hook
          '(lambda ()
             (set-face-foreground font-lock-variable-name-face "#00a000")
             (make-face-bold font-lock-keyword-face)
             (set-face-foreground font-lock-reference-face "Blue")
             ))
```

4 The Prolog Language

This chapter describes the syntax and semantics of the Prolog language, and introduces the central built-in predicates and other important language constructs. In many cases, an entry in a list of built-in predicates, will be annotated with keywords. These annotations are defined in Section 11.1.3 [mpg-ref-cat], page 938.

4.1 Syntax

4.1.1 Overview

This section describes the syntax of SICStus Prolog.

4.1.2 Terms

4.1.2.1 Overview

The data objects of the language are called *term*s. A term is either a *constant*, a *variable*, or a *compound term*.

A constant is either a *number* (integer or floating-point) or an *atom*. Constants are definite elementary objects, and correspond to proper nouns in natural language.

Variables and compound terms are described in Section 4.1.2.5 [ref-syn-trm-var], page 48, and Section 4.1.3 [ref-syn-cpt], page 49, respectively.

Foreign data types are discussed in the context of `library(structs)`; see Section 10.44 [lib-structs], page 799.

4.1.2.2 Integers

The printed form of an integer consists of a sequence of digits optionally preceded by a minus sign (‘`-`’). These are normally interpreted as base 10 integers. It is also possible to enter integers in base 2 (binary), 8 (octal), and 16 (hexadecimal); this is done by preceding the digit string by the string ‘`0b`’, ‘`0o`’, or ‘`0x`’ respectively. The characters A-F or a-f stand for digits greater than 9. For example, the following tokens all represent the integer fifteen:

```
15   0b1111   0o17  0xf
```

Note that

```
+525
```

is not a valid integer.

There is also a special notation for character constants. E.g.:

```
0'A   0'\x41\   0'\101\
```

are all equivalent to `65` (the character code for ‘`A`’). ‘`0'`’ followed by any character except ‘`\`’ (backslash) is thus read as an integer. If ‘`0'`’ is followed by ‘`\`’, then the ‘`\`’ denotes the start of an escape sequence with special meaning (see Section 4.1.7.6 [ref-syn-syn-esc], page 64).

4.1.2.3 Floating-point Numbers

A floating-point number (float) consists of a sequence of digits with an embedded decimal point, optionally preceded by a minus sign (-), and optionally followed by an exponent consisting of upper- or lowercase '`E`' and a signed base 10 integer. Examples of floats are:

```
1.0   -23.45   187.6E12   -0.0234e15   12.0E-2
```

Note that there must be at least one digit before, and one digit after, the decimal point.

4.1.2.4 Atoms

An atom is identified by its name, which is a sequence characters, and can be written in any of the following forms:

- Any sequence of alphanumeric characters (including '`_`'), starting with a lowercase letter. Note that an atom may not begin with an underscore. The characters that are allowed to occur in such an unquoted atom are restricted to a subset of Unicode; see Section 4.1.7.5 [ref-syn-syn-tok], page 60.
- Any sequence from the following set of characters (except '`/*`', which begins a comment):

  ```
  + - * / \ ^ < > = ~ : . ? @ # $ &
  ```

- Any sequence of characters delimited by single quotes. Backslashes in the sequence denote escape sequences (see Section 4.1.7.6 [ref-syn-syn-esc], page 64), and if the single quote character is included in the sequence, then it must be escaped, e.g. `'can\'t'`. The characters that are allowed to occur in such a quoted atom are restricted to a subset of Unicode; see Section 4.1.7.5 [ref-syn-syn-tok], page 60.
- Any of:

  ```
  ! ; [] {}
  ```

  Note that the bracket pairs are special: '`[]`' and '`{}`' are atoms but '`[`', '`]`', '`{`', and '`}`' are not. The form `[X]` is a special notation for lists (see Section 4.1.3.1 [ref-syn-cpt-lis], page 50) as an alternative to `.(X,[])`, and the form `{X}` is allowed as an alternative to `{}(X)`.

Examples of atoms are:

```
a   void   =   :=   'Anything in quotes'   []
```

Please note: It is recommended that you do not invent atoms beginning with the character '`$`', since it is possible that such names may conflict with the names of atoms having special significance for certain built-in predicates.

4.1.2.5 Variables

Variables may be written as any sequence of alphanumeric characters (including '`_`') beginning with either a capital letter or '`_`'. For example:

```
X   Value   A   A1   _3   _RESULT
```

If a variable is referred to only once in a clause, then it does not need to be named and may be written as an *anonymous* variable, represented by the underline character '`_`' by itself. Any number of anonymous variables may appear in a clause; they are read as distinct variables. Anonymous variables are not special at run time.

4.1.2.6 Foreign Terms

Pointers to C data structures can be handled using the Structs package.

4.1.3 Compound Terms

The structured data objects of Prolog are compound terms. A compound term comprises a *functor* (called the *principal functor* of the term) and a sequence of one or more terms called *arguments*. A functor is characterized by its *name*, which is an atom, and its *arity* or number of arguments. For example, the compound term whose principal functor is '`point`' of arity 3, and which has arguments X, Y, and Z, is written

```
point(X, Y, Z)
```

When we need to refer explicitly to a functor we will normally denote it by the form *Name/Arity*. Thus, the functor '`point`' of arity 3 is denoted

```
point/3
```

Note that a functor of arity 0 is represented as an atom.

Functors are generally analogous to common nouns in natural language. One may think of a functor as a record type and the arguments of a compound term as the fields of a record. Compound terms are usefully pictured as trees. For example, the (compound) term

```
s(np(john), vp(v(likes), np(mary)))
```

would be pictured as the following tree:



The principal functor of this term is `s/2`. Its arguments are also compound terms. In illustration, the principal functor of the first argument is `np/1`.

Sometimes it is convenient to write certain functors as *operators*; binary functors (that is, functors of two arguments) may be declared as *infix* operators, and unary functors (that is, functors of one argument) may be declared as either *prefix* or *postfix* operators. Thus it is possible to write

```
X+Y     P;Q     X<Y      +X     P;
```

as optional alternatives to

```
+(X,Y)   ;(P,Q)   <(X,Y)   +(X)   ;(P)
```

The use of operators is described fully in Section 4.1.5 [ref-syn-ops], page 51.

4.1.3.1 Lists

Lists form an important class of data structures in Prolog. They are essentially the same as the lists of Lisp: a list is either the atom `[]`, representing the empty list, or else a compound term with functor `.` and two arguments, which are the head and tail of the list respectively, where the tail of a list is another list. Thus a list of the first three natural numbers is the structure



which could be written using the standard syntax, as (A) but which is normally written in a special list notation, as (B). Two examples of this list notation, as used when the tail of a list is a variable, are (C), which represent the structure in (D).

```
.(1,.(2,.(3,[])))                                                    (A)

[1,2,3]                                                              (B)

[X|L]     [a,b|L]                                                    (C)
```



(D)

Note that the notation [X|L] does not add any new power to the language; it simply improves readability. These examples could be written equally well as (E).

```
 .(X,L) .(a,.(b,L))                                                  (E)
```

4.1.3.2 Strings As Lists

For convenience, a further notational variant is allowed for lists of integers that correspond to character codes. Lists written in this notation are called *strings*. E.g.:

```
"SICStus"
```

which, by default, denotes exactly the same list as

```
[83,73,67,83,116,117,115]
```

The Prolog flag `double_quotes` can be used to change the way strings are interpreted. The default value of the flag is `codes`, which implies the above interpretation. If the flag is set to `chars`, then a string is transformed to a list of character atoms. E.g. with this setting the above string represents the list:

```
['S','I','C','S',t,u,s]
```

Finally if `double_quotes` has the value `atom`, then the string is made equivalent to the atom formed from its characters: the above sample string is then the same as the atom `'SICStus'`.

Please note: Most code assumes that the Prolog flag `double_quotes` has its default value (`codes`). Changing this flag is not recommended.

Backslashes in the sequence denote escape sequences (see Section 4.1.7.6 [ref-syn-syn-esc], page 64). As for quoted atoms, if a double quote character is included in the sequence, then it must be escaped, e.g. `"can\"t"`.

The built-in predicates that print terms (see Section 4.6.4 [ref-iou-tou], page 108) do not use string syntax even if they could.

The characters that are allowed to occur within double quotes are restricted to a subset of Unicode; see Section 4.1.7.5 [ref-syn-syn-tok], page 60.

4.1.4 Character Escaping

The character escaping facility is prescribed by the ISO Prolog standard, and allows escape sequences to occur within strings and quoted atoms, so that programmers can put non-printable characters in atoms and strings and still be able to see what they are doing.

Strings or quoted atoms containing escape sequences can occur in terms obtained by `read/[1,2]`, `compile/1`, and so on. The ‘`0''`’ notation for the integer code of a character is also affected by character escaping.

The only characters that can occur in a string or quoted atom are the printable characters and `SPC`. All other whitespace characters must be expressed with escape sequences (see Section 4.1.7.6 [ref-syn-syn-esc], page 64).

4.1.5 Operators and their Built-in Predicates

4.1.5.1 Overview

Operators in Prolog are simply a notational convenience. For example, ‘`+`’ is an infix operator, so

```
2 + 1
```

is an alternative way of writing the term `+(2, 1)`. That is, `2 + 1` represents the data structure

```
      +
     /   \
    2     1
```

and *not* the number 3. (The addition would only be performed if the structure were passed as an argument to an appropriate procedure, such as `is/2`; see Section 4.7.2 [ref-ari-eae], page 123.)

Prolog syntax allows operators of three kinds: *infix*, *prefix*, and *postfix*. An infix operator appears between its two arguments, while a prefix operator precedes its single argument and a postfix operator follows its single argument.

Each operator has a *precedence*, which is a number from 1 to 1200. The precedence is used to disambiguate expressions in which the structure of the term denoted is not made explicit through the use of parentheses. The general rule is that the operator with the *highest* precedence is the principal functor. Thus if '`+`' has a higher precedence than '`/`', then

```
a+b/c      a+(b/c)
```

are equivalent, and denote the term `+(a,/(b,c))`. Note that the infix form of the term `/(+(a,b),c)` must be written with explicit parentheses:

```
(a+b)/c
```

If there are two operators in the expression having the same highest precedence, then the ambiguity must be resolved from the *types* of the operators. The possible types for an infix operator are

- `xfx`
- `xfy`
- `yfx`

Operators of type '`xfx`' are not associative: it is required that both of the arguments of the operator be subexpressions of *lower* precedence than the operator itself; that is, the principal functor of each subexpression must be of lower precedence, unless the subexpression is written in parentheses (which gives it zero precedence).

Operators of type '`xfy`' are right-associative: only the first (left-hand) subexpression must be of lower precedence; the right-hand subexpression can be of the *same* precedence as the main operator. Left-associative operators (type '`yfx`') are the other way around.

An atom named *Name* is declared as an operator of type *Type* and precedence *Precedence* by the command

```
:-op(Precedence, Type, Name).
```

An operator declaration can be canceled by redeclaring the *Name* with the same *Type*, but *Precedence* 0.

The argument *Name* can also be a list of names of operators of the same type and precedence.

It is possible to have more than one operator of the same name, so long as they are of different kinds: infix, prefix, or postfix. Note that the ISO Prolog standard contains the restriction that there should be no infix and postfix operators with the same name, however, SICStus Prolog lifts this restriction.

An operator of any kind may be redefined by a new declaration of the same kind. This applies equally to operators that are provided as standard, except for the `','` operator. Declarations for all these *built-in operators* can be found in Section 4.1.5.4 [ref-syn-ops-bop], page 55.

For example, the built-in operators '`+`' and '`-`' are as if they had been declared by (A) so that (B) is valid syntax, and means (C) or pictorially (D).

```
:-op(500, yfx, [+,-]).                                          (A)

a-b+c                                                           (B)

(a-b)+c                                                         (C)

            +
          /   \
         -     c
        / \
       a   b                                                    (D)
```

The list functor `./2` is not a standard operator, but we could declare it to be (E) and then (F) would represent the structure (G).

```
:-op(600, xfy, .).                                              (E)

a.b.c                                                           (F)

          .
         / \
        a   .
           / \
          b   c                                                 (G)
```

Contrasting this with the diagram above for a-b+c shows the difference between '`yfx`' operators where the tree grows to the left, and '`xfy`' operators where it grows to the right. The tree cannot grow at all for '`xfx`' operators; it is simply illegal to combine '`xfx`' operators having equal precedences in this way.

The possible types for a prefix operator are:

- `fx`
- `fy`

and for a postfix operator they are:

- `xf`
- `yf`

The meaning of the types should be clear by analogy with those for infix operators. As an example, if `not` were declared as a prefix operator of type `fy`, then

```
not not P
```

would be a permissible way to write `not(not(P))`. If the type were `fx`, then the preceding expression would not be legal, although

```
not P
```

would still be a permissible form for `not(P)`.

If these precedence and associativity rules seem rather complex, then remember that you can always use parentheses when in any doubt.

4.1.5.2 Manipulating and Inspecting Operators

To add or remove an operator, use `op(`*`Precedence`*`, `*`Type`*`, `*`Name`*`)`. `op/3` declares the atom *Name* to be an operator of the stated *Type* and *Precedence*. If *Precedence* is 0, then the operator properties of *Name* (if any) are canceled. **Please note**: operators are *global*, as opposed to being local to the current module, Prolog text, or otherwise. See Section 11.3.147 [mpg-ref-op], page 1153.

To examine the set of operators currently in force, use `current_op(`*`Precedence`*`, `*`Type`*`, `*`Name`*`)`. See Section 11.3.53 [mpg-ref-current_op], page 1034.

4.1.5.3 Syntax Restrictions

Note carefully the following syntax restrictions, which serve to remove potential ambiguities associated with prefix operators.

1. The arguments of a compound term written in standard syntax must be expressions of precedence *less than* 1000. Thus it is necessary to write the expression `P:-Q` in parentheses

   ```
   assert((P:-Q))
   ```

   because the precedence of the infix operator '`:-`', and hence of the expression `P:-Q`, is 1200. Enclosing the expression in parentheses reduces its precedence to 0.
2. Similarly, the elements of a list written in standard syntax must be expressions of precedence *less than* 1000. Thus it is necessary to write the expression `P->Q` in parentheses

   ```
   [(P->Q)]
   ```

   because the precedence of the infix operator '`->`', and hence of the expression `P->Q`, is 1050. Enclosing the expression in parentheses reduces its precedence to 0.
3. In a term written in standard syntax, the principal functor and its following '`(`' must *not* be separated by any intervening spaces, newlines, or other characters. Thus

```
point (X,Y,Z)
```

is invalid syntax.

4. If the argument of a prefix operator starts with a '(', then this '(' must be separated from the operator by at least one space or other whitespace character. Thus

   ```
   :-(p;q),r.
   ```

   (where ':-' is the prefix operator) is invalid syntax. The system would try to interpret it as the structure:

   

   That is, it would take ':-' to be a functor of arity 1. However, since the arguments of a functor are required to be expressions of precedence less than 1000, this interpretation would fail as soon as the ';' (precedence 1100) were encountered.

   In contrast, the term:

   ```
   :- (p;q),r.
   ```

   is valid syntax and represents the following structure:

   

4.1.5.4 Built-in Operators

```
:- op( 1200, xfx, [ :-, --> ]).
:- op( 1200,  fx, [ :-, ?- ]).
:- op( 1150,  fx, [ mode, public, dynamic, volatile, discontiguous,
                    multifile, block, meta_predicate,
                    initialization ]).
:- op( 1100, xfy, [ ;, do ]).
:- op( 1050, xfy, [ -> ]).
:- op( 1000, xfy, [ ',' ]).
:- op(  900,  fy, [ \+, spy, nospy ]).
:- op(  700, xfx, [ =, \=, is, =.., ==, \==, @<, @>, @=<, @>=,
                                  =:=, =\=, <, >, =<, >= ]).
:- op(  550, xfy, [ : ]).
:- op(  500, yfx, [ +, -, \, /\, \/ ]).
:- op(  400, yfx, [ *, /, //, div, mod, rem, <<, >> ]).
:- op(  200, xfx, [ ** ]).
:- op(  200, xfy, [ ^ ]).
:- op(  200,  fy, [ +, -, \ ]).
```

The above operators are as in the ISO Prolog standard, except the following, which are not present in ISO Prolog at all:

```
:- op( 1150,  fx, [ mode, public, dynamic, volatile, discontiguous,
                    multifile, block, meta_predicate,
                    initialization ]).
:- op( 1100, xfy, [ do ]).
:- op(  900,  fy, [ spy, nospy ]).
:- op(  550, xfy, [ : ]).
:- op(  500, yfx, [ \ ]).
:- op(  200,  fy, [ + ]).
```

4.1.6 Commenting

Comments have no effect on the execution of a program, but they are very useful for making programs more comprehensible. Two forms of comments are allowed:

1. The character '`%`' followed by any sequence of characters up to the end of the line.
2. The symbol '`/*`' followed by any sequence of characters (including newlines) up to the symbol '`*/`'.

4.1.7 Formal Syntax

4.1.7.1 Overview

A Prolog program consists of a sequence of *sentences*. Each sentence is a Prolog *term*. How sentences are interpreted as terms is defined in Section 4.1.7.3 [ref-syn-syn-sen], page 57, below. Note that a term representing a sentence may be written in any of its equivalent syntactic forms. For example, the functor `:-/2` could be written in standard functional notation instead of as the usual infix operator.

Terms are written as sequences of *tokens*. Tokens are sequences of characters, which are treated as separate symbols. Tokens include the symbols for variables, constants, and functors, as well as punctuation characters such as parentheses and commas.

The interpretation of sequences of tokens as terms is defined in Section 4.1.7.4 [ref-syn-syn-trm], page 59. Each list of tokens that is read in (for interpretation as a term or sentence) must be terminated by a *full stop* (a period followed by a whitespace character such as newline or space) token. Two tokens must be separated by a *space* if they could otherwise be interpreted as a single token. Both spaces and *comment*s are ignored when interpreting the token list as a term. A comment may appear at any point in a token list (separated from other tokens by spaces where necessary).

The interpretation of sequences of characters as tokens is defined in Section 4.1.7.5 [ref-syn-syn-tok], page 60. The next section describes the notation used in the formal definition of Prolog syntax.

4.1.7.2 Notation

- Syntactic categories (or *nonterminals*) are printed in italics, for example *query*. Depending on the section, a category may represent a class of either terms, token lists, or character strings.
- A syntactic rule takes the general form

  ```
  C ::= F1
      | F2
      | F3
      .
      .
      .
  ```

  which states that an entity of category *C* may take any of the alternative forms *F1*, *F2*, or *F3*.
- Certain definitions and restrictions are given in ordinary English, enclosed in braces (‘`{}`’).
- A category written as ‘`C...`’ denotes a sequence of one or more *C*s.
- A category written as ‘`?C`’ denotes an optional *C*. Therefore ‘`?C...`’ denotes a sequence of zero or more *C*s.
- A few syntactic categories have names with arguments, and rules in which they appear may contain meta-variables in the form of italicized capital letters. The meaning of such rules should be clear from analogy with the definite clause grammars described in Section 4.14 [ref-gru], page 193.
- In Section 4.1.7.4 [ref-syn-syn-trm], page 59, particular tokens of the category *Name* (a name beginning with a capital letter) are written as quoted atoms, while tokens that are individual punctuation characters are written literally.

4.1.7.3 Syntax of Sentences as Terms

sentence	::= *module* `:` *sentence*	
	| *list*	{ where *list* is a list of *sentence* }

	| *clause*	
	| *directive*	
	| *query*	
	| *grammar-rule*	
clause	::= *rule* | *unit-clause*	
rule	::= *head* `:-` *body*	
unit-clause	::= *head*	{ where *head* is not otherwise a *sentence* }
directive	::= `:-` *body*	
query	::= `?-` *body*	
head	::= *module* `:` *head*	
	| *goal*	{ where *goal* is not a *variable* }
body	::= *module* `:` *body*	
	| *body* `->` *body disj body*	
	| *body* `->` *body*	
	| `\+` *body*	
	| *body disj body*	
	| *body* `,` *body*	
	| `once(`*body*`)`	
	| `do(`*iter*`,`*body*`)`	
	| `if(`*body*`,`*body*`,`*body*`)`	
	| *term* `^` *body*	
	| *goal*	
goal	::= *term*	{ where *term* is not otherwise a *body* }
grammar-rule	::= *gr-head* `-->` *gr-body*	
gr-head	::= *module* `:` *gr-head*	
	| *gr-head* `,` *terminals*	
	| *non-terminal*	{ where *non-terminal* is not a *variable* }
gr-body	::= *module* `:` *gr-body*	
	| *gr-body* `->` *gr-body disj gr-body*	
	| *gr-body* `->` *gr-body*	
	| `\+` *gr-body*	
	| *gr-body disj gr-body*	
	| *gr-body* `,` *gr-body*	
	| `once(`*gr-body*`)`	
	| `do(`*iter*`,`*gr-body*`)`	
	| `if(`*gr-body*`,`*gr-body*`,`*gr-body*`)`	
	| *term* `^` *gr-body*	
	| *non-terminal*	
	| *terminals*	
	| *gr-condition*	

non-terminal	::= *term*	{ where *term* is not otherwise a *gr-body* }
terminals	::= *list* | *string*	
gr-condition	::= `!` | `{`*body*`}`	
module	::= *atom*	
disj	::= `;` | |	{ read as `;` unless | is declared infix }
iter	::= *iter* `,` *iter*	
	|	
	`fromto(`*term*`,`*term*`,`*term*`,`*term*`)`	
	| `foreach(`*term*`,`*term*`)`	
	| `foreacharg(`*term*`,`*term*`)`	
	| `foreacharg(`*term*`,`*term*`,`*term*`)`	
	| `count(`*term*`,`*term*`,`*term*`)`	
	| `for(`*term*`,`*term*`,`*term*`)`	
	| `param(`*term*`)`	

4.1.7.4 Syntax of Terms as Tokens

term-read-in	::= *subterm(1200) full stop*	
subterm(N)	::= *term(M)*	{ where M is less than or equal to N }
term(N)	::= *op(N,fx) subterm(N-1)*	{ except in the case of a *number* if *subterm* starts with a '`(`', *op* must be followed by *whitespace-text* }
	| *op(N,fy) subterm(N)*	{ if *subterm* starts with a '`(`', *op* must be followed by *whitespace-text* }
	| *subterm(N-1) op(N,xfx) subterm(N-1)*	
	| *subterm(N-1) op(N,xfy) subterm(N)*	
	| *subterm(N) op(N,yfx) subterm(N-1)*	
	| *subterm(N-1) op(N,xf)*	
	| *subterm(N) op(N,yf)*	
term(1100)	::= *subterm(1099)* | *subterm(1100)*	{ term with functor `;/2` unless | is declared infix }
term(1000)	::= *subterm(999)* `,` *subterm(1000)*	{ term with functor `','/2` }
term(0)	::= *functor* `(` *arguments* `)`	{ provided there is no *whitespace-text* between the *functor* and the '`(`' }
	| `(` *subterm(1200)* `)`	
	| `{` *subterm(1200)* `}`	
	| *list*	
	| *string*	
	| *constant*	

	| *variable*	
op(N,T)	::= *name*	{ where *name* has been declared as an operator of type *T* and precedence *N* }
arguments	::= *subterm(999)*	
	| *subterm(999)* `,` *arguments*	
list	::= `[]`	
	| `[` *listexpr* `]`	
listexpr	::= *subterm(999)*	
	| *subterm(999)* `,` *listexpr*	
	| *subterm(999)* | *subterm(999)*	
constant	::= *atom* | *number*	
number	::= *unsigned-number*	
	| *sign unsigned-number*	
unsigned-number	::= *natural-number* | *unsigned-float*	
atom	::= *name*	
functor	::= *name*	

4.1.7.5 Syntax of Tokens as Character Strings

SICStus Prolog supports wide characters (up to 31 bits wide), interpreted as a superset of Unicode.

Each character in the code set has to be classified as belonging to one of the character categories, such as *small-letter*, *digit*, etc. This classification is called the character-type mapping, and it is used for defining the syntax of tokens.

Only character codes 0..255, i.e. the ISO-8859-1 (Latin 1) subset of Unicode, can be part of unquoted tokens[1], unless the Prolog flag `legacy_char_classification` is set; see Section 4.9.4 [ref-lps-flg], page 140. This restriction may be lifted in the future.

For quoted tokens, i.e. quoted atoms and strings, almost any sequence of code points assigned to non-private abstract characters in Unicode 15 is allowed. The disallowed characters are those in the whitespace-char category except that space (character code 32) is allowed despite it being a whitespace-char.

An additional restriction is that the sequence of characters that makes up a quoted token must be in Normal Form C (NFC) `http://www.unicode.org/reports/tr15/`. This is currently not enforced. A future release may enforce this restriction or perform this normalization automatically.

NFC is the normalization form used on the web (`http://www.w3.org/TR/charmod/`) and what most software can be expected to produce by default. Any sequence consisting of only characters from Latin 1 is already in NFC.

[1] Characters outside this range can still be included in quoted atoms and strings by using escape sequences (see Section 4.1.7.6 [ref-syn-syn-esc], page 64).

When the Prolog flag `legacy_char_classification` is set, characters in the whitespace-char category are still treated as whitespace but other character codes outside the range 0..255, assigned to non-private abstract characters in Unicode 15, are treated as lower case. Such characters can therefore appear as themselves, without using escape sequences, both in quoted and unquoted tokens.

Note: Any output produced by `write_term/2` with the option `quoted(true)` will be in NFC. This includes output from `writeq/[1,2]` and `write_canonical/[1,2]`.

whitespace-char
: These are character codes 0..32, 127..160, 8206..8207, and 8232..8233. This includes ASCII characters such as `TAB`, `LFD`, and `SPC`, as well as all characters with Unicode property "Pattern_Whitespace" including the Unicode-specific `LINE SEPARATOR` (8232).

small-letter
: These are character codes 97..122, i.e. the letters '`a`' through '`z`', as well as the non-ASCII character codes 170, 186, 223..246, and 248..255.

  If the Prolog flag `legacy_char_classification` (see Section 4.9.4 [ref-lps-flg], page 140) is set, then the *small-letter* set will also include almost every code point above 255 assigned to non-private abstract characters in Unicode 15.

capital-letter
: These are character codes 65..90, i.e. the letters '`A`' through '`Z`', as well as the non-ASCII character codes 192..214, and 216..222.

digit
: These are character codes 48..57, i.e. the digits '`0`' through '`9`'.

symbol-char
: These are character codes 35, 36, 38, 42, 43, 45..47, 58, 60..64, 92, 94, and 126, i.e. the characters:

  ```
  + - * / \ ^ < > = ~ : . ? @ # $ &
  ```

  In addition, the non-ASCII character codes 161..169, 171..185, 187..191, 215, and 247 belong to this character type[2].

solo-char
: These are character codes 33 and 59 i.e. the characters '`!`' and '`;`'.

punctuation-char
: These are character codes 37, 40, 41, 44, 91, 93, and 123..125, i.e. the characters:

  ```
  % ( ) , [ ] { | }
  ```

quote-char
: These are character codes 34, 39, and 96 i.e. the characters '`"`', '`'`', and '`` ` ``'.

underline
: This is character code 95 i.e. the character '`_`'.

Other characters are unclassified and may only appear in comments and to some extent, as discussed above, in quoted atoms and strings.

[2] In release 3 and 4.0.0 the lower case characters 170 and 186 were incorrectly classified as symbol-char. This was corrected in release 4.0.1.

token	::= *name*	
	| *natural-number*	
	| *unsigned-float*	
	| *variable*	
	| *string*	
	| *punctuation-char*	
	| *whitespace-text*	
	| *full stop*	
name	::= *quoted-name*	
	| *word*	
	| *symbol*	
	| *solo-char*	
	| `[` *?whitespace-text* `]`	
	| `{` *?whitespace-text* `}`	
word	::= *small-letter ?alpha...*	
symbol	::= *symbol-char...*	{ except in the case of a *full stop* or where the first 2 chars are '`/*`' }
natural-number	::= *digit...*	
	| *base-prefix alpha...*	{ where each *alpha* must be digits of the base indicated by *base-prefix*, treating a,b,... and A,B,... as 10,11,... }
	| `0 '` *char-item*	{ yielding the character code for *char* }
unsigned-float	::= *simple-float*	
	| *simple-float exp exponent*	
simple-float	::= *digit... . digit...*	
exp	::= `e` | `E`	
exponent	::= *digit...* | *sign digit...*	
sign	::= `-` | `+`	
variable	::= *underline ?alpha...*	
	| *capital-letter ?alpha...*	
string	::= `"` *?string-item...* `"`	
string-item	::= *quoted-char*	{ other than '`"`' or '`\`' }
	| `""`	
	| `\` *escape-sequence*	
quoted-atom	::= `'` *?quoted-item...* `'`	
quoted-item	::= *quoted-char*	{ other than '`'`' or '`\`' }
	| `''`	
	| `\` *escape-sequence*	
whitespace-text	::= *whitespace-text-item...*	
whitespace-text-item	::= *whitespace-char* | *comment*	
comment	::= `/*` *?char...* `*/`	{ where *?char...* must not contain '`*/`' }

	| % *?char...* LFD	{ where *?char...* must not contain LFD }
full stop	::= .	{ the following token, if any, must be *whitespace-text*}
char	::= *whitespace-char*	
	| *printing-char*	
printing-char	::= *alpha*	
	| *symbol-char*	
	| *solo-char*	
	| *punctuation-char*	
	| *quote-char*	
alpha	::= *capital-letter* | *small-letter* | *digit* | *underline*	
escape-sequence	::= a	{ alarm, character code 7 }
	| b	{ backspace, character code 8 }
	| t	{ horizontal tab, character code 9 }
	| n	{ newline, character code 10 }
	| v	{ vertical tab, character code 11 }
	| f	{ form feed, character code 12 }
	| r	{ carriage return, character code 13 }
	| e	{ escape, character code 27 }
	| d	{ delete, character code 127 }
	| *other-escape-sequence*	
quoted-name	::= *quoted-atom*	
base-prefix	::= 0b	{ indicates base 2 }
	| 0o	{ indicates base 8 }
	| 0x	{ indicates base 16 }
char-item	::= *quoted-item*	
other-escape-sequence	::= x *alpha...* \	{treating a,b,... and A,B,... as 10,11,... } in the range [0..15], hex character code }
	| *digit...* \	{ in the range [0..7], octal character code }
	| LFD	{ ignored }
	| \	{ stands for itself }
	| '	{ stands for itself }
	| "	{ stands for itself }
	| `	{ stands for itself }
quoted-char	::= SPC	
	| *printing-char*	

4.1.7.6 Escape Sequences

A backslash occurring inside integers in '0'' notation or inside quoted atoms or strings has special meaning, and indicates the start of an escape sequence. The following escape sequences exist:

`\a` *ISO*
: alarm (character code 7)

`\b` *ISO*
: backspace (character code 8)

`\t` *ISO*
: horizontal tab (character code 9)

`\n` *ISO*
: newline (character code 10)

`\v` *ISO*
: vertical tab (character code 11)

`\f` *ISO*
: form feed (character code 12)

`\r` *ISO*
: carriage return (character code 13)

`\e`
: escape (character code 27)

`\d`
: delete (character code 127)

`\x`*hex-digit...*`\` *ISO*
: the character code represented by the hexadecimal digits

`\`*octal-digit...*`\` *ISO*
: the character code represented by the octal digits.

`\LFD` *ISO*
: A backslash followed by a single newline character is ignored. The purpose of this is to allow a *string* or *quoted-name* to be spread over multiple lines.

`\\, \', \", \`` *ISO*
: Stand for the character following the '\'.

4.1.7.7 Notes

1. The expression of precedence 1000 (i.e. belonging to syntactic category *term(1000)*), which is written

   ```
   X,Y
   ```

   denotes the term `','(X,Y)` in standard syntax.
2. The parenthesized expression (belonging to syntactic category *term(0)*)

   ```
   (X)
   ```

   denotes simply the term `X`.

3. The curly-bracketed expression (belonging to syntactic category *term(0)*)

   ```
   {X}
   ```

   denotes the term `{}(X)` in standard syntax.
4. Note that, for example, `-3` denotes a number whereas `-(3)` denotes a compound term that has `-/1` as its principal functor.
5. The character '`"`' within a string must be written duplicated: '`""`'. Similarly for the character '`'`' within a quoted atom.
6. Backslashes in strings, quoted atoms, and integers written in '`0'`' notation denote escape sequences.
7. A name token declared to be a prefix operator will be treated as an atom only if no *term-read-in* can be read by treating it as a prefix operator.
8. A name token declared to be both an infix and a postfix operator will be treated as a postfix operator only if no *term-read-in* can be read by treating it as an infix operator.
9. The whitespace following the full stop is not considered part of the full stop, and so it remains in the input stream.

4.1.8 Summary of Predicates

Detailed information is found in the reference pages for the following:

`current_op(P,T,A)` *ISO*
: atom A is an operator of type T with precedence P

`op(P,T,A)` *ISO*
: make atom A an operator of type T with precedence P

4.2 Semantics

This section gives an informal description of the semantics of SICStus Prolog.

4.2.1 Programs

A fundamental unit of a logic program is the *goal* or *procedure call* for example:

```
gives(tom, apple, teacher)

reverse([1,2,3], L)

X < Y
```

A goal is merely a special kind of term, distinguished only by the context in which it appears in the program. The principal functor of a goal is called a *predicate*. It corresponds roughly to a verb in natural language, or to a procedure name in a conventional programming language.

A logic *program* consists simply of a sequence of statements called *sentences*, which are analogous to sentences in natural language.

A sentence comprises a *head* and a *body*. The head either consists of a single goal or is empty. The body consists of a sequence of zero or more goals (it may be empty). If the head is not empty, then the sentence is called a *clause*.

If the body of a clause is empty, then the clause is called a *unit clause*, and is written in the form (A) where P is the head goal. We interpret this *declaratively* as (B) and *procedurally* as (C).

P. (A)

"P is true." (B)

"Goal P is satisfied." (C)

If the body of a clause is non-empty, then the clause is called a *non-unit clause*, and is written in the form (D) where P is the head goal and Q, R, and S are the goals that make up the body. We can read such a clause either declaratively as (E) or procedurally as (F).

P :- Q, R, S. (D)

"P is true if Q and R and S are true." (E)

"To satisfy goal P, satisfy goals Q, R, and S." (F)

A sentence with an empty head is called a *directive*, of which the most important kind is called a *query* and is written in the form (G). Such a query is read declaratively as (H), and procedurally as (I).

?- P, Q. (G)

"Are P and Q true?" (H)

"Satisfy goals P and Q." (I)

Sentences generally contain variables. A variable should be thought of as standing for some definite but unidentified object. This is analogous to the use of a pronoun in natural language. Note that a variable is not simply a writable storage location as in most programming languages; rather it is a local name for some data object, like the variable of pure Lisp. Note that variables in different sentences are completely independent, even if they have the same name—the *lexical scope* of a variable is limited to a single sentence.

To illustrate this, here are some examples of sentences containing variables, with possible declarative and procedural readings:

`employed(X) :- employs(Y, X).`

"Any X is employed if any Y employs X."

"To find whether a person X is employed, find whether any Y employs X."

`derivative(X, X, 1).`

"For any X, the derivative of X with respect to X is 1."

"The goal of finding a derivative for the expression X with respect to X itself is satisfied by the result 1."

`?- ungulate(X), aquatic(X).`

"Is it true, for any X, that X is an ungulate and X is aquatic?"

"Find an X that is both an ungulate and aquatic."

In any program, the *procedure* for a particular predicate is the sequence of clauses in the program whose head goals have that predicate as principal functor. For example, the procedure for a predicate `concatenate` of three arguments might well consist of the two clauses shown in (J) where `concatenate(L1, L2, L3)` means "the list L1 concatenated with the list L2 is the list L3".

```
concatenate([], L, L).                                    (J)
concatenate([X|L1], L2, [X|L3]) :-
            concatenate(L1, L2, L3).                      (K)
```

In Prolog, several predicates may have the same name but different arities. Therefore, when it is important to specify a predicate unambiguously, the form *Name/Arity* is used, for example `concatenate/3`.

4.2.2 Types of Predicates Supplied with SICStus Prolog

Certain predicates are predefined by the Prolog system. Most of these cannot be changed or retracted. Such predicates are called *built-in predicates*.

Other predicates can be modified or totally redefined. These are the hook predicates used e.g. in term expansion, the foreign language interface, file name resolution, printing, message handling, and query handling.

4.2.2.1 Hook Predicates

Hook predicates are called by the system. They enable you to modify SICStus Prolog's behavior. Most of them are undefined by default. The idea of a hook predicate is that its clauses are independent of each other, and it makes sense to spread their definitions over several files (which may be written by different people). In other words, a hook predicate is typically declared to be multifile (see Section 4.3.4.1 [Multifile Declarations], page 87). Often, an application needs to combine the functionality of several software modules, among which some define clauses for such hook predicates. By simply declaring every hook predicate as multifile, the functionality of the clauses for the hook predicate is automatically combined. If this is not done, then the last software module to define clauses

for a particular hook predicate will effectively supersede any clauses defined for the same hook predicate in a previous module. Most hook predicates must be defined in the `user` module, and usually only their first solution is relevant.

4.2.3 Control Structures

As we have seen, the goals in the body of a sentence are linked by the operator '`,`', which can be interpreted as conjunction (and). The Prolog language provides a number of other operators, known as *control structures*, for building complex goals. Apart from being built-in predicates, these control structures play a special role in certain language features, namely Grammar Rules (see Section 4.14 [ref-gru], page 193), and when code is loaded or asserted in the context of modules (see Section 4.11 [ref-mod], page 165). The set of control structures is described in this section, and consists of:

`:P,:Q` *ISO*
: prove P and Q

`:P;:Q` *ISO*
: prove P or Q

`+M::P` *ISO*
: call P in module M

`:P->:Q;:R` *ISO*
: if P succeeds, then prove Q; if not, then prove R

`:P->:Q` *ISO*
: if P succeeds, then prove Q; if not, then fail

`!` *ISO*
: cut any choices taken in the current procedure

`\+ :P` *ISO*
: goal P is not provable

`?X ^ :P`
: there exists an X such that P is provable (used in `setof/3` and `bagof/3`)

`+`*Iterators* `do :`*Body*
: executes *Body* iteratively according to *Iterators*

`if(:P,:Q,:R)`
: for each solution of P succeeds, prove Q; if none, then prove R

`once(:P)` *ISO*
: Find the first solution, if any, of goal P.

4.2.3.1 The Cut

Besides the sequencing of goals and clauses, Prolog provides one other very important facility for specifying control information. This is the *cut*, written '`!`'. It is inserted in the program just like a goal, but is not to be regarded as part of the logic of the program and should be ignored as far as the declarative semantics is concerned.

The effect of the cut is as follows. When first encountered as a goal, cut succeeds immediately. If backtracking should later return to the cut, then the effect is to fail the *parent goal*,

i.e. the goal that matched the head of the clause containing the cut, and caused the clause to be activated. In other words, the cut operation *commits* the system to all choices made since the parent goal was invoked, and causes other alternatives to be discarded. The goals thus rendered *determinate* are the parent goal itself, any goals occurring before the cut in the clause containing the cut, and any subgoals that were executed during the execution of those preceding goals.

For example, the procedure

```
member(X, [X|L]).
member(X, [Y|L]) :-
   member(X, L).
```

can be used to test whether a given term is in a list:

```
| ?- member(b, [a,b,c]).
```

returns the answer 'yes'. The procedure can also be used to extract elements from a list, as in

```
| ?- member(X, [d,e,f]).
```

With backtracking this will successively return each element of the list. Now suppose that the first clause had been written instead:

```
member(X, [X|L]) :- !.
```

In this case, the second call above would extract only the first element of the list ('d'). On backtracking, the cut would immediately fail the entire procedure.

Another example:

```
x :- p, !, q.
x :- r.
```

This is analogous to "if p then q else r" in an Algol-like language.

Note that a cut discards all the alternatives subsequent to the parent goal, even when the cut appears within a disjunction. This means that the normal method for eliminating a disjunction—by defining an extra predicate—cannot be applied to a disjunction containing a cut.

A proper use of the cut is usually a major difficulty for new Prolog programmers. The usual mistakes are to over-use cut, and to let cuts destroy the logic. A cut that does not destroy the logic is called a *green cut*; a cut that does is called a *red cut*. We would like to advise all users to follow these general rules. Also see Chapter 9 [Writing Efficient Programs], page 359.

- Write each clause as a self-contained logic rule, which just defines the truth of goals

that match its head. Then add cuts to remove any fruitless alternative computation paths that may tie up memory.

- Cuts are hardly ever needed in the last clause of a predicate.
- Use cuts sparingly, and *only* at proper places. A cut should be placed at the exact point that it is known that the current choice is the correct one; no sooner, no later, usually placed right after the head, sometimes preceded by simple tests.
- Make cuts as local in their effect as possible. If a predicate is intended to be determinate, then define *it* as such; do not rely on its callers to prevent unintended backtracking.
- Binding output arguments before a cut is a common source of programming errors. If a predicate is not steadfast, then it is usually for this reason.

To illustrate the last issue, suppose that you want to write a predicate `max/3` that finds the greater of two numbers. The pure version is:

```
max(X, Y, X) :- X >= Y.
max(X, Y, Y) :- X < Y.
```

Now since the two conditions are mutually exclusive, we can add a green cut to the first clause:

```
max(X, Y, X) :- X >= Y, !.
max(X, Y, Y) :- X < Y.
```

Furthermore, if the `X >= Y` test fails, then we know that `X < Y` must be true, and therefore it is tempting to turn the green cut into a red one and drop the `X < Y` test:

```
max(X, Y, X) :- X >= Y, !.
max(X, Y, Y).
```

Unfortunately, this version of `max/3` can give wrong answers, for example:

```
| ?- max(10, 0, 0).
yes
```

The reason is that the query does not match the head of the first clause, and so we never executed the `X >= Y` test. When we dropped the `X < Y` test, we made the mistake of assuming that the head of the first clause would match any query. This is an example of a predicate that is *not steadfast*. A steadfast version is:

```
max(X, Y, Z) :- X >= Y, !, Z = X.
max(X, Y, Y).
```

4.2.3.2 Disjunction

It is sometimes convenient to use an additional operator '`;`', standing for disjunction (or). (The precedence of '`;`' is such that it dominates '`,`' but is dominated by '`:-`'.) An example is the clause (A), which can be read as (B).

```
grandfather(X, Z) :-
     (   mother(X, Y)
     ;   father(X, Y)
     ),
     father(Y, Z).                                          (A)
```

"For any X, Y, and Z,
   X has Z as a grandfather if
   either the mother of X is Y
      or the father of X is Y,
   and the father of Y is Z." (B)

Such uses of disjunction can usually be eliminated by defining an extra predicate. For instance, (A) is equivalent to (C)

```
grandfather(X, Z) :- parent(X, Y), father(Y, Z).
parent(X, Y) :- mother(X, Y).
parent(X, Y) :- father(X, Y).                               (C)
```

For historical reasons, the token '`|`', when used outside a list, is actually an alias for '`;`'. The aliasing is performed when terms are read in. Since release 4.3, however, '`|`' can be defined as a proper infix operator, which then disables the aliasing. So the use of '`|`' instead of '`;`' for disjunction is not recommended in new code.

4.2.3.3 If-Then-Else

As an alternative to the use of cuts, and as an extension to the disjunction syntax, Prolog provides the construct:

```
(If -> Then ; Else)
```

This is the same as the if-then-else construct in other programming languages. Procedurally, it calls the *If* goal, committing to it if it succeeds, then calling the *Then* goal, otherwise calling the *Else* goal. *Then* and *Else*, but not *If*, can produce more solutions on backtracking.

Cuts inside of *If* do not make much sense and are not recommended. If you do use them, then their scope is limited to *If* itself.

The if-then-else construct is often used in a multiple-branch version:

```
(   If_1 -> Then_1
;   If_2 -> Then_2
    ...
;   /* otherwise -> */
    WhenAllElseFails
)
```

In contexts other than as the first argument of `;/2`, the following two goals are equivalent:

```
(If -> Then)

(If -> Then ; fail)
```

That is, the '`->`' operator has nothing to do with, and should not be confused with, logical implication.

`once/1` is a control construct that provides a "local cut". That is, the following three goals are equivalent:

```
once(If)

(If -> true)

(If -> true ; fail)
```

Finally, there is another version of if-then-else of the form:

```
if(If,Then,Else)
```

which differs from `(If -> Then ; Else)` in that `if/3` explores *all* solutions to *If*. This feature is also known as a "soft cut". There is a small time penalty for this—if *If* is known to have only one solution of interest, the form `(If -> Then ; Else)` should be preferred.

4.2.3.4 Negation as Failure

The following construct provides a kind of pseudo-negation meaning "P is not provable". This is not real negation ("P is false"). The following two goals are equivalent:

```
\+ P

(P -> fail ; true)
```

4.2.3.5 Do Loops *since release 4.1*

Proposed in [Schimpf 2002], the control structure

```
(Iterators do Body)
```

often eliminates the need to write an auxiliary predicate to perform some simple iteration. Semantically a do loop can be viewed as a shorthand for a goal:

```
PreCallGoals, aux(CallArgs).
```

where *aux* is a new, unique predicate symbol, *CallArgs* is its initial arguments, and *PreCallGoals* is a sequence of goals to be executed before calling *aux*, which is of the following form:

```
aux(BaseArgs) :- !.
aux(HeadArgs) :- PreBodyGoals, Body, aux(RecArgs).
```

where *BaseArgs*, *HeadArgs* and *RecArgs* are sequence of arguments and *PreBodyGoals* is a sequence of goals. Thus the semantics of a do loop is precisely defined by a set of rewrite rules from *Iterators* to those sequences of arguments and goals. Those rules are given in tabular form at the end of this section.

The '`do`' operator is an infix operator of the same priority as '`;`'. It is recommended to always enclose a do loop in parentheses. *Iterators* is a comma-separated sequence of iterators, and *Goal* is any goal.

Before giving the full list of available iterators, we now show some simple examples.

The iterator `foreach(`*Var*`,`*List*`)` provides iteration over a list:

```
| ?- (foreach(X,[1,2,3]) do writeq(X), nl).
1
2
3
yes
```

The same iterator can be used to construct a list:

```
| ?- (foreach(X,[1,2,3]), foreach(Y,List) do Y is X+3).
List = [4, 5, 6]
```

The iterator `fromto(`*First*`,`*In*`,`*Out*`,`*Last*`)` can be used to express an accumulator with initial value *First*, final value *Last*, with *In* and *Out* being local variables in *Body*:

```
| ?- (foreach(X,[1,2,3]), fromto(0,In,Out,Sum) do Out is In+X).
Sum = 6
```

The iterator `for(`*Var*`,`*Min*`,`*Max*`)` will iterate *Body* with *Var* ranging over integers *Min* thru *Max*, which can be expressions:

```
| ?- (for(I,1,5), foreach(I,List) do true).
List = [1,2,3,4,5]
```

The iterator `count(`*Var*`,`*Min*`,`*Max*`)` will iterate *Body* with *Var* ranging over ascending integers from *Min*, unifying *Max* with the final value. Its main use is to count the number of iterations:

```
| ?- (foreach(X,[a,b,c,d,e]), count(I,1,N), foreach(I-
X,Pairs) do true).
N = 5,
Pairs = [1-a,2-b,3-c,4-d,5-e]
```

The iterator `foreacharg(`*Var*`,`*Struct*`)` provides iteration over the arguments of a structure. The variant `foreacharg(`*Var*`,`*Struct*`,`*I*`)` also exists, with *I* ranging over the argument number, 1-based:

```
| ?- (foreacharg(A,f(1,2,3)), foreach(A,List) do true).
List = [1,2,3]

| ?- (foreacharg(A,f(a,b,c,d,e),I), foreach(I-A,List) do true).
List = [1-a,2-b,3-c,4-d,5-e]
```

Do loops have special variable scoping rules, which sometimes contradict the default rule that the scope of a variable is the clause in which it occurs: the scope of variables occurring in *Body* as well as variables quantified by iterators is one loop iteration. The exact scope of variables is given in the table below. To override the scoping rule, i.e. to enable a variable to be passed to all loop iterations, use the `param(Var)` declaration:

```
| ?- (for(I,1,5), foreach(X,List), param(X) do true).
List = [X,X,X,X,X]
```

An omitted `param(Var)` iterator is often spotted by the compiler, which issues a warning. Suppose that we want to define a predicate that removes all occurrences of the element *Kill* from the list *List* giving *Residue*. A do loop formulation is given below, along with a buggy version where `param(Kill)` is missing:

```
                                                                % do.pl
delete1(List, Kill, Residue) :- % correct
        (   foreach(X,List),
            fromto(Residue,S0,S,[]),
            param(Kill)
        do  (X = Kill -> S0 = S ; S0 = [X|S])
        ).


delete2(List, Kill, Residue) :- % wrong
        (   foreach(X,List),
            fromto(Residue,S0,S,[])
        do  (X = Kill -> S0 = S ; S0 = [X|S])
        ).
```

The compiler warns about the missing `param(Kill)`, and for a good reason: the first version works as intended, but the second does not:

```
| ?- [do].
% compiling /home/matsc/sicstus4/do.pl...
* [Kill] treated as local in do loop but also used outside
* suggest renaming or adding param([Kill])
* Approximate lines: 8-15, file: '/home/matsc/sicstus4/do.pl'
% compiled /home/matsc/sicstus4/do.pl in mod-
ule user, 10 msec 192 bytes
| ?- delete1([1,2,3,4,5], 3, R).
R = [1,2,4,5]

| ?- delete2([1,2,3,4,5], 3, R).
R = []
```

In some cases it is harmless and even useful to use the same local variable name in two do-loops. The compiler tries to detect this and will suppress warnings in these cases:

```
                                                        % do_scope.pl
sums_and_squares(List, Doubles, Squares) :-
        % X is used as a local variable in both do-loops. This is
        % harmless and will give no warning.
        (   foreach(X, List),
            foreach(Double, Doubles)
        do
            Double is X+X
        ),
        (   foreach(X, List),
            foreach(Square, Squares)
        do
            Square is X*X
        ).
```

Please note: In the context of multiple iterators, for the loop to terminate, all termination conditions must hold simultaneously. For example:

```
| ?- (for(I,1,2), for(J,1,3) do writeq(I-J), nl).
1-1
2-2
3-3
4-4
...
```

will not terminate, because the two termination condition never hold simultaneously.

Finally, do loops can be used as a control structure in grammar rules as well. A do loop in a grammar rule context will generate (or parse) the concatenation of the lists of symbols generated (or parsed) by each loop iteration. For example, suppose that you are representing three-dimensional points as lists `[x,y,z]`. Suppose that you need to generate a list of all such points for x between 1 and *Length*, y between 1 and *Width*, and z between 1 and

Height. A generator of such lists can be written as a grammar rule with nested do loops as follows.

```
| ?- compile(user).
| points3d(Length, Width, Height) -->
|         (   for(X,1,Length),
|             param(Width,Height)
|         do  (   for(Y,1,Width),
|                 param(X,Height)
|             do  (   for(Z,1,Height),
|                     param(X,Y)
|                 do  [[X,Y,Z]]
|                 )
|             )
|         ).
| ?- ^D
% compiled user in module user, 0 msec 1024 bytes
| ?- phrase(points3d(3,2,4), S).
S = [[1,1,1],[1,1,2],[1,1,3],[1,1,4],
     [1,2,1],[1,2,2],[1,2,3],[1,2,4],
     [2,1,1],[2,1,2],[2,1,3],[2,1,4],
     [2,2,1],[2,2,2],[2,2,3],[2,2,4],
     [3,1,1],[3,1,2],[3,1,3],[3,1,4],
     [3,2,1],[3,2,2],[3,2,3],[3,2,4]]
```

We now summarize the available iterators. In this table, the phrase "*var* is a local variable" means that *var* should occur in *Goal* and is a brand new variable in each iteration. All other variables have *global* scope, i.e. the scope is the clause containing the do loop.

`fromto(`*First*`,`*In*`,`*Out*`,`*Last*`)`
: In the first iteration, *In*=*First*. In the *n*:th iteration, *In* is the value that *Out* had at the end of the *(n-1)*:th iteration. *In* and *Out* are local variables. The termination condition is `Out=Last`.

`foreach(`*X*`,`*List*`)`
: Iterate with *X* ranging over all elements of *List*. *X* is a local variable. Can also be used for constructing a list. The termination condition is `Tail = []`, where *Tail* is the suffix of *List* that follows the elements that have been iterated over.

`foreacharg(`*X*`,`*Struct*`)`
: with *X* ranging over all arguments of *Struct*. *X* is a local variable. Cannot be used for constructing a term. So the termination condition is true iff all arguments have been iterated over.

`foreacharg(`*X*`,`*Struct*`,`*Idx*`)`
: Iterate with *X* ranging over all arguments of *Struct* and *Idx* ranging over the argument number, 1-based. *X* and *Idx* are local variables. Cannot be used for constructing a term. So the termination condition is true iff all arguments have been iterated over.

`for(I,MinExpr,MaxExpr)`

This is used when the number of iterations is known. Let *Min* take the value `integer(MinExpr)`, let *Max* take the value `integer(MaxExpr)`, and let *Past* take the value `max(Min,Max+1)`. Iterate with *I* ranging over integers from *Min* to `max(Min,Max)` inclusive. *I* is a local variable. The termination condition is `I = Past`.

`count(I,MinExpr,Max)`

This is normally used for counting the number of iterations. Let *Min* take the value `integer(MinExpr)`. Iterate with *I* ranging over integers from *Min*. *I* is a local variable. The termination condition is `I = Max`, i.e. *Max* can be and typically is a variable.

`param(Var)`

For declaring variables global, i.e. shared with the context. *Var* can be a single variable, or a list of them. The termination condition is true. **Please note**: By default, variables have local scope.

`IterSpec1, IterSpec2`

The iterators are iterated synchronously; that is, they all take their first value for the first iteration, their second value for the second iteration, etc. The order in which they are written does not matter. The set of local variables is the union of those of the iterators. The termination condition is the conjunction of those of the iterators.

Finally, we present the set of rewrite rules for the conceptual *aux* predicate that was introduced above. The rules define the translation from the iterators to the previously introduced *PreCallGoals*, *CallArgs*, *BaseArgs*, *HeadArgs*, *PreBodyGoals*, and *RecArgs*. This defines the precise semantics of any do loop:

iterator	*PreCallGoals*	*PreBodyGoals*
`fromto(F,I0,I1,T)`	`true`	`true`
`foreach(X,L)`	`true`	`true`
`foreacharg(A,S)`	`functor(S,_,N), N1 is N+1`	`I1 is I0+1, arg(I0,S,A)`
`foreacharg(A,S,I1)`	`functor(S,_,N), N1 is N+1`	`I1 is I0+1, arg(I0,S,A)`
`count(I,FE,T)`	`F is integer(FE)-1`	`I is I0+1`
`for(I,FE,TE)`	`F is integer(FE),` `S is max(F,integer(TE)+1)`	`I1 is I+1`
`param(P)`	`true`	`true`

iterator	*CallArgs*	*BaseArgs*	*HeadArgs*	*RecArgs*
`fromto(F,I0,I1,T)`	`F,T`	`L0,L0`	`I0,L1`	`I1,L1`
`foreach(X,L)`	`L`	`[]`	`[X|T]`	`T`
`foreacharg(A,S)`	`S,1,N1`	`_,I0,I0`	`S,I0,I2`	`S,I1,I2`
`foreacharg(A,S,I1)`	`S,1,N1`	`_,I0,I0`	`S,I0,I2`	`S,I1,I2`
`count(I,FE,T)`	`F,T`	`L0,L0`	`I0,L1`	`I,L1`
`for(I,FE,TE)`	`F,S`	`L0,L0`	`I,L1`	`I1,L1`
`param(P)`	`P`	`P`	`P`	`P`

4.2.3.6 Other Control Structures

The "all solution" predicates recognize the following construct as meaning "there exists an X such that P is true", and treats it as equivalent to P. The use of this explicit existential quantifier outside the `setof/3` and `bagof/3` constructs is superfluous and discouraged. Thus, the following two goals are equivalent:

```
X^P
```

```
P
```

The following construct is meaningful in the context of modules (see Section 4.11 [ref-mod], page 165), meaning "P is true in the context of the M module":

```
M:P
```

4.2.4 Declarative and Procedural Semantics

The semantics of definite clauses should be fairly clear from the informal interpretations already given. However, it is useful to have a precise definition. The *declarative semantics* of definite clauses tells us which goals can be considered true according to a given program, and is defined recursively as follows:

> A goal is *true* if it is the head of some clause instance and each of the goals (if any) in the body of that clause instance is true, where an *instance* of a clause (or term) is obtained by substituting, for each of zero or more of its variables, a new term for all occurrences of the variable.

For example, if a program contains the procedure for `concatenate/3`, declared in Section 4.2.1 [ref-sem-pro], page 65, then the declarative semantics tells us that (A) is true, because this goal is the head of a certain instance of the second clause (K) for `concatenate/3`, namely (B), and we know that the only goal in the body of this clause instance is true, because it is an instance of the unit clause that is the first clause for `concatenate/3`.

```
concatenate([a], [b], [a,b])
```

```
concatenate([a], [b], [a,b]):-
   concatenate([], [b], [b]).
```

Note that the declarative semantics makes no reference to the sequencing of goals within the body of a clause, nor to the sequencing of clauses within a program. This sequencing information is, however, very relevant for the *procedural semantics* that Prolog gives to definite clauses. The procedural semantics defines exactly how the Prolog system will execute a goal, and the sequencing information is the means by which the Prolog programmer directs the system to execute his program in a sensible way. The effect of executing a goal is to enumerate, one by one, its true instances. Here is an informal definition of the procedural semantics.

> To *execute* a goal, the system searches forwards from the beginning of the program for the first clause whose head *matches* or *unifies* with the goal. The *unification* process [Robinson 65] finds the most general common instance of the two terms, which is unique if it exists. If a match is found, then the matching clause instance is then *activated* by executing in turn, from left to right, each of the goals (if any) in its body. If at any time the system fails to find a match for a goal, then it *backtracks*; that is, it rejects the most recently activated clause, undoing any substitutions made by the match with the head of the clause. Next it reconsiders the original goal that activated the rejected clause, and tries to find a subsequent clause that also matches the goal.

For example, if we execute the goal expressed by the query (A), then we find that it matches the head of the second clause for `concatenate/3`, with `X` instantiated to `[a|X1]`. The new variable `X1` is constrained by the new goal produced, which is the recursive procedure call (B) and this goal matches the second clause, instantiating `X1` to `[b|X2]`, and yielding the new goal (C).

```
| ?- concatenate(X, Y, [a,b]).                                    (A)

concatenate(X1, Y, [b])                                           (B)

concatenate(X2, Y, [])                                            (C)
```

Now this goal will only match the first clause, instantiating both `X2` and `Y` to `[]`. Since there are no further goals to be executed, we have a solution

```
X = [a,b]
Y = []
```

That is, the following is a true instance of the original goal:

```
concatenate([a,b], [], [a,b])
```

If this solution is rejected, then backtracking will generate the further solutions

```
X = [a]
Y = [b]

X = []
Y = [a,b]
```

in that order, by re-matching goals already solved once using the first clause of `concatenate/3`, against the second clause.

Thus, in the procedural semantics, the set of clauses

```
H :- B1, ..., Bm.
H' :- B1', ..., Bm'.
...
```

are regarded as a *procedure definition* for some predicate H, and in a query

```
?- G1, ..., Gn.
```

each *Gi* is regarded as a *procedure call*. To execute a query, the system selects by its *computation rule* a goal, *Gj* say, and searches by its *search rule* a clause whose head matches *Gj*. Matching is done by the *unification* algorithm (see [Robinson 65]), which computes the most general unifier, *mgu*, of *Gj* and H). The *mgu* is unique if it exists. If a match is found, then the current query is *reduced* to a new query

```
?- (G1, ..., Gj-1, B1, ..., Bm, Gj+1, ..., Gn)mgu.
```

and a new cycle is started. The execution terminates when the empty query has been produced.

If there is no matching head for a goal, then the execution backtracks to the most recent successful match in an attempt to find an alternative match. If such a match is found, then an alternative new query is produced, and a new cycle is started.

In SICStus Prolog, as in other Prolog systems, the search rule is simple: "search forward from the beginning of the program".

The computation rule in traditional Prolog systems is also simple: "pick the leftmost goal of the current query". However, SICStus Prolog and other modern implementations have a somewhat more complex computation rule "pick the leftmost unblocked goal of the current query".

A goal can be blocked on one ore more uninstantiated variables, and a variable may block several goals. Thus binding a variable can cause blocked goals to become unblocked, and backtracking can cause currently unblocked goals to become blocked again. Moreover, if the current query is

```
?- G1, ..., Gj-1, Gj, Gj+1, ..., Gn.
```

where *Gj* is the first unblocked goal, and matching *Gj* against a clause head causes several blocked goals in *G1*, . . . , *Gj-1* to become unblocked, then these goals may become reordered.

Another consequence is that a query may be derived consisting entirely of blocked goals. Such a query is said to have *floundered*. The top level checks for this condition. If detected, then the outstanding blocked subgoals are printed on the standard error stream along

with the answer substitution, to notify the user that the answer (s)he has got is really a speculative one, since it is only valid if the blocked goals can be satisfied.

A goal is blocked if certain arguments are uninstantiated and its predicate definition is annotated with a matching block declaration (see Section 4.3.4.5 [Block Declarations], page 88). Goals of certain built-in predicates may also be blocked if their arguments are not sufficiently instantiated.

When this mechanism is used, the control structure resembles that of coroutines, suspending and resuming different threads of control. When a computation has left blocked goals behind, the situation is analogous to spawning a new suspended thread.

When a blocked goal becomes unblocked, the situation is analogous to temporarily suspending the current thread and resuming the thread to which the blocked goal belongs. Please note that a stretch of unifications is treated as atomic with respect to unblocking goals. Also, if such a stretch is followed by an explicit failure (`fail/0`, `false/0`), any unblocked goal is not run.

4.2.5 Meta-Calls

If X is instantiated to a term that would be acceptable as the body of a clause, then the goal `call(`*X*`)` is executed exactly as if that term appeared textually in place of the `call(`*X*`)`, except the scope of any cut occurring in X is limited to the execution of X. That is, the cut does not "propagate" into the clause in which `call(`*X*`)` occurs. If X is not properly instantiated, then an error exception is raised as described in Section 4.2.6 [ref-sem-exc], page 81.

In release 4, `call/1` has been generalized to `call/`*N* of any arity N between 1 and 255: the first argument is treated as template, which should be augmented by the remaining arguments, giving the goal to call. For example, the goal `call(p(X),Y,Z)` is equivalent to the goal `p(X,Y,Z)`. Note in particular that the first argument does not need to be an atom.

4.2.6 Exceptions Related to Procedure Calls

All predicates that take a call argument will raise the following exceptions:

`instantiation_error`
: Module prefix or goal uninstantiated.

`type_error`
: Goal not a callable.

`existence_error`
: Procedure does not exist.

`context_error`
: Declaration or clause construct called as procedure.

The reference page for such predicates will simply refer to these as "Call errors" and will go on to detail other exceptions that may be raised for a particular predicate.

4.2.7 Occurs Check

Prolog's unification does not have an *occurs check*; that is, when unifying a variable against a term, the system does not check to see if the variable occurs in the term. When the variable occurs in the term, unification should fail, but the absence of the check means that the unification succeeds, producing a *cyclic* term. Operations such as trying to print a cyclic term will cause a loop.

The absence of the occurs check is not a bug or a design oversight, but a conscious design decision. The reason for this decision is that unification of a variable and a term with the occurs check is at best linear in the sum of the term, whereas such unification without the occurs check runs in constant time. For any programming language to be practical, basic operations should take constant time. Unification against a variable may be thought of as the basic operation of Prolog, and this can take constant time only if the occurs check is omitted. Thus the absence of an occurs check is essential to Prolog's practicality as a programming language. The inconvenience caused by this restriction is, in practice, very slight.

SICStus Prolog unifies, compares (see Section 4.8.8 [ref-lte-cte], page 134), asserts, and copies cyclic terms without looping. The `write_term/[2,3]` built-in predicate can optionally handle cyclic terms. Unification with occurs check is available as a built-in predicate; see Section 4.8.1.2 [ref-lte-met-usu], page 130. The `acyclic_term/1` built-in predicate can test whether a term is acyclic; `subsumes_term/2` can test whether a term is subsumed by another one (see Section 4.8 [ref-lte], page 130). Additional predicates for subsumption and testing (a)cyclicity are available in a library package; see Section 10.47 [lib-terms], page 902. Other predicates usually do not handle cyclic terms well.

4.2.8 Summary of Control Predicates

`:P,:Q` *ISO*
: prove P and Q

`:P;:Q` *ISO*
: prove P or Q

`+M::P` *ISO*
: call P in module M

`:P->:Q;:R` *ISO*
: if P succeeds, prove Q; if not, prove R

`:P->:Q` *ISO*
: if P succeeds, prove Q; if not, fail

`!` *ISO*
: cut any choices taken in the current procedure

`\+ :P` *ISO*
: goal P is not provable

`?X ^ :P`
: there exists an X such that P is provable (used in `setof/3` and `bagof/3`)

`block` *:P* *declaration*
: declaration that predicates specified by *P* should block until sufficiently instantiated

`call(`*:P*`)` *ISO*
`call(`*:P*`,...)` *ISO*
: execute *P* or `P(...)`

`call_cleanup(`*:Goal*`,`*:Cleanup*`)`
: Executes the procedure call *Goal*. When *Goal* succeeds determinately, is cut, fails, or raises an exception, *Cleanup* is executed.

`call_residue_vars(`*:Goal*`,`*?Vars*`)`
: Executes the procedure call *Goal*. *Vars* is unified with the list of new variables created during the call that remain unbound and have blocked goals or attributes attached to them.

+Iterators `do` *:Body*
: executes *Body* iteratively according to *Iterators*

`fail` *ISO*
: fail (start backtracking)

`false` *ISO*
: same as `fail`

`freeze(`*+Var*`,`*:Goal*`)`
: Blocks *Goal* until `nonvar(`*Var*`)` holds.

`if(`*:P*`,`*:Q*`,`*:R*`)`
: for each solution of *P* that succeeds, prove *Q*; if none, prove *R*

`once(`*:P*`)` *ISO*
: Find the first solution, if any, of goal *P*.

`otherwise`
: same as true

`repeat` *ISO*
: succeed repeatedly on backtracking

`true` *ISO*
: succeed

`when(`*+Cond*`,`*:Goal*`)`
: block *Goal* until *Cond* holds

4.3 Loading Programs

4.3.1 Overview

There are two ways of loading programs into Prolog—loading source files and loading precompiled PO files. Source files can be *compiled* into virtual machine code, as well as *consulted* for interpretation. Dynamic predicates are always stored in interpreted form, however.

Virtual machine code runs about 8 times faster than interpreted code, and requires less runtime storage. Compiled code is fully debuggable, except certain constructs compile inline and cannot be traced. Compiled code also provides better precision for execution profiling and coverage analysis.

Since release 4.3, on 32 and 64 bit x86 platforms running Windows, OS X, and Linux, SICStus Prolog has the ability to compile predicates from virtual machine code to native code. This process, known as Just In Time (JIT) compilation, is controlled by a couple of system properties (see Section 4.17.1 [System Properties and Environment Variables], page 228), but is otherwise automatic. JIT compilation is seamless wrt. debugging, profiling, coverage analysis, etc. JIT compiled code runs up to 4 times faster than virtual machine code, but takes more space.

The virtual machine compiler operates in two different modes, controlled by the `compiling` Prolog flag. The possible values of the flag are:

`compactcode`
: Compilation produces byte-coded abstract instructions. The default.

`debugcode`
: Compilation produces *interpreted* code, i.e. compiling is replaced by consulting.

This section contains references to the use of the module system. These can be ignored if the module system is not being used (see Section 4.11 [ref-mod], page 165, for information on the module system).

4.3.2 The Load Predicates

Loading a program is accomplished by one of these predicates

`[]`
`[`*`:File`*`|`*`:Files`*`]`
`load_files(`*`:Files`*`)`
`load_files(`*`:Files`*`, +`*`Options`*`)`
: loads source or PO file(s), whichever is the more recent, according to *Options*.

`compile(`*`:Files`*`)`
: loads source file(s) into virtual machine code.

`consult(`*`:Files`*`)`
`reconsult(`*`:Files`*`)`
: loads source file(s) into interpreted representation.

`ensure_loaded(`*`:Files`*`)`
: loads source or PO file(s), whichever is the more recent, unless the file has already been loaded and it has not been modified since it was loaded.

`use_module(`*`:Files`*`)`
`use_module(`*`:File`*`,+`*`I`*`)`
`use_module(`*`?M`*`,`*`:File`*`,+`*`I`*`)`
: loads module files, see Section 4.11.3 [ref-mod-def], page 166, for information about module files.

The following notes apply to all the Load Predicates:

1. The *File* argument must be one of the following:
   - a file specification, that is the name of a file containing Prolog code; a '`.pro`', '`.pl`' or a '`.po`' suffix to a filename may be omitted (see Section 4.5.1 [ref-fdi-fsp], page 99)
   - the atom `user`
2. The *Files* argument can be a *File*, as above, or a list of such elements.
3. These predicates resolve file specifications in the same way as `absolute_file_name/2`. For information on file names refer to Section 4.5 [ref-fdi], page 99.
4. The above predicates raise an exception if any of the files named in *Files* does not exist, unless the `fileerrors` flag is set to `off`.

   Errors detected during compilation, such as an attempt to redefine a built-in predicate, also cause exceptions to be raised. However, these exceptions are caught by the compiler, an appropriate error message is printed, and compilation continues.
5. There are a number of *style warnings* that may appear when a file is compiled. These are designed to aid in catching simple errors in your programs and are initially `on`, but can be turned `off` if desired by setting the appropriate flags, which are:

   `single_var_warnings`
   : If `on`, then warnings are printed when a *sentence* (see Section 4.1.7.3 [ref-syn-syn-sen], page 57) containing variables not beginning with '`_`' occurring once only is compiled or consulted.

     The Prolog flag `legacy_char_classification` (see Section 4.9.4 [ref-lps-flg], page 140) expands the set of variable names for which warnings are printed. When `legacy_char_classification` is in effect warnings are printed also for variables that occur only once and whose name begin with '`_`' followed by a character that is not an uppercase Latin 1 character.

   `redefine_warnings`
   : This flag can take more values; see Section 4.9.4 [ref-lps-flg], page 140. If `on`, then the user is asked what to do when:
     - a module or predicate is being redefined from a different file than its previous definition.
     - a predicate is being imported whilst it was locally defined already.
     - a predicate is being redefined locally whilst it was imported already.
     - a predicate is being imported whilst it was imported from another module already.

   `discontiguous_warnings`
   : If `on`, then warnings are printed when clauses are not together in source files, and the relevant predicate has not been declared `discontiguous`.
6. By default, all clauses for a predicate are required to come from just one file. A predicate must be declared `multifile` if its clauses are to be spread across several different files. See the reference page for `multifile/1`.

7. If a file being loaded is not a module file, then all the predicates defined in the file are loaded into the source module. The form `load_files(Module:Files)` can be used to load the file into the specified module. See Section 4.11.3 [ref-mod-def], page 166, for information about module files. If a file being loaded *is* a module file, then it is first loaded in the normal way, the source module imports all the public predicates of the module file except for `use_module/[1,2,3]` and `load_files/[1,2]` if you specify an import list.
8. If there are any directives in the file being loaded, that is, any terms with principal functor `:-/1` or `?-/1`, then these are executed as they are encountered. Only the first solution of directives is produced, and variable bindings are not displayed. Directives that fail or raise exceptions give rise to warning or error messages, but do not terminate the load. However, these warning or error messages can be intercepted by the hook `user:portray_message/2`, which can call `abort/0` to terminate the load, if that is the desired behavior.
9. A common type of directive to have in a file is one that loads another file, such as

   ```
   :- [otherfile].
   ```

   In this case, if `otherfile` is a relative filename, then it is resolved with respect to the directory containing the file that is being loaded, not the current working directory of the Prolog system.

   Any legal Prolog goal may be included as a directive. There is no difference between a '`:-/1`' and a '`?-/1`' goal in a file being compiled.
10. If *Files* is the atom `user`, or *Files* is a list, and during loading of the list `user` is encountered, then procedures are to be typed directly into Prolog from `user_input`, e.g. the terminal. A special prompt, '`| `', is displayed at the beginning of every new clause entered from the terminal. Continuation lines of clauses typed at the terminal are preceded by a prompt of five spaces. When all clauses have been typed in, the last should be followed by end-of-file, or the atom `end_of_file` followed by a full stop.
11. During loading of source code, all terms being read in are subject to term expansion. Grammar rules is a special, built-in case of this mechanism. By defining the hook predicates `user:term_expansion/6` and `goal_expansion/5`, you can specify any desired transformation to be done as clauses are loaded.
12. The current load context (module, file, stream, directory) can be queried using `prolog_load_context/2`.
13. Predicates loading source code are affected by the character-conversion mapping, cf. `char_conversion/2`.

4.3.3 Redefining Procedures during Program Execution

You can redefine procedures during the execution of the program, which can be very useful while debugging. The normal way to do this is to use the '`break`' option of the debugger to enter a break state (see `break/0`, Section 4.15.7 [ref-ere-int], page 215), and then load an altered version of some procedures. If you do this, then it is advisable, after redefining the procedures and exiting from the break state, to wind the computation back to the first call to any of the procedures you are changing: you can do this by using the '`retry`' option with an argument that is the invocation number of that call. If you do not wind the computation back like this, then:

- if you are in the middle of executing a procedure that you redefine, then you will find that the old definition of the procedure continues to be used until it exits or fails;
- if you should backtrack into a procedure you have just redefined, then alternative clauses in the old definition will still be used.

See Section 11.3.27 [mpg-ref-break], page 1003.

4.3.4 Declarations and Initializations

When a program is to be loaded, it is sometimes necessary to tell the system to treat some of the predicates specially. This information is supplied by including *declarations* about such predicates in the source file, preceding any clauses for the predicates that they concern. A declaration is written just as a directive is, beginning with '`:-`'. A declaration is effective from its occurrence through the end of file.

Although declarations that affect more than one predicate may be collapsed into a single declaration, the recommended style is to write the declarations for a predicate immediately before its first clause.

Operator declarations are not declarations proper, but rather directives that modify the global table of syntax operators. Operator declarations are executed as they are encountered while loading programs.

The rest of this section details the available forms of predicate declarations.

4.3.4.1 Multifile Declarations

A declaration

```
:- multifile :PredSpec, ..., :PredSpec.                    ISO
```

where each *PredSpec* is a predicate specification, causes the specified predicates to become *multifile*. This means that if more clauses are subsequently loaded from other files for the same predicate, then the new clauses will not replace the old ones, but will be added at the end instead.

An example where multifile declarations are particularly useful is in defining *hook predicates*. A hook predicate is a user-defined predicate that somehow alters or customizes the behavior of SICStus Prolog. A number of such hook predicates are described in this manual. See also Section 4.2.2.1 [ref-sem-typ-hok], page 67.

Multifile declarations *must precede* any other declarations for the same predicate(s)!

If a file containing clauses for a multifile predicate is reloaded, then the old clauses from the same file are removed. The new clauses are added at the end. **Please note**: if the file being reloaded is a module file, however, then all predicates belonging to the module are abolished, including any multifile predicate.

If a multifile predicate is loaded from a file with no multifile declaration for it, then the predicate is redefined as if it were an ordinary predicate (i.e. the user is asked for confirmation).

If a multifile predicate is declared dynamic in one file, then it must also be done so in the other files from which it is loaded. See Section 11.3.125 [mpg-ref-multifile], page 1128.

4.3.4.2 Dynamic Declarations

A declaration

```
:- dynamic :PredSpec, ..., :PredSpec.                    ISO
```

where each *PredSpec* is a predicate specification, causes the specified predicates to become dynamic, which means that other predicates may inspect and modify them, adding or deleting individual clauses. Dynamic predicates are always stored in interpreted form even if a compilation is in progress. This declaration is meaningful even if the file contains no clauses for a specified predicate—the effect is then to define a dynamic predicate with no clauses.

The semantics of dynamic code is described in Section 4.12.1 [ref-mdb-bas], page 180. See Section 11.3.68 [mpg-ref-dynamic], page 1051.

4.3.4.3 Volatile Declarations

A declaration

```
:- volatile :PredSpec, ..., :PredSpec.
```

where each *PredSpec* is a predicate specification, causes the specified predicates to become *volatile*.

A predicate should be declared as volatile if it refers to data that cannot or should not be saved in a saved state. In most cases a volatile predicate will be dynamic, and it will be used to keep facts about streams or memory references. When a program state is saved at runtime, the clauses of all volatile predicates will be left unsaved. The predicate definitions will be saved though, which means that the predicates will keep all its properties such as `volatile`, `dynamic` or `multifile` when the saved state is restored. See Section 11.3.250 [mpg-ref-volatile], page 1285.

4.3.4.4 Discontiguous Declarations

By default, the development system issues warnings if it encounters clauses that are not together for some predicate. A declaration:

```
:- discontiguous :PredSpec, ..., :PredSpec.              ISO
```

disables such warnings for the predicates specified by each *PredSpec*. The warnings can also be disabled globally by setting the `discontiguous_warnings` flag to `off`. See Section 11.3.65 [mpg-ref-discontiguous], page 1047.

4.3.4.5 Block Declarations

The declaration

```
:- block :BlockSpec, ..., :BlockSpec.
```

where each *BlockSpec* is a skeletal goal, specifies conditions for blocking goals of the predicate referred to by the skeletal goal (`f/3` say). The arguments of the skeletal goal can be:

'`-`' see below

'`?`'

'`anything else`'
ignored

When a goal for `f/3` is to be executed, the mode specs are interpreted as conditions for blocking the goal, and if at least one condition evaluates to `true`, the goal is blocked.

A block condition evaluates to `true` if and only if all arguments specified as '`-`' are uninstantiated, in which case the goal is blocked until at least one of those variables is instantiated. If several conditions evaluate to `true`, then the implementation picks one of them and blocks the goal accordingly.

The recommended style is to write the block declarations in front of the source code of the predicate they refer to. Indeed, they are part of the source code of the predicate, and must precede the first clause. For example, with the definition:

```
:- block merge(-,?,-), merge(?,-,-).

merge([], Y, Y).
merge(X, [], X).
merge([H|X], [E|Y], [H|Z]) :- H @< E,  merge(X, [E|Y], Z).
merge([H|X], [E|Y], [E|Z]) :- H @>= E, merge([H|X], Y, Z).
```

calls to `merge/3` having uninstantiated arguments in the first *and* third position *or* in the second *and* third position will suspend.

The behavior of blocking goals for a given predicate on uninstantiated arguments cannot be switched off, except by abolishing or redefining the predicate. See Section 11.3.26 [mpg-ref-block], page 1001.

4.3.4.6 Meta-Predicate Declarations

To ensure correct semantics in the context of multiple modules, some predicates are subject to module name expansion. Clauses or directives containing goals for such predicates need to have certain arguments annotated by a module prefix. A declaration:

```
:- meta_predicate :MetaPredSpec, ..., :MetaPredSpec.
```

where each *MetaPredSpec* is a skeletal goal, informs the compiler which predicates and which of its arguments should be subject to such annotations. See Section 4.11.16 [ref-mod-met], page 175, and Section 4.11.15 [ref-mod-mne], page 175, for details.

4.3.4.7 Module Declarations

One of the following declarations:

```
:- module(+ModuleName, +ExportList).

:- module(+ModuleName, +ExportList, +Options).
```

where *ExportList* is a list of predicate specifications, declares that the forthcoming predicates should go into the module named *ModuleName* and that the predicates listed should be exported. See Section 4.11 [ref-mod], page 165, for details. See Section 11.3.122 [mpg-ref-meta_predicate], page 1123.

4.3.4.8 Public Declarations

The only effect of a declaration

```
:- public :PredSpec, ..., :PredSpec.
```

where each *PredSpec* is a predicate specification, is to give the SICStus cross-referencer (see Section 9.12 [The Cross-Referencer], page 383) a starting point for tracing reachable code. In some Prologs, this declaration is necessary for making compiled predicates visible. In SICStus Prolog, predicate visibility is handled by the module system. See Section 4.11 [ref-mod], page 165.

4.3.4.9 Mode Declarations

A declaration

```
:- mode :ModeSpec, ..., :ModeSpec.
```

where each *ModeSpec* is a skeletal goal, has no effect whatsoever, but is accepted for compatibility reasons. Such declarations may be used as a commenting device, as they express the programmer's intention of data flow in predicates.

4.3.4.10 is/2 Declarations

A declaration

```
:- SPEC is ANNOTATION.
```

is treated as a piece of documentation about the predicate specified by *SPEC*. It has no effect on normal execution, but the information is recorded and can be accessed by e.g. analysis and debugging tools. For details, see Section 10.18 [lib-is_directives], page 582.

4.3.4.11 Include Declarations

A directive

```
:- include(+Files).                                                    ISO
```

where *Files* is a file name or a list of file names, instructs the processor to literally embed the Prolog clauses and directives in *Files* into the file being loaded. This means that the effect of the `include` directive is as if the `include` directive itself were being replaced by the text in the *Files*. Including some files is thus different from loading them in several respects:

- The embedding file counts as the source file of the predicates loaded, e.g. with respect to the built-in predicate `source_file/2`; see Section 4.9.3 [ref-lps-apf], page 140.
- Some clauses of a predicate can come from the embedding file, and some from included files.
- When including a file twice, all the clauses in it will be entered twice into the program (although this is not very meaningful).
- The virtual clauses `beginning_of_file` and `end_of_file` are seen by term expansions for source files, but not for included files.

SICStus Prolog uses the included file name (as opposed to the embedding file name) only in source-linked debugging and error reporting. See Section 11.3.104 [mpg-ref-include], page 1099.

4.3.4.12 Initializations

A directive

```
:- initialization :Goal.                                        ISO
```

in a file appends *Goal* to the list of goals that shall be executed *after* that file has been loaded.

`initialization/1` is actually callable at any point during loading of a file. Initializations are saved by `save_modules/2` and `save_program/[1,2]`, and so are executed after loading or restoring such files too, in input order.

Goal is associated with the file loaded, and with a module, if applicable. When a file, or module, is going to be reloaded, all goals earlier installed by that file, or in that module, are removed first. See Section 11.3.105 [mpg-ref-initialization], page 1100.

4.3.5 Term and Goal Expansion

During loading of source code, all terms being read in are subject to term expansion. Grammar rules is a special, built-in case of this mechanism. By defining the hook predicates `user:term_expansion/6` and `goal_expansion/5`, you can specify any desired transformation to be done as clauses are loaded.

Term expansions are added by defining clauses for the following hook predicate. Such clauses should follow the pattern:

```
:- multifile user:term_expansion/6.
user:term_expansion(Term1, Layout1, Ids, Term2, Layout2, [to-
ken|Ids]) :- ...
        nonmember(token, Ids),
        token_expansion(Term1, Layout1, Term2, Layout2), !.
```

where *token_expansion/4* should be a predicate defining how to transform a given *Term1* into *Term2*. The hook is called for every *Term1* read, including at end of file, represented as the term `end_of_file`. If it succeeds, then *Term2* is used for further processing; otherwise,

the default grammar rule expansion is attempted. It is often useful to let a term expand to a list of directives and clauses, which will then be processed sequentially.

A key idea here is *Ids*, which is used to look up what expansions have already been applied. The argument is supposed to be a list of tokens, each token uniquely identifying an expansion. The tokens are arbitrary atoms, and are simply added to the input list, before expansions recursively are applied. This token list is used to avoid cyclic expansions.

The other arguments are for supporting source-linked debugging; see the reference page for details. See Section 11.3.228 [mpg-ref-term_expansion], page 1259.

Please note: term expansions are global, i.e. they affect all code that are compiled or consulted. In particular a term expansion is not affected by module imports. Care should be taken so that a term expansion does not unintentionally affect some unrelated source code. `goal_expansion/5` provides a more robust, and module aware, way to transform individual goals.

Goal expansions are added by defining the hook predicate:

```
M:goal_expansion(Goal1, Layout1, Module, Goal2, Layout2) :- ...
```

which should define how to transform a given *Goal1* into *Goal2*. Expansions are per module and should be defined in the module *M* in which *Goal1* is locally defined. It is called for every goal occurring in a clause being loaded, asserted, or meta-called. If it succeeds, then *Goal2* is used for further processing, and may be arbitrarily complex.

Please note: In general, the goal expansion can happen both at compile time and at runtime (and sometimes both, even for the same goal). For this reason the code that implements goal expansion should be present both at compile time and at runtime.

The other arguments are for supporting source-linked debugging and passing the source module; see the reference page for details.

To invoke term expansion from a program, use:

```
?- expand_term(Term1, Term2).
```

which transforms *Term1* into *Term2* using the built-in (for grammar rules) as well as user-defined term expansion rules. See Section 11.3.97 [mpg-ref-goal_expansion], page 1091.

4.3.6 Conditional Compilation

A pair of directives

```
:- if(:Goal).
...
:- endif.
```

will evaluate *Goal* and, if the goal succeeds, then the sentences between the `if/1` directive and the matching `endif/0` directive will be processed as usual.

If the evaluation of *Goal* does not succeed, i.e. fails or raises an exception, then the sentences between the `if/1` directive and the `endif/0` directive are completely ignored, except that any conditional directives must be properly nested. In particular, term expansion will not be performed on such ignored sentences and the goals of any nested conditional directives will not be evaluated.

The full form of conditional compilation directives include optional `else/0` and `elif/1` and are used as follows

```
:- if(:Goal1).
...
:- else.
...
:- endif.
```

If the goal of the `if/1` directive succeeds, then the sentences up to the matching `else/0` directive are processed as usual. Otherwise, if the goal fails or raises an exception, then the sentences between the `else/0` directive and the matching `endif/0` directive are processed as usual.

Finally, `elif/1` is available as a shorthand for nested uses of `if/1` and `else/0`

```
:- if(:Goal1).
...
:- elif(:Goal2).
...
:- elif(:Goal3).
...
:- else.
...
:- endif.
```

will evaluate the goals in turn, until one of them succeeds in which case the following sentences will be processed as usual up to the corresponding `else/0`, `endif/0` or `elif/1`.

A valid sequence of conditional compilation directives must contain exactly one `if/1` directive followed by zero or more `elif/1` directives followed by at most one `else/0` directive followed by exactly one `endif/0` directive. Valid sequences of conditional directives can be nested.

All directives that make up a sequence of conditional compilation directives must be in the same file. For instance, you cannot have a `if/1` directive in one file and then have the corresponding `endif/0` directive in a file included with an `include/1` directive. Nested conditional compilation sequences can of course be located in included files.

Conditional compilation directives are handled very early in the processing of an input file. In particular, term expansion hooks will never see `if/1`, `else/0`, `elif/1` or `endif/0` directives. Also, neither of `if/1`, `else/0`, `elif/1` or `endif/0` are defined as predicates.

If evaluation of a goal for `if/1` directive or an `elif/1` directive raises an exception, then an error message will be written and the goal will be treated as if it failed.

4.3.6.1 Conditional Compilation Examples

Conditional compilation is useful for writing portable Prolog code since it makes it possible to adapt to peculiarities of various implementations. The Prolog flag `dialect`, used by several Prolog implementations, is especially useful here.

```
:- if(current_prolog_flag(dialect, sicstus)).
%% We are being compiled in SICStus
%% Only SICStus has this library
:- use_module(library(process), [process_create/2]).

:- elif(current_prolog_flag(dialect, othervendor)).

%% We are being compiled in Other Vendor, we need to provide our own
%% compatibility layer

:- use_module(...).
process_create(A,B) :- ...

:- else.
%% We are being compiled in some unknown Prolog, give up.

process_create(_,_) :- throw(not_implemented).

:- endif.
```

Another possible usage is for disabling, perhaps costly, debugging code when building an optimized version of the code.

```
%% Only need environ/2 at compile-time for conditional compilation
:- load_files(library(system), [when(compile_time), imports([environ/2])]).

:- if(\+ environ(optimize, true)).

%% This clause does some expensive sanity checks. Disabled when building
%% an optimized version.
foo(X) :-
   \+ valid_x(X),
   throw(invalid_x(X)).

:- endif.

%% This clause is always present.
foo(X) :-
   do_x_things(X).
```

Invoking the SICStus development system with an option `-Doptimize=true`, to set the system property `optimize`, and then compiling the above code will ensure that the first, sanity checking, clause is not part of the `foo/1` predicate. Invoking the development system without such an option will ensure that the sanity checking clause is part of the `foo/1` predicate.

4.3.7 Predicate List

Detailed information is found in the reference pages for the following:

`[]`
`[`*:F*`|`*+Fs*`]` same as `load_files([`*F*`|`*Fs*`])`

`block` *:P* *declaration*
: predicates specified by P should block until sufficiently instantiated

`compile(`*:F*`)`
: load compiled clauses from files F

`consult(`*:F*`)`
`reconsult(`*:F*`)`
: load interpreted clauses from files F

`expand_term(+`*T*`,-`*X*`)` *hookable*
: term T expands to term X using `user:term_expansion/6` or grammar rule expansion

`goal_expansion(+`*Term1*`, +`*Layout1*`, +`*Module*`, -`*Term2*`, -`*Layout2*`)` *hook*
: Defines transformations on goals while clauses are being compiled or asserted, and during meta-calls.

`discontiguous` *:P* *declaration*, *ISO*
: clauses of predicates P do not have to appear contiguously

`dynamic` *:P* *declaration*, *ISO*
: predicates specified by P are dynamic

`elif(`*:Goal*`)` *declaration*
: Provides an alternative branch in a sequence of conditional compilation directives.

`else` *declaration*
: Provides an alternative branch in a sequence of conditional compilation directives.

`endif` *declaration*
: Terminates a sequence of conditional compilation directives.

`ensure_loaded(`*:F*`)` *ISO*
: load F if not already loaded

`if(`*:Goal*`)` *declaration*
: Starts a sequence of conditional compilation directives for conditionally including parts of a source file.

`include(+F)` *declaration, ISO*
: include the source file(s) F verbatim

`initialization :G` *declaration, ISO*
: declares G to be run when program is started

`load_files(:F)`
`load_files(:F,+O)`
: load files according to options O

`meta_predicate :P` *declaration*
: declares predicates P that are dependent on the module from which they are called

`mode :P` *declaration*
: NO-OP: document calling modes for predicates specified by P

`module(+M,+L)` *declaration*
`module(+M,+L,+O)` *declaration*
: module M exports predicates in L, options O

`multifile :P` *declaration, ISO*
: the clauses for P are in more than one file

`public :P` *declaration*
: NO-OP: declare predicates specified by P public

`restore(+F)`
: restore the state saved in file F

`user:term_expansion(+Term1, +Layout1, +Tokens1, -Term2, -Layout2, -Tokens2)`
hook
: Overrides or complements the standard transformations to be done by `expand_term/2`.

`use_module(:F)`
`use_module(:F,+I)`
: import the procedure(s) I from the module file F

`use_module(?M,:F,+I)`
: import I from module M, loading module file F if necessary

`volatile :P` *declaration*
: predicates specified by P are not to be included in saves

4.4 Saving and Loading the Prolog Database

4.4.1 Overview of PO Files

A *PO file* (Prolog object file) contains a binary representation of a set of modules, predicates, clauses and directives. They are portable between different platforms, except between 32-bit and 64-bit platforms.

PO files are created by `save_files/2`, `save_modules/2`, and `save_predicates/2`, which all save a selected set of code and data from the running application. They can be loaded by the predicates described in Section 4.3 [ref-lod], page 83.

PO files provide tremendous flexibility that can be used for many purposes, for example:

- precompiling Prolog libraries for fast loading;
- packaging Prolog code for distribution;
- generating precompiled databases of application data;
- selectively loading particular application databases (and rule bases);
- saving Prolog data across application runs;
- building and saving new application databases from within applications;

The facilities for saving and loading PO files are more than just a convenience when developing programs; they are also a powerful tool that can be used as part of the application itself.

4.4.2 Saved States

saved states are just a special case of PO files. The `save_program/[1,2]` predicate will save the execution state in a file. The state consists of all predicates and modules except built-in predicates and clauses of volatile predicates, the current operator declarations, the current character-conversion mapping, the values of all writable Prolog flags except those marked as *volatile* in Section 4.9.4 [ref-lps-flg], page 140, any blackboard data (see Section 4.12.9 [ref-mdb-bbd], page 188), database data (see Section 4.12.1 [ref-mdb-bas], page 180), and as of release 4.2, information for source-linked debugging. See Section 11.3.199 [mpg-ref-save_program], page 1220.

A saved state, can be restored using the `restore/1` predicate from within Prolog:

```
| ?- restore(File).
```

which will replace the current program state by the one in *File*. See Section 11.3.192 [mpg-ref-restore], page 1212.

A saved state can also be given as an option to the `sicstus` command:

```
% sicstus -r File
```

which will start execution by restoring *File*.

The location (i.e. directory) of the saved state, when it is created with `save_program/[1,2]` and loaded with `restore/1`, is treated in a special way in order to make it possible locate files when the saved state has been moved. See Section 3.10 [Saving], page 30, for more information.

The `save_program/2` predicate can be used to specify an initial goal that will be run when the saved state is restored. For example:

```
| ?- save_program(saved_state,initial_goal([a,b,c])).
```

When `saved_state` is loaded `initial_goal/1` will be called. This allows saved states to be generated that will immediately start running the user's program when they are restored. In

addition to this `save_program/2` facility, see also the `initialization/1` facility to declare goal to be executed upon loading (see Section 4.3.4.12 [Initializations], page 91).

4.4.3 Selective Saving and Loading of PO Files

The `save_program/[1,2]` and `restore/1` predicates discussed in the previous section are used for saving and restoring the entire Prolog database. To save selected parts of a Prolog database, the predicates `save_files/2`, `save_modules/2`, and `save_predicates/2` are used.

To save everything that was loaded from the files `src1.pl` and `src2.pl` into `file1.po` (extensions optional), as well as from any file included by them, you would use:

```
| ?- save_files([src1,src2],file1).
```

Any module declarations, predicates, multifile clauses, or directives encountered in those files will be saved. Source file information as provided by `source_file/[1,2]` for the relevant predicates and modules is also saved.

To save the modules `user` and `special` into `file2.po` you would use:

```
| ?- save_modules([user,special],file2).
```

The module declarations, predicates and initializations belonging to those modules will be saved. Source file information and embedded directives (except initializations) are *not* saved.

To just save certain predicates into `file3.po` you would use:

```
| ?- save_predicates([person/2,dept/4],file3).
```

This will only save the predicates specified. When the PO file is loaded the predicates will be loaded into the same module they were in originally.

Any PO file, however generated, can be loaded into Prolog with `load_files/[1,2]`:

```
| ?- load_files(file1).
```

or, equivalently:

```
| ?- [file1].
```

The information from each PO file loaded is incrementally added to the database. This means that definitions from later loads may replace definitions from previous loads.

The predicates `load_files/[1,2]` are used for compiling and loading source files as well as PO files. If `file1.po` and `file1.pl` both exist (and `file1` does not), then `load_files(file1)` will load the source (‘`.pl`’) or the PO, whichever is the most recent.

Refer to Section 4.3 [ref-lod], page 83, for more information on loading programs, and also to the reference page for `load_files/[1,2]`.

4.4.4 Predicate List

Detailed information is found in the reference pages for the following:

`initialization` *:G* *declaration,ISO*
: declares *G* to be run when program is started

`load_files(`*:F*`)`
`load_files(`*:F*`,+`*O*`)`
: load files according to options *O*

`user:runtime_entry(+`*S*`)` *hook*
: entry point for a runtime system

`save_files(+`*L*`,+`*F*`)`
: saves the modules, predicates, clauses and directives in the given files *L* into file *F*

`save_modules(+`*L*`,+`*F*`)`
: save the modules specifed in *L* into file *F*

`save_predicates(:`*L*`,+`*F*`)`
: save the predicates specified in *L* into file *F*

`save_program(+`*F*`)`
`save_program(+`*F*`,:`*G*`)`
: save all Prolog data into file *F* with startup goal *G*

`volatile` *:P* *declaration*
: declares predicates specified by *P* to not be included in saves.

4.5 Files and Directories

4.5.1 The File Search Path Mechanism

As a convenience for the developer and as a means for extended portability of the final application, SICStus Prolog provides a flexible mechanism to localize the definitions of the system dependent parts of the file and directory structure a program relies on, in such a way that the application can be moved to a different directory hierarchy or to a completely new file system, with a minimum of effort.

This mechanism, which can be seen as a generalization of the `user:library_directory/1` scheme available in previous releases, presents two main features:

1. An easy way to create aliases for frequently used directories, thus localizing to one single place in the program the physical directory name, which typically depends on the file system and directory structure.
2. A possibility to associate more than one directory specification with each alias, thus giving the developer full freedom in sub-dividing libraries, and other collections of programs, as it best suits the structure of the external file system, without making the process of accessing files in the libraries any more complicated. In this case, the alias can be said to represent a file search path, not only a single directory.

The directory aliasing mechanism, together with the additional file search capabilities of `absolute_file_name/3`, can effectively serve as an intermediate layer between the external world and a portable program. For instance, the developer can hide the directory representation by defining directory aliases, and he can automatically get a proper file extension added, dependent on the type of file he wants to access, by using the appropriate options to `absolute_file_name/3`.

A number of directory aliases and file search paths, are predefined in the SICStus Prolog system. The most important of those is the `library` file search path, giving the user instant access to the SICStus library, consisting of several sub-directories and extensive supported programs and tools.

Specifying a library file, using the alias, is possible simply by replacing the explicit file (and directory) specification with the following term:

```
library(file)
```

The name of the file search path, in this case `library`, is the main functor of the term, and indicates that *file* is to be found in one of the library directories.

The association between the alias `library` (the name of the search path) and the library directories (the definitions of the search path), is extended by Prolog facts, `user:library_directory/1`, which are searched in sequence to locate the file. Each of these facts specifies a directory where to search for *file*, whenever a file specification of the form `library(file)` is encountered.

The library mechanism discussed above, which can be extended with new directories associated with the alias `library`, has become subsumed by a more general aliasing mechanism, in which arbitrary names can be used as aliases for directories. The general mechanism also gives the possibility of defining path aliases in terms of already defined aliases.

In addition to `library`, the following aliases are predefined in SICStus Prolog: `runtime`, `system`, `application`, `temp`, and `path`. The interpretation of the predefined aliases are explained below.

4.5.1.1 Defining File Search Paths

The information about which directories to search when an alias is encountered is extended by clauses for the hook predicate `user:file_search_path/2`, of the following form:

```
user:file_search_path(PathAlias, DirectorySpec).
```

PathAlias must be an atom. It can be used as an alias for *DirectorySpec*.

DirectorySpec
: Can either be an atom, spelling out the name of a directory, or a compound term using other path aliases to define the location of the directory.

The directory path may be absolute, as in (A) or relative as in (B), which defines a path relative to the current working directory.

Then, files may be referred to by using file specifications of the form similar to `library(file)`. For example, (C), names the file `/usr/jackson/.login`, while (D) specifies the path `etc/demo/my_demo` relative to the current working directory.

```
user:file_search_path(home, '/usr/jackson').                    (A)

user:file_search_path(demo, 'etc/demo').                        (B)

home('.login')                                                  (C)

demo(my_demo)                                                   (D)
```

As mentioned above, it is also possible to have multiple definitions for the same alias. If clauses (E) and (F) define the `home` alias, then to locate the file specified by (G) each `home` directory is searched in sequence for the file `.login`. If `/usr/jackson/.login` exists, then it is used. Otherwise, `/u/jackson/.login` is used if it exists.

```
user:file_search_path(home, '/usr/jackson').                    (E)
user:file_search_path(home, '/u/jackson').                      (F)

home('.login')                                                  (G)
```

The directory specification may also be a term of arity 1, in which case it specifies that the argument of the term is relative to the `user:file_search_path/2` defined by its functor. For example, (H) defines a directory relative to the directory given by the `home` alias. Therefore, the alias `sp_directory` represents the search path `/usr/jackson/prolog/sp` followed by `/u/jackson/prolog/sp`. Then, the file specification (I) refers to the file (J), if it exists. Otherwise, it refers to the file (K), if it exists.

```
user:file_search_path(sp_directory, home('prolog/sp')).         (H)

sp_directory(test)                                              (I)

/usr/jackson/prolog/sp/test                                     (J)

/u/jackson/prolog/sp/test                                       (K)
```

Aliases such as `home` or `sp_directory` are useful because even if the `home` directory changes, or the `sp_directory` is moved to a different location, only the appropriate `user:file_search_path/2` facts need to be changed. Programs relying on these paths are not affected by the change of directories because they make use of file specifications of the form `home(file)` and `sp_directory(file)`.

All built-in predicates that take file specification arguments allow these specifications to include path aliases defined by `user:file_search_path/2` facts. The main predicate for expanding file specifications is `absolute_file_name/[2,3]`. See Section 11.3.79 [mpg-ref-file_search_path], page 1062.

Please note: The `user:file_search_path/2` database may contain directories that do not exist or are syntactically invalid (as far as the operating system is concerned). If an invalid directory is part of the database, then the system will fail to find any files in it, and the directory will effectively be ignored.

4.5.1.2 Frequently Used File Specifications

Frequently used `user:file_search_path/2` facts are best defined using the initialization file `~/.sicstusrc` or `~/sicstus.ini`, which is consulted at startup time by the Development System. Therefore, with reference to the examples from Section 4.5.1.1 [ref-fdi-fsp-def], page 100, clauses like the one following should be placed in the initialization file so that they are automatically available to user programs after startup:

```
:- multifile user:file_search_path/2.
user:file_search_path(home, '/usr/jackson').
user:file_search_path(sp_directory, home('prolog/sp')).
user:file_search_path(demo, 'etc/demo').
```

4.5.1.3 Predefined File Search Paths

`user:file_search_path/2` is undefined at startup, but all callers first try a number of default file search paths, almost as if `user:file_search_path/2` had the following initial clauses. Therefore, to expand file search paths, you should not call `user:file_search_path/2` directly, but instead call `absolute_file_name/[2,3]`.

See Section 4.9.4 [ref-lps-flg], page 140, for more info on the Prolog flag `host_type`.

The system properties `SP_APP_DIR` and `SP_RT_DIR` expand respectively to the absolute path of the directory that contains the executable and the directory that contains the SICStus runtime. The system property `SP_TEMP_DIR` expands to a directory suitable for storing temporary files, it is particularly useful with the `open/4` option `if_exists(generate_unique_name)`.

```
%% file_search_path/2 (virtual) initial clauses
file_search_path(library, '$SP_LIBRARY_DIR').
file_search_path(library, Path) :-
        library_directory(Path).
file_search_path(system, Platform) :-
        prolog_flag(host_type, Platform).
file_search_path(application, '$SP_APP_DIR').
file_search_path(runtime, '$SP_RT_DIR').
file_search_path(temp, '$SP_TEMP_DIR').
file_search_path(path, Path) :-
 %% enumerate all directories in $PATH
 ...
```

The only default expansion for the `library` file search path is the value of the system property `SP_LIBRARY_DIR`. However, you can add expansions for `library` by adding clauses to `user:library_directory/1` (which is initially undefined). This feature is mainly for

compatibility with earlier releases. It is better to add your own names for file search paths directly to `user:file_search_path/2` and not extend the file search path `library` at all.

```
:- multifile user:library_directory/1.
user:library_directory('/home/joe/myprologcode/').
user:library_directory('/home/jane/project/code').
```

4.5.2 Syntactic Rewriting

A file specification must be an atom or a compound term with arity 1. Such compound terms are transformed to atoms as described in Section 4.5.1 [ref-fdi-fsp], page 99. Let *FileSpec* be the given or transformed atomic file specification.

A file specification *FileSpec* is subject to *syntactic rewriting*. Depending on the operation, the resulting absolute filename is subject to further processing. Syntactic rewriting is performed wrt. a context directory *Context* (an absolute path), in the following steps:

- Under Windows, all '\' characters are converted to '`/`'. This replacement is also performed, as needed, during all subsequent steps.
- A '`$`*PROP*' in the beginning of *FileSpec*, followed by '`/`' or the end of the path, is replaced by the absolute path of the value of the system property *PROP*. This is especially useful when the system property has no explicit value and thus takes its value from the environment variable with the same name. If *var* does not exist or its value is empty, then a permission error is raised.

  A relative path that does not begin with '`/`' is made absolute by prepending *Context* followed by a '`/`'. Note that, under UNIX, all paths that begin with '`/`' are absolute.

  Under Windows only, a relative path that begins with a '`/`' is made absolute by prepending the root (see below) of *Context*.
- A '`~`*user*' in the beginning of *FileSpec*, followed by '`/`' or the end of the path, is replaced by the absolute path of the home directory of *user*. If the home directory of *user* cannot be determined, then a permission error is raised.

  Under Windows this has not been implemented, instead a permission error is raised.

  If the home directory of *user* is a relative path, then it is made absolute using *Context* if needed.
- A '`~`' in the beginning of *FileSpec*, followed by '`/`' or the end of the path, is replaced by the absolute path of the home directory of the current user. If the home directory of the current user cannot be determined, then a permission error is raised.

  The home directory of the current user is a relative path it is made absolute using *Context* if needed.

  Under Windows, the home directory of the current user is determined using the system properties or environment variables `HOMEDRIVE` and `HOMEPATH`.
- If *FileSpec* is a relative file name, then *Context* is prepended to it.
- The *root* of the file name is determined. Under UNIX this is simply the initial '`/`', if any. Under Windows there are several variants of roots, as follows.
  - *driveletter*`:/` where *driveletter* is a single upper or lower case character in the range '`a`' to '`z`'. For example, '`C:/`'.

  - `//?/`*driveletter*`:/` This is transformed to *driveletter*`:/`.
  - `//`*host*`/`*share*`/` (a '`UNC`' path, also known as a *network path*) where *host* and *share* are non-empty and do not contain `/`.
  - `//?/unc/`*host*`/`*share*`/` This is transformed to `//`*host*`/`*share*`/`

  If no *root* can be determined, then a permission error is raised.

  A path is absolute if and only if it is begins with a root, as above.
- The following steps are repeatedly applied to the last '`/`' of the *root* and the characters that follow it repeatedly until no change occurs.
  1. Repeated occurrences of `/` are replaced by a single `/`.
  2. '`/.`', followed by '`/`' or the end of the path, is replaced by '`/`'.
  3. `/`*parent*`/..`, followed by '`/`' or the end of the path, is replaced by '`/`'.

  If the path still contains `/..`, followed by '`/`' or the end of the path, then a permission error is raised.
- Any trailing '`/`' is deleted unless it is part of the *root*.
- Finally, under Windows, the *case-normalized path* is obtained as follows: All Latin 1 characters (i.e. character codes in [0..255]) are converted to lower case. All other characters are converted to upper case.

  File systems under Windows are generally case insensitive. This step ensures that two file names that differ only in case, and therefore would reference the same file in the file system, will case-normalize to identical atoms.

  Since release 4.3, `open/[3,4]`, and other build-in predicates that create files and directories, creates files using the file name argument as obtained from syntactic rewriting but before applying case-normalization. This means that `open('HelloWorld.txt', write, S), file_property(S,file_name(Name).` will create a file that has the mixed-case name `HelloWorld.txt` in the file system but `Name` will end in '`helloworld.txt`', i.e. the stream property will reflect the case-normalized path.

  The fact that `open/[3,4]` et al. preserves case when creating files seldom matters, except for aesthetics, since any Windows application that tries to open a file named `HelloWorld.txt` will also find `helloworld.txt`.

The following UNIX examples assumes that *Context* is '`/usr/`'; that the environment variables `VAR1`, `VAR2`, `VAR3` have the values '`/opt/bin`', '`foo`' and '`~/temp`' respectively and that the home directory of the current user, '`joe`', is '`/home/joe`'.

```
/foo/bar
   ↦ /foo/bar

/foo/.//bar/../blip///
   ↦ /foo/blip

/foo//../bar/../../blip
   ↦ error
```

```
$VAR1/../local/
   ↦ /opt/local

$VAR2/misc/.
   ↦ /usr/foo/misc

$VAR3/misc/.
   ↦ /home/joe/temp/misc

~joe/../jenny/bin.
   ↦ /home/jenny/bin
```

The following Windows examples assume that *Context* is '`C:/Source/proj1`'; that the environment variables `VAR1`, `VAR2`, `VAR3` have the values '`\\server\docs\brian`', '`foo`' and '`~/temp`' respectively and that the home directory of the current user is '`C:/home`'.

```
/foo/bar
   ↦ c:/foo/bar

foo//../../blip
   ↦ c:/source/blip

$VAR1/../local/
   ↦ //server/docs/local

$VAR2/misc/.
   ↦ c:/source/proj1/foo/misc

$VAR3/misc/.
   ↦ c:/home/temp/misc

~joe/../jenny/bin.
   ↦ error
```

4.5.3 List of Predicates

Detailed information is found in the reference pages for the following:

`absolute_file_name(+`*R*`,-`*A*`)` *hookable*
`absolute_file_name(+`*R*`,-`*A*`,+`*O*`)` *hookable*
: expand relative filename *R* to absolute file name *A* using options specified in *O*

`user:file_search_path(+`*F*`,-`*D*`)` *hook*
: directory *D* is included in file search path *F*

`user:library_directory(-D)` *hook*

D is a library directory that will be searched

4.6 Input and Output

4.6.1 Introduction

Prolog provides two classes of predicates for input and output: those that handle individual bytes or characters, and those that handle complete Prolog terms.

Input and output happen with respect to *stream*s. Therefore, this section discusses predicates that handle files and streams in addition to those that handle input and output of bytes, characters and terms.

4.6.2 About Streams

A Prolog stream can refer to a file or to the user's terminal[3]. Each stream is used either for input or for output, but typically not for both. A stream is either *text*, for character and term I/O, or *binary*, for byte I/O. At any one time there is a *current input* stream and a *current output* stream.

Input and output predicates fall into two categories:

1. those that use the current input or output stream;
2. those that take an explicit stream argument;

Initially, the current input and output streams both refer to the user's terminal. Each input and output built-in predicate refers implicitly or explicitly to a stream. The predicates that perform byte, character and term I/O operations come in pairs such that (A) refers to the current stream, and (B) specifies a stream.

predicate_name/n (A)
predicate_name/n+1 (B)

4.6.2.1 Programming Note

Deciding which version to use involves a trade-off between speed and readability of code: in general, version (B), which specifies a stream, runs slower than (A). So it may be desirable to write code that changes the current stream and uses version (A). However, the use of (B) avoids the use of global variables and results in more readable programs.

4.6.2.2 Stream Categories

SICStus Prolog streams are divided into two categories, those opened by `see/1` or `tell/1` and those opened by `open/[3,4]`. A stream in the former group is referred to by its *file specification*, while a stream in the latter case is referred to by its *stream object* (see the figure "Categorization of Stream Handling Predicates"). For further information about file specifications, see Section 4.5 [ref-fdi], page 99. Stream objects are discussed in Section 4.6.7.1

[3] At the C level, you can define more general streams, e.g. referring to pipes or to encrypted files.

[ref-iou-sfh-sob], page 113. Reading the state of open streams is discussed in Section 4.6.8 [ref-iou-sos], page 118.

Each operating system permits a different number of streams to be open.

4.6.3 Term Input

Term input operations include:

- reading a term and
- changing the prompt that appears while reading.

4.6.3.1 Reading Terms: The "Read" Predicates

The "Read" predicates are

- `read(-Term)`
- `read(+Stream, -Term)`
- `read_term(-Term, +Options)`
- `read_term(+Stream, -Term, +Options)`

`read_term/[2,3]` offers many options to return extra information about the term. See Section 11.3.185 [mpg-ref-read_term], page 1202.

When Prolog reads a term from the current input stream the following conditions must hold:

- The term must be followed by a full stop. See Section 4.1.7.1 [ref-syn-syn-ove], page 56. The full stop is removed from the input stream but is not a part of the term that is read.

  `read/[1,2]` does not terminate until the full stop is encountered. Thus, if you type at top level

  ```
  | ?- read(X)
  ```

  then you will keep getting prompts (first '`|: `', and five spaces thereafter) every time you type `RET`, but nothing else will happen, whatever you type, until you type a full stop.
- The term is read with respect to current operator declarations. See Section 4.1.5 [ref-syn-ops], page 51, for a discussion of operators.
- When a syntax error is encountered, an error message is printed and then the "read" predicate tries again, starting immediately after the full stop that terminated the erroneous `term`. That is, it does not fail on a syntax error, but perseveres until it eventually manages to read a term. This behavior can be changed with `prolog_flag/3` or using `read_term/[2,3]`. See Section 11.3.167 [mpg-ref-prolog_flag], page 1182.
- If the end of the current input stream has been reached, then `read(X)` will cause X to be unified with the atom `end_of_file`.

4.6.3.2 Changing the Prompt

To query or change the sequence of characters (prompt) that indicates that the system is waiting for user input, call `prompt/2`.

This predicate affects only the prompt given when a user's program is trying to read from the terminal (for example, by calling `read/1` or `get_code/1`). Note also that the prompt is reset to the default '`|: `' on return to the top level. See Section 11.3.169 [mpg-ref-prompt], page 1185.

4.6.4 Term Output

Term output operations include:

- writing to a stream (various "write" Predicates)
- displaying, usually on the user's terminal (`display/1`)
- changing the effects of `print/[1,2]` (`user:portray/1`)
- writing a clause as `listing/[0,1]` does, except original variable names are not retained (`portray_clause/[1,2]`)

4.6.4.1 Writing Terms: the "Write" Predicates

- `write(+`*`Stream`*`, +`*`Term`*`)`
- `write(+`*`Term`*`)`
- `writeq(+`*`Stream`*`, +`*`Term`*`)`
- `writeq(+`*`Term`*`)`
- `write_canonical(+`*`Term`*`)`
- `write_canonical(+`*`Stream`*`, +`*`Term`*`)`
- `write_term(+`*`Stream`*`, +`*`Term`*`, +`*`Options`*`)`
- `write_term(+`*`Term`*`, +`*`Options`*`)`

`write_term/[2,3]` is a generalization of the others and provides a number of options. See Section 11.3.254 [mpg-ref-write_term], page 1289.

4.6.4.2 Common Characteristics

The output of the "write" predicates is not terminated by a full stop; therefore, if you want the term to be acceptable as input to `read/[1,2]`, then you must send the terminating full stop to the output stream yourself. For example,

```
| ?- writeq(a), write(' .'), nl.
```

Note that, in general, you need to prefix the full stop with a layout character, like space, to ensure that it can not "glue" with characters in the term.

If *Term* is uninstantiated, then it is written as an anonymous variable (an underscore followed by a non-negative integer).

Please note: The "name" used when writing a variable may differ between separate calls to a "write" predicate. If this is a concern, then you can use either of the following methods to ensure that the variable is always written in same way.

- Avoid the problem altogether by writing the entire term with a single call to a "write" predicate. Multiple occurrence of the same variable within the written term will be written in the same way.
- Use the `variable_names/1 write_term` option to explicitly name the variable. This option was added in release 4.3.
- Use `numbervars/3` to bind the variables in the written term to (ground) `'$VAR'(`*N*`)` terms and use the `numbervars(true) write_term` option. Note that this may not work with attributed variables, like those used by `library(clpfd)`.

`write_canonical/[1,2]` is provided so that *Term*, if written to a file, can be read back by `read/[1,2]` regardless whether there are special characters in *Term* or prevailing operator declarations.

4.6.4.3 Distinctions Among the "Write" Predicates

- For `write` and `writeq`, the term is written with respect to current operator declarations (See Section 4.1.5 [ref-syn-ops], page 51, for a discussion of operators).

  `write_canonical(`*Term*`)` writes *Term* to the current or specified output stream in standard syntax (see Section 4.1 [ref-syn], page 47, on Prolog syntax), and quotes atoms and functors to make them acceptable as input to `read/[1,2]`. That is, operator declarations are not used and compound terms are always written in the form:

  ```
  name(arg1, ..., argn)
  ```

  and the special list syntax, e.g. `[a,b,c]`, or braces syntax, e.g. `{a,b,c}` are not used.

  Calling `write_canonical/1` is a good way of finding out how Prolog parses a term with several operators.

- Atoms, and other terms, output by `write/[1,2]` cannot in general be read back using `read/[1,2]`. For example,

  ```
  | ?- write('a b').
  a b
  ```

  For this reason `write/[1,2]` is only useful as a way to treat atoms as strings of characters. It is rarely, if ever, useful to use `write/[1,2]` with other kinds of terms, i.e. variables, numbers or compound terms.

  If you want to be sure that the atom can be read back by `read/[1,2]`, then you should use `writeq/[1,2]`, or `write_canonical/[1,2]`, which put quotes around atoms when necessary, or use `write_term/[2,3]` with the `quoted` option set to `true`. Note also that the printing of quoted atoms is sensitive to character escaping (see Section 4.1.4 [ref-syn-ces], page 51).

- `write/[1,2]` and `writeq/[1,2]` use the write option `numbervars(true)`, so treat terms of the form `'$VAR'(`*N*`)` specially: they write '`A`' if *N*=0, '`B`' if *N*=1, ...'`Z`' if *N*=25, '`A1`' if *N*=26, etc. Terms of this form are generated by `numbervars/3` (see Section 4.8.6 [ref-lte-anv], page 133).

```
| ?- writeq(a('$VAR'(0),'$VAR'(1))).
a(A,B)
```

`write_canonical/1` does *not* treat terms of the form `'$VAR'(N)` specially.

4.6.4.4 Displaying Terms

Like `write_canonical/[1,2]`, `display/1` ignores operator declarations and shows all compound terms in standard prefix form. For example, the command

```
| ?- display(a+b).
```

produces the following:

```
+(a,b)
```

Unlike `write_canonical/[1,2]`, `display/1` does not put quotes around atoms and functors, even when needed for reading the term back in, so `write_canonical/[1,2]` is often preferable. See Section 11.3.66 [mpg-ref-display], page 1048.

4.6.4.5 Using the Portray Hook

By default, the effect of `print/[1,2]` is the same as that of `write/[1,2]`, but you can change its effect by providing clauses for the hook predicate `user:portray/1`.

If X is a variable, then it is printed using `write(X)`. Otherwise the user-definable procedure `user:portray(X)` is called. If this succeeds, then it is assumed that X has been printed and `print/[1,2]` exits (succeeds).

If the call to `user:portray/1` fails, and if X is a compound term, then `write/[1,2]` is used to write the principal functor of X and `print/[1,2]` is called recursively on its arguments. If X is atomic, then it is written using `write/[1,2]`.

When `print/[1,2]` has to print a list, say `[X1,X2,...,Xn]`, it passes the whole list to `user:portray/1`. As usual, if `user:portray/1` succeeds, then it is assumed to have printed the entire list, and `print/[1,2]` does nothing further with this term. Otherwise `print/[1,2]` writes the list using bracket notation, calling `print/[1,2]` on each element of the list in turn.

Since `[X1,X2,...,Xn]` is simply a different way of writing `.(X1,[X2,...,Xn])`, one might expect `print/[1,2]` to be called recursively on the two arguments `X1` and `[X2,...,Xn]`, giving `user:portray/1` a second chance at `[X2,...,Xn]`. This does *not* happen; lists are a special case in which `print/[1,2]` is called separately for each of `X1,X2,...Xn`.

4.6.4.6 Portraying a Clause

If you want to print a clause, then `portray_clause/[1,2]` is almost certainly the command you want. None of the other term output commands puts a full stop after the written term. If you are writing a file of facts to be loaded by `compile/1`, then use `portray_clause/[1,2]`, which attempts to ensure that the clauses it writes out can be read in again as clauses.

The output format used by `portray_clause/[1,2]` and `listing/[0,1]` has been carefully designed to be clear. We recommend that you use a similar style. In particular, never

put a semicolon (disjunction symbol) at the end of a line in Prolog. See Section 11.3.157 [mpg-ref-portray_clause], page 1168.

4.6.5 Byte and Character Input

4.6.5.1 Overview

The operations in this category are:

- reading ("get" predicates),
- peeking ("peek" predicates),
- skipping ("skip" predicates),
- checking for end of line or end of file ("at_end" predicates).

4.6.5.2 Reading Bytes and Characters

- `get_byte([`*Stream*`,] `*N*`)` unifies *N* with the next consumed byte from the current or given input stream, which must be binary.
- `get_code([`*Stream*`,] `*N*`)` unifies *N* with the next consumed character code from the current or given input stream, which must be text.
- `get_char([`*Stream*`,] `*A*`)` unifies *A* with the next consumed character atom from the current or given input stream, which must be text.

4.6.5.3 Peeking

Peeking at the next character without consuming it is useful when the interpretation of "this character" depends on what the next one is.

- `peek_byte([`*Stream*`,] `*N*`)` unifies *N* with the next unconsumed byte from the current or given input stream, which must be binary.
- `peek_code([`*Stream*`,] `*N*`)` unifies *N* with the next unconsumed character code from the current or given input stream, which must be text.
- `peek_char([`*Stream*`,] `*A*`)` unifies *A* with the next unconsumed character atom from the current or given input stream, which must be text.

4.6.5.4 Skipping

There are two ways of skipping over characters in the current or given input stream: skip to a given character, or skip to the end of a line.

- `skip_byte([`*Stream*`,] `*N*`)` skips over bytes through the first occurrence of *N* from the current or given input stream, which must be binary.
- `skip_code([`*Stream*`,] `*N*`)` skips over character codes through the first occurrence of *N* from the current or given input stream, which must be text.
- `skip_char([`*Stream*`,] `*A*`)` skips over character atoms through the first occurrence of *A* from the current or given input stream, which must be text.
- `skip_line` or `skip_line(`*Stream*`)` skips to the end of line of the current or given input stream. Use of this predicate helps portability of code since it avoids dependence on any particular character code(s) being returned at the end of a line.

4.6.5.5 Finding the End of Line and End of File

To test whether the end of a line on the end of the file has been reached on the current or given input stream, use `at_end_of_line/[0,1]` or `at_end_of_stream/[0,1]`.

Note that these predicates never block waiting for input. This means that they may fail even if the stream or line is in fact at its end. An alternative that will never guess wrong is to use `peek_code/[1,2]` or `peek_byte/[1,2]`.

4.6.6 Byte and Character Output

The byte and character output operations are:

- writing (putting) bytes and characters
- creating newlines and tabs
- flushing buffers
- formatting output.

4.6.6.1 Writing Bytes and Characters

- `put_byte([`*Stream*`,] `*N*`)` writes the byte *N* to the current or given output stream, which must be binary.
- `put_code([`*Stream*`,] `*N*`)` writes the character code *N* to the current or given output stream, which must be text.
- `put_char([`*Stream*`,] `*A*`)` writes the character atom *A* to the current or given output stream, which must be text.

The byte or character is not necessarily printed immediately; they may be flushed if the buffer is full. See Section 4.6.7.10 [ref-iou-sfh-flu], page 118.

4.6.6.2 New Line

`nl` or `nl(`*Stream*`)` terminates the record on the current or given output stream. A linefeed character is printed.

4.6.6.3 Formatted Output

`format([`*Stream*`,] `*Control*`, `*Arguments*`)` interprets the *Arguments* according to the *Control* string and prints the result on the current or given output stream. Alternatively, an output stream can be specified in an initial argument. This predicate is used to produce formatted output, like the following example.

```
| ?- toc(1.5).
Table of Contents                                                  i

********************** NICE TABLE ************************
*                                                          *
*      Right aligned      Centered      Left aligned       *
*                 123         45         678              *
*                   1        2345        6789             *
************************************************************
```

For details, including the code to produce this example, see the example program in the reference page for `format/[2,3]`. See Section 11.3.85 [mpg-ref-format], page 1071.

4.6.7 Stream and File Handling

The operations implemented are opening, closing, querying status, flushing, error handling, setting.

The predicates in the "see" and "tell" families are supplied for compatibility with other Prologs. They take either file specifications or stream objects as arguments (see Section 11.1 [mpg-ref], page 937) and they specify an alternative, less powerful, mechanism for dealing with files and streams than the similar predicates (`open/[3,4]`, etc.), which take stream objects (see the figure "Categorization of Stream Handling Predicates").

4.6.7.1 Stream Objects

Each input and output stream is represented by a unique Prolog term, a *stream object*. In general, this term is of the form

`user` Stands for the standard input or output stream, depending on context.

`'$stream'(`*X*`)`
A stream connected to some file. *X* is an integer.

Atom A stream alias. Aliases can be associated with streams using the `alias(`*Atom*`)` option of `open/4`. There are also three predefined aliases:

`user_input`
An alias initially referring to the UNIX `stdin` stream. The alias can be changed with `prolog_flag/3` and accessed by the C variable `SP_stdin`.

`user_output`
An alias initially referring to the UNIX `stdout` stream. The alias can be changed with `prolog_flag/3` and accessed by the C variable `SP_stdout`.

`user_error`
An alias initially referring to the UNIX `stderr` stream. The alias can be changed with `prolog_flag/3` and accessed by the C variable `SP_stderr`. This stream is used by the Prolog top level and debugger, and for all unsolicited messages by built-in predicates.

Stream objects are created by the predicate `open/[3,4]` Section 4.6.7.4 [ref-iou-sfh-opn], page 114, and passed as arguments to those predicates that need them. Representation for stream objects to be used in C code is different. Use `stream_code/2` to convert from one to the other when appropriate. See Section 11.3.219 [mpg-ref-stream_code], page 1245.

4.6.7.2 Exceptions Related to Streams

All predicates that take a stream argument will raise the following exceptions:

`instantiation_error`
: *Stream* argument is not ground

`type_error`
: *Stream* is not an input (or output) stream type.

`existence_error`
: *Stream* is syntactically valid but does not name an open stream.

`permission_error`
: *Stream* names an open stream but the stream is not open for the required operation, or has reached the end of stream on input, or is binary when text is required, or vice versa, or there was an error in the bottom layer of write function of the stream.

`system_error`
: Some operating system dependent error occurred during I/O.

The reference page for each stream predicate will simply refer to these as "Stream errors" and will go on to detail other exceptions that may be raised for a particular predicate.

4.6.7.3 Suppressing Error Messages

If the `fileerrors` flag is set to `off`, then the built-in predicates that open files simply fail, instead of raising an exception if the specified file cannot be opened.

4.6.7.4 Opening a Stream

Before I/O operations can take place on a stream, the stream must be opened, and it must be set to be current input or current output. As illustrated in the figure "Categorization of Stream Handling Predicates", the operations of opening and setting are separate with respect to the stream predicates, and combined in the File Specification Predicates.

- `open(`*`File`*`, `*`Mode`*`, `*`Stream`*`)` attempts to open the file *File* in the mode specified (read,write or append). If the `open/3` request is successful, then a stream object, which can be subsequently used for input or output to the given file, is unified with *Stream*.

  The `read` mode is used for input. The `write` and `append` modes are used for output. The `write` option causes a new file to be created for output. If the file already exists, then it is set to empty and its previous contents are lost. The `append` option opens an already-existing file and adds output to the end of it. The `append` option will create the file if it does not already exist.

  Options can be specified by calling `open/4`. See Section 11.3.148 [mpg-ref-open], page 1154.
- `set_input(`*`Stream`*`)` makes *Stream* the current input stream. Subsequent input predicates such as `read/1` and `get_code/1` will henceforth use this stream.
- `set_output(`*`Stream`*`)` makes *Stream* the current output stream. Subsequent output predicates such as `write/1` and `put_code/1` will henceforth use this stream.

Opening a stream and making it current are combined in `see` and `tell`:

- `see(`*S*`)` makes file *S* the current input stream. If *S* is an atom, then it is taken to be a file specification, and
  - if there is an open input stream associated with the filename, and that stream was opened by `see/1`, then it is made the current input stream;
  - Otherwise, the specified file is opened for input and made the current input stream. If it is not possible to open the file, and the `fileerrors` flag is on (as it is by default), then `see/1` raises an error exception. Otherwise, `see/1` merely fails.

  See Section 11.3.200 [mpg-ref-see], page 1222.
- `tell(`*S*`)` makes *S* the current output stream.
  - If there is an open output stream currently associated with the filename, and that stream was opened by `tell/1`, then it is made the current output stream;
  - Otherwise, the specified file is opened for output and made the current output stream. If the file does not exist, then it is created. If it is not possible to open the file (because of protections, for example), and the `fileerrors` flag is on (which it is by default), then `tell/1` raises an error exception. Otherwise, `tell/1` merely fails.

  See Section 11.3.225 [mpg-ref-tell], page 1255.

It is important to remember to close streams when you have finished with them. Use `seen/0` or `close/1` for input files, and `told/0` or `close/1` for output files.

- `open_null_stream(`*Stream*`)` opens a text output stream that is not connected to any file and unifies its stream object with *Stream*. Characters or terms that are sent to this stream are thrown away. This predicate is useful because various pieces of local state are kept for null streams: the predicates `character_count/2`, `line_count/2` and `line_position/2` can be used on these streams (see Section 4.6.8 [ref-iou-sos], page 118).

4.6.7.5 Text Stream Encodings

SICStus Prolog supports character codes up to 31 bits wide where the codes are interpreted as for Unicode for the common subset.

When a character code (a "code point" in Unicode terminology) is read or written to a stream, it must be encoded into a byte sequence. The method by which each character code is encoded to or decoded from a byte sequence is called "character encoding".

The following character encodings are currently supported by SICStus Prolog.

`ANSI_X3.4-1968`
: The 7-bit subset of Unicode, commonly referred to as ASCII.

`ISO-8859-1`
: The 8-bit subset of Unicode, commonly referred to as Latin 1.

`ISO-8859-2`
: A variant of ISO-8859-1, commonly referred to as Latin 2.

`ISO-8859-15`
: A variant of ISO-8859-1, commonly referred to as Latin 9.

`windows 1252`
: The Microsoft Windows code page 1252.

`UTF-8`
`UTF-16`
`UTF-16LE`
`UTF-16BE`
`UTF-32`
`UTF-32LE`
`UTF-32BE`

: The suffixes `LE` and `BE` denote respectively little endian and big endian.

  These encodings can be auto-detected if a Unicode signature is present in a file opened for read. A Unicode signature is also known as a Byte order mark (BOM).

In addition, it is possible to use all alternative names defined by the IANA registry `http://www.iana.org/assignments/character-sets`.

All encodings in the table above, except the UTF-XXX encodings, supports the `reposition(true)` option to `open/4` (see Section 11.3.148 [mpg-ref-open], page 1154).

The encoding to use can be specified when using `open/4` and similar predicates using the option `encoding/1`. When opening a file for input, the encoding can often be determined automatically. The default is `ISO-8859-1` if no encoding is specified and no encoding can be detected from the file contents.

The encoding used by a text stream can be queried using `stream_property/2`.

See Section 11.3.148 [mpg-ref-open], page 1154, for details on how character encoding is auto-detected when opening text files.

4.6.7.6 Finding the Current Input Stream

- `current_input(`*Stream*`)` unifies *Stream* with the current input stream.
- If the current input stream is `user_input`, then `seeing(`*S*`)` unifies *S* with `user`. Otherwise, if the current input stream was opened by `see(`*F*`)`, then `seeing(`*S*`)` unifies *S* with *F*. Otherwise, if the current input stream was opened by `open/[3,4]`, then `seeing(`*S*`)` unifies *S* with the corresponding stream object.

  `seeing/1` can be used to verify that a section of code leaves the current input stream unchanged as follows:

  ```
  /* nonvar(FileNameOrStream), */
  see(FileNameOrStream),
  ...
  seeing(FileNameOrStream)
  ```

  WARNING: The sequence

```
seeing(File),
...
set_input(File),
```

will signal an error if the current input stream was opened by `see/1`. The only sequences that are guaranteed to succeed are

```
seeing(FileOrStream),
...
see(FileOrStream)
```

and

```
current_input(Stream),
...
set_input(Stream)
```

4.6.7.7 Finding the Current Output Stream

- `current_output(`*`Stream`*`)` unifies *Stream* with the current output stream.
- If the current output stream is `user_output`, then `telling(`*`S`*`)` unifies *S* with `user`. Otherwise, if the current output stream was opened by `tell(`*`F`*`)`, then `telling(`*`S`*`)` unifies *S* with *F*. Otherwise, if the current output stream was opened by `open/[3,4]`, then `telling(`*`S`*`)` unifies *S* with the corresponding stream object.

  `telling/1` can be used to verify that a section of code leaves the current output stream unchanged as follows:

```
/* nonvar(FileNameOrStream), */
tell(FileNameOrStream),
...
telling(FileNameOrStream)
```

  WARNING: The sequence

```
telling(File),
...
set_output(File),
```

  will signal an error if the current output stream was opened by `tell/1`. The only sequences that are guaranteed to succeed are

```
telling(FileOrStream),
...
tell(FileOrStream)
```

  and

```
current_output(Stream),
...
set_output(Stream)
```

4.6.7.8 Finding Out About Open Streams

`current_stream(`*`File`*`, `*`Mode`*`, `*`Stream`*`)` succeeds if *Stream* is a stream that is currently open on file *File* in mode *Mode*, where *Mode* is either `read`, `write`, or `append`. None of the arguments need be initially instantiated. This predicate is nondeterminate and can be

used to backtrack through all open streams. `current_stream/3` ignores certain predefined streams, including the initial values of the special streams for the standard input, output, and error channels. See Section 11.3.57 [mpg-ref-current_stream], page 1039.

`stream_property(`*`Stream`*`, `*`Property`*`)` succeeds if *Stream* is a currently open stream with property *Property*. Predefined streams, like the three standard channels, are *not* ignored. See Section 11.3.222 [mpg-ref-stream_property], page 1248.

4.6.7.9 Closing a Stream

- `close(`*`X`*`)` closes the stream corresponding to *X*, where *X* should be a stream object created by `open/[3,4]`, or a file specification passed to `see/1` or `tell/1`. In the example:

  ```
  see(foo),
  ...
  close(foo)
  ```

  `foo` will be closed. However, in the example:

  ```
  open(foo, read, S),
  ...
  close(foo)
  ```

  an exception will be raised and `foo` will not be closed. See Section 11.3.39 [mpg-ref-close], page 1017.
- `told/0` closes the current output stream. The current output stream is then set to be `user_output`.
- `seen/0` closes the current input stream. The current input stream is then set to be `user_input`.

4.6.7.10 Flushing Output

Output to a stream is not necessarily sent immediately; it is buffered. The predicate `flush_output/1` flushes the output buffer for the specified stream and thus ensures that everything that has been written to the stream is actually sent at that point.

- `flush_output(`*`Stream`*`)` sends all data in the output buffer to stream *Stream*.

See Section 11.3.82 [mpg-ref-flush_output], page 1068.

4.6.8 Reading the State of Opened Streams

Byte, character, line count and line position for a specified stream are obtained as follows:

- `byte_count(`*`Stream, N`*`)` unifies *N* with the total number of bytes either read or written on the open binary stream *Stream*.
- `character_count(`*`Stream, N`*`)` unifies *N* with the total number of characters either read or written on the open text stream *Stream*.
- `line_count(`*`Stream, N`*`)` unifies *N* with the total number of lines either read or written on the open text stream *Stream*. A freshly opened text stream has a line count of 0, i.e. this predicate counts the number of newlines seen.

- `line_position(Stream, N)` unifies N with the total number of characters either read or written on the current line of the open text stream *Stream*. A fresh line has a line position of 0, i.e. this predicate counts the length of the current line.

4.6.8.1 Stream Position Information for Terminal I/O

Input from Prolog streams that have opened the user's terminal for reading is echoed back as output to the same terminal. This is interleaved with output from other Prolog streams that have opened the user's terminal for writing. Therefore, all streams connected to the user's terminal share the same set of position counts and thus return the same values for each of the predicates `character_count/2`, `line_count/2` and `line_position/2`.

4.6.9 Random Access to Files

There are two methods of finding and setting the stream position, *stream positioning* and *seeking*. The current position of the read/write pointer in a specified stream can be obtained by using `stream_position/2` or `stream_property/2`. It may be changed by using `set_stream_position/2`. Alternatively, `seek/4` may be used.

Seeking is more general, and stream positioning is more portable. The differences between them are:

- `stream_position/2` is similar to `seek/4` with *Offset* = 0, and *Method* = `current`.
- Where `set_stream_position/2` asks for stream position objects, `seek/4` uses integer expressions to represent the position or offset. Stream position objects are obtained by calling `stream_position/2`, and are discussed in the reference page.

4.6.10 Summary of Predicates and Functions

Reference pages for the following provide further detail on the material in this section.

`at_end_of_line`
`at_end_of_line(+S)`
: testing whether at end of line on input stream S

`at_end_of_stream` *ISO*
`at_end_of_stream(+S)` *ISO*
: testing whether end of file is reached for the input stream S

`flush_output` *ISO*
`flush_output(+S)` *ISO*
: flush the output buffer for stream S

`get_byte(-C)` *ISO*
`get_byte(+S,-C)` *ISO*
: C is the next byte on binary input stream S

`get_char(-C)` *ISO*
`get_char(+S,-C)` *ISO*
: C is the next character atom on text input stream S

`get_code(-C)` *ISO*
`get_code(+S,-C)` *ISO*
: C is the next character code on text input stream S

`nl` *ISO*
`nl(+S)` *ISO*
: send a newline to stream S

`peek_byte(+C)` *ISO*
`peek_byte(+S,+C)` *ISO*
: looks ahead for next input byte on the binary input stream S

`peek_char(+C)` *ISO*
`peek_char(+S,+C)` *ISO*
: looks ahead for next input character atom on the text input stream S

`peek_code(+C)` *ISO*
`peek_code(+S,+C)` *ISO*
: looks ahead for next input character code on the text input stream S

`put_byte(+C)` *ISO*
`put_byte(+S,+C)` *ISO*
: write byte C to binary stream S

`put_char(+C)` *ISO*
`put_char(+S,+C)` *ISO*
: write character atom C to text stream S

`put_code(+C)` *ISO*
`put_code(+S,+C)` *ISO*
: write character code C to text stream S

`skip_byte(+C)`
`skip_byte(+S,+C)`
: skip input on binary stream S until after byte C

`skip_char(+C)`
`skip_char(+S,+C)`
: skip input on text stream S until after char C

`skip_code(+C)`
`skip_code(+S,+C)`
: skip input on text stream S until after code C

`skip_line`
`skip_line(+S)`
: skip the rest input characters of the current line on the input stream S

`byte_count(+S,-N)`
: N is the number of bytes read/written on binary stream S

`character_count(+S,-N)`
: N is the number of characters read/written on text stream S

`close(+F)` *ISO*
`close(+F,+O)` *ISO*
close file or stream F with options O

`current_input(-S)` *ISO*
S is the current input stream

`current_output(-S)` *ISO*
S is the current output stream

`current_stream(?F,?M,?S)`
S is a stream open on file F in mode M

`line_count(+S,-N)`
N is the number of lines read/written on text stream S

`line_position(+S,-N)`
N is the number of characters read/written on the current line of text stream S

`open(+F,+M,-S)` *ISO*
`open(+F,+M,-S,+O)` *ISO*
file F is opened in mode M, options O, returning stream S

`open_null_stream(+S)`
new output to text stream S goes nowhere

`prompt(-O,+N)`
queries or changes the prompt string of the current input stream

`see(+F)` make file F the current input stream

`seeing(-N)`
the current input stream is named N

`seek(+S,+O,+M,+N)`
seek to an arbitrary byte position on the stream S

`seen` close the current input stream

`set_input(+S)` *ISO*
select S as the current input stream

`set_output(+S)` *ISO*
select S as the current output stream

`set_stream_position(+S,+P)` *ISO*
P is the new position of stream S

`stream_code(?S,?C)`
Converts between Prolog and C representations of a stream

`stream_position(+S,-P)`
P is the current position of stream S

`stream_position_data(?Field,?Position,?Data)`
The *Field* field of the stream position term *Position* is *Data*.

`stream_property(?Stream, ?Property)` *ISO*
: Stream *Stream* has property *Property*.

`tell(+F)` make file F the current output stream

`telling(-N)`
: to file N

`told` close the current output stream

`char_conversion(+InChar, +OutChar)` *ISO*
: The mapping of *InChar* to *OutChar* is added to the character-conversion mapping.

`current_char_conversion(?InChar, ?OutChar)` *ISO*
: *InChar* is mapped to *OutChar* in the current character-conversion mapping.

`current_op(?P,?T,?A)` *ISO*
: atom A is an operator of type T with precedence P

`display(+T)`
: write term T to the user output stream in functional notation

`format(+C,:A)`
`format(+S,+C,:A)`
: write arguments A on stream S according to control string C

`op(+P,+T,+A)` *ISO*
: make atom A an operator of type T with precedence P

`user:portray(+T)` *hook*
: tell `print/[1,2]` and `write_term/[2,3]` what to do

`portray_clause(+C)`
`portray_clause(+S,+C)`
: write clause C to the stream S

`print(+T)` *hookable*
`print(+S,+T)` *hookable*
: display the term T on stream S using `user:portray/1` or `write/2`

`read(-T)` *ISO*
`read(+S,-T)` *ISO*
: read term T from stream S

`read_term(-T,+O)` *ISO*
`read_term(+S,-T,+O)` *ISO*
: read T from stream S according to options O

`write(+T)` *ISO*
`write(+S,+T)` *ISO*
: write term T on stream S

`write_canonical(+T)` *ISO*
`write_canonical(+S,+T)` *ISO*
: write term T on stream S so that it can be read back by `read/[1,2]`

`writeq(+T)` *ISO*
`writeq(+S,+T)` *ISO*
: write term T on stream S, quoting atoms where necessary

`write_term(+T,+O)` *hookable,ISO*
`write_term(+S,+T,+O)` *hookable,ISO*
: writes T to S according to options O

4.7 Arithmetic

4.7.1 Overview

In Prolog, arithmetic is performed by certain built-in predicates, which take arithmetic expressions as their arguments and evaluate them. Arithmetic expressions can evaluate to integers or floating-point numbers (floats).

For all practical purposes the range of integers can be considered limited only by the amount of available memory.

The range of floats is the one provided by the C `double` type, typically `[4.9e-324, 1.8e+308]` (plus or minus). In case of overflow or division by zero, an evaluation error exception will be raised. Floats are represented by 64 bits and they conform to the IEEE 754 standard.

The arithmetic operations of evaluation and comparison are implemented in the predicates described in Section 4.7.2 [ref-ari-eae], page 123, and Section 4.7.4 [ref-ari-acm], page 124. All of them take arguments of the type *Expr*, which is described in detail in Section 4.7.5 [ref-ari-aex], page 124.

4.7.2 Evaluating Arithmetic Expressions

The most common way to do arithmetic calculations in Prolog is to use the built-in predicate `is/2`.

-Term `is` *+Expr*
: *Term* is the value of arithmetic expression *Expr*.

Expr must not contain any uninstantiated variables. Do Not confuse `is/2` with `=/2`.

4.7.3 Exceptions Related to Arithmetic

All predicates that evaluate arithmetic expressions will raise the following exceptions:

`instantiation_error`
: Nonground expression given.

`type_error`
: Float given where integer required, or integer given where float is required, or term given as expression with a principal functor that is not a defined function.

`evaluation_error`
: Function undefined for the given argument. For example, attempt to divide by zero.

`representation_error`
: Integer value too large to be represented.

The reference page for such predicates will simply refer to these as "Arithmetic errors" and will go on to detail other exceptions that may be raised for a particular predicate.

4.7.4 Arithmetic Comparison

Each of the following predicates evaluates each of its arguments as an arithmetic expression, then compares the results. If one argument evaluates to an integer and the other to a float, then the integer is coerced to a float before the comparison is made.

Note that two floating-point numbers are equal if and only if they have the same bit pattern. Because of rounding error, it is not normally useful to compare two floats for equality.

Expr1 `=:=` *Expr2*
: succeeds if the results of evaluating terms *Expr1* and *Expr2* as arithmetic expressions are equal

Expr1 `=\=` *Expr2*
: succeeds if the results of evaluating terms *Expr1* and *Expr2* as arithmetic expressions are not equal

Expr1 `<` *Expr2*
: succeeds if the result of evaluating *Expr1* as an arithmetic expression is less than the result of evaluating *Expr2* as an arithmetic expression.

Expr1 `>` *Expr2*
: succeeds if the result of evaluating *Expr1* as an arithmetic expression *Expr1* is greater than the result of evaluating *Expr2* as an arithmetic expression.

Expr1 `=<` *Expr2*
: succeeds if the result of evaluating *Expr1* as an arithmetic expression is not greater than the result of evaluating *Expr2* as an arithmetic expression.

Expr1 `>=` *Expr2*
: succeeds if the result of evaluating *Expr1* as an arithmetic expression is not less than the result of evaluating *Expr2* as an arithmetic expression.

4.7.5 Arithmetic Expressions

Arithmetic evaluation and testing is performed by predicates that take arithmetic expressions as arguments. An *arithmetic expression* is a term built from numbers, variables, and functors that represent arithmetic functions. These expressions are evaluated to yield an arithmetic result, which may be either an integer or a float; the type is determined by the rules described below.

At the time of evaluation, each variable in an arithmetic expression must be bound to a number or another arithmetic expression. If the expression is not sufficiently bound or if

it is bound to terms of the wrong type, then Prolog raises exceptions of the appropriate type (see Section 4.15.3 [ref-ere-hex], page 202). Some arithmetic operations can also detect overflows. They also raise exceptions, e.g. division by zero results in an evaluation error being raised.

Only certain functors are permitted in arithmetic expressions. These are listed below, together with a description of their arithmetic meanings. For the rest of the section, X and Y are considered to be arithmetic expressions. Unless stated otherwise, the arguments of an expression may be any numbers and its value is a float if any of its arguments is a float; otherwise, the value is an integer. Any implicit coercions are performed with the `integer/1` and `float/1` functions. All trigonometric and transcendental functions take float arguments and deliver float values. The trigonometric functions take arguments or deliver values in radians.

Integers can for all practical purposes be considered to be of infinite size. Negative integers can be considered to be infinitely sign extended.

The arithmetic functors are annotated with *ISO*, with the same meaning as for the built-in predicates; see Section 1.5 [ISO Compliance], page 6.

`+X` *ISO*

The value is X.

`-X` *ISO*

The value is the negative of X.

`X+Y` *ISO*

The value is the sum of X and Y.

`X-Y` *ISO*

The value is the difference between X and Y.

`X*Y` *ISO*

The value is the product of X and Y.

`X/Y` *ISO*

The value is the *float* quotient of X and Y.

`X//Y` *ISO*

The value is the *integer* quotient of X and Y, truncated towards zero. X and Y have to be integers.

`X div Y` *since release 4.3, ISO*

The value is the *integer* quotient of X and Y, rounded downwards to the nearest integer. X and Y have to be integers.

`X rem Y` *ISO*

The value is the *integer* remainder after truncated division of X by Y, i.e. `X-Y*(X//Y)`. The sign of a nonzero remainder will thus be the same as that of the dividend. X and Y have to be integers.

`X mod Y` *ISO*

The value is the *integer* remainder after floored division of X by Y, i.e. `X-Y*(X div Y)`. The sign of a nonzero remainder will thus be the same as that of the divisor. X and Y have to be integers.

`integer(X)`

The value is the closest integer between X and 0, if X is a float; otherwise, X itself.

`float_integer_part(X)` *ISO*

The same as `float(integer(X))`. X has to be a float.

`float_fractional_part(X)` *ISO*

The value is the fractional part of X, i.e. `X - float_integer_part(X)`.

X has to be a float.

`float(X)` *ISO*

The value is the float equivalent of X, if X is an integer; otherwise, X itself.

`X/\Y` *ISO*

The value is the bitwise conjunction of the integers X and Y. X and Y have to be integers, treating negative integers as infinitely sign extended.

`X\/Y` *ISO*

The value is the bitwise disjunction of the integers X and Y. X and Y have to be integers, treating negative integers as infinitely sign extended.

`xor(X,Y)` *since release 4.3, ISO*

The value is the bitwise exclusive or of the integers X and Y. X and Y have to be integers, treating negative integers as infinitely sign extended.

`X\Y`

The same as `xor(X,Y)`.

`\(X)` *ISO*

The value is the bitwise negation of the integer X. X has to be an integer, treating negative integers as infinitely sign extended.

`X<<Y` *ISO*

The value is the integer X shifted arithmetically left by Y places. i.e. filling with a copy of the sign bit. X and Y have to be integers, and Y can be negative, in which case the shift is right.

`X>>Y` *ISO*

The value is the integer X shifted arithmetically right by Y places, i.e. filling with a copy of the sign bit. X and Y have to be integers, and Y can be negative, in which case the shift is left.

`[X]`

A list of just one number X evaluates to X. Since a quoted string is just a list of integers, this allows a quoted character to be used in place of its character code; e.g. `"A"` behaves within arithmetic expressions as the integer 65.

`abs(X)` *ISO*

The value is the absolute value of X.

`sign(X)` *ISO*

The value is the sign of X, i.e. -1, if X is negative, 0, if X is zero, and 1, if X is positive, coerced into the same type as X (i.e. the result is an integer, if and only if X is an integer).

`gcd(X,Y)`

The value is the greatest common divisor of the two integers X and Y. X and Y have to be integers.

`min(X,Y)` *ISO*

The value is the lesser value of X and Y.

`max(X,Y)` *ISO*

The value is the greater value of X and Y.

`msb(X)`

The value is the position of the most significant nonzero bit of the integer X, counting bit positions from zero. It is equivalent to, but more efficient than, `integer(log(2,X))`. X must be greater than zero, and X has to be an integer.

`round(X)` *ISO*

The value is the closest integer to X. If X is exactly half-way between two integers, then it is rounded up (i.e. the value is the least integer greater than X).

`truncate(X)` *ISO*

The value is the closest integer between X and 0.

`floor(X)` *ISO*

The value is the greatest integer less or equal to X.

`ceiling(X)` *ISO*

The value is the least integer greater or equal to X.

`sin(X)` *ISO*

The value is the sine of X.

`cos(X)` *ISO*

The value is the cosine of X.

`tan(X)` *ISO*

The value is the tangent of X.

`cot(X)`

The value is the cotangent of X.

`sinh(X)`

The value is the hyperbolic sine of X.

`cosh(X)`

The value is the hyperbolic cosine of X.

`tanh(`*X*`)`

The value is the hyperbolic tangent of *X*.

`coth(`*X*`)`

The value is the hyperbolic cotangent of *X*.

`asin(`*X*`)` *ISO*

The value is the arc sine of *X*.

`acos(`*X*`)` *ISO*

The value is the arc cosine of *X*.

`atan(`*X*`)` *ISO*

The value is the arc tangent of *X*.

`atan2(`*X*`,`*Y*`)` *ISO*

The value is the four-quadrant arc tangent of *X* and *Y*.

`acot(`*X*`)`

The value is the arc cotangent of *X*.

`acot2(`*X*`,`*Y*`)`

The value is atan2(*Y*,*X*).

`asinh(`*X*`)`

The value is the hyperbolic arc sine of *X*.

`acosh(`*X*`)`

The value is the hyperbolic arc cosine of *X*.

`atanh(`*X*`)`

The value is the hyperbolic arc tangent of *X*.

`acoth(`*X*`)`

The value is the hyperbolic arc cotangent of *X*.

`sqrt(`*X*`)` *ISO*

The value is the square root of *X*.

`log(`*X*`)` *ISO*

The value is the natural logarithm of *X*.

`log(`*Base*`,`*X*`)`

The value is the logarithm of *X* in the base *Base*.

`exp(`*X*`)` *ISO*

The value is the natural exponent of *X*.

X `**` *Y* *ISO*

The value is *X* raised to the power of *Y*, represented as a float. In particular, the value of `0.0 ** 0.0` is `1.0`.

`exp(`*X*`,`*Y*`)`

The same as `X ** Y`.

`X ^ Y` *since release 4.3, ISO*

The value is X raised to the power of Y, represented as a float if any of X and Y is a float; otherwise, as an integer. In particular, the value of `0^0` is `1`.

`pi` *since release 4.3, ISO*

The value is approximately 3.14159.

The following operation is included in order to allow integer arithmetic on character codes.

`[X]` Evaluates to X for numeric X. This is relevant because character strings in Prolog are lists of character codes, that is, integers. Thus, for those integers that correspond to character codes, the user can write a string of one character in place of that integer in an arithmetic expression. For example, the expression (A) is equivalent to (B), which in turn becomes (C) in which case X is unified with 2:

```
X is "c" - "a"          (A)
X is [99] - [97]        (B)
X is 99 - 97            (C)
```

A cleaner way to do the same thing is

```
X is 0'c - 0'a
```

4.7.6 Predicate Summary

`-Y is +X` *ISO*

Y is the value of arithmetic expression X

`+X =:= +Y` *ISO*

the results of evaluating terms X and Y as arithmetic expressions are equal.

`+X =\= +Y` *ISO*

the results of evaluating terms X and Y as arithmetic expressions are not equal.

`+X < +Y` *ISO*

the result of evaluating X as an arithmetic expression is less than the result of evaluating Y as an arithmetic expression.

`+X >= +Y` *ISO*

the result of evaluating X as an arithmetic expression is not less than the result of evaluating Y as an arithmetic expression.

`+X > +Y` *ISO*

the result of evaluating X as an arithmetic expression X is greater than the result of evaluating Y as an arithmetic expression.

`+X =< +Y` *ISO*

the result of evaluating X as an arithmetic expression is not greater than the result of evaluating Y as an arithmetic expression.

4.8 Looking at Terms

4.8.1 Meta-logical Predicates

Meta-logical predicates are those predicates that allow you to examine the current instantiation state of a simple or compound term, or the components of a compound term. This section describes the meta-logical predicates as well as others that deal with terms as such.

4.8.1.1 Type Checking

The following predicates take a term as their argument. They are provided to check the type of that term. The reference pages for these predicates include examples of their use.

`atom(+T)` *ISO*
: term T is an atom

`atomic(+T)` *ISO*
: term T is an atom or a number

`callable(+T)` *ISO*
: T is an atom or a compound term

`compound(+T)` *ISO*
: T is a compound term

`db_reference(+X)` *since release 4.1*
: X is a db_reference

`float(+N)` *ISO*
: N is a floating-point number

`ground(+T)` *ISO*
: term T is a nonvar, and all substructures are nonvar

`integer(+T)` *ISO*
: term T is an integer

`mutable(+X)`
: X is a mutable term

`nonvar(+T)` *ISO*
: term T is one of atom, number, compound (that is, T is instantiated)

`number(+N)` *ISO*
: N is an integer or a float

`simple(+T)`
: T is not a compound term; it is either atomic or a var

`var(+T)` *ISO*
: term T is a variable (that is, T is uninstantiated)

4.8.1.2 Unification

The following predicates are related to unification. Unless mentioned otherwise, unification is performed without occurs check (see Section 4.2.7 [ref-sem-occ], page 82).

To unify two terms, simply use:

```
?- X = Y.
```

Please note:

- Do Not confuse this predicate with `=:=/2` (arithmetic comparison) or `==/2` (term identity).
- `=/2` binds free variables in X and Y in order to make them identical.

To unify two terms with occurs check, use:

```
?- unify_with_occurs_check(X,Y).
```

To check whether two terms do not unify, use the following, which is equivalent to `\+ (X=Y)`:

```
?- X \= Y.
```

To check whether two terms are either strictly identical or do not unify, use the following. This construct is useful in the context of `when/2`:

```
?- ?=(X,Y).
```

To constrain two terms to not unify, use the following. It blocks until `?=(X,Y)` holds:

```
?- dif(X,Y).
```

The goal:

```
?- subsumes_term(General,Specific).
```

is true when *Specific* is an instance of *General*. It does not bind any variables.

4.8.2 Analyzing and Constructing Terms

The built-in predicate `functor/3`:

- decomposes a given term into its name and arity, or
- given a name and arity, constructs the corresponding compound term creating new uninstantiated variables for its arguments.

The built-in predicate `arg/3` unifies a term with a specified argument of another term.

The built-in predicate *Term* `=..` *List* unifies *List* with a list whose head is the atom corresponding to the principal functor of *Term* and whose tail is a list of the arguments of *Term*.

The built-in predicate `acyclic_term/2(`*Term*`)` succeeds if and only if *Term* is finite (acyclic).

The built-in predicate `term_variables(`*`Term`*`,`*`Variables`*`)` unifies *Variables* with the set of variables that occur in *Term*, in first occurrence order.

4.8.3 Analyzing and Constructing Lists

To combine two lists to form a third list, use `append(`*`Prefix`*`, `*`Suffix`*`, `*`List`*`)`.

To analyze a list into its component lists in various ways, use `append/3` with *List* instantiated to a proper list. The reference page for `append/3` includes examples of its usage, including backtracking.

To check the length of a list call `length(`*`List`*`, `*`Length`*`)`.

To produce a list of a certain length, use `length/2` with *Length* instantiated and *List* partly uninstantiated.

To check if a term is the element of a list, use `memberchk(`*`Element`*`, `*`List`*`)`.

To enumerate the elements of a list via backtracking, use `member(`*`Element`*`, `*`List`*`)`.

To check that a term is NOT the element of a list, use `nonmember(`*`Element`*`, `*`List`*`)`, which is equivalent to `\+member(`*`Element`*`, `*`List`*`)`.

4.8.4 Converting between Constants and Text

Three predicates convert between constants and lists of character codes: `atom_codes/2`, `number_codes/2`, and `name/2`. Two predicates convert between constants and lists of character atoms: `atom_chars/2`, `number_chars/2`.

`atom_codes(`*`Atom`*`, `*`Codes`*`)` is a relation between an atom *Atom* and a list *Codes* consisting of the character codes comprising the printed representation of *Atom*. Initially, either *Atom* must be instantiated to an atom, or *Codes* must be instantiated to a proper code list.

`number_codes(`*`Number`*`, `*`Codes`*`)` is a relation between a number *Number* and a list *Codes* consisting of the character codes comprising the printed representation of *Number*. Initially, either *Number* must be instantiated to a number, or *Codes* must be instantiated to a proper code list.

Similarly, `atom_chars(`*`Atom`*`, `*`Chars`*`)` and `number_chars(`*`Atom`*`, `*`Chars`*`)` are relations between a constant and a list consisting of the character atoms comprising the printed representation of the constant.

`name/2` converts between a constant and a code list. Given a code list, `name/2` will convert it to a number if it can, otherwise to an atom. This means that there are atoms that can be constructed by `atom_codes/2` but not by `name/2`. `name/2` is retained for backwards compatibility with other Prologs. New programs should use `atom_codes/2` or `number_codes/2` as appropriate.

`char_code/2` converts between a character atom and a character code.

4.8.5 Atom Operations

To compute *Length*, the number of characters of the atom *Atom*, use:

```
?- atom_length(Atom,Length).
```

To concatenate *Atom1* with *Atom2* giving *Atom12*, use the following. The predicate can also be used to split a given *Atom12* into two unknown parts:

```
?- atom_concat(Atom1,Atom2,Atom12).
```

To extract a sub-atom *SubAtom* from *Atom*, such that the number of characters preceding *SubAtom* is *Before*, the number of characters after *SubAtom* is *After*, and the length of *SubAtom* is *Length*, use the following. Only *Atom* needs to be instantiated:

```
?- sub_atom(Atom,Before,Length,After,SubAtom).
```

4.8.6 Assigning Names to Variables

Each variable in a term is instantiated to a term of the form `'$VAR'(N)`, where N is an integer, by the predicate `numbervars/3`. The "write" predicates (`write/[1,2]`, `writeq/[1,2]`, and `write_term/[2,3]` with the `numbervars(true)` option) transform these terms into variable names starting with upper case letters.

4.8.7 Copying Terms

The meta-logical predicate `copy_term/2` makes a copy of a term in which all variables have been replaced by brand new variables, and all mutables by brand new mutables. This is precisely the effect that would have been obtained from the definition:

```
copy_term(Term, Copy) :-
   recorda(copy, copy(Term), DBref),
   instance(DBref, copy(Temp)),
   erase(DBref),
   Copy = Temp.
```

although the built-in predicate `copy_term/2` is more efficient.

When you call `clause/[2,3]` or `instance/2`, you get a new copy of the term stored in the database, in precisely the same sense that `copy_term/2` gives you a new copy. One of the uses of `copy_term/2` is in writing interpreters for logic-based languages; with `copy_term/2` available you can keep "clauses" in a Prolog data structure and pass this structure as an argument without having to store the "clauses" in the Prolog database. This is useful if the set of "clauses" in your interpreted language is changing with time, or if you want to use clever indexing methods.

A naive way to attempt to find out whether one term is a copy of another is shown in this example:

```
identical_but_for_variables(X, Y) :-
   \+ \+ (
      numbervars(X, 0, N),
      numbervars(Y, 0, N),
      X = Y
   ).
```

This solution is sometimes sufficient, but will not work if the two terms have any variables in common. If you want the test to succeed even when the two terms do have some variables in common, then you need to copy one of them; for example,

```
identical_but_for_variables(X, Y) :-
   \+ \+ (
      copy_term(X, Z),
      numbervars(Z, 0, N),
      numbervars(Y, 0, N),
      Z = Y
   ).
```

Please note: If the term being copied contains attributed variables (see Section 10.3 [lib-atts], page 397) or suspended goals (see Section 4.2.4 [ref-sem-sec], page 78), then those attributes are not retained in the copy. To retain the attributes, you can use:

```
copy_term(Term, Copy, Body)
```

which in addition to copying the term unifies *Body* with a goal such that executing *Body* will reinstate the attributes in the *Copy*. *Copy* as well as *Body* contain brand new (unattributed) variables only.

4.8.8 Comparing Terms

4.8.8.1 Introduction

The predicates described in this section are used to compare and order terms, rather than to evaluate or process them. For example, these predicates can be used to compare variables; however, they never instantiate those variables. These predicates should not be confused with the arithmetic comparison predicates (see Section 4.7.4 [ref-ari-acm], page 124) or with unification.

4.8.8.2 Standard Order of Terms

These predicates use a standard total order when comparing terms. The standard total order is:

- Variables, by age (oldest first—the order is *not* related to the names of variables).
- Floats, in numeric order (e.g. -1.0 is put before 1.0).
- Integers, in numeric order (e.g. -1 is put before 1).
- Atoms, in alphabetical (i.e. character code) order.
- Compound terms, ordered first by arity, then by the name of the principal functor,

then by age for mutables and by the arguments in left-to-right order for other terms. Recall that lists are equivalent to compound terms with principal functor `./2`.

For example, here is a list of terms in standard order:

```
[ X, -1.0, -9, 1, fie, foe, X = Y, foe(0,2), fie(1,1,1) ]
```

Please note: the standard order is only well-defined for finite (acyclic) terms. There are infinite (cyclic) terms for which no order relation holds. Furthermore, blocking goals (see Section 4.2.4 [ref-sem-sec], page 78) on variables or modifying their attributes (see Section 10.3 [lib-atts], page 397) does not preserve their order.

The predicates for comparison of terms are described below.

`+`*T1* `==` `+`*T2*
: *T1* and *T2* are literally identical (in particular, variables in equivalent positions in the two terms must be identical).

`+`*T1* `\==` `+`*T2*
: *T1* and *T2* are *not* literally identical.

`+`*T1* `@<` `+`*T2*
: *T1* is before term *T2* in the standard order.

`+`*T1* `@>` `+`*T2*
: *T1* is after term *T2*

`+`*T1* `@=<` `+`*T2*
: *T1* is not after term *T2*

`+`*T1* `@>=` `+`*T2*
: *T1* is not before term *T2*

`compare(-`*Op*`, +`*T1*`, +`*T2*`)`
: the result of comparing terms *T1* and *T2* is *Op*, where the possible values for *Op* are:

`=`	if *T1* is identical to *T2*,
`<`	if *T1* is before *T2* in the standard order,
`>`	if *T1* is after *T2* in the standard order.

4.8.8.3 Sorting Terms

Two predicates, `sort/2` and `keysort/2` sort lists into the standard order. `keysort/2` takes a list consisting of key-value pairs and sorts according to the key.

Further sorting predicates are available in `library(samsort)`.

4.8.9 Mutable Terms

One of the tenets of logic programming is that terms are immutable objects of the Herbrand universe, and the only sense in which they can be modified is by means of instantiating

non-ground parts. There are, however, algorithms where destructive assignment is essential for performance. Although alien to the ideals of logic programming, this feature can be defended on practical grounds.

SICStus Prolog provides an abstract datatype and four operations for efficient *backtrackable* destructive assignment. In other words, any destructive assignments are transparently undone on backtracking. Modifications that are intended to survive backtracking must be done by asserting or retracting dynamic program clauses instead. Unlike previous releases of SICStus Prolog, destructive assignment of arbitrary terms is not allowed.

A *mutable term* is represented as a compound term with a reserved functor: `'$mutable'(`*Value*`,`*Timestamp*`)` where *Value* is the current value and *Timestamp* is reserved for bookkeeping purposes [Aggoun & Beldiceanu 90].

Any copy of a mutable term created by `copy_term/[2,3]`, `assert`, `retract`, a database predicate, or an all solutions predicate, is an independent copy of the original mutable term. Any destructive assignment done to one of the copies will not affect the other copy.

The following operations are provided:

`create_mutable(+`*Datum*`,-`*Mutable*`)`
: *Datum*.

`get_mutable(-`*Datum*`,+`*Mutable*`)`
: The current value of the mutable term *Mutable* is *Datum*.

`update_mutable(+`*Datum*`,+`*Mutable*`)`
: Updates the current value of the mutable term *Mutable* to become *Datum*.

`mutable(+`*Mutable*`)`
: *X* is currently instantiated to a mutable term.

Please note: the effect of unifying two mutables is undefined.

4.8.10 Summary of Predicates

`atom(+`*T*`)` *ISO*
: term *T* is an atom

`atomic(+`*T*`)` *ISO*
: term *T* is an atom or a number

`callable(+`*T*`)` *ISO*
: *T* is an atom or a compound term

`compound(+`*T*`)` *ISO*
: *T* is a compound term

`db_reference(+`*X*`)` *since release 4.1*
: *X* is a db_reference

`float(+`*N*`)` *ISO*
: *N* is a floating-point number

`ground(+T)` *ISO*
term T is a nonvar, and all substructures are nonvar

`integer(+T)` *ISO*
term T is an integer

`mutable(+X)`
X is a mutable term

`nonvar(+T)` *ISO*
term T is one of atom, number, compound (that is, T is instantiated)

`number(+N)` *ISO*
N is an integer or a float

`simple(+T)`
T is not a compound term; it is either atomic or a var

`var(+T)` *ISO*
term T is a variable (that is, T is uninstantiated)

`compare(-C,+X,+Y)` *ISO*
C is the result of comparing terms X and Y

`+X == +Y` *ISO*
terms X and Y are strictly identical

`+X \== +Y` *ISO*
terms X and Y are not strictly identical

`+X @< +Y` *ISO*
term X precedes term Y in standard order for terms

`+X @>= +Y` *ISO*
term X follows or is identical to term Y in standard order for terms

`+X @> +Y` *ISO*
term X follows term Y in standard order for terms

`+X @=< +Y` *ISO*
term X precedes or is identical to term Y in standard order for terms

`?T =.. ?L` *ISO*
the functor and arguments of term T comprise the list L.

`?X = ?Y` *ISO*
terms X and Y are unified.

`+X \= +Y` *ISO*
terms X and Y no not unify.

`?=(+X,+Y)`
X and Y are either strictly identical or do not unify.

`acyclic_term(+T)` *since release 4.3, ISO*
term T is a finite (acyclic) term.

`arg(+N,+T,-A)` *ISO*
the Nth argument of term T is A.

`atom_chars(?A,?L)` *ISO*
A is the atom containing the character atoms in list L.

`atom_codes(?A,?L)` *ISO*
A is the atom containing the characters in code list L.

`atom_concat(?Atom1,?Atom2,?Atom12)` *ISO*
Atom *Atom1* concatenated with *Atom2* gives *Atom12*.

`atom_length(+Atom,-Length)` *ISO*
Length is the number of characters of the atom *Atom*.

`char_code(?Char,?Code)` *ISO*
Code is the character code of the one-char atom *Char*.

`copy_term(+T,-C)` *ISO*
C is a copy of T in which all variables have been replaced by new variables.

`copy_term(+T,-C,-G)`
C is a copy of T in which all variables have been replaced by new variables, and G is a goal for reinstating any attributes in C.

`create_mutable(+Datum,-Mutable)`
Mutable is a new mutable term with current value *Datum*.

`dif(+X,+Y)`
X and Y are constrained to be different.

`frozen(+Term,-Goal)`
Goal is the conjunction of all goals blocked on some variable in *Term*.

`functor(?T,?F,?N)` *ISO*
the principal functor of term T has name F and arity N.

`get_mutable(-Datum,+Mutable)`
The current value of the mutable term *Mutable* is *Datum*.

`name(?A,?L)` *deprecated*
the code list of atom or number A is L.

`number_chars(?N,?L)` *ISO*
N is the numeric representation of list of character atoms L.

`number_codes(?N,?L)` *ISO*
N is the numeric representation of code list L.

`numbervars(+T,+M,-N)`
number the variables in term T from M to N-1.

`sub_atom(+Atom,?Before,?Length,?After,?SubAtom)` *ISO*
The characters of *SubAtom* form a sublist of the characters of *Atom*, such that the number of characters preceding *SubAtom* is *Before*, the number of characters after *SubAtom* is *After*, and the length of *SubAtom* is *Length*.

`subsumes_term(General,Specific)` *since release 4.3, ISO*
: *Specific* is an instance of *General*.

`term_variables(+Term,-Variables)` *since release 4.3, ISO*
: *Variables* is the set of variables that occur in *Term*, in first occurrence order.

`unify_with_occurs_check(?X,?Y)` *ISO*
: True if X and Y unify to a finite (acyclic) term.

`?T =.. ?L` *ISO*
: the functor and arguments of term T comprise the list L

`append(?A,?B,?C)`
: the list C is the concatenation of lists A and B

`keysort(+L,-S)` *ISO*
: the list L sorted by key yields S

`length(?L,?N)`
: the length of list L is N

`member(?X,?L)`
: X is a member of L

`memberchk(+X,+L)`
: X is a member of L

`nonmember(+X,+L)`
: X is not a member of L

`sort(+L,-S)` *ISO*
: sorting the list L into order yields S

4.9 Looking at the Program State

4.9.1 Overview

Various aspects of the program state can be inspected: the clauses of all or selected dynamic procedures, currently available atoms, user defined predicates, source files of predicates and clauses, predicate properties and the current load context can all be accessed by calling the predicates listed in Section 4.9.1 [ref-lps-ove], page 139. Furthermore, the values of Prolog flags can be inspected and, where it makes sense, changed.

4.9.2 Associating Predicates with their Properties

The following properties are associated with predicates either implicitly or by declaration:

`built_in` The predicate is built-in.

`compiled` The predicate is in virtual code representation.

`interpreted`
: The predicate is in interpreted representation.

`fd_constraint`
: The predicate is a so-called indexical predicate; see Section 10.9.13 [Defining Indexical Constraints], page 495.

`dynamic` The predicate was declared dynamic.

`volatile` The predicate was declared volatile.

`multifile`
The predicate was declared multifile.

`block(`*`SkeletalGoal`*`)`
The predicate has block declarations.

`meta_predicate(`*`SkeletalGoal`*`)`
The predicate is a meta-predicate.

As of release 4.2, the *SkeletalGoal* will contain the specifications used in the original meta-predicate declaration.

`exported` The predicate was exported from a module.

`imported_from(`*`Module`*`)`
The predicate was imported from the module *Module*.

Every predicate has exactly one of the properties `[built_in, compiled, interpreted, fd_constraint]`, at most one of the properties

`[exported, imported_from(`*`Module`*`)]`, zero or more `block(`*`SkeletalGoal`*`)` properties, and at most one of the remaining properties.

To query these associations, use `predicate_property/2`. The reference page contains several examples. See Section 11.3.159 [mpg-ref-predicate_property], page 1171.

4.9.3 Associating Predicates with Files

Information about loaded files and the predicates and clauses in them is returned by `source_file/[1,2]`. `source_file/1` can be used to identify an absolute filename as loaded, or to backtrack through all loaded files. To find out the correlation between loaded files and predicates, call `source_file/2`. See Section 11.3.216 [mpg-ref-source_file], page 1241.

4.9.4 Prolog Flags

Certain aspects of the state of the program are accessible as values of the global Prolog flags. Some of these flags are read-only and correspond to implementation defined properties and exist to aid portability. Others can be set and impact the behavior of certain built-in predicates.

The flags are accessed by the built-in predicates `prolog_flag/[2,3]`, `current_prolog_flag/2`, and `set_prolog_flag/2`.

Please note: Prolog flags are *global*, as opposed to being local to the current module, Prolog text, or otherwise.

The possible Prolog flag names and values are listed below. Flags annotated *ISO* are prescribed by the ISO standard. Flags annotated *volatile* are not saved by `save_program/[1,2]`. Flags annotated *read-only* are read-only:

`agc_margin`
: An integer *Margin*. The atoms will be garbage collected when *Margin* new atoms have been created since the last atom garbage collection. Initially 10000.

`argv` *volatile*
: The value is a list of atoms of the program arguments supplied when the current SICStus Prolog process was started. For example, if SICStus Prolog were invoked with:

```
% sicstus -- hello world 2001
```

then the value will be `[hello,world,'2001']`.

Setting the value can be useful when writing test cases for code that expects to be run with command line parameters.

`bounded` *read-only*,*volatile*,*ISO*
: One of the flags defining the integer type. For SICStus, its value is `false`, indicating that the domain of integers is practically unbounded.

`char_conversion` *volatile*,*ISO*
: If this flag is `on`, then unquoted characters in terms and programs read in will be converted, as specified by previous invocations of `char_conversion/2`. If the flag is `off`, then no conversion will take place. The default value is `on`.

`compiling`
: Governs the mode in which `compile/1` operate (see Section 4.3 [ref-lod], page 83).

`compactcode`
: Compilation produces byte-coded abstract instructions (the default).

`debugcode`
: Compiling is replaced by consulting.

`debugging` *volatile*
: Corresponds to the predicates `debug/0`, `nodebug/0`, `trace/0`, `notrace/0`, `zip/0`, `nozip/0`. The flag describes the mode the debugger is in, or is required to be switched to:

`trace` Trace mode (the debugger is creeping).

`debug` Debug mode (the debugger is leaping).

`zip` Zip mode (the debugger is zipping).

`off` The debugger is switched off (the default).

`debug` *volatile*,*ISO*
: The flag `debug`, prescribed by the ISO Prolog standard, is a simplified form of the `debugging` flag:

`off` *ISO* The debugger is switched off (the default).

`on` *ISO* The debugger is switched on (to trace mode, if previously switched off).

`profiling` *since release 4.2*

This flag describes the mode the execution profiler (see Section 9.2 [Execution Profiling], page 359) is in, or is required to be switched to:

`off` The profiler is switched off (the default).

`on` The profiler is switched on.

(The flags `profiling`, `debugging` and `debug` have no effect in runtime systems.)

`double_quotes` *volatile,ISO*

Governs the interpretation of double quoted strings (see Section 4.1.3.2 [ref-syn-cpt-sli], page 50):

`codes` *ISO*

Code list comprising the string. The default.

`chars` *ISO*

Char list comprising the string.

`atom` *ISO* The atom composed of the same characters as the string.

`quoted_charset`

This flag is relevant when `quoted(true)` holds when writing terms. Its value should be one of the atoms:

`portable` Atoms and functors are written using character codes less than 128 only, i.e. using the 7-bit subset of the ISO-8859-1 (Latin 1) character set (see Section 4.1.7.5 [ref-syn-syn-tok], page 60).

`prolog`

Atoms and functors are written using a character set that can be read back by `read/[1,2]`. This is a subset of Unicode that includes all of ISO-8859-1 (Latin 1) as well as some additional characters.

This character set may grow but not shrink in subsequent releases. This ensures that future releases can always read a term written by an older release.

Note that the character set supported by the stream is not taken into account. You can use `portable` instead of `prolog` if the stream does not support Unicode.

`debugger_print_options`

The value is a list of options for `write_term/3` (see Section 4.6.4.1 [ref-iou-tou-wrt], page 108), to be used in the debugger's messages. The initial value is `[quoted(true),numbervars(true),portrayed(true),max_depth(10)]`.

`dialect` *since release 4.1,read-only*

The value of this flag is `sicstus`. It is useful for distinguishing between Prolog implementations.

Also see the Prolog flag `version_data`, below.

`discontiguous_warnings` *volatile*

`on` or `off`. Enable or disable warning messages when clauses are not together in source files. Initially `on` in development systems, `off` in runtime systems.

`fileerrors`
: `on` or `off`. Enables or disables raising of file error exceptions. Initially `on` (enabled).

`gc`
: `on` or `off`. Enables or disables garbage collection of the global stack. Initially `on` (enabled).

`gc_margin`
: *Margin*: At least *Margin* kilobytes of free global stack space are guaranteed to exist after a garbage collection. Also, no garbage collection is attempted if the global stack has grown less than *Margin* kilobytes since the last garbage collection. Initially 1000.

`gc_trace`
: Governs global stack garbage collection trace messages.

  `verbose` Turn on verbose tracing of garbage collection.

  `terse` Turn on terse tracing of garbage collection.

  `off` Turn off tracing of garbage collection (the default).

`host_type` *read-only,volatile*
: The value is an atom identifying the platform on which SICStus was compiled, such as `'x86-linux-glibc2.1'`.

`informational` *volatile*
: `on` or `off`. Enables or disables the printing of informational messages. Initially `on` (printing enabled) in development systems, unless the `--noinfo` command line option was used; `off` (printing disabled) in runtime systems.

`integer_rounding_function` *read-only,volatile,ISO*
: One of the flags defining the integer type. In SICStus Prolog its value is `toward_zero`, indicating that the integer division (`(//)/2`) and integer remainder (`rem/2`) arithmetic functions use rounding toward zero; see Section 4.7 [ref-ari], page 123.

`legacy_char_classification` *since release 4.0.3,volatile*
: `on` or `off`. When enabled, most legal Unicode codepoints above 255 are treated as lowercase characters when reading Prolog terms. This improves compatibility with earlier versions of SICStus Prolog and makes it possible to use full Unicode, e.g. Chinese characters, in unquoted atoms as well as variable names, Section 4.1.7.5 [ref-syn-syn-tok], page 60. Initially `off` (disabled).

  Setting this flag affects the `read_term/[2,3]` option `singletons/1`; see Section 11.3.185 [mpg-ref-read_term], page 1202. It also affects the style warning for singleton variables; see the description of the `single_var_warnings` in Section 4.3.2 [ref-lod-lod], page 84.

`max_arity` *read-only,volatile,ISO*
: Specifies the maximum arity allowed for a compound term. In SICStus Prolog this is 255.

`max_integer` *read-only,volatile,ISO*
: Specifies the largest possible integer value. As in SICStus Prolog the range of integers in not bounded, `prolog_flag/[2,3]` and `current_prolog_flag/2` will fail when accessing this flag.

`max_tagged_integer` *since release 4.1*,*read-only*,*volatile*

The largest small integer, i.e. integers larger than this are less efficient to manipulate and are not available in `library(clpfd)`.

`min_integer` *read-only*,*volatile*,*ISO*

Specifies the smallest possible integer value. As in SICStus Prolog the range of integers in not bounded, `prolog_flag/[2,3]` and `current_prolog_flag/2` will fail, when accessing this flag.

`min_tagged_integer` *since release 4.1*,*read-only*,*volatile*

The smallest small integer, i.e. integers smaller than this are less efficient to manipulate and are not available in `library(clpfd)`.

`os_data` *since release 4.1*,*read-only*,*volatile*

The value is a term `os(Family,Name,Extra)` describing the operating system on which this SICStus process is running, i.e. it is the runtime version of the `platform_data` flag, below.

Family has the same value and meaning as for the `platform_data` flag, below.

On UNIX-like systems the *Name* is the lower case value `sysname` returned from `uname(3)` at runtime, i.e. the same as from the command `uname -s`. On all supported versions of Microsoft Windows this is `win32nt`.

`Extra` is a list of extra information. Entries may be added to this list without prior notice.

Currently, at least up to release 4.2.3, the *Family* and *Name* for the `platform_data` and `os_data` flags happens to be the same but this may change in the unlikely case that the operating system starts to return something new. For this reason it is probably better to use `platform_data` than `os_data` in most cases.

The `Extra` value for `os_data` may differ from its `platform_data` counterpart in order to accurately describe the running operating system.

`platform_data` *since release 4.1*,*read-only*,*volatile*

The value is a term `platform(Family,Name,Extra)` describing the operating system platform for which this version of SICStus was built.

Family describes the family or class of operating system. Currently documented values are `unix`, for UNIX-like systems like Linux, OS X, Solaris and Android; and `windows` for all supported versions of Microsoft Windows. You should not assume that these are the only two possibilities.

Name describes the name of the operating system. On UNIX-like systems this correspond to the (lower case) output from `uname -s`. Currently documented values are `linux`, `darwin`, `android` and `win32nt`.

Note that this implies that some operating systems may have unexpected names. In particular the name for Apple OS X is `darwin` and for 64-bit versions of SICStus on Microsoft Windows it is `win32nt`.

`Extra` is bound to a list of extra information. Entries may be added to this list without prior notice.

`redefine_warnings`

Enable or disable warning messages when:

- a module or predicate is being redefined from a different file than its previous definition. Such warnings are currently not issued when a '`.po`' file is being loaded.
- a predicate is being imported while it was locally defined already.
- a predicate is being redefined locally while it was imported already.
- a predicate is being imported while it was imported from another module already.

The possible values are:

`on` The default in development systems. The user is queried about what to do in each case.

`off` The default in runtime systems, but note that this flag is not *volatile*. Redefinitions are performed silently, as if the user had accepted them.

`reject` *since release 4.0.3*

Redefinitions are refused silently, as if the user had rejected them.

`proceed` *since release 4.0.3*

Redefinitions are performed, and warnings are issued.

`suppress` *since release 4.0.3*

Redefinitions are refused, and warnings are issued.

`single_var_warnings` *volatile*

`on` or `off`. Enable or disable warning messages when a *sentence* (see Section 4.1.7.3 [ref-syn-syn-sen], page 57) containing variables not beginning with '`_`' occurring once only is compiled or consulted. Initially `on` in development systems, `off` in runtime systems.

`source_info` *volatile*

`emacs` or `on` or `off`. If not `off` while source code is being loaded, then information about line numbers and file names are stored with the loaded code. If the value is `on` while debugging, then this information is used to print the source code location while prompting for a debugger command. If the value is `on` while printing an uncaught error exception message, then the information is used to print the source code location of the culprit goal or one of its ancestors, as far as it can be determined. If the value is `emacs` in any of these cases, then the appropriate line of code is instead highlighted, and no extra text is printed. The value is `off` initially, and that is its only available value in runtime systems.

`syntax_errors`

Controls what action is taken upon syntax errors in `read/[1,2]`.

`dec10` The syntax error is reported and the read is repeated.

`error` An exception is raised. See Section 4.15 [ref-ere], page 201. (the default).

`fail` The syntax error is reported and the read fails.

`quiet` The read quietly fails.

`system_type` *read-only,volatile*

The value is `development` in development systems and `runtime` in runtime systems.

`title` The window title. The default value is the same as the boot message '`SICStus 4.10.2 ... Licensed to SICS`'. It is currently only used as the window title on the Windows platform.

`toplevel_print_options`

The value is a list of options for `write_term/3` (see Section 4.6.4.1 [ref-iou-touwrt], page 108), to be used when the top level displays variable bindings and answer constraints. It is also used when messages are displayed. The initial value is `[quoted(true),numbervars(true),portrayed(true),max_depth(10)]`.

`typein_module`

Permitted values are atoms. Controls the current type-in module (see Section 4.11.8 [ref-mod-tyi], page 170). Corresponds to the predicate `set_module/1`.

`unknown` *ISO*

The system can optionally catch calls to predicates that have no definition. First, the user defined predicate `user:unknown_predicate_handler/3` (see Section 4.15 [ref-ere], page 201) is called. If undefined or if the call fails, then the action is governed by the state of the this flag, which can be:

`trace` Causes calls to undefined predicates to be reported and the debugger to be entered at the earliest opportunity. Not available in runtime systems.

`error` *ISO*

Causes calls to such predicates to raise an exception (the default). See Section 4.15 [ref-ere], page 201.

`warning` *ISO*

Causes calls to such predicates to display a warning message and then fail.

`fail` *ISO* Causes calls to such predicates to fail.

`user_input` *volatile*

Permitted values are any stream opened for reading. Controls which stream is referenced by `user_input` and `SP_stdin`. It is initially set to a stream connected to UNIX `stdin`.

`user_output` *volatile*

Permitted values are any stream opened for writing. Controls which stream is referenced by `user_output` and `SP_stdout`. It is initially set to a stream connected to UNIX `stdout`.

`user_error` *volatile*
: Permitted values are any stream opened for writing. Controls which stream is referenced by `user_error` and `SP_stderr`. It is initially set to a stream connected to UNIX `stderr`.

`version` *read-only,volatile*
: The value is an atom containing the banner text displayed on startup, such as `'SICStus 4.1.0 (i386-darwin-9.8.0): Wed Oct 14 14:43:58 CEST 2009'`.

  Also see the Prolog flag `version_data`, below.

`version_data` *since release 4.1,read-only,volatile*
: The value is a term `sicstus(Major,Minor,Revision,Beta,Extra)` with integer major, minor, revision, and beta version.

  `Extra` is bound to a list of extra information. Entries may be added to this list without prior notice.

  Also see the Prolog flag `dialect`, above.

You can use `prolog_flag/2` to enumerate all the *FlagName*s that the system currently understands, together with their current values. Use `prolog_flag/2` to make queries, `prolog_flag/3` to make changes.

4.9.5 Load Context

When a Prolog source file is being read in, some aspects of the load context can be accessed by the built-in predicate `prolog_load_context/2`, which accesses the value of a given key. The available keys are:

`source`
: The absolute path name of the file being loaded. During loading of a PO file, the corresponding source file name is returned.

`file`
: Outside included files (see Section 4.3.4.11 [Include Declarations], page 90) this is the same as the `source` key. In included files this is the absolute path name of the file being included.

`directory`
: The absolute path name of the directory of the file being loaded. In included files this is the directory of the file being included.

`module`
: The source module (see Section 4.11.15 [ref-mod-mne], page 175). This is useful for example if you are defining clauses for `user:term_expansion/6` and need to access the source module at compile time.

`stream`
: The stream being loaded. This key is not available during loading of a PO file.

`term_position`
: A term representing the stream position of the last clause read. This key is not available during loading of a PO file.

4.9.6 Predicate Summary

`current_atom(?A)`
: backtrack through all atoms

`current_module(?M)`
: M is the name of a current module

`current_module(?M,?F)`
: F is the name of the file in which M's module declaration appears

`current_predicate(:A/?N)` *ISO*
`current_predicate(?A,:P)`
: A is the name of a predicate with most general goal P and arity N

`current_prolog_flag(?F,?V)` *ISO*
: V is the current value of Prolog flag F

`listing` list all dynamic procedures in the type-in module

`listing(:P)`
: list the dynamic procedure(s) specified by P

`predicate_property(:P,?Prop)`
: *Prop* is a property of the loaded predicate P

`prolog_flag(?F,?V)`
: V is the current value of Prolog flag F

`prolog_flag(+F,=O,+N)`
: O is the old value of Prolog flag F; N is the new value

`prolog_load_context(?K,?V)`
: find out the context of the current load

`set_module(+M)`
: make M the type-in module

`set_prolog_flag(+F,+N)` *ISO*
: N is the new value of Prolog flag F

`source_file(?F)`
: F is a source file that has been loaded into the database

`source_file(:P,?F)`
: P is a predicate defined in the loaded file F

`unknown(-O,+N)` *development*
: Changes action on undefined predicates from O to N.

4.10 Memory Use and Garbage Collection

4.10.1 Overview

SICStus Prolog uses five data areas: program space, global stack, local stack, choice stack, and trail stack. Each of these areas is automatically expanded if it overflows.

The local stack contains all the control information and variable bindings needed in a Prolog execution. Space on the local stack is reclaimed on determinate success of predicates and by tail recursion optimization, as well as on backtracking.

The choice stack contains data representing outstanding choices for some goals or disjunctions. Space on the choice stack is reclaimed on backtracking.

The global stack contains all the data structures constructed in an execution of the program. This area grows with forward execution and shrinks on backtracking.

The trail stack contains references to all the variables that need to be reset when backtracking occurs. This area grows with forward execution and shrinks on backtracking.

The program space contains compiled and interpreted code, recorded terms, and atoms. The space occupied by compiled code, interpreted code, and recorded terms is recovered when it is no longer needed; the space occupied by atoms that are no longer in use can be recovered by atom garbage collection described in Section 4.10.7 [ref-mgc-ago], page 160.

These fluctuations in memory usage of the above areas can be monitored by `statistics/[0,2]`.

SICStus Prolog uses the global stack to construct compound terms, including lists. Global Stack space is used as Prolog execution moves forward. When Prolog backtracks, it automatically reclaims space on the global stack. However, if a program uses a large amount of space before failure and backtracking occur, then this type of reclamation may be inadequate.

Without garbage collection, the Prolog system must attempt to expand the global stack whenever a global stack overflow occurs. To do this, it first requests additional space from the operating system. If no more space is available, then the Prolog system attempts to allocate unused space from the other Prolog data areas. If additional space cannot be found, then a resource error is raised.

Global stack expansion and abnormal termination of execution due to lack of stack space can occur even if there are structures on the global stack that are no longer accessible to the computation (these structures are what is meant by "garbage"). The proportion of garbage to non-garbage terms varies during execution and with the Prolog code being executed. The global stack may contain no garbage at all, or may be nearly all garbage.

The garbage collector periodically reclaims inaccessible global stack space, reducing the need for global stack expansion and lessening the likelihood of running out of global stack. When the garbage collector is enabled (as it is by default), the system makes fewer requests to the operating system for additional space. The fact that less space is required from the operating system can produce a substantial savings in the time taken to run a program, because paging overhead can be much less.

For example, without garbage collection, compiling a file containing the sequence

```
p(_) :- p([a]).
:- p(_).
```

causes the global stack to expand until the Prolog process eventually runs out of space. With garbage collection enabled, the above sequence continues indefinitely. The list built

on the global stack by each recursive call is inaccessible to future calls (since `p/1` ignores its argument) and can be reclaimed by the garbage collector.

Garbage collection does not guarantee freedom from out-of-space errors, however. Compiling a file containing the sequence

```
p(X) :- p([X]).
:- p(a).
```

expands the global stack until the Prolog process eventually runs out of space. This happens in spite of the garbage collector, because all the terms built on the global stack are accessible to future computation and cannot be reclaimed.

4.10.1.1 Reclaiming Space

`trimcore/0` reclaims space in all of Prolog's data areas. At any given time, each data area contains some free space. For example, the local stack space contains the local stack and some free space for that stack to grow into. The data area is automatically expanded when it runs out of free space, and it remains expanded until `trimcore/0` is called, even though the stack may have shrunk considerably in the meantime. The effect of `trimcore/0` is to reduce the free space in all the data areas as much as possible, and to endeavor to give the space no longer needed back to the operating system.

The system property `PROLOGKEEPSIZE` can be used to define a lower bound on the amount of memory to be retained. Also, the system property `PROLOGINITSIZE` can be used to request that an initial amount of memory be allocated. This initially allocated memory will not be touched by `trimcore/0`.

When trimming a given stacks, `trimcore/0` will retain at least the amount of space initially allocated for that stack.

`trimcore/0` is called each time Prolog returns to the top level or the top of a break level, except it does not trim the stacks then. See Section 11.3.239 [mpg-ref-trimcore], page 1271.

4.10.1.2 Displaying Statistics

Statistics relating to memory usage, run time, and garbage collection, including information about which areas of memory have overflowed and how much time has been spent expanding them, can be displayed by calling `statistics/0`.

The output from `statistics/0` looks like this:

```
memory (total)       3334072 bytes
   global stack      1507184 bytes:       2516 in use,   1504668 free
   local stack         49296 bytes:        276 in use,     49020 free
   trail stack         34758 bytes:        248 in use,     34510 free
   choice stack        34874 bytes:        364 in use,     34510 free
   program space     1707960 bytes:    1263872 in use,    444088 free
   program space breakdown:
            compiled code               575096 bytes
            atom                        166528 bytes
            predicate                   157248 bytes
            try_node                    144288 bytes
            sw_on_key                   105216 bytes
            incore_info                  51096 bytes
            atom table                   36864 bytes
            interpreted code             13336 bytes
            atom buffer                   2560 bytes
            SP_malloc                     2288 bytes
            FLI stack                     2048 bytes
            miscellaneous                 1640 bytes
            BDD hash table                1560 bytes
            source info (B-tree)          1024 bytes
            numstack                      1024 bytes
            int_info                       880 bytes
            file table                     400 bytes
            source info (itable)           328 bytes
            module                         320 bytes
            source info (lheap)             80 bytes
            foreign resource                32 bytes
            all solutions                   16 bytes
    4323 atoms (151927 bytes) in use, 1044252 free
    No memory resource errors

      0.020 sec. for 7 global, 20 local, and 0 choice stack overflows
      0.060 sec. for 15 garbage collections which collected 5461007 bytes
      0.000 sec. for 0 atom garbage collections which collected 0 atoms (0 bytes)
      0.000 sec. for 4 defragmentations
      0.000 sec. for 7 dead clause reclamations
      0.000 sec. for 0 dead predicate reclamations
     39.410 sec. runtime
    ========
     39.490 sec. total runtime
    109.200 sec. elapsed time
```

Note the use of indentation to indicate sub-areas. That is, memory contains the program space and the four stacks: global, local, choice, and trail.

The memory (total) figure shown as "in use" is the sum of the spaces for the program space and stacks. The "free" figures for the stacks are for free space within those areas. However, this free space is considered used as far as the memory (total) area is concerned, because it has been allocated to the stacks. The program space is not considered to have its own free space. It always allocates new space from the general memory (total) free area.

If a memory resource error has occurred previously in the execution, then the memory area for which memory could not be allocated is displayed.

Individual statistics can be obtained by `statistics/2`, which accepts a keyword and returns a list of statistics related to that keyword.

The keys and values for `statistics(`*`Keyword`*`, `*`Value`*`)` are summarized below. The keywords `core` and `heap` are included to retain compatibility with other Prologs. Times are given in milliseconds and sizes are given in bytes.

Keyword *Value*

`runtime` [*since start of Prolog*,*since previous statistics*]
These refer to CPU time used while executing, excluding time spent in memory management tasks or in system calls. The second element is the time since the latest call to `statistics/2` with this key or to `statistics/0`.

`total_runtime`
[*since start of Prolog*,*since previous statistics*]
These refer to total CPU time used while executing, including memory management tasks such as garbage collection but excluding system calls. The second element is the time since the latest call to `statistics/2` with this key or to `statistics/0`.

`walltime` [*since start of Prolog*,*since previous statistics*]
These refer to absolute time elapsed. The second element is the time since the latest call to `statistics/2` with this key or to `statistics/0`.

`global_stack`
[*size used*,*free*]
This refers to the global stack, where compound terms are stored. The values are gathered before the list holding the answers is allocated. Formed from basic values below.

`local_stack`
[*size used*,*free*]
This refers to the local stack, where recursive predicate environments are stored. Formed from basic values below.

`trail` [*size used*,*free*]
This refers to the trail stack, where conditional variable bindings are recorded. Formed from basic values below.

`choice` [*size used*,*free*]
This refers to the choice stack, where partial states are stored for backtracking purposes. Formed from basic values below.

`memory`

`core` `[size used,0]`
These refer to the amount of memory actually allocated by the Prolog engine. The zero is there for compatibility with other Prolog implementations. Formed from basic values below.

`program`
`heap` `[size used,size free]`
These refer to the amount of memory allocated for the database, symbol tables, and the like. Formed from basic values below.

`garbage_collection`
`[no. of GCs,bytes freed,time spent]`
Formed from basic values below.

`stack_shifts`
`[no. of global shifts,no. of local/choice shifts,time spent]`
Formed from basic values below.

`atoms` `[no. of atoms,bytes used,atoms free]`
The number of atoms free is the number of atoms allocated (the first element in the list) subtracted from the maximum number of atoms, i.e. 262143 (33554431) on 32-bit (64-bit) architectures. Note that atom garbage collection may be able to reclaim some of the allocated atoms. Formed from basic values below.

`atom_garbage_collection`
`[no. of AGCs,bytes freed,time spent]`
Formed from basic values below.

`defragmentation`
`[no. of defragmentations,time spent]`
Formed from basic values below.

`memory_used` *since release 4.1*
bytes used

`memory_free` *since release 4.1*
bytes free

`global_stack_used` *since release 4.1*
bytes used

`global_stack_free` *since release 4.1*
bytes free

`local_stack_used` *since release 4.1*
bytes used

`local_stack_free` *since release 4.1*
: *bytes free*

`trail_used` *since release 4.1*
: *bytes used*

`trail_free` *since release 4.1*
: *bytes free*

`choice_used` *since release 4.1*
: *bytes used*

`choice_free` *since release 4.1*
: *bytes free*

`atoms_used` *since release 4.1*
: *bytes used*

`atoms_nbused` *since release 4.1*
: *atoms used*

`atoms_nbfree` *since release 4.1*
: *atoms free*

`ss_global` *since release 4.1*
: *number of global stack shifts*

`ss_local` *since release 4.1*
: *number of local stack shifts*

`ss_choice` *since release 4.1*
: *number of choice stack shifts*

`ss_time` *since release 4.1*
: *time spent stack shifting*

`gc_count` *since release 4.1*
: *number of garbage collections*

`gc_freed` *since release 4.1*
: *number of bytes freed*

`gc_time` *since release 4.1*
time spent collecting garbage

`agc_count` *since release 4.1*
number of atom garbage collections

`agc_nbfreed` *since release 4.1*
number of garbage collected atoms

`agc_freed` *since release 4.1*
number of bytes freed by atom garbage collected

`agc_time` *since release 4.1*
time spent garbage collected atoms

`defrag_count` *since release 4.1*
number of memory defragmentations

`defrag_time` *since release 4.1*
time spent defragmenting memory

`dpgc_count` *since release 4.1*
number of dead predicate reclamations

`dpgc_time` *since release 4.1*
time spent reclaiming dead predicates

`dcgc_count` *since release 4.1*
number of dead clause reclamations

`dcgc_time` *since release 4.1*
time spent reclaiming dead clauses

`memory_culprit` *since release 4.1*
memory bucket in which latest memory resource error occurred

`memory_buckets` *since release 4.1*
list of bucket-size pair
where *size* is the amount of memory in use for memory bucket *bucket*.

`jit_count` *since release 4.3*
number of JIT-compiled predicates
This is zero when JIT compilation is not available.

`jit_time` *since release 4.3*

time spent JIT-compiling predicates
This is zero when JIT compilation is not available.

To see an example of the use of each of these keywords, type

```
| ?- statistics(K, L).
```

and then repeatedly type ';' to backtrack through all the possible keywords. As an additional example, to report information on the runtime of a predicate `p/0`, add the following to your program:

```
:- statistics(runtime, [T0| _]),
   p,
   statistics(runtime, [T1|_]),
   T is T1 - T0,
   format('p/0 took ~3d sec.~n', [T]).
```

See Section 11.3.218 [mpg-ref-statistics], page 1244.

4.10.2 Garbage Collection and Programming Style

The availability of garbage collection can lead to a more natural programming style. Without garbage collection, a procedure that generates global stack garbage may have to be executed in a failure-driven loop. Failure-driven loops minimize global stack usage from iteration to iteration of a loop via SICStus Prolog's automatic recovery of global stack space on failure. For instance, in the following procedure `echo/0` echoes Prolog terms until it reads an end-of-file character. It uses a failure-driven loop to recover inaccessible global stack space.

```
echo :- repeat,
        read(Term),
        echo_term(Term),
        !.

echo_term(Term) :-
        Term == end_of_file.
echo_term(Term) :-
        writeq(Term), nl,
        fail.
```

Any global stack garbage generated by `read/1` or `write/1` is automatically reclaimed by the failure of each iteration.

Although failure-driven loops are an accepted Prolog idiom, they are not particularly easy to read or understand. So we might choose to write a clearer version of `echo/0` using recursion instead, as in

```
echo :- read(Term),
        echo_term(Term).

echo_term(Term) :-
        Term == end_of_file,
        !.
echo_term(Term) :-
        writeq(Term), nl,
        echo.
```

Without garbage collection the more natural recursive loop accumulates global stack garbage that cannot be reclaimed automatically. While it is unlikely that this trivial example will run out of global stack space, larger and more practical applications may be unable to use the clearer recursive style without garbage collection. With garbage collection, all inaccessible global stack space will be reclaimed by the garbage collector.

Using recursion rather than failure-driven loops can improve programming style further. We might want to write a predicate that reads terms and collects them in a list. This is naturally done in a recursive loop by accumulating results in a list that is passed from iteration to iteration. For instance,

```
collect(List) :-
        read(Term),
        collect_term(Term, List).

collect_term(Term, []) :-
        Term == end_of_file,
        !.
collect_term(Term, [Term|List0]) :-
        collect(List0).
```

For more complex applications this sort of construction might prove unusable without garbage collection. Instead, we may be forced to use a failure-driven loop with side effects to store partial results, as in the following much less readable version of `collect/1`:

```
collect(List) :-
        repeat,
        read(Term),
        store_term(Term),
        !,
        collect_terms(List).

store_term(Term) :-
        Term == end_of_file.

store_term(Term) :-
        assertz(term(Term)),
        fail.

collect_terms([M|List]) :-
        retract(term(M)),
        !,
        collect_terms(List).
collect_terms([]).
```

The variable bindings made in one iteration of a failure-driven loop are unbound on failure of the iteration. Thus partial results cannot simply be stored in a data structure that is passed along to the next iteration. We must instead resort to storing partial results via side effects (here, `assertz/1`) and collect (and clean up) partial results in a separate pass. The second example is much less clear to most people than the first. It is also much less efficient than the first. However, if there were no garbage collector, then larger examples of the second type might be able to run where those of the first type would run out of memory.

4.10.3 Enabling and Disabling the Garbage Collector

The user has the option of executing programs with or without garbage collection. Procedures that do not use a large amount of global stack space before backtracking may not be affected when garbage collection is enabled. Procedures that do use a large amount of global stack space may execute more slowly due to the time spent garbage collecting, but will be more likely to run to completion. On the other hand, such programs may run faster when the garbage collector is enabled because the virtual memory is not expanded to the extent that "thrashing" occurs. The `gc` Prolog flag can be set to `on` or `off`. To monitor garbage collections in verbose mode, set the `gc_trace` flag to `verbose`. By default, garbage collection is enabled.

4.10.4 Monitoring Garbage Collections

By default, the user is given no indication that the garbage collector is operating. If no program ever runs out of space and no program using a lot of global stack space requires an inordinate amount of processing time, then such information is unlikely to be needed.

However, if a program thought to be using much global stack space runs out of space or runs inordinately slowly, then the user may want to determine whether more or less

frequent garbage collections are necessary. Information obtained from the garbage collector by turning on the `gc_trace` Prolog flag can be helpful in this determination.

4.10.5 Interaction of Garbage Collection and Global Stack Expansion

For most programs, the default settings for the garbage collection parameters should suffice. For programs that have high global stack requirements, the default parameters may result in a higher ratio of garbage collection time to run time. These programs should be given more space in which to run.

The `gc_margin` is a non-negative integer specifying the desired margin in kilobytes. For example, the default value of 1000 means that the global stack will not be expanded if garbage collection can reclaim at least one megabyte. The advantage of this criterion is that it takes into account both the user's estimate of the global stack usage and the effectiveness of garbage collecting.

1. Setting the `gc_margin` higher than the default will cause fewer global stack expansions and garbage collections. However, it will use more space, and garbage collections will be more time-consuming when they do occur.

   Setting the margin too large will cause the global stack to expand so that if it does overflow, then the resulting garbage collection will significantly disrupt normal processing. This will be especially so if much of the global stack is accessible to future computation.
2. Setting the `gc_margin` lower than the default will use less space, and garbage collections will be less time-consuming. However, it will cause more global stack expansions and garbage collections.

   Setting the margin too small will cause many garbage collections in a small amount of time, so that the ratio of garbage-collecting time to computation time will be abnormally high.
3. Setting the margin correctly will cause the global stack to expand to a size where expansions and garbage collections are infrequent and garbage collections are not too time-consuming, if they occur at all.

The correct value for the `gc_margin` is dependent upon many factors. Here is a non-prioritized list of some of them:

- The amount of memory available to the Prolog process
- The maximum memory limit imposed on the Prolog process
- The program's rate of global stack garbage generation
- The program's rate of global stack non-garbage generation
- The program's backtracking behavior
- The amount of time needed to collect the generated garbage
- The growth rate of the other Prolog stacks

The algorithm used when the global stack overflows is as follows:

```
if gc is on and
the global stack has grown at least gc_margin kilobytes
since the last garbage collection then
   garbage collect the global stack
   if less than gc_margin kilobytes are reclaimed then
      try to expand the global stack
   endif
else
   try to expand the global stack
endif
```

The user can use the `gc_margin` option of `prolog_flag/3` to reset the `gc_margin` (see Section 4.9.1 [ref-lps-ove], page 139). If a garbage collection reclaims at least the `gc_margin` kilobytes of global stack space, then the global stack is not expanded after garbage collection completes. Otherwise, the global stack is expanded after garbage collection. This expansion provides space for the future global stack usage that will presumably occur. In addition, no garbage collection occurs if the global stack has grown less than `gc_margin` kilobytes since the last garbage collection.

4.10.6 Invoking the Garbage Collector Directly

Normally, the garbage collector is invoked only when some Prolog data area overflows, so the time of its invocation is not predictable. In some applications it may be desirable to invoke the garbage collector at regular intervals (when there is known to be a significant amount of garbage on the global stack) so that the time spent garbage collecting is more evenly distributed in the processing time. For instance, it may prove desirable to invoke the garbage collector after each iteration of a question-and-answer loop that is not failure-driven.

In rare cases the default garbage collection parameters result in excessive garbage collecting costs or global stack expansion, and the user cannot tune the `gc_margin` parameter adequately. Explicitly invoking the garbage collector using the built-in predicate `garbage_collect/0` can be useful in these circumstances.

See Section 11.3.89 [mpg-ref-garbage_collect], page 1081.

4.10.7 Atom Garbage Collection

By default, atoms created during the execution of a program remain permanently in the system until Prolog exits. For the majority of applications this behavior is not a problem and can be ignored. However, for two classes of application this can present problems. Firstly the internal architecture of SICStus Prolog limits the number of atoms that be can created to 1,048,575 on 32-bit machines, and this can be a problem for database applications that read large numbers of atoms from a database. Secondly, the space occupied by atoms can become significant and dominate memory usage, which can be a problem for processes designed to run perpetually.

These problems can be overcome by using atom garbage collection to reclaim atoms that are no longer accessible to the executing program.

Atoms can be created in many ways: when an appropriate token is read with `read_term/3`, when source or PO files are loaded, when `atom_codes/2` is called with a character list, or when `SP_atom_from_string()` is called in C code. In any of these contexts an atom is only created if it does not already exist; all atoms for a given string are given the same identification number, which is different from the atom of any other string. Thus, atom recognition and comparison can be done quickly, without having to look at strings. An occurrence of an atom is always of a fixed, small size, so where a given atom is likely to be used in several places simultaneously the use of atoms can also be more compact than the use of strings.

A Prolog functor is implemented like an atom, but also has an associated arity. For the purposes of atom garbage collection, a functor is considered to be an occurrence of the atom of that same name.

Atom garbage collection is similar to global stack garbage collection, invoked automatically as well as through a call to the built-in predicate `garbage_collect_atoms/0`. The atom garbage collector scans Prolog's data areas looking for atoms that are currently in use and then throws away all unused atoms, reclaiming their space.

Atom garbage collection can turn an application that continually grows and eventually either runs into the atom number limit or runs out of space into one that can run perpetually. It can also make feasible applications that load and manipulate huge quantities of atom-rich data that would otherwise become full of useless atoms.

4.10.7.1 The Atom Garbage Collector User Interface

Because the creation of atoms does not follow any other system behaviors like memory growth or global stack garbage collection, SICStus has chosen to keep the invocation of atom garbage collection independent of any other operation and to keep the invocation of atom garbage collection explicit rather than making it automatic. It is often preferable for the programmer to control when it will occur in case preparations need to be made for it.

Atom garbage collection is invoked automatically when the number of new atoms created since the last atom garbage collection reaches the value of the `agc_margin` flag.

Atom garbage collection can be invoked explicitly by calling `garbage_collect_atoms/0`. The predicate normally succeeds silently. The user may determine whether to invoke atom garbage collection at a given point based on information returned from a call to `statistics/2` with the keyword `atoms`. That call returns a list of the form

```
[number of atoms, atom space in use, atom space free]
```

For example,

```
| ?- statistics(atoms, Stats).

Stats = [4313,121062,31032]
```

One would typically choose to call `garbage_collect_atoms/0` prior to each iteration of an iterative application, when either the number of atoms or the atom space in use passes some threshold, e.g.

```
<driver loop> :-
        ...
        repeat,
           maybe_atom_gc,
           <do next iteration>
           ...
        fail.
<driver loop>.
```

where

```
maybe_atom_gc :-
        statistics(atoms, [_,Inuse,_]),
        atom_gc_space_threshold(Space),
        ( Inuse > Space -> garbage_collect_atoms ; true ).

% Atom GC if there are more than 100000 bytes of atoms:
atom_gc_space_threshold(100000).
```

More sophisticated approaches might use both atom number, atom space and `agc_margin` thresholds, or could adjust a threshold if atom garbage collection did not free an adequate number of atoms.

To be most effective, atom garbage collection should be called when as few as possible atoms are actually in use. In the above example, for instance, it makes the most sense to do atom garbage collection at the beginning of each iteration rather than at the end, as at the beginning of the iteration the previous failure may just have freed large amounts of atom-rich global and local stack. Similarly, it is better to invoke atom garbage collection after abolishing or retracting a large database than to do so before. See Section 11.3.90 [mpg-ref-garbage_collect_atoms], page 1082.

4.10.7.2 Protecting Atoms in Foreign Memory

SICStus Prolog's foreign language interface allows atoms to be passed to foreign functions. When calling foreign functions from Prolog, atoms are passed via the `+atom` argument type in the predicate specifications of `foreign/[2,3]` facts. The strings of atoms can be passed to foreign functions via the `+string` argument type. In the latter case a pointer to the Prolog symbol table's copy of the string for an atom is what is passed. When calling Prolog from C, atoms are passed back from C to Prolog using the `-atom` and `-string` argument types in `extern/1` declarations. Atoms can also be created in foreign code via functions like `SP_atom_from_string()`.

Prolog does not keep track of atoms (or strings of atoms) stored in foreign memory. As such, it cannot guarantee that those atoms will be retained by atom garbage collection. Therefore SICStus Prolog provides functions to *register* atoms (or their strings) with the atom garbage

collector. Registered atoms will not be reclaimed by the atom garbage collector. Atoms can be registered while it is undesirable for them to be reclaimed, and then unregistered when they are no longer needed.

Of course, the majority of atoms passed as atoms or strings to foreign functions do not need to be registered. Only those that will be stored across foreign function calls (in global variables) or across nested calls to Prolog are at risk. An extra margin of control is given by the fact the programmer always invokes atom garbage collection explicitly, and can ensure that this is only done in contexts that are "safe" for the individual application.

To register or unregister an atom, one of the following functions is used:

```
int SP_register_atom(atom)
SP_atom atom;

int SP_unregister_atom(atom)
SP_atom atom;
```

These functions return either `SP_ERROR` or a non-negative integer. The return values are discussed further in Section 4.10.7.4 [ref-mgc-ago-are], page 164.

As noted above, when an atom is passed as a string (`+string`) to a foreign function, the string the foreign function receives is the one in Prolog's symbol table. When atom garbage collection reclaims the atom for that string, the space for the string will also be reclaimed.

Thus, if the string is to be stored across foreign calls, then either a copy of the string or else the atom (`+atom`) should be passed into the foreign function so that it can be registered and `SP_string_from_atom()` can be used to access the string from the atom.

Keep in mind that the registration of atoms only pertains to those passed to foreign functions or created in foreign code. Atoms in Prolog's data areas are maintained automatically. Note also that even though an atom may be unregistered in foreign code, atom garbage collection still may not reclaim it as it may be referenced from Prolog's data areas. But if an atom is registered in foreign code, then it will be preserved regardless of its presence in Prolog's data areas.

The following example illustrates the use of these functions. In this example the current value of an object (which is an atom) is being stored in a C global variable. There are two C functions that can be called from Prolog, one to update the current value and one to access the value.

```
#include <sicstus/sicstus.h>

SP_atom current_object = NULL;

update_object(SP_atom newvalue)
{
        /* if current_object contains an atom, unregister it */
        if (current_object)
                (void) SP_unregister_atom(current_object);

        /* register new value */
        (void) SP_register_atom(newvalue);
        current_object = newvalue;
}

SP_atom get_object(void)
{
        return current_object;
}
```

4.10.7.3 Permanent Atoms

Atom garbage collection scans all Prolog's dynamic data areas when looking for atoms that are in use. Scanning finds atoms in the Prolog stacks and in all compiled and interpreted code that has been dynamically loaded into Prolog via `consult/1`, `use_module/1`, `assert/2`, etc. However, there are certain potential sources of atoms in the Prolog image from which atoms cannot be reclaimed. Atoms for Prolog code that has been statically linked with either the Prolog Development Environment or the Runtime Environment have been placed in the text space, making them (and the code that contains them) effectively permanent. Although such code can be abolished, its space can never be reclaimed.

These atoms are internally flagged as permanent by the system and are always retained by atom garbage collection. An atom that has become permanent cannot be made non-permanent, so can never be reclaimed.

4.10.7.4 Details of Atom Registration

The functions that register and unregister atoms are in fact using reference counting to keep track of atoms that have been registered. As a result, it is safe to combine your code with libraries and code others have written. If the other code has been careful to register and unregister its atoms as appropriate, then atoms will not be reclaimed until everyone has unregistered them.

Of course, it is possible when writing code that needs to register atoms that errors could occur. Atoms that are registered too many times simply will not be garbage collected until they are fully unregistered. However, atoms that are not registered when they should be may be reclaimed on atom garbage collection. One normally does not need to think about the reference counting going on in `SP_register_atom()` and `SP_unregister_atom()`, but some understanding of its details could prove helpful when debugging.

To help you diagnose problems with registering and unregistering atoms, `SP_register_atom()` and `SP_unregister_atom()` both normally return the current reference count for the atom. If an error occurs, e.g. a nonexistent atom is registered or unregistered, then `SP_ERROR` is returned.

An unregistered atom has a reference count of 0. Unregistering an atom that is unregistered is a no-op; in this case, `SP_unregister_atom()` returns 0. A permanent atom has a reference count of 256. In addition, if an atom is simultaneously registered 256 times, then it becomes permanent. (An atom with 256 distinct references is an unlikely candidate for reclamation!) Registering or unregistering an atom that is permanent is also a no-op; `SP_register_atom()` and `SP_unregister_atom()` return 256.

4.10.8 Summary of Predicates

`garbage_collect`
: force an immediate garbage collection

`garbage_collect_atoms`
: garbage collect atom space

`statistics`
: display various execution statistics

`statistics(?K,?V)`
: the execution statistic with key K has value V

`trimcore` reduce free stack space to a minimum

4.11 Modules

4.11.1 Overview

The module system lets the user divide large Prolog programs into *modules*, or rather smaller sub-programs, and define the interfaces between those modules. Each module has its own name space; that is, a predicate defined in one module is distinct from any predicates with the same name and arity that may be defined in other modules. The module system encourages a group of programmers to define the dependence each has on others' work before any code is written, and subsequently allows all to work on their own parts independently. It also helps to make library predicates behave as extensions of the existing set of built-in predicates.

The SICStus Prolog library uses the module system and can therefore serve as an extended example of the concepts presented in the following text. The design of the module system is such that loading library files and calling library predicates can be performed without knowledge of the module system.

Some points to note about the module system are that:

- It is based on predicate modularity rather than on data modularity; that is, atoms and functors are global.
- It is flat rather than hierarchical; any module may refer to any other module by its name—there is no need to specify a path of modules.

- It is not strict; modularity rules can be explicitly overridden. This is primarily for flexibility during debugging.
- It is efficient; calls to predicates across module boundaries incur little or no overhead.

4.11.2 Basic Concepts

Each predicate in a program is identified by its *module*, as well as by its name and arity.

A module defines a set of predicates, among which some have the property of being *public*. Public predicates are predicates that can be *imported* by other modules, which means that they can then be called from within those modules. Predicates that are not public are *private* to the module in which they are defined; that is, they cannot be called from outside that module (except by explicitly overriding the modularity rules as described in Section 4.11.6 [ref-mod-vis], page 168).

There are two kinds of importation:

1. A module *M1* may import a specified set of predicates from another module *M2*. All the specified predicates should be public in *M2*.
2. A module *M1* may import all the public predicates of another module *M2*.

Built-in predicates do not need to be imported; they are automatically available from within any module.

There is a special module called `user`, which is used by default when predicates are being defined and no other module has been specified.

The other predefined module is the `prolog` module where all the built-in predicates reside. The exported built-in predicates are automatically imported into each new module as it is created.

If you are using a program written by someone else, then you need not be concerned as to whether or not that program has been made into a module. The act of loading a module from a file using `compile/1`, or `ensure_loaded/1` (see Section 4.3 [ref-lod], page 83) will automatically import all the public predicates in that module. Thus the command

```
:- ensure_loaded(library(lists)).
```

will load the list-processing predicates from the library and make them available.

4.11.3 Defining a Module

The normal way to define a module is by creating a *module file* for it and loading it into the Prolog system. A module file is a Prolog file that begins with a *module declaration*.

A module declaration has one of the forms:

```
:- module(+ModuleName, +PublicPredList).

:- module(+ModuleName, +PublicPredList, +Options).
```

Such a declaration must appear as the first term in a file, and declares that file to be a module file. The predicates in the file will become part of the module *ModuleName*, and the predicates specified in *PublicPredList* are those that can be imported by other modules; that is, the public predicates of this module.

Options is an optional argument, and should be a list. The only available option is `hidden(Boolean)`, where *Boolean* is `false` (the default) or `true`. In the latter case, tracing of the predicates of the module is disabled (although spypoints can be set), and no source information is generated at compile time.

Instead of creating and loading a module file, it is also possible to define a module dynamically by, for example, asserting clauses into a specified module. A module created in this way has no public predicates; all its predicates are private. This means that they cannot be called from outside that module except by explicitly overriding the modularity rules as described in Section 4.11.6 [ref-mod-vis], page 168. Dynamic creation of modules is described in more detail in Section 4.11.9 [ref-mod-dmo], page 171.

4.11.4 Converting Non-module Files into Module Files

The Prolog cross-referencer can automatically generate `module/2` declarations from its cross-reference information. This is useful if you want to take a set of files making up a program and make each of those files into a module file. For more information, see Section 9.12 [The Cross-Referencer], page 383,

Alternatively, if you have a complete Prolog program consisting of a set of source files `{file1, file2, ...}`, and you wish to encapsulate it in a single module *mod*, then this can be done by creating a "driver" file of the following form:

```
:- module(mod, [ ... ]).

:- ensure_loaded(file1).
:- ensure_loaded(file2).
   .
   .
   .
```

When a module is created in this way, none of the files in the program `{file1, file2, ...}` have to be changed.

4.11.5 Loading a Module

To gain access to the public predicates of a module file, load it as you would any other file—using `compile/1`, or `ensure_loaded/1` as appropriate. For example, if your code contains a directive such as

```
:- ensure_loaded(File).
```

then this directive will load the appropriate file *File* whether or not *File* is a module file. The only difference is that if *File* is a module file, then any private predicates that it defines will not be visible to your program.

The load predicates are adequate for use at Prolog's top level, or when the file being loaded is a utility such as a library file. When you are writing modules of your own, `use_module/[1,2,3]` is the most useful.

The following predicates are used to load modules:

`use_module(`*F*`)`
: import the module file(s) *F*, loading them if necessary; same as `ensure_loaded(`*F*`)` if all files in *F* are module files

`use_module(:`*F*`,+`*I*`)`
: import the procedure(s) *I* from the module file *F*, loading module file *F* if necessary

`use_module(?`*M*`,:`*F*`,+`*I*`)`
: import *I* from module *M*, loading module file *F* if necessary

Before a module file is loaded, the associated module is *reinitialized*: any predicates previously imported into or defined in that module are forgotten by the module.

If a module of the same name with a different *PublicPredList* or different meta-predicate list has previously been loaded from a different module file, then a warning is printed and you are given the option of abandoning the load. Only one of these two modules can exist in the system at one time.

Normally, a module file can be reloaded after editing with no need to reload any other modules. However, when a module file is reloaded after its *PublicPredList* has been changed, any modules that import predicates from it may have become inconsistent. This is because a module is associated with a predicate at compile time, rather than run time. Thus, other modules may refer to predicates in a module file that are no longer public. In the case of module importation (where all, rather than specific, public predicates of a module are imported), it is possible that some predicates in the importing module should now refer to a newly-public predicate but do not. SICStus Prolog tries to detect such inconsistencies, and issues a warning when it does detect one. Similarly, if a meta-predicate declaration of an exported predicate changes, then modules that have already imported that predicate become inconsistent, because module name expansion requirements have changed. The current release of SICStus Prolog is unable to detect such inconsistencies.

Modules may be saved to a PO file by calling `save_modules(`*Modules*`,`*File*`)` (see Section 4.4 [ref-sls], page 96).

4.11.6 Visibility Rules

By default, predicates defined in one module cannot be called from another module. This section enumerates the exceptions to this—the ways in which a predicate can be *visible* to modules other than the one in which it is defined.

1. The built-in predicates can be called from any module.
2. Any predicate that is named in the *PublicPredList* of a module, and that is imported by some other module *M*, can be called from within *M*.
3. Module Prefixing: Any predicate, whether public or not, can be called from any other module if its module is explicitly given as a prefix to the goal, attached with the `:/2` operator. The module prefix overrides the default module. For example,

   ```
   :- mod:foo(X,Y).
   ```

   always calls `foo/2` in module *mod*. This is effectively a loophole in the module system, which allows you to override the normal module visibility rules. It is intended primarily to facilitate program development and debugging, and it should not be used extensively since it subverts the original purposes of using the module system.

   Note that a predicate called in this way does not necessarily have to be defined in the specified module. It may be imported into it. It can even be a built-in predicate, and this is sometimes useful—see Section 4.11.7 [ref-mod-som], page 169, for an example.

4.11.7 The Source Module

For any given procedure call, or goal, the *source module* is the module in which the corresponding predicate must be visible. That is, unless the predicate is built-in, it must be defined in, or imported into, the source module.

For goals typed at the top level, the source module is the *type-in module*, which is `user` by default—see Section 4.11.8 [ref-mod-tyi], page 170. For goals appearing in a file, whether in a directive or in the body of a clause, the source module is the one into which that file has been loaded.

There are a number of built-in predicates that take predicate specifications, clauses, or goals as arguments. Each of these types of argument must be understood with reference to some module. For example, `assert/1` takes a clause as its argument, and it must decide into which module that clause should be asserted. The default assumption is that it asserts the clause into the source module. Another example is `call/1`. The goal (A) calls the predicate `foo/1` in the source module; this ensures that in the compound goal (B) both occurrences of `foo/1` refer to the same predicate.

```
call(foo(X))                                                    (A)

call(foo(X)), foo(Y)                                            (B)
```

All predicates that refer to the source module allow you to override it by explicitly naming some other module to be used instead. This is done by prefixing the relevant argument of the predicate with the module to be used followed by a '`:`' operator. For example (C), asserts `f(x)` in module `m`.

```
| ?- assert(m:f(x)).                                            (C)
```

Note that if you call a goal in a specified module, overriding the normal visibility rules (see Section 4.11.6 [ref-mod-vis], page 168), then the source module for that goal is the one you specify, not the module in which this call occurs. For example (D), has exactly the same

effect as (C)—`f(x)` is asserted in module `m`. In other words, prefixing a goal with a module duplicates the effect of calling that goal from that module.

```
| ?- m:assert(f(x)).                                                    (D)
```

Another built-in predicate that refers to the source module is `compile/1`. In this case, the argument is a file, or list of files, rather than a predicate specification, clause, or goal. However, in the case where a file is not a module file, `compile/1` must decide into which module to compile its clauses, and it chooses the source module by default. This means that you can compile a file *File* into a specific module *M* using

```
| ?- compile(M:File).
```

Thus if *File* is a module file, then this command would cause its public predicates to be imported into module *M*. If *File* is a non-module file, then it is loaded into module *M*.

For a list of the built-in predicates that depend on the source module, see Section 4.11.15 [ref-mod-mne], page 175. In some cases, user-defined predicates may also require the concept of a source module. This is discussed in Section 4.11.16 [ref-mod-met], page 175.

4.11.8 The Type-in Module

The *type-in* module is the module that is taken as the source module for goals typed in by the user. The name of the default type-in module is `user`. That is, the predicates that are available to be called directly by the user are those that are visible in the module `user`.

When debugging, it is often useful to call, directly from the top level, predicates that are private to a module, or predicates that are public but that are not imported into `user`. This can be done by prefixing each goal with the module name, as described in Section 4.11.6 [ref-mod-vis], page 168; but rather than doing this extensively, it may be more convenient to make this module the type-in module.

The type-in module can be changed using the built-in predicate `set_module/1`; for example,

```
| ?- set_module(mod).
```

This command will cause subsequent goals typed at the top level to be executed with `mod` as their source module.

The name of the type-in module is always displayed, except when it is `user`. If you are running Prolog under the editor interface, then the type-in module is displayed in the status line of the Prolog window. If you are running Prolog without the editor interface, then the type-in module is displayed before each top-level prompt.

For example, if you are running Prolog without the editor:

```
| ?- set_module(foo).

yes
[foo]
| ?-
```

It should be noted that it is unlikely to be useful to change the type-in module via a directive embedded in a file to be loaded, because this will have no effect on the load—it will only change the type-in module for commands subsequently entered by the user.

4.11.9 Creating a Module Dynamically

There are several ways in which you can create a module without loading a module file for it. One way to do this is by asserting clauses into a specified module. For example, the command (A) will create the dynamic predicate `f/1` and the module `m` if they did not previously exist.

```
| ?- assert(m:f(x)).                                                    (A)
```

Another way to create a module dynamically is to compile a non-module file into a specified module. For example (B), will compile the clauses in *File* into the module *M*.

```
| ?- compile(M:File).                                                   (B)
```

The same effect can be achieved by (temporarily) changing the type-in module to *M* (see Section 4.11.8 [ref-mod-tyi], page 170) and then calling `compile(File)`, or executing the command in module *M* as in (C).

```
| ?- M:compile(File).                                                   (C)
```

4.11.10 Module Prefixes on Clauses

Every clause in a Prolog file has a source module implicitly associated with it. If the file is a module file, then the module named in the module declaration at the top of the file is the source module for all the clauses. If the file is not a module file, then the relevant module is the source module for the command that caused this file to be loaded.

The source module of a predicate decides in which module it is defined (the module of the head), and in which module the goals in the body are going to be called (the module of the body). It is possible to override the implicit source module, both for head and body, of clauses and directives, by using prefixes. For example, consider the module file:

```
:- module(a, []).

:- dynamic m:a/1.
b(1).
m:c([]).
m:d([H|T]) :- q(H), r(T).
m:(e(X) :- s(X), t(X)).
f(X) :- m:(u(X), v(X)).
```

In the previous example, the following modules apply:

1. `a/1` is declared dynamic in the module `m`.
2. `b/1` is defined in module `a` (the module of the file).
3. `c/1` is defined in module `m`.

4. `d/1` is defined in module `m`, but `q/1` and `r/1` are called in module `a` (and must therefore be defined in module `a`).
5. `e/1` is defined in module `m`, and `s/1` and `t/1` are called in module `m`.
6. `f/1` is defined in module `a`, but `u/1` and `v/1` are called in module `m`.

Module prefixing is especially useful when the module prefix is `user`. There are several predicates that have to be defined in module `user` but that you may want to define (or extend) in a program that is otherwise entirely defined in some other module or modules; see Section 11.2.12 [mpg-top-hok], page 950.

Note that if clauses for one of these predicates are to be spread across multiple files, then it will be necessary to declare that predicate to be multifile by putting a multifile declaration in each of the files.

4.11.10.1 Current Modules

A loaded, or dynamically created, module becomes current as soon as it is encountered, and a module can never lose the property of being current. The set of current modules can be obtained with `current_module/1`, see Section 4.11.13 [ref-mod-ilm], page 173.

4.11.11 Debugging Code in a Module

Having loaded a module to be debugged, you can trace through its execution in the normal way. When the debugger stops at a port, the procedure being debugged is displayed with its module name as a prefix unless the module is `user`.

The predicate `spy/1` depends on the source module. It can be useful to override this during debugging. For example,

```
| ?- spy mod1:f/3.
```

puts a spypoint on `f/3` in module `mod1`.

It can also be useful to call directly a predicate that is private to its module in order to test that it is doing the right thing. This can be done by prefixing the goal with its module; for example,

```
| ?- mod1:f(a,b,X).
```

4.11.12 Name Clashes

A *name clash* can arise if:

1. a module tries to import a predicate from some other module `m1` and it has already imported a predicate with the same name and arity from a module `m2`;
2. a module tries to import a predicate from some other module `m1` and it already contains a definition of a predicate with the same name and arity; or
3. a module tries to define a predicate with the same name and arity as one that it has imported.

Whenever a name clash arises, a message is displayed beginning with the words '`NAME CLASH`'. The user is asked to choose from one of several options; for example,

```
NAME CLASH: f/3 is already imported into module user
            from module m1;
            do you want to override this definition with
            the one in m2? (y,n,p,s,a or ?)
```

The meanings of the five recognized replies are as follows:

y forget the previous definition of `f/3` from `m1` and use the new definition of `f/3` from `m2` instead.

n retain the previous definition of `f/3` from `m1` and ignore the new definition of `f/3` from `m2`.

p (for proceed) means forget the previous definition of `f/3` and of all subsequent predicate definitions in `m1` that clash during the current load of `m2`. Instead, use the new definitions in `m2`. When the *p* option is chosen, predicates being loaded from `m1` into `m2` will cause no '`NAME CLASH`' messages for the remainder of the load, though clashes with predicates from other modules will still generate such messages.

s (for suppress) means forget the new definition of `f/3` and of all subsequent predicate definitions in `m1` that clash during the current load of `m2`. Instead, use the old definitions in `m2`. When the *s* option is chosen, predicates being loaded from `m1` into `m2` will cause no '`NAME CLASH`' messages for the remainder of the load, though clashes with predicates from other modules will still generate such messages.

? gives brief help information.

4.11.13 Obtaining Information about Loaded Modules

The built-in predicate `current_module/2` can be used to find all the currently loaded module, and where they were loaded from. See Section 11.3.52 [mpg-ref-current_module], page 1032.

`current_module(?M)`
: M is the name of a current module

`current_module(?M,?F)`
: F is the name of the file in which M's module declaration appears. Not all modules have a corresponding file.

4.11.13.1 Predicates Defined in a Module

The built-in predicate `current_predicate/2` can be used to find the predicates that are defined in a particular module.

To backtrack through all of the predicates defined in module `m`, use

```
| ?- current_predicate(_, m:Goal).
```

To backtrack through *all* predicates defined in *any* module, use

```
| ?- current_predicate(_, M:Goal).
```

This succeeds once for every predicate in your program. See Section 11.3.55 [mpg-ref-current_predicate], page 1036.

4.11.13.2 Predicates Visible in a Module

The built-in predicate `predicate_property/2` can be used to find the properties of any predicate that is visible to a particular module.

To backtrack through all of the predicates imported by module `m`, use

```
| ?- predicate_property(m:Goal, imported_from(_)).
```

To backtrack through all of the predicates imported by module `m1` from module `m2`, use

```
| ?- predicate_property(m1:Goal, imported_from(m2)).
```

For example, you can load the `between` module from the library and then remind yourself of what predicates it defines like this:

```
| ?- compile(library(between)).
% ... loading messages ...

yes
| ?- predicate_property(P, imported_from(between)).
P = numlist(_A,_B) ? ;
P = numlist(_A,_B,_C,_D,_E) ? ;
  .
  .
  .
```

This tells you what predicates are imported into the type-in module from `basics`.

You can also find *all* imports into *all* modules using

```
| ?- predicate_property(M1:G, imported_from(M2)).
```

To backtrack through all of the defined predicates exported by module `m`, use

```
| ?- predicate_property(m:Goal, exported).
```

See Section 11.3.159 [mpg-ref-predicate_property], page 1171.

4.11.14 Importing Dynamic Predicates

Imported dynamic predicates may be asserted and retracted. For example, suppose the following file is loaded via `use_module/1`:

```
:- module(m1, [f/1]).
:- dynamic f/1.
f(0).
```

Then `f/1` can be manipulated as if it were defined in the current module. For example,

```
| ?- clause(f(X), true).

X = 0
```

The built-in predicate `listing/[0,1]` distinguishes predicates that are imported into the current source module by prefixing each clause with the module name. Thus,

```
| ?- listing(f).

m1:f(0).
```

However, `listing/[0,1]` does not prefix clauses with their module if they are defined in the source module itself. Note that

```
| ?- listing.
```

can be used to see all the dynamic predicates defined in or imported into the current type-in module. And

```
| ?- listing(m1:_).
```

can be used to see all such predicates that are defined in or imported into module `m1`. See Section 11.3.116 [mpg-ref-listing], page 1114.

4.11.15 Module Name Expansion

The concept of a source module is explained in Section 4.11.7 [ref-mod-som], page 169. For any goal, the applicable source module is determined when the goal is compiled rather than when it is executed.

A procedure that needs to refer to the source module has arguments designated for module name expansion. These arguments are expanded when code is consulted, compiled or asserted by the transformation *X* -> *M:X* where *M* is the name of the source module. For example, the goal `call(X)` is expanded into `call(M:X)` and the goal `clause(Head, Body)` is expanded into `clause(M:Head, Body)`.

Module name expansion is avoided if the argument to be expanded is already a `:/2` term. In this case it is unnecessary since the module to be used has already been supplied by the programmer.

4.11.16 The `meta_predicate` Declaration

Sometimes a user-defined predicate will require module name expansion (see Section 4.11.15 [ref-mod-mne], page 175). This can be specified by providing a `meta_predicate` declaration for that procedure.

Module name expansion is needed whenever the argument of a predicate has some module-dependent meaning. For example, if this argument is a goal that is to be called, then it will be necessary to know in which module to call it—or, if the argument is a clause to be asserted, in which module it should go.

Consider, for example, a sort routine to which the name of the comparison predicate is passed as an argument. In this example, the comparison predicate should be called, with two arguments like the built-in `@=</2`, with respect to the module containing the call to the sort routine. Suppose that the sort routine is

```
mysort(CompareProc, InputList, OutputList)
```

An appropriate `meta_predicate` declaration for this is

```
:- meta_predicate mysort(2, +, -).
```

The significant argument in the `mysort/3` term is the '2', which indicates that module name expansion is required for this argument and that two additional arguments will be added when this argument is invoked as a goal. This means that whenever a goal `mysort(A, B, C)` appears in a clause, it will be transformed at load time into `mysort(M:A, B, C)`, where *M* is the source module. There are some exceptions to this compile-time transformation rule; the goal is not transformed if either of the following applies:

1. *A* is of the form *Module:Goal*.
2. *A* is a variable and the same variable appears in the head of the clause in a module-name-expansion position.

The reason for (2) is that otherwise module name expansion could build larger and larger structures of the form *Mn: . . . :M2:M1:Goal*. For example, consider the following program fragment adapted from the library (see `library(samsort)` for the full program):

```
:- module(samsort, [samsort/3]).

:- meta_predicate
        samsort(2, +, ?),
        sam_sort(+, 2, +, +, ?).

samsort(_, [], []) :- !.
samsort(Order, List, Sorted) :-
        sam_sort(List, Order, [], 0, Sorted).
  .
  .
  .
```

Normally, the `sam_sort/5` goal in this example would have the module name of its second argument expanded thus:

```
sam_sort(List, samsort:Order, [], 0, Sorted)
```

because of the `meta_predicate` declaration. However, in this situation the appropriate source module will have already been attached to *Order* because it is the first argument of `samsort/3`, which also has a `meta_predicate` declaration. Therefore it is not useful to attach the module name (`samsort`) to *Order* in the call of `sam_sort/5`.

The argument of a `meta_predicate` declaration can be a term, or a sequence of terms separated by commas. Each argument of each of these terms must be one of the following:

‘`:`’
: requires module name expansion

  If the argument will be treated as a goal, then it is better to explicitly indicate this using an integer; see the next item.

nsuppressed
: a non-negative integer.

  This is a special case of ‘`:`’ which means that the argument can be made into a goal by adding *nsuppressed* additional arguments. E.g., if the argument will be passed to `call/1`, then `0` (zero) should be used.

  An integer is treated the same as ‘`:`’ above by the SICStus runtime. Other tools, such as the cross referencer (see Section 9.12 [The Cross-Referencer], page 383) and the SICStus Prolog IDE (see Section 3.11 [SPIDER], page 32), will use this information to better follow predicate references in analyzed source code.

  If the number of extra arguments is unknown or varies, then the generic `:` is always safe to use, but will give less accurate results from source analysis tools.

‘`*`’
‘`+`’
‘`-`’
‘`?`’
: ignored

The reason for ‘`+`’, ‘`-`’ and ‘`?`’ is simply so that the information contained in a DEC-10 Prolog-style “mode” declaration may be represented in the `meta_predicate` declaration if you wish. There are many examples of `meta_predicate` declarations in the library.

Prior to release 4.1, only `:` (colon) was used and the integer form was undocumented (but supported, e.g. by the cross referencer).

4.11.17 Semantics of Module Name Expansion

Although module name expansion is performed when code is consulted, compiled or asserted, it is perhaps best explained in terms of an interpreter, especially the issue of how deeply clauses are expanded. The semantics of `call/1`, taking `meta_predicate` declarations into account, is shown as if defined by the interpreter shown below. The interpreter's case analysis is as follows:

control constructs
: (Including cuts and module prefixes). The interpreter implements the semantics of the construct, expanding its argument.

callable terms with functor N/A
: First, we look for a `meta_predicate` declaration for *N/A*. If one exists, then the relevant arguments are expanded. Otherwise, the goal is left unexpanded. Then, if *N/A* is a built-in predicate, then it is called. Otherwise, a clause with head functor *N/A* is looked up using the imaginary predicate `:-/2`, unified against, and its body is interpreted.

non-callable terms
: Raise error exception.

Throughout the interpretation, we must keep track of the module context. The interpreter is as follows, slightly simplified. `-->/2` is *not* a predicate:

```
call(M:Body) :-
        icall(Body, M).

icall(Var, M) :- \+callable(Var), !,
        must_be(Var, callable, call(M:Var), 1).
icall(M:Body, _) :- !,
        icall(Body, M).
icall(!, _) :- !,
        % cut relevant choicepoints.
icall((A, B), M) :- !,
        icall(A, M),
        icall(B, M).
icall((A -> B), M) :- !,
    (   icall(A, M) ->
        icall(B, M)
    ).
icall((A -> B ; C), M) :- !,
    (   icall(A, M) ->
        icall(B, M)
    ;   icall(C, M)
    ).
icall((A ; B), M) :- !,
    (   icall(A, M)
    ;   icall(B, M)
    ).
icall(\+(A), M) :- !,
    (   icall(A, M) ->
        fail
    ;   true
    ).
icall(_^A, M) :- !,
        icall(A, M).
icall(do(Iter,Body), M) :- !,
    (   Iter,
        param(M)
    do  icall(Body, M)
    ).
icall(if(A,B,C), M) :- !,
     if(icall(A, M),
        icall(B, M),
        icall(C, M)).
icall(once(A), M) :- !,
    (   icall(A, M) -> true
    ).
icall(Goal, M) :-
    (   predicate_property(M:Goal, meta_predicate(Meta)) ->
        functor(Goal, Name, Arity),
        functor(AGoal, Name, Arity),
        (   foreacharg(Spec,Meta),
            foreacharg(Arg,Goal),
            foreacharg(Ann,AGoal),
            param(M)
        do  (   Spec==(:) -> Ann = M:Arg
```

4.11.18 Predicate Summary

`current_module(?M)`
: M is the name of a current module

`current_module(?M,?F)`
: F is the name of the file in which M's module declaration appears

`meta_predicate :P` *declaration*
: declares predicates P that are dependent on the module from which they are called

`module(+M,+L)` *declaration*
`module(+M,+L,+O)` *declaration*
: declaration that module M exports predicates in L, options O

`save_modules(+L,+F)`
: save the modules specifed in L into file F

`set_module(+M)`
: make M the type-in module

`use_module(:F)`
: import the module file(s) F, loading them if necessary

`use_module(:F,+I)`
: import the procedure(s) I from the module file F

`use_module(?M,:F,+I)`
: import I from module M, loading module file F if necessary

4.12 Modification of the Database

4.12.1 Introduction

The family of assertion and retraction predicates described below enables you to modify a Prolog program by adding or deleting clauses while it is running. These predicates should not be overused. Often people who are experienced with other programming languages have a tendency to think in terms of global data structures, as opposed to data structures that are passed as procedure arguments, and hence they make too much use of assertion and retraction. This leads to less readable and less efficient programs.

An interesting question in Prolog is what happens if a procedure modifies itself, by asserting or retracting a clause, and then fails. On backtracking, does the current execution of the procedure use new clauses that are added to the bottom of the procedure?

> **Historical note:** In some non-ISO-conforming implementations of Prolog, changes to the Prolog database become globally visible upon the success of the built-in predicate modifying the database. An unsettling consequence is that the definition of a procedure can change while it is being run. This can lead to code that is difficult to understand. Furthermore, the memory performance of the interpreter implementing these semantics is poor. Worse yet, the semantics rendered ineffective the added determinacy detection available through indexing.

SICStus Prolog implements the "logical" view in updating dynamic predicates, conforming to the ISO standard. This means that the definition of a dynamic procedure that is visible to a call is effectively frozen when the call is made. A procedure always contains, as far as a call to it is concerned, exactly the clauses it contained when the call was made.

A useful way to think of this is to consider that a call to a dynamic procedure makes a *virtual copy* of the procedure and then runs the copy rather than the original procedure. Any changes to the procedure made by the call are immediately reflected in the Prolog database, but not in the copy of the procedure being run. Thus, changes to a running procedure will not be visible on backtracking. A subsequent call, however, makes and runs a copy of the modified Prolog database. Any changes to the procedure that were made by an earlier call will now be visible to the new call.

In addition to being more intuitive and easy to understand, the new semantics allow interpreted code to execute with the same determinacy detection (and excellent memory performance) as static compiled code (see Section 9.5 [Indexing], page 364, for more information on determinacy detection).

4.12.2 Dynamic and Static Procedures

All Prolog procedures are classified as being either *static* or *dynamic procedures*. Static procedures can be changed only by completely redefining them using the Load Predicates (see Section 4.3 [ref-lod], page 83). Dynamic procedures can be modified by adding or deleting individual clauses using the assert and retract procedures.

If a procedure is defined by loading source code, then it is static by default. If you need to be able to add, delete, or inspect the individual clauses of such a procedure, then you must make the procedure dynamic.

There are two ways to make a procedure dynamic:

- If the procedure is defined by loading source code, then it must be declared to be dynamic before it is defined.
- If the procedure is to be created by assertions only, then the first `assert` operation on the procedure automatically makes it dynamic.

A procedure is declared dynamic by preceding its definition with a declaration of the form:

```
:- dynamic :Pred
```

where *Pred* must be a procedure specification of the form *Name*/*Arity*, or a sequence of such specifications, separated by commas. For example,

```
:- dynamic exchange_rate/3, spouse_of/2,
           gravitational_constant/1.
```

where '`dynamic`' is a built-in prefix operator. If *Pred* is not of the specified form, then an exception is raised, and the declaration is ignored.

Note that the symbol '`:-` ' preceding the word '`dynamic`' is essential. If this symbol is omitted, then a permission error is raised because it appears that you are trying to define a clause for the built-in predicate `dynamic/1`. Although `dynamic/1` is a built-in predicate, it may only be used in declarations.

When a dynamic declaration is encountered in a file being loaded, it is considered to be a part of the redefinition of the procedures specified in its argument. Thus, if you load a file containing only

```
:- dynamic hello/0
```

then the effect will be to remove any previous definition of `hello/0` from the database, and to make the procedure dynamic. You cannot make a procedure dynamic retroactively. If you wish to make an already-existing procedure dynamic, then it must be redefined.

It is often useful to have a dynamic declaration for a procedure even if it is to be created only by assertions. This helps another person to understand your program, since it emphasizes the fact that there are no pre-existing clauses for this procedure, and it also avoids the possibility of Prolog stopping to tell you there are no clauses for this procedure if you should happen to call it before any clauses have been asserted. This is because unknown procedure catching (see Section 3.6 [Undefined Predicates], page 29) does not apply to dynamic procedures; it is presumed that a call to a dynamic procedure should simply fail if there are no clauses for it.

If a program needs to make an undefined procedure dynamic, then this can be achieved by calling `clause/2` on that procedure. The call will fail because the procedure has no clauses, but as a side effect it will make the procedure dynamic and thus prevent unknown procedure catching on that procedure. See the Reference page for details of `clause/2`.

Although you can simultaneously declare several procedures to be dynamic, as shown above, it is recommended that you use a separate dynamic declaration for each procedure placed immediately before the clauses for that procedure. In this way when you reload the procedure using the editor interface, you will be reminded to include its dynamic declaration.

Dynamic procedures are implemented by interpretation, even if they are included in a file that is compiled. This means that they are executed more slowly than if they were static, and also that they can be printed using `listing/0`. Dynamic procedures, as well as static procedures, are indexed on their first argument; see Section 9.5 [Indexing], page 364.

4.12.3 Database References

A *database reference* is a term that uniquely identifies a clause or recorded term (see Section 4.12.8 [ref-mdb-idb], page 187) in the database. Database references are provided only to increase efficiency in programs that access the database in complex ways. Use of a database reference to a clause can save repeated searches using `clause/2`. However, it does *not* normally pay to access a clause via a database reference when access via first argument indexing is possible.

4.12.4 Adding Clauses to the Database

The assertion predicates are used to add clauses to the database in various ways. The relative position of the asserted clause with respect to other clauses for the same predicate is determined by the choice among `assert/1`, `asserta/1`, and `assertz/1`. A database reference that uniquely identifies the clause being asserted is established by providing an optional second argument to any of the assertion predicates.

`assert(:C)`
: clause C is asserted in an arbitrary position in its predicate

`assert(:C,-R)`
: as `assert/1`; reference R is returned

`asserta(:C)`
: clause C is asserted before existing clauses

`asserta(:C,-R)`
: as `asserta/1`; reference R is returned

`assertz(:C)`
: clause C is asserted after existing clauses

`assertz(:C,-R)`
: as `assertz/1`; reference R is returned

Please note: If the term being asserted contains attributed variables (see Section 10.3 [lib-atts], page 397) or suspended goals (see Section 4.2.4 [ref-sem-sec], page 78), then those attributes are not stored in the database. To retain the attributes, you can use `copy_term/3` (see Section 4.8.7 [ref-lte-cpt], page 133).

4.12.5 Removing Clauses from the Database

This section briefly describes the predicates used to remove the clauses and/or properties of a predicate from the system.

> **Please note:** Removing all of a predicate's clauses by `retract/1` and/or `erase/1` (see Section 4.12.5.1 [ref-mdb-rcd-efu], page 184) does not remove the predicate's properties (and hence its definition) from the system. The only way to completely remove a predicate's clauses *and* properties is to use `abolish/[1,2]`.

`retract(:C)`
: erase the first dynamic clause that matches C

`retractall(:H)`
: erase every clause whose head matches H

`abolish(:F)`
: abolish the predicate(s) specified by F

`abolish(:F,+O)`
: abolish the predicate(s) specified by F with options O

`erase(+R)`
: erase the clause or recorded term (see Section 4.12.8 [ref-mdb-idb], page 187) with reference R

4.12.5.1 A Note on Efficient Use of `retract/1`

WARNING: `retract/1` is a nondeterminate procedure. Thus, we can use

```
| ?- retract((foo(X) :- Body)), fail.
```

to retract all clauses for `foo/1`. A nondeterminate procedure in SICStus Prolog uses a *choicepoint*, a data structure kept on an internal stack, to implement backtracking. This applies to user-defined procedures as well as to built-in and library procedures. In a simple model, a choicepoint is created for each call to a nondeterminate procedure, and is deleted on determinate success or failure of that call, when backtracking is no longer possible. In fact, SICStus Prolog improves upon this simple model by recognizing certain contexts in which choicepoints can be avoided, or are no longer needed.

The Prolog *cut* (‘`!`’) works by removing choicepoints, disabling the potential backtracking they represented. A choicepoint can thus be viewed as an “outstanding call”, and a *cut* as deleting outstanding calls.

To avoid leaving inconsistencies between the Prolog database and outstanding calls, a retracted clause is reclaimed only when the system determines that there are no choicepoints on the stack that could allow backtracking to the clause. Thus, the existence of a single choicepoint on the stack can disable reclamation of retracted clauses for the procedure whose call created the choicepoint. Space is recovered only when the choicepoint is deleted.

Often `retract/1` is used determinately; for example, to retract a single clause, as in

```
| ?- <do some stuff>
     retract(Clause),
     <do more stuff without backtracking>.
```

No backtracking by `retract/1` is intended. Nonetheless, if Clause may match more than one clause in its procedure, then a choicepoint will be created by `retract/1`. While executing “<do more stuff without backtracking>”, that choicepoint will remain on the stack, making it impossible to reclaim the retracted Clause. Such choicepoints can also disable tail recursion optimization. If not cut away, then the choicepoint can also lead to runaway retraction on the unexpected failure of a subsequent goal. This can be avoided by simply cutting away the choicepoint with an explicit `cut` or a local cut (‘`->`’). Thus, in the previous example, it is preferable to write either

```
| ?- <do some stuff>
     retract(Clause),
     !,
     <do more stuff without backtracking>.
```

or

```
| ?- <do some stuff>
     ( retract(Clause) -> true ),
     <do more stuff without backtracking>.
```

This will reduce stack size and allow the earliest possible reclamation of retracted clauses.

4.12.6 Accessing Clauses

Goal **Succeeds If:**

`clause(:P,?Q)`
: there is a clause for a dynamic predicate with head P and body Q

`clause(:P,?Q,?R)`
: there is a clause for a dynamic predicate with head P, body Q, and reference R

`instance(+R,-T)`
: T is an instance of the clause or term referenced by R

4.12.7 Modification of Running Code: Examples

The following examples show what happens when a procedure is modified while it is running. This can happen in two ways:

1. The procedure calls some other procedure that modifies it.
2. The procedure succeeds nondeterminately, and a subsequent goal makes the modification.

In either case, the question arises as to whether the modifications take effect upon backtracking into the modified procedure. In SICStus Prolog the answer is that they do not. As explained in the overview to this section (see Section 4.12.1 [ref-mdb-bas], page 180), modifications to a procedure affect only calls to that procedure that occur after the modification.

4.12.7.1 Example: assertz

Consider the procedure `foo/0` defined by

```
:- dynamic foo/0.
foo :- assertz(foo), fail.
```

Each call to `foo/0` asserts a new last clause for `foo/0`. After the Nth call to `foo/0` there will be N+1 clauses for `foo/0`. When `foo/0` is first called, a virtual copy of the procedure is made, effectively freezing the definition of `foo/0` for that call. At the time of the call, `foo/0` has exactly one clause. Thus, when `fail/0` forces backtracking, the call to `foo/0` simply fails: it finds no alternatives. For example,

```
| ?- compile(user).
| :- dynamic foo/0.
| foo :- assertz(foo), fail.
| ^D
% user compiled in module user, 0.100 sec 2.56 bytes

yes
| ?- foo.  % The asserted clause is not found

no
| ?- foo.  % A later call does find it, however

yes
| ?-
```

Even though the virtual copy of `foo/0` being run by the first call is not changed by the assertion, the Prolog database is. Thus, when a second call to `foo/0` is made, the virtual copy for that call contains two clauses. The first clause fails, but on backtracking the second clause is found and the call succeeds.

4.12.7.2 Example: retract

```
| ?- assert(p(1)), assert(p(2)), assert(p(3)).

yes
| ?- p(N), writeq(N), nl, retract(p(2)),
     retract(p(3)), fail.
1
2
3

no
| ?- p(N), writeq(N), fail.
1
no
| ?-
```

At the first call to `p/1`, the procedure has three clauses. These remain visible throughout execution of the call to `p/1`. Thus, when backtracking is forced by `fail/0`, N is bound to 2 and written. The retraction is again attempted, causing backtracking into `p/1`. N is bound to 3 and written out. The call to `retract/1` fails. There are no more clauses in `p/1`, so the query finally fails. A subsequent call to `p/1`, made after the retractions, sees only one clause.

4.12.7.3 Example: abolish

```
| ?- compile(user).
| :- dynamic q/1.
| q(1).
| q(2).
| q(3).
| ^D
% user compiled in modules user, 0.117 sec 260 bytes

yes
| ?- q(N), writeq(N), nl, abolish(q/1), fail.
1
2
3

no
| ?-
```

Procedures that are abolished while they have outstanding calls do not become invisible to those calls. Subsequent calls however, will find the procedure undefined.

4.12.8 The Internal Database

The following predicates are provided solely for compatibility with other Prolog systems. Their semantics can be understood by imagining that they are defined by the following clauses:

```
recorda(Key, Term, Ref) :-
     functor(Key, Name, Arity),
     functor(F, Name, Arity),
     asserta('$recorded'(F,Term), Ref).
recordz(Key, Term, Ref) :-
     functor(Key, Name, Arity),
     functor(F, Name, Arity),
     assertz('$recorded'(F,Term), Ref).
recorded(Key, Term, Ref) :-
     functor(Key, Name, Arity),
     functor(F, Name, Arity),
     clause('$recorded'(F,Term), _, Ref).
```

The reason for the calls to `functor/3` in the above definition is that only the principal functor of the key is significant. If *Key* is a compound term, then its arguments are ignored.

> **Please note:** Equivalent functionality and performance, with reduced memory costs, can usually be had through normal dynamic procedures and indexing (see Section 4.12.1 [ref-mdb-bas], page 180, and Section 9.5 [Indexing], page 364).

`recorda(`*`Key`*`, `*`Term`*`, `*`Ref`*`)` records the *Term* in the internal database as the first item for the key *Key*; a database reference to the newly-recorded term is returned in *Ref*.

`recordz(`*`Key`*`, `*`Term`*`, `*`Ref`*`)` is like `recorda/3` except that it records the term as the last item in the internal database.

`recorded(`*`Key`*`, `*`Term`*`, `*`Ref`*`)` searches the internal database for a term recorded under the key *Key* that unifies with *Term*, and whose database reference unifies with *Ref*.

`current_key(`*`KeyName`*`, `*`KeyTerm`*`)` succeeds when *KeyName* is the atom or integer that is the name of *KeyTerm*. *KeyTerm* is an integer, atom, or compound term that is the key for a currently recorded term.

4.12.9 Blackboard Primitives

The predicates described in this section store arbitrary terms in a per-module repository known as the "blackboard". The main purpose of the blackboard was initially to provide a means for communication between branches executing in parallel, but the blackboard works equally well during sequential execution. The blackboard implements a mapping from keys to values. Keys are restricted to being atoms or small integers, whereas values are arbitrary terms. In contrast to the predicates described in the previous sections, a given key can map to at most a single term.

Each Prolog module maintains its own blackboard, so as to avoid name clashes if different modules happen to use the same keys. The "key" arguments of these predicates are subject to module name expansion, so the module name does not have to be explicitly given unless multiple Prolog modules are supposed to share a single blackboard.

The predicates below implement atomic blackboard actions.

`bb_put(`*`:Key, +Term`*`)`
: A copy of *Term* is stored under *Key*. See Section 11.3.24 [mpg-ref-bb_put], page 999.

`bb_get(`*`:Key, ?Term`*`)`
: If a term is currently stored under *Key*, then a copy of it is unified with *Term*. Otherwise, `bb_get/2` silently fails. See Section 11.3.23 [mpg-ref-bb_get], page 998.

`bb_delete(`*`:Key, ?Term`*`)`
: If a term is currently stored under *Key*, then the term is deleted, and a copy of it is unified with *Term*. Otherwise, `bb_delete/2` silently fails. See Section 11.3.22 [mpg-ref-bb_delete], page 997.

`bb_update(`*`:Key, ?OldTerm, ?NewTerm`*`)`
: If a term is currently stored under *Key* and unifies with *OldTerm*, then the term is replaced by a copy of *NewTerm*. Otherwise, `bb_update/3` silently fails. This predicate provides an atomic swap operation. See Section 11.3.25 [mpg-ref-bb_update], page 1000.

Please note: If the term being stored contains attributed variables (see Section 10.3 [lib-atts], page 397) or suspended goals (see Section 4.2.4 [ref-sem-sec], page 78), then those attributes are not stored. To retain the attributes, you can use `copy_term/3` (see Section 4.8.7 [ref-lte-cpt], page 133).

The following example illustrates how these primitives may be used to implement a "maxof" predicate that finds the maximum value computed by some nondeterminate goal. We use a single key `max`[4]. We assume that *Goal* does not produce any "false" solutions that would be eliminated by cuts in a sequential execution. Thus, *Goal* may need to include redundant checks to ensure that its solutions are valid, as discussed above.

```
maxof(Value, Goal, _) :-
        bb_put(max, -1),                % initialize max-so-far
        call(Goal),
        update_max(Value),
        fail.
maxof(_, _, Max) :-
        bb_delete(max, Max),
        Max > 1.

update_max(New):-
        bb_get(max, Old),
        compare(C, Old, New),
        update_max(C, Old, New).

update_max(<, Old, New) :- bb_update(max, Old, New).
update_max(=, _, _).
update_max(>, _, _).
```

4.12.10 Summary of Predicates

`abolish(:F)` *ISO*
: abolish the predicate(s) specified by F

`abolish(:F,+O)`
: abolish the predicate(s) specified by F with options O

`assert(:C)`
`assert(:C,-R)`
: clause C is asserted; reference R is returned

`asserta(:C)` *ISO*
`asserta(:C,-R)`
: clause C is asserted before existing clauses; reference R is returned

[4] This is not necessarily a good example of using the blackboard. For instance, the implementation is not reentrant, e.g. it will not work if the *Goal* itself uses `maxof/3`. A reentrant implementation would need to ensure that multiple nested calls to `maxof/3` do not interfere with each other.

`assertz(:C)` *ISO*
`assertz(:C,-R)`
clause C is asserted after existing clauses; reference R is returned

`bb_delete(:Key,-Term)`
Delete from the blackboard *Term* stored under *Key*.

`bb_get(:Key,-Term)`
Get from the blackboard *Term* stored under *Key*.

`bb_put(:Key,+Term)`
Store *Term* under *Key* on the blackboard.

`bb_update(:Key, -OldTerm, +NewTerm)`
Replace *OldTerm* by *NewTerm* under *Key* on the blackboard.

`clause(:P,?Q)` *ISO*
`clause(:P,?Q,?R)`
there is a clause for a dynamic predicate with head P, body Q, and reference R

`current_key(?N, ?K)`
N is the name and K is the key of a recorded term

`dynamic :P` *declaration,ISO*
predicates specified by P are dynamic

`erase(+R)`
erase the clause or record with reference R

`instance(+R,-T)`
T is an instance of the clause or term referenced by R

`recorda(+K,+T,-R)`
make term T the first record under key K; reference R is returned

`recorded(?K,?T,?R)`
term T is recorded under key K with reference R

`recordz(+K,+T,-R)`
make term T the last record under key K; reference R is returned

`retract(:C)` *ISO*
erase the first dynamic clause that matches C

`retractall(:H)` *ISO*
erase every clause whose head matches H

4.13 Sets and Bags: Collecting Solutions to a Goal

4.13.1 Introduction

When there are many solutions to a goal, and a list of all those solutions is desired, one means of collecting them is to write a procedure that repeatedly backtracks into that goal to get another solution. In order to collect all the solutions together, it is necessary to use the database (via assertion) to hold the solutions as they are generated, because backtracking

to redo the goal would undo any list construction that had been done after satisfying the goal.

The writing of such a backtracking loop can be avoided by the use of one of the built-in predicates `setof/3`, `bagof/3` and `findall/[3,4]`, which are described below. These provide a nice logical abstraction, whereas with a user-written backtracking loop the need for explicit side effects (assertions) destroys the declarative interpretation of the code. The built-in predicates are also more efficient than those a user could write.

Please note: If the solutions being collected contain attributed variables (see Section 10.3 [lib-atts], page 397) or suspended goals (see Section 4.2.4 [ref-sem-sec], page 78), then those attributes are not retained in the list of solutions. To retain the attributes, you can use `copy_term/3` (see Section 4.8.7 [ref-lte-cpt], page 133).

4.13.2 Collecting a Sorted List

`setof(`*`Template`*`, `*`Generator`*`, `*`Set`*`)` returns the set *Set* of all instances of *Template* such that *Generator* is provable, where that set is non-empty. The term *Generator* specifies a goal to be called as if by `call/1`. *Set* is a set of terms represented as a list of those terms, without duplicates, in the standard order for terms (see Section 4.8.8 [ref-lte-cte], page 134).

Obviously, the set to be enumerated should be finite, and should be enumerable by Prolog in finite time. It is possible for the provable instances to contain variables, but in this case *Set* will only provide an imperfect representation of what is in reality an infinite set.

If *Generator* is instantiated, but contains uninstantiated variables that do not also appear in *Template*, then `setof/3` can succeed nondeterminately, generating alternative values for *Set* corresponding to different instantiations of the free variables of *Generator*. (It is to allow for such usage that *Set* is constrained to be non-empty.) For example, if your program contained the clauses

```
likes(tom, beer).
likes(dick, beer).
likes(harry, beer).
likes(bill, cider).
likes(jan, cider).
likes(tom, cider).
```

then the call

```
| ?- setof(X, likes(X,Y), S).
```

might produce two alternative solutions via backtracking:

```
Y = beer,
S = [dick,harry,tom] ;
Y = cider,
S = [bill,jan,tom] ;
no
```

The call

```
| ?- setof((Y,S), setof(X,likes(X,Y),S), SS).
```

would then produce

```
SS = [(beer,[dick,harry,tom]),(cider,[bill,jan,tom])] ;
no
```

See Section 11.3.209 [mpg-ref-setof], page 1233.

4.13.2.1 Existential Quantifier

X `^` P is recognized as meaning "there exists an X such that P is true", and is treated as equivalent to simply calling P. The use of the explicit existential quantifier outside `setof/3` and `bagof/3` is superfluous.

Variables occurring in *Generator* will not be treated as free if they are explicitly bound within *Generator* by an existential quantifier. An existential quantification is written:

```
Y^Q
```

meaning "there exists a Y such that Q is true", where Y is some Prolog variable. For example:

```
| ?- setof(X, Y^likes(X,Y), S).
```

would produce the single result

```
S = [bill,dick,harry,jan,tom] ;
no
```

in contrast to the earlier example.

Furthermore, it is possible to existentially quantify a term, where all the variables in that term are taken to be existentially quantified in the goal. E.g.

```
A=term(X,Y), setof(Z, A^foo(X,Y,Z), L).
```

will treat X and Y as if they are existentially quantified.

4.13.3 Collecting a Bag of Solutions

`bagof/3` is exactly the same as `setof/3` except that the list (or alternative lists) returned will not be ordered, and may contain duplicates. This relaxation saves time and space in execution. See Section 11.3.21 [mpg-ref-bagof], page 996.

4.13.3.1 Collecting All Instances

`findall/3` is a special case of `bagof/3`, where all free variables in the generator are taken to be existentially quantified. Thus the use of the operator `^` is avoided. Because `findall/3` avoids the relatively expensive variable analysis done by `bagof/3`, using `findall/3` where appropriate rather than `bagof/3` can be considerably more efficient.

`findall/4` is a variant of `findall/3` with an extra argument to which the list of solutions is appended. This can reduce the amount of append operations in the program. See Section 11.3.80 [mpg-ref-findall], page 1064.

4.13.4 Predicate Summary

`?X ^ :P` there exists an X such that P is provable (used in `setof/3` and `bagof/3`)

`bagof(?X,:P,-B)` *ISO*
: B is the bag of instances of X such that P is provable

`findall(?T,:G,-L)` *ISO*
`findall(?T,:G,?L,?R)`
: L is the list of all solutions T for the goal G, concatenated with R or with the empty list

`setof(?X,:P,-S)` *ISO*
: S is the set of instances of X such that P is provable

4.14 Grammar Rules

This section describes SICStus Prolog's grammar rules, and the translation of these rules into Prolog clauses. At the end of the section is a list of grammar-related built-in predicates.

4.14.1 Definite Clause Grammars

Prolog's grammar rules provide a convenient notation for expressing definite clause grammars, which are useful for the analysis of both artificial and natural languages.

The usual way one attempts to make precise the definition of a language, whether it is a natural language or a programming language, is through a collection of rules called a "grammar". The rules of a grammar define which strings of words or symbols are valid sentences of the language. In addition, the grammar generally analyzes the sentence into a structure that makes its meaning more explicit.

A fundamental class of grammar is the context-free grammar (CFG), familiar to the computing community in the notation of "BNF" (Backus-Naur form). In CFGs, the words, or basic symbols, of the language are identified by "terminal symbols", while categories of phrases of the language are identified by non-terminal symbols. Each rule of a CFG expresses a possible form for a non-terminal, as a sequence of terminals and non-terminals. The analysis of a string according to a CFG is a parse tree, showing the constituent phrases of the string and their hierarchical relationships.

Context-free grammars (CFGs) consist of a series of rules of the form:

```
nt --> body.
```

where *nt* is a non-terminal symbol and body is a sequence of one or more items separated by commas. Each item is either a non-terminal symbol or a sequence of terminal symbols. The meaning of the rule is that *body* is a possible form for a phrase of type *nt*. A non-terminal symbol is written as a Prolog atom, while a sequence of terminals is written as a Prolog list, whereas a terminal may be any Prolog term.

Definite clause grammars (DCGs) are a generalization of context-free grammars and rules corresponding to DCGs are referred to as "Grammar Rules". A grammar rule in Prolog takes the general form

```
head --> body.
```

meaning "a possible form for *head* is *body*". Both *body* and *head* are sequences of one or more items linked by the standard Prolog conjunction operator '`,`' (comma).

Definite clause grammars extend context-free grammars in the following ways:

- A non-terminal symbol may be any callable Prolog term.
- A terminal symbol may be any Prolog term. To distinguish terminals from non-terminals, a sequence of one or more terminal symbols is written within a grammar rule as a Prolog list. An empty sequence is written as the empty list '`[]`'. If the terminal symbols are character codes, then such lists can be written (as elsewhere) as strings. An empty sequence is written as the empty list ('`[]`' or '`""`').
- Extra conditions, in the form of Prolog procedure calls, may be included in the right-hand side of a grammar rule. These extra conditions allow the explicit use of procedure calls in the body of a rule to restrict the constituents accepted. Such procedure calls are written enclosed in curly brackets ('`{`' and '`}`').
- The left-hand side of a grammar rule consists of a non-terminal, optionally followed by a sequence of terminals (again written as a Prolog list).
- Alternatives may be stated explicitly in the right-hand side of a grammar rule, using the disjunction operator '`;`' (semicolon) as in Prolog.
- The cut symbol '`!`' may be included in the right-hand side of a grammar rule, as in a Prolog clause. The cut symbol does not need to be enclosed in curly brackets. The same is true for the control constructs. However, all other built-in predicates not enclosed in curly brackets will be treated as non-terminal symbols. The precise meaning of this rule is clarified in Section 4.14.4 [ref-gru-tra], page 196.
- The extra arguments of non-terminals provide the means of building structure (such as parse trees) in grammar rules. As non-terminals are "expanded" by matching against grammar rules, structures are progressively built up in the course of the unification process.
- The extra arguments of non-terminals can also provide a general treatment of context dependency by carrying test and contextual information.

4.14.2 How to Use the Grammar Rule Facility

Following is a summary of the steps that enable you to construct and utilize definite clause grammars:

STEPS:

1. Write a grammar, using `-->/2` to formulate rules.
2. Compile the file containing the grammar rules. The Load Predicates automatically translate the grammar rules into Prolog clauses.

3. Use `phrase/[2,3]` to parse or generate strings.

OPTIONAL STEPS:

1. Modify the way in which Prolog translates your grammar rules by defining clauses for `user:term_expansion/6`; see Section 4.3.5 [ref-lod-exp], page 91.

2. In debugging or in using the grammar facility for more obscure purposes it may be useful to understand more about `expand_term/2`.

4.14.3 An Example

As an example, here is a simple grammar that parses an arithmetic expression (made up of digits and operators) and computes its value. Create a file containing the following rules:

grammar.pl

```
expr(Z) --> term(X), "+", expr(Y), {Z is X + Y}.
expr(Z) --> term(X), "-", expr(Y), {Z is X - Y}.
expr(X) --> term(X).

term(Z) --> number(X), "*", term(Y), {Z is X * Y}.
term(Z) --> number(X), "/", term(Y), {Z is X / Y}.
term(Z) --> number(Z).

number(C) --> "+", number(C).
number(C) --> "-", number(X), {C is -X}.
number(X) --> [C], {"0"=<C, C=<"9", X is C - "0"}.
```

In the last rule, C is the character code of a decimal digit.

This grammar can now be used to parse and evaluate an expression by means of the built-in predicates `phrase/[2,3]`. See Section 11.3.155 [mpg-ref-phrase], page 1165. For example,

```
| ?- [grammar].
| ?- phrase(expr(Z), "-2+3*5+1").

Z = 14

| ?- phrase(expr(Z), "-2+3*5", Rest).

Z = 13,
Rest = [] ;

Z = 1,
Rest = "*5" ;

Z = -2,
Rest = "+3*5" ;

no
```

4.14.4 Semantics of Grammar Rules

Grammar rules are best explained in terms of an interpreter. The semantics of `phrase/3` is shown as if defined by the interpreter shown below. The interpreter's case analysis is as follows:

control constructs
: (Including cuts and module prefixes). The interpreter implements the semantics of the construct, descending into its argument. Note that other built-in predicates are *not* treated this way.

lists
: Treated as terminal symbols.

curly brackets
: Treated as procedure calls.

callable terms with functor N/A
: A grammar rule with head functor *N/A* is looked up using the imaginary predicate `-->/2`, unified against, and its body is interpreted. If none exists, then this is treated as a procedure call to a predicate *N/A+2*.

non-callable terms
: Raise error exception.

The following points are worth noting:

- The code below defines what constructs of and to what depth grammar rule bodies are interpreted, as opposed to being treated as non-terminals.
- Throughout the interpretation, we must keep track of the module context.
- The head non-terminal of a grammar rule is optionally followed by a sequence of terminals. This feature is not supported by the interpreter, but is supported in the actual implementation.

- As a general rule, the last argument is unified *after* any side effects, including cuts. This is in line with the rule that output arguments should not be unified before a cut (see Section 9.1 [Eff Overview], page 359). In other words, grammar rules are *steadfast*.
- The last clause gives a clue to how grammar rules are actually implemented, i.e. by compile-time transformation to ordinary Prolog clauses. A grammar rule with head functor *N/A* is transformed to a Prolog clause with head functor *N/A+2*, the extra arguments being `S0` and `S`. `-->/2` is *not* a predicate.

The interpreter is as follows, slightly simplified:

```
phrase(M:Body, S0, S) :-
        phrase(Body, M, S0, S).

phrase(Var, M, S0, S) :- \+callable(Var), !,
        must_be(Var, callable, phrase(M:Var,S0,S), 1).
phrase(M:Body, _, S0, S) :- !,
        phrase(Body, M, S0, S).
phrase(!, _, S0, S) :- !,
        cut relevant choicepoints,
        S0 = S.                 % unification AFTER action
phrase((A, B), M, S0, S) :- !,
        phrase(A, M, S0, S1),
        phrase(B, M, S1, S).
phrase((A -> B), M, S0, S) :- !,
    (   phrase(A, M, S0, S1) ->
        phrase(B, M, S1, S)
    ).
phrase((A -> B ; C), M, S0, S) :- !,
    (   phrase(A, M, S0, S1) ->
        phrase(B, M, S1, S)
    ;   phrase(C, M, S0, S)
    ).
phrase((A ; B), M, S0, S) :- !,
    (   phrase(A, M, S0, S)
    ;   phrase(B, M, S0, S)
    ).
phrase(\+(A), M, S0, S) :- !,
    (   phrase(A, M, S0, _) ->
        fail
    ;   S0 = S
    ).
phrase(_^A, M, S0, S) :- !,
        phrase(A, M, S0, S).
phrase(do(Iter,Body), M, S0, S) :- !,
    (   Iter,
        fromto(S0,S1,S2,S)
    do  phrase(Body, M, S1, S2)
    ).
phrase(if(A,B,C), M, S0, S) :- !,
        if(phrase(A, M, S0, S1),
           phrase(B, M, S1, S),
           phrase(C, M, S0, S)).
phrase(once(A), M, S0, S) :- !,
    (   phrase(A, M, S0, S1) ->
        S1 = S                  % unification AFTER call
    ).
phrase([], _, S0, S) :- !,
        S0 = S.
phrase([H|T], M, S0, S) :- !,
        S0 = [H|S1],
        phrase(T, M, S1, S).
phrase({G}, M, S0, S) :- !,
        call(M:G),              % Please note: transparent to cuts
```

As mentioned above, grammar rules are merely a convenient abbreviation for ordinary Prolog clauses. Each grammar rule is translated into a Prolog clause as it is compiled. This translation is exemplified below.

The procedural interpretation of a grammar rule is that it takes an input list of symbols or character codes, analyzes some initial portion of that list, and produces the remaining portion (possibly enlarged) as output for further analysis. The arguments required for the input and output lists are not written explicitly in a grammar rule, but are added when the rule is translated into an ordinary Prolog clause. The translations shown differ from the output of `listing/[0,1]` in that internal translations such as variable renaming are not represented. This is done in the interests of clarity. For example, a rule such as (A) will be depicted as translating into (B) rather than (C).

```
p(X) --> q(X).                                                    (A)
```

```
p(X, S0, S) :-
        q(X, S0, S).                                              (B)
```

```
p(A, B, C) :-
        q(A, B, C).                                               (C)
```

If there is more than one non-terminal on the right-hand side, as in (D), then the corresponding input and output arguments are identified, translating into (E):

```
p(X, Y) --> q(X), r(X, Y), s(Y).                                  (D)
```

```
p(X, Y, S0, S) :-                                                 (E)
    q(X, S0, S1),
    r(X, Y, S1, S2),
    s(Y, S2, S).
```

Terminals are translated using the built-in predicate `=/2`. For instance, (F) is translated into (G):

```
p(X) --> [go, to], q(X), [stop].                                  (F)
```

```
p(X, S0, S) :-                                                    (G)
    S0 = [go,to|S1],
    q(X, S1, S2),
    S2 = [stop|S].
```

Extra conditions expressed as explicit procedure calls, enclosed in curly braces, naturally translate into themselves. For example (H) translates to (I):

```
p(X) --> [X], {integer(X), X > 0}, q(X).                          (H)
```

```
p(X, S0, S) :-                                                    (I)
    S0 = [X|S1],
    integer(X),
    X > 0,
    q(X, S1, S).
```

Terminals on the left-hand side of a rule, enclosed in square brackets, also translate into a unification. For example, (J) becomes (K):

```
is(N), [not] --> [aint].                                          (J)
```

```
is(N, S0, S) :-                                                   (K)
    S0 = [aint|S1],
    S = [not|S1].
```

Disjunction and other control constructs have a fairly obvious translation. For example, (L), a rule that equates phrases like "(sent) a letter to him" and "(sent) him a letter", translates to (M):

```
args(X, Y) -->                                                    (L)
    (   indir(X), [to], indir(Y)
    ;   indir(Y), dir(X)
    ).
```

```
args(X, Y, S0, S) :-                                              (M)
    (   dir(X, S0, S1),
        S1 = [to|S2],
        indir(Y, S2, S)
    ;   indir(Y, S0, S1),
        dir(X, S1, S)
    ).
```

In order to look at these translations, declare the grammar rules dynamic and use `listing/[0,1]`. However, bear in mind that a grammar rule with head functor *N/A* is transformed to a Prolog clause with head functor *N/A+2*. For example, the following declaration for grammar rule (L) would enable you to list its translation, (M):

```
:- dynamic args/4.
```

4.14.5 Summary of Predicates

:Head `-->` *:Body*
: A possible form for *Head* is *Body*

`expand_term(+`*T*`,-`*X*`)` *hookable*
: term *T* expands to term *X* using `user:term_expansion/6` or grammar rule expansion

`phrase(:`*P*`, -`*L*`)`
`phrase(:`*P*`, ?`*L*`, ?`*R*`)`
: *R* or the empty list is what remains of list *L* after phrase *P* has been found

`user:term_expansion(+Term1, +Layout1, +Tokens1, -Term2, -Layout2, -Tokens2)`
hook

Overrides or complements the standard transformations to be done by `expand_term/2`.

4.15 Errors and Exceptions

4.15.1 Overview

Whenever the Prolog system encounters a situation where it cannot continue execution, it throws an exception. For example, if a built-in predicate detects an argument of the wrong type, then it throws a `type_error` exception. The manual page description of each built-in predicate lists the kinds of exceptions that can be thrown by that built-in predicate.

The default effect of throwing an exception is to terminate the current computation and then print an error message. After the error message, you are back at Prolog's top level. For example, if the goal

```
X is a/2
```

is executed somewhere in a program, then you get

```
! Type error in argument 2 of (is)/2
! expected evaluable, but found a/0
! goal:  _255 is a/2
| ?-
```

Particular things to notice in this message are:

'`!`' This character indicates that this is an error message rather than a warning[5] or informational message.

'`Type Error`'
This is the *error class*. Exceptions thrown by the Prolog system are called *errors*. Every error is categorized into one of a small number of classes. The classes are listed in Section 4.15.4 [ref-ere-err], page 204.

'`goal:`' The goal that caused the exception to be thrown.

Built-in predicates check their arguments, but predicates exported by library modules generally do not, although some do check their arguments to a lesser or greater extent.

4.15.2 Throwing Exceptions

You can throw exceptions from your own code using:

[5] The difference between an error (including exceptions) and a warning: A *warning* is issued if Prolog detects a situation that is likely to cause problems, though it is possible that you intended it. An *error*, however, indicates that Prolog recognizes a situation where it cannot continue.

`throw(+ExceptionTerm)` *ISO*

The argument to this predicate is the *exception term*, an arbitrary non-variable term. See Section 11.3.236 [mpg-ref-throw], page 1268.

Please note: If the exception term contains attributed variables (see Section 10.3 [lib-atts], page 397) or suspended goals (see Section 4.2.4 [ref-sem-sec], page 78), then those attributes do not become part of the exception. To retain the attributes, you can use `copy_term/3` (see Section 4.8.7 [ref-lte-cpt], page 133).

4.15.3 Handling Exceptions

It is possible to protect a part of a program against abrupt termination in the event of an exception. There are several ways to do this:

- Trap exceptions to a particular goal by calling `catch/3` as described in Section 4.15.3.1 [ref-ere-hex-pgo], page 202.
- Handle undefined predicates or subsets of them through the hook predicate `user:unknown_predicate_handler/3`; see Section 4.15.3.2 [ref-ere-hex-hup], page 203.
- Trap exceptions matching *Exception* to the debugger by defining the following hook predicate:

  `user:error_exception(+Exception)` *hook,development*
  See Section 11.3.73 [mpg-ref-error_exception], page 1056.
- Control syntax errors with the `syntax_errors` Prolog flag or with the same option to `read_term/[2,3]`; see Section 4.15.4.11 [ref-ere-err-syn], page 212.
- Control existence and permission errors in the context of opening files with the `fileerrors` Prolog flag or with the same option to `absolute_file_name/3`; see Section 4.15.4.7 [ref-ere-err-exi], page 210, and Section 4.15.4.8 [ref-ere-err-per], page 210.

4.15.3.1 Protecting a Particular Goal

The built-in predicate `catch/3` enables you to handle exceptions to a specific goal:

`catch(:ProtectedGoal, ?ExceptionTerm, :Handler)` *ISO*

ProtectedGoal is executed. If all goes well, then it will behave just as if you had written `call(ProtectedGoal)` instead. If an exception is thrown while *ProtectedGoal* is running, then Prolog will abandon *ProtectedGoal* entirely. Any bindings made by *ProtectedGoal* will be undone, just as if it had failed. If the exception occurred in the scope of a `call_cleanup(Goal,Cleanup)`, then *Cleanup* will be called. side effects, such as asserts and retracts, are not undone, just as they are not undone when a goal fails. After undoing the bindings, Prolog tries to unify the exception term thrown with the *ExceptionTerm* argument. If this unification succeeds, then *Handler* will be executed as if you had written

ExceptionTerm=<the actual exception term>,
Handler

If this unification fails, then Prolog will keep searching up the ancestor list looking for another exception handler. If during this search it reaches a recursive call to Prolog from C, then the recursive calls returns with an uncaught exception. If it reaches the top level (or a break level), then an appropriate error message is printed (using `print_message/2`).

ProtectedGoal need not be determinate. That is, backtracking into *ProtectedGoal* is possible, and the exception handler becomes reactivated in this case. However, if *ProtectedGoal* is determinate, then the call to `catch/3` is also determinate.

The *ProtectedGoal* is logically *inside* the `catch/3` goal, but the *Handler* is *not*. If an exception is thrown inside the *Handler*, then this `catch/3` goal will *not* be reactivated. If you want an exception handler that protects itself, then you have to program it, perhaps like this:

```
recursive_catch_handler(Err, Goal, Handler) :-
    catch(Goal, Err,
        recursive_catch_handler(Err, Handler, Handler)).
```

See Section 11.3.34 [mpg-ref-catch], page 1011.

Certain built-in and library predicates rely on the exception mechanism, so it is usually a bad idea to let *Pattern* be a variable, matching any exception. If it must be a variable, then the *Handler* should examine the exception and pass it on if it is not relevant to the current invocation.

4.15.3.2 Handling Unknown Predicates

Users can write a handler for the specific exception occurring when an undefined predicate is called by defining clauses for the hook predicate `user:unknown_predicate_handler/3`. This can be thought of as a "global" exception handler for this particular exception, because unlike `catch/3`, its effect is not limited to a particular goal. Furthermore, the exception is handled at the point where the undefined predicate is called.

The handler can be written to apply to all unknown predicates, or to a class of them. The reference page contains an example of constraining the handler to certain predicates.

If `call(`*`Module:Goal`*`)` is the trapped call to the undefined predicate, then the hook is called as:

`user:unknown_predicate_handler(+`*`Goal`*`, +`*`Module`*`, -`*`NewGoal`*`)` *hook*

If this succeeds, then Prolog replaces the call to the undefined predicate with the call to *Module:NewGoal*. Otherwise, the action taken is governed by the `unknown` Prolog flag (see Section 4.9.4 [ref-lps-flg], page 140), the allowed values of which are:

`trace` Causes calls to undefined predicates to be reported and the debugger to be entered at the earliest opportunity. Not available in runtime systems.

`error` *ISO*

Causes calls to such predicates to raise an exception (the default).

`warning` *ISO*
: Causes calls to such predicates to display a warning message and then fail.

`fail` *ISO*
: Causes calls to such predicates to fail.

Finally, this flag can be accessed by the built-in predicate:

`unknown(?OldValue, ?NewValue)` *development*

This unifies *OldValue* with the current value, sets the flag to *NewValue*, and prints a message about the new value. See Section 11.3.245 [mpg-ref-unknown_predicate_handler], page 1278.

4.15.4 Error Classes

Exceptions thrown by the Prolog system are called errors.

Error terms have the form:

```
error(ISO_Error, SICStus_Error)
```

where the principal functor of *ISO_Error* (resp. *SICStus_Error*) indicates the error class (see Section 4.15.4 [ref-ere-err], page 204). The classification always coincides.

Please note: Do Not throw error terms except when you re-throw a previously caught error term. They correspond to the exceptions thrown by the built-in predicates. Throwing such forged error terms can lead to unexpected results.

See Section 10.50 [lib-types], page 910, for an alternative interface to throwing error exceptions, which tries to include line number information for source-linked debugging.

Error messages like the one shown earlier are printed using the built-in predicate `print_message/2`. One of the arguments to `print_message/2` is the exception term. `print_message/2` can be customized, as described in Section 4.16 [ref-msg], page 216.

The set of error classes used by the system has been kept small:

Instantiation Error *ISO*
: An input argument is insufficiently instantiated.

Uninstantiation Error *ISO*
: An input argument is too instantiated.

Type Error *ISO*
: An input argument is of the wrong type.

Domain Error *ISO*
: An input argument is illegal but of the right type.

Evaluation Error *ISO*
: An incorrect arithmetic expression was evaluated.

Representation Error *ISO*
: A computed value cannot be represented.

Existence Error *ISO*
: Something does not exist.

Permission Error *ISO*
: Specified operation is not permitted.

Context Error
: Specified operation is not permitted in this context.

Consistency Error
: Two otherwise correct values are inconsistent with each other.

Syntax Error *ISO*
: Error in reading a term.

Resource Error *ISO*
: Some resource limit has been exceeded.

System Error *ISO*
: An error detected by the operating system.

The format of the exception thrown by the built-in predicates is:

```
error(ISO_Error, SICStus_Error)
```

where *ISO_Error* is the error term prescribed by the ISO Prolog standard, while *SICStus_Error* is the part defined by the standard to be implementation defined. This so called SICStus error term has the same principal functor as *ISO_Error* but more arguments containing additional information, such as the goal and the argument number causing the error. Arguments are numbered from 1 upwards. An argument number given as zero means that an unspecific argument caused the error.

The list below itemizes the error terms, showing the *ISO_Error* and *SICStus_Error* form of each one, in that order. The SICStus and ISO error terms always belong to the same error class, but note that the Context and Consistency error classes are extensions to the ISO Prolog standard.

The goal part of the error term may optionally have the form `$@(Callable,PC)` where *PC* is an internal encoding of the line of code containing the culprit goal or one of its ancestors. To decompose an annotated goal *AGoal* into a *Goal* proper and a *SourceInfo* descriptor term, indicating the source position of the goal, use:

```
?- goal_source_info(AGoal, Goal, SourceInfo).
```

The reference page gives details about the *SourceInfo* format. See Section 11.3.98 [mpg-ref-goal_source_info], page 1093.

`instantiation_error` *ISO*
`instantiation_error(Goal,ArgNo)`
: *Goal* was called with insufficiently instantiated arguments.

`uninstantiation_error(`*`Culprit`*`)` *ISO*
`uninstantiation_error(`*`Goal`*`,`*`ArgNo`*`,`*`Culprit`*`)`
: *Goal* was called with too instantiated arguments, expecting *Culprit* to be uninstantiated.

`type_error(`*`TypeName`*`,`*`Culprit`*`)` *ISO*
`type_error(`*`Goal`*`,`*`ArgNo`*`,`*`TypeName`*`,`*`Culprit`*`)`
: *Goal* was called with the wrong type of argument(s). *TypeName* is the expected type and *Culprit* what was actually found.

`domain_error(`*`Domain`*`,`*`Culprit`*`)` *ISO*
`domain_error(`*`Goal`*`,`*`ArgNo`*`,`*`Domain`*`,`*`Culprit`*`)`
: *Goal* was called with argument(s) of the right type but with illegal value(s). *Domain* is the expected domain and *Culprit* what was actually found.

`existence_error(`*`ObjectType`*`,`*`Culprit`*`)` *ISO*
`existence_error(`*`Goal`*`,`*`ArgNo`*`,`*`ObjectType`*`,`*`Culprit`*`,`*`Reserved`*`)`
: Something does not exist as indicated by the arguments. See Section 4.15.4.7 [ref-ere-err-exi], page 210, for ways of controlling this behavior.

`permission_error(`*`Operation`*`,`*`ObjectType`*`,`*`Culprit`*`)` *ISO*
`permission_error(`*`Goal`*`,`*`Operation`*`,`*`ObjectType`*`,`*`Culprit`*`,`*`Reserved`*`)`
: The *Operation* is not permitted on *Culprit* of the *ObjectType*. See Section 4.15.4.8 [ref-ere-err-per], page 210, for ways of controlling this behavior.

`context_error(`*`ContextType`*`,`*`CommandType`*`)`
`context_error(`*`Goal`*`,`*`ContextType`*`,`*`CommandType`*`)`
: The *CommandType* is not permitted in *ContextType*.

`syntax_error(`*`Message`*`)` *ISO*
`syntax_error(`*`Goal`*`,`*`Position`*`,`*`Message`*`,`*`Tokens`*`,`*`AfterError`*`)`
: A syntax error was found when reading a term with `read/[1,2]` or assembling a number from its characters with `number_chars/2` or `number_codes/2`. See Section 4.15.4.11 [ref-ere-err-syn], page 212, for ways of controlling this behavior.

`evaluation_error(`*`ErrorType`*`,`*`Culprit`*`)` *ISO*
`evaluation_error(`*`Goal`*`,`*`ArgNo`*`,`*`ErrorType`*`,`*`Culprit`*`)`
: An incorrect arithmetic expression was evaluated.

`representation_error(`*`ErrorType`*`)` *ISO*
`representation_error(`*`Goal`*`,`*`ArgNo`*`,`*`ErrorType`*`)`
: A representation error occurs when the program tries to compute some well-defined value that cannot be represented, such as a compound term with arity > 255.

`consistency_error(`*`Culprit1`*`,`*`Culprit2`*`,`*`Message`*`)`
`consistency_error(`*`Goal`*`,`*`Culprit1`*`,`*`Culprit2`*`,`*`Message`*`)`
: A consistency error occurs when two otherwise valid values or operations have been specified that are inconsistent with each other.

`resource_error(`*ResourceType*`)` *ISO*
`resource_error(`*Goal*`,`*ResourceType*`)`
: A resource error occurs when SICStus Prolog has insufficient resources to complete execution.

`system_error` *ISO*
`system_error(`*Message*`)`
: An error occurred while dealing with the operating system.

Most exception terms include a copy of the *Goal* that threw the exception.

In general, built-in predicates that cause side effects, such as the opening of a stream or asserting a clause into the Prolog database, attempt to do all error checking before the side effect is performed. Unless otherwise indicated in the documentation for a particular predicate or error class, it should be assumed that goals that throw exceptions have not performed any side effect.

4.15.4.1 Instantiation Errors

An instantiation error occurs when a predicate or command is called with one of its input arguments insufficiently instantiated.

The *SICStus_Error* term associated with an instantiation error is

```
instantiation_error(Goal, ArgNo)
```

where *ArgNo* is a non-negative integer indicating which argument caused the problem. *ArgNo*=0 means that the problem could not be localized to a single argument.

Note that the *ArgNo*th argument of *Goal* might well be a non-variable: the error is *in* that argument. For example, the goal

```
X is Y+1
```

where Y is uninstantiated throws the exception

```
error(instantiation_error,
      instantiation_error(_A is _B+1,2))
```

because the second argument to `is/2` contains a variable.

4.15.4.2 Uninstantiation Errors

An uninstantiation error occurs when a predicate or command is called with one of its input arguments instantiated when an unbound variable was expected.

The *SICStus_Error* term associated with an instantiation error is

```
uninstantiation_error(Goal,ArgNo,Culprit)
```

For example, the goal

```
open(f, write, bar)
```

throws the exception

```
error(uninstantiation_error(bar),
      uninstantiation_error(open(f,write,bar),3,bar))
```

because the third argument was not a variable.

4.15.4.3 Type Errors

A type error occurs when an input argument is of the wrong *type*. In general, a *type* is taken to be a class of terms for which there exists a unary *type test predicate*. Some types are built-in, such as `atom/1` and `integer/1`.

The type of a term is the sort of thing you can tell just by looking at it, without checking to see how *big* it is. So "integer" is a type, but "non-negative integer" is not, and "atom" is a type, but "atom with 5 letters in its name" and "atom starting with '`x`'" are not.

The point of a type error is that you have *obviously* passed the wrong sort of argument to a command; perhaps you have switched two arguments, or perhaps you have called the wrong predicate, but it is not a subtle matter of being off by one.

Most built-in predicates check all their input arguments for type errors.

The *SICStus_Error* term associated with a type error is

```
type_error(Goal, ArgNo, TypeName, Culprit)
```

ArgNo *Culprit* occurs somewhere in the *ArgNo*th argument of *Goal*.

TypeName
says what sort of term was expected; it should be the name of a unary predicate that is true of whatever terms would not provoke a type error.

Culprit is the actual term being complained about: *TypeName*(*Culprit*) should be false.

For example:

```
| ?- catch((writeq(3),1), Error, true).
Error = error(type_error(callable,(writeq(3),1)),
              type_error(user:(writeq(3),1),0,callable,(writeq(3),1)))
```

4.15.4.4 Domain Errors

A domain error occurs when an input argument is of the right type but there is something wrong with its value. For example, the second argument to `open/[3,4]` is supposed to be an atom that represents a valid mode for opening a file, such as `read` or `write`. If a number or a compound term is given instead, then that is a type error. If an atom is given that is not a valid mode, then that is a domain error.

The main reason that we distinguish between type errors and domain errors is that they usually represent different sorts of mistakes in your program. A type error usually indicates that you have passed the wrong argument to a command, whereas a domain error usually indicates that you passed the argument you meant to check, but you hadn't checked it enough.

The *SICStus_Error* term associated with a domain error is

```
domain_error(Goal, ArgNo, DomainName, Culprit)
```

The arguments correspond to those of the *SICStus_Error* term for a type error, except that *DomainName* is not in general the name of a unary predicate: it needn't even be an atom. For example, if some command requires an argument to be an integer in the range 1..99, then it might use `between(1,99)` as the *DomainName*. With respect to the `date_plus` example under **Type Errors**, if the month had been given as 13, then it would have passed the type test but would throw a domain error.

For example, the goal

```
open(somefile,rread,S)
```

throws the exception

```
error(domain_error(io_mode,rread),
      domain_error(open(somefile,rread,_A),2,io_mode,rread))
```

The *Message* argument is used to provide extra information about the problem.

4.15.4.5 Evaluation Errors

An evaluation error occurs when an incorrect arithmetic expression was evaluated. Floating-point overflow is another evaluation error. The *SICStus_Error* term associated with an evaluation error is

```
evaluation_error(Goal, ArgNo, TypeName, Culprit)
```

This has the same arguments as a type error.

4.15.4.6 Representation Errors

A representation error occurs when your program calls for the computation of some well-defined value that cannot be represented.

Most representation errors are some sort of overflow. For example, creating a compound term with arity greater than 255 results in a representation error.

The *SICStus_Error* term for a representation error is

```
representation_error(Goal, ArgNo, Message)
```

ArgNo identifies the argument of the goal that cannot be constructed.

Message further classifies the problem. A message of `0` or `''` provides no further information.

4.15.4.7 Existence Errors

An existence error occurs when a predicate attempts to access something that does not exist. For example, trying to compile a file that does not exist, erasing a database reference that has already been erased.

The *SICStus_Error* term associated with an existence error is

```
existence_error(Goal, ArgNo, ObjectType, Culprit, Message)
```

ArgNo index of argument of *Goal* where *Culprit* appears

ObjectType
expected type of non-existent object

Culprit name for the non-existent object

Message the constant `0` or `''`, or some additional information provided by the operating system or other support system indicating why *Culprit* is thought not to exist.

For example, '`see('../brother/niece')`' might throw the exception

```
error(existence_error(source_sink,'../brother/niece'),
      existence_error(see('../brother/niece'),1,file,'../brother/niece',0))
```

An existence error does not necessarily cause an exception to be thrown. For I/O predicates, the behavior can be controlled with the `fileerrors` Prolog flag (see Section 4.9.4 [ref-lps-flg], page 140) or with the `fileerrors/1` alias `file_errors/1` option to `absolute_file_name/3`. The following values are possible:

`on` (fileerrors flag value)
`error` (absolute_file_name/3 fileerrors value)
Throw an exception if a given file cannot be opened. The default.

`off` (fileerrors flag value)
`fail` (absolute_file_name/3 fileerrors value)
Merely fail if a given file cannot be opened.

4.15.4.8 Permission Errors

A permission error occurs when an operation is attempted that is among the kinds of operation that the system is in general capable of performing, and among the kinds that you are in general allowed to request, but this particular time it is not permitted. Usually, the reason for a permission error is that the *owner* of one of the objects has requested that the object be protected.

For example, an attempts to assert or retract clauses for a predicate that has not been declared `:-dynamic` is rejected with a permission error.

File system protection is another major source of such errors.

The *SICStus_Error* term associated with a permission error is

```
permission_error(Goal, Operation, ObjectType, Culprit, Message)
```

Operation operation attempted; *Operation* exists but is not permitted with *Culprit*.

ObjectType
Culprit's type.

Culprit name of protected object.

Message provides such operating-system-specific additional information as may be available. A message of `0` or `''` provides no further information.

A permission error does not necessarily cause an exception to be thrown. For I/O predicates, the behavior can be controlled with the `fileerrors` Prolog flag (see Section 4.9.4 [ref-lps-flg], page 140) or with the `fileerrors/1` alias `file_errors/1` option to `absolute_file_name/3`, exactly as for existence errors.

4.15.4.9 Context Errors

A context error occurs when a goal or declaration appears in the wrong place. There may or may not be anything wrong with the goal or declaration as such; the point is that it is out of place. Calling `multifile/1` as a goal is a context error, as is having `:-module/2` anywhere but as the first term in a source file. This error class is an extension to the ISO Prolog standard.

The *SICStus_Error* term associated with a context error is

```
context_error(Goal, ContextType, CommandType)
```

ContextType
the context in which the command was attempted.

CommandType
the type of command that was attempted.

4.15.4.10 Consistency Errors

A consistency error occurs when two otherwise valid values or operations have been specified that are inconsistent with each other. For example, if two modules each import the same predicate from the other, then that is a consistency error. This error classe is an extension to the ISO Prolog standard.

The *SICStus_Error* term associated with a consistency error is

```
consistency_error(Goal, Culprit1, Culprit2, Message)
```

Culprit1 One of the conflicting values/operations.

Culprit2 The other conflicting value/operation.

Message Additional information, or `0`, or `''`.

4.15.4.11 Syntax Errors

A syntax error occurs when data are read from some external source but have an improper format or cannot be processed for some other reason. This category mainly applies to `read/1` and its variants.

The *SICStus_Error* term associated with a syntax error is

```
syntax_error(Goal, Position, Message, Left, Right)
```

where *Goal* is the goal in question, *Position* identifies the position in the stream where reading started, and *Message* describes the error. Left and right are lists of tokens before and after the error, respectively.

Note that the *Position* is where reading started, not where the error *is*.

`read/1` does two things. First, it reads a sequence of characters from the current input stream up to and including a clause terminator, or the end of file marker, whichever comes first. Then it attempts to parse the sequence of characters as a Prolog term. If the parse is unsuccessful, then a syntax error occurs. Thus, in the case of syntax errors, `read/1` disobeys the normal rule that predicates should detect and report errors before they perform any side effects, because the side effect of reading the characters has been done.

A syntax error does not necessarily cause an exception to be thrown. For I/O predicates, but not for `number_chars/2` and `number_codes/2`, The behavior can be controlled via the `syntax_errors` Prolog flag (see Section 4.9.4 [ref-lps-flg], page 140), or via the `syntax_errors/1` option to `read_term/[2,3]`. The following values are possible:

`quiet` When a syntax error is detected, nothing is printed, and `read/1` just quietly fails.

`dec10` This provides compatibility with other Prologs: when a syntax error is detected, a syntax error message is issued with `print_message/2`, and the `read` is repeated. This is the default.

`fail` This provides compatibility with other Prologs. When a syntax error is detected, a syntax error message is printed on `user_error`, and the `read` then fails.

`error` When a syntax error is detected, an exception is thrown.

4.15.4.12 Resource Errors

A resource error occurs when some resource runs out. For example, you can run out of virtual memory, or you can exceed the operating system limit on the number of simultaneously open files.

Often a resource error arises because of a programming mistake: for example, you may exceed the maximum number of open files because your program does not close files when it has finished with them. Or, you may run out of virtual memory because you have a non-terminating recursion in your program.

The *SICStus_Error* term for a resource error is

```
resource_error(Goal, Resource)
```

Goal A copy of the goal, or `0` if no goal was responsible; for example there is no particular goal to blame if you run out of virtual memory.

Resource identifies the resource that was exhausted. The values for *Resource* that are currently in use are `memory` when attempting to use too much memory and, since release 4.8, `file_handle` when attempting to open too many files.

4.15.4.13 System Errors

System errors are problems that the operating system notices (or causes). Note that many of the exception indications returned by the operating system (such as "file does not exist") are mapped to Prolog exceptions; it is only really unexpected things that show up as system errors.

The *SICStus_Error* term for a system error is

```
system_error(Message)
```

where *Message* is not further specified.

4.15.5 An Example

Suppose you want a routine that is to prompt for a file name and open the file if it can; otherwise it is to prompt the user for a replacement name. If the user enters an empty name, then it is to fail. Otherwise, it is to keep asking the user for a name until something works, and then it is to return the stream that was opened. There is no need to return the file name that was finally used. We can get it from the stream. Code:

```
retry_open_output(Stream) :-
    ask_query(filename, format('Type name of file to open\n',[]), -, FileName),
    FileName \== '',
    catch(open(FileName, write, Stream),
          Error,
          (   Error = error(_,Excp),
              file_error(Excp)
          ->  print_message(warning, Excp),
              retry_open_output(Stream)
          ;   throw(Error)
          )).

file_error(existence_error(open(_,_,_), 1, _, _, _)).
file_error(permission_error(open(_,_,_), _, _, _, _)).

:- multifile 'SU_messages':query_class/5.
'SU_messages':query_class(filename, '> ', line, atom_codes, help_query) :- !.

:- multifile 'SU_messages':query_map/4.
'SU_messages':query_map(atom_codes, Codes, success, Atom) :- !,
        (Codes==end_of_file -> Atom = '' ; atom_codes(Atom, Codes)).
```

Sample session:

```
| ?- retry_open_output(S).
Type name of file to open
> nodir/nofile
* Existence error in argument 1 of open/3
* file '/tmp/nodir/nofile' does not exist
* goal:  open('nodir/nofile',write,_701)
Type name of file to open
> newfile
S = '$stream'(3491752)
```

What this example does *not* catch is as interesting as what it does. All errors except existence and permission errors are re-thrown, as they represent errors in the program. The example also shows that you generally do not want to catch *all* exceptions that a particular goal might throw.

4.15.6 Legacy Predicates

Exception handling for Prolog was originally introduced in Quintus Prolog, and later inherited by SICStus Prolog, with an API that predated the ISO standard. This API is still supported but should be regarded as legacy, and consists of the two predicates `raise_exception/1` and `on_exception/3`:

`on_exception(?Template, :ProtectedGoal, :Handler)`
: Equivalent to `catch(:ProtectedGoal, ?Template, :Handler)`. Any exception term matching *Template* is caught and handled. See Section 11.3.145 [mpg-ref-on_exception], page 1151.

`raise_exception(+ExceptionTerm)`
: If *ExceptionTerm* matches one of the SICStus error terms listed in Section 4.15.4 [ref-ere-err], page 204, then the corresponding error term `error(ISO_Error, SICStus_Error)` is constructed and thrown. Otherwise, *ExceptionTerm* is thrown as is.

Prior to release 4.3, `throw/1` and `raise_exception/3` used to be equivalent and throw their argument as is, whereas `catch/3` and `on_exception/3` both used to attempt to recognize and expand SICStus error terms into `error/2` terms. Unless a forged SICStus error term is thrown by `throw/1`, the net behavior is unchanged. See Section 11.3.182 [mpg-ref-raise_exception], page 1198.

4.15.7 Interrupting Execution

There exist more drastic means of interrupting the normal control flow. To invoke a recursive top level, use:

```
?- break.
```

See Section 11.3.27 [mpg-ref-break], page 1003.

To exit from Prolog, use:

```
?- halt.
```

To exit from Prolog with return code *Code*, use:

```
?- halt(Code).
```

See Section 11.3.101 [mpg-ref-halt], page 1096.

To abort the execution of the current query and return to the top level, use:

```
?- abort.
```

See Section 11.3.2 [mpg-ref-abort], page 964.

> **Please note:** `halt/[0,1]` and `abort/0` are implemented by throwing a reserved exception, which has a handler at the top level of development systems and executables built with the `spld` tool. Thus they give the opportunity for cleanup goals (see `call_cleanup/2`) to run.

4.15.8 Summary of Predicates

`abort` abort execution of the program; return to current break level

`break` start a new break level to interpret commands from the user

`catch(`*`:P`*`,`*`?E`*`,`*`:H`*`)` *ISO*
: specify a handler H for any exception E arising in the execution of the goal P

`user:error_exception(+`*`Exception`*`)` *hook,development*
: *Exception* is an exception that traps to the debugger if it is switched on.

`goal_source_info(+`*`AGoal`*`, -`*`Goal`*`, -`*`SourceInfo`*`)`
: Decomposes the annotated goal *AGoal* into a *Goal* proper and the *SourceInfo* descriptor term, indicating the source position of the goal.

`halt` *ISO*
`halt(C)` *ISO*
: exit from Prolog with exit code C

`on_exception(`*`?E`*`,`*`:P`*`,`*`:H`*`)`
: specify a handler H for any exception E arising in the execution of the goal P

`raise_exception(+`*`E`*`)`
: raise exception E

`throw(+`*`E`*`)` *ISO*
: raise exception E

`unknown(`*`?OldValue`*`, `*`?NewValue`*`)` *development*
: access the `unknown` Prolog flag and print a message

`user:unknown_predicate_handler(+`*`Goal`*`, +`*`Module`*`, -`*`NewGoal`*`)` *hook*
: tell Prolog to call *`Module`*`:`*`NewGoal`* if *`Module`*`:`*`Goal`* is undefined

4.16 Messages and Queries

This section describes the two main aspects of user interaction, displaying messages and querying the user. We will deal with these two issues in turn.

4.16.1 Message Processing

Every message issued by the Prolog system is displayed using a single predicate:

```
print_message(Severity, Message)
```

Message is a term that encodes the message to be printed. The format of message terms is subject to change, but can be inspected in the file `library('SU_messages')` of the SICStus Prolog distribution.

The atom *Severity* specifies the type (or importance) of the message. The following table lists the severities known to the SICStus Prolog system, together with the line prefixes used in displaying messages of the given severity:

`error`	`'! '`	for error messages
`warning`	`'* '`	for warning messages
`informational`	`'% '`	for informational messages
`help`	`''`	for help messages
`query`	`''`	for query texts (see Section 4.16.3 [Query Processing], page 220)

`silent` `''` a special kind of message, which normally does not produce any output, but can be intercepted by hooks

`print_message/2` is a built-in predicate, so that users can invoke it to have their own messages processed in the same way as the system messages.

The processing and printing of the messages is highly customizable. For example, this allows the user to change the language of the messages, or to make them appear in dialog windows rather than on the terminal.

4.16.1.1 Phases of Message Processing

Messages are processed in two major phases. The user can influence the behavior of each phase using appropriate hooks, described later.

The first phase is called the *message generation phase*: it determines the text of the message from the input (the abstract message term). No printing is done here. In this phase the user can change the phrasing or the language of the messages.

The result of the first phase is created in the form of a *format-command list*. This is a list whose elements are *format-commands*, or the atom `nl` denoting the end of a line. A format-command describes a piece of text not extending over a line boundary and it can be one of the following:

FormatString-Args
`format(`*FormatString*`, `*Args*`)`
: This indicates that the message text should appear as if printed by

```
format(FormatString, Args).
```

`write_term(`*Term*`, `*Options*`)`
: This indicates that the message text should appear as if printed by

```
write_term(Term, Options).
```

`write_term(`*Term*`)`
: Equivalent to `write_term(`*Term*`, `*Options*`)` where *Options* is the actual value of the Prolog flag `toplevel_print_options`.

As an example, let us see what happens in case of the toplevel call `_ =:= 3`. An instantiation error is raised by the Prolog system, which is caught, and the abstract message term `error(instantiation_error,instantiation_error(_=:=3,1))` is generated—the first argument is the goal, and the second argument is the position of the uninstantiated variable within the goal. In the first phase of message processing this is converted to the following format-command list:

```
['Instantiation error'-[],' in argument ~d of ~q'-[1,=:= /2],nl,
 'goal:  '-[],write_term(_=:=3),nl]
```

A minor transformation, so-called *line splitting* is performed on the message text before it is handed over to the second phase. The format-command list is broken up along the `nl`

atoms into a list of lines, where each line is a list of format-commands. We will use the term format-command lines to refer to the result of this transformation.

In the example above, the result of this conversion is the following:

```
[['Instantiation error'-[],' in argument ~d of ~q'-[1,=:= /2]],
 ['goal:  '-[],write_term(_=:=3)]]
```

The above format-command lines term is the input of the second phase of message processing.

The second phase is called the *message printing phase*, this is where the message is actually displayed. The severity of the message is used here to prefix each line of the message with some characters indicating the type of the message, as listed above.

The user can change the exact method of printing (e.g. redirection of messages to a stream, a window, or using different prefixes, etc.) through appropriate hooks.

In our example the following lines are printed by the second phase of processing:

```
! Instantiation error in argument 1 of =:= /2
! goal:  _=:=3
```

The user can override the default message processing mechanism in the following two ways:

- A global method is to define the hook predicate `portray_message/2`, which is the first thing called by message processing. If this hook exists and succeeds, then it overrides all other processing—nothing further is done by `print_message/2`.
- If a finer method of influencing the behavior of message processing is needed, then there are several further hooks provided, which affect only one phase of the process. These are described in the following paragraphs.

4.16.1.2 Message Generation Phase

The default message generation predicates are located in the `library('SU_messages')` file, in the `'SU_messages'` module, together with other message and query related predicates. This is advantageous when these predicates have to be changed as a whole (for example when translating all messages to another language), because this can be done simply by replacing the file `library('SU_messages')` by a new one.

In the message generation phase three alternative methods are tried:

- First the hook predicate `generate_message_hook/3` is executed, if it succeeds, then it is assumed to deliver the output of this phase.
- Next the default message generation is invoked via `'SU_messages':generate_message/3`.
- In the case that neither of the above methods succeed, a built-in fall-back message generation method is used.

The hook predicate `generate_message_hook/3` can be used to override the default behavior, or to handle new messages defined by the programmer that do not fit the default message generation schemes. The latter can also be achieved by adding new clauses to the hook predicate `'SU_messages':generate_message/3`.

If both the hook and the default method refuses to handle the message, then the following simple format-command list is generated from the abstract message term *Message*:

```
['~q'-[Message],nl]
```

This will result in displaying the abstract message term itself, as if printed by `writeq/1`.

For messages of the severity `silent` the message generation phase is skipped, and the `[]` format-command list is returned as the output.

4.16.1.3 Message Printing Phase

By default this phase is handled by the built-in predicate `print_message_lines/3`. Each line of the message is prefixed with a string depending on the severity, and is printed to `user_error`. The `query` severity is special—no newline is printed after the last line of the message.

This behavior can be overridden by defining the hook predicate `message_hook/3`, which is called with the severity of the message, the abstract message term and its translation to format-command lines. It can be used to make smaller changes, for example by calling `print_message_lines/3` with a stream argument other than `user_error`, or to implement a totally different display method such as using dialog windows for messages.

For messages of the severity `silent` the message printing phase consists of calling the hook predicate `message_hook/3` only. Even if the hook fails, no printing is done.

4.16.2 Message Handling Predicates

`print_message(+Severity, +Message)` *hookable*
: Portrays or else writes *Message* of a given *Severity* on the standard error stream. See Section 11.3.162 [mpg-ref-print_message], page 1176.

`portray_message(+Severity, +Message)` *hook*
`user:portray_message(+Severity, +Message)`
: Tells `print_message/2` what to do.

`generate_message_hook(+Message, -L0, -L)` *hook*
`user:generate_message_hook(+Message, -L0, -L)`
: A way for the user to override the call to `'SU_messages':generate_message/3` in the message generation phase in `print_message/2`.

`'SU_messages':generate_message(+Message, -L0, -L)` *hook*
: Predefined message generation rules.

`message_hook(+Severity, +Message, +Lines)` *hook*
`user:message_hook(+Severity, +Message, +Lines)`
: Overrides the call to `print_message_lines/3` in `print_message/2`. A way for the user to intercept the abstract message term *Message* of type *Severity*, whose translation is *Lines*, before it is actually printed.

`print_message_lines(+Stream, +Severity, +Lines)`
: Print the *Lines* to *Stream*, preceding each line with a prefix defined by *Severity*.

`goal_source_info(+AGoal, -Goal, -SourceInfo)`
: Decomposes the annotated goal *AGoal* into a *Goal* proper and the *SourceInfo* descriptor term, indicating the source position of the goal.

4.16.3 Query Processing

All user input in the Prolog system is handled by a single predicate:

```
ask_query(QueryClass, Query, Help, Answer)
```

QueryClass, described below, specifies the form of the query interaction. *Query* is an abstract message term specifying the query text, *Help* is an abstract message term used as a help message in certain cases, and *Answer* is the (abstract) result of the query.

`ask_query/4` is a built-in predicate, so that users can invoke it to have their own queries processed in the same way as the system queries.

The processing of queries is highly customizable. For example, this allows changing the language of the input expected from the user, or to make queries appear in dialog windows rather than on the terminal.

4.16.3.1 Query Classes

Queries posed by the system can be classified according to the kind of input they expect, the way the input is processed, etc. Queries of the same kind form a *query class*.

For example, queries requiring a yes/no answer form a query class with the following characteristics:

- the text ‘ `(y or n)` ’ is used as the prompt;
- a single line of text is input;
- if the first non-whitespace character of the input is `y` or `n` (possibly in capitals), then the query returns the atom `yes` or `no`, respectively, as the abstract answer;
- otherwise a help message is displayed and the query is repeated.

There are built-in query classes for reading in yes/no answers, toplevel queries, debugger commands, etc.

A query class is characterized by a ground Prolog term, which is supplied as the first argument to the query processing predicate `ask_query/4`. The characteristics of a query class are normally described by the hook predicate

```
'SU_messages':query_class(QueryClass, Prompt, InputMethod,
                          MapMethod, FailureMode).
```

The arguments of the `query_class` predicate have the following meaning:

Prompt an atom to be used for prompting the user.

InputMethod

a non-variable term, which specifies how to obtain input from the user.

For example, a built-in input method is described by the atom `line`. This requests that a line is input from the user, and the code list is returned. Another built-in input method is `term(Options)`; here, a Prolog term is read and returned.

The input obtained using *InputMethod* is called *raw input*, as it may undergo further processing.

In addition to the built-in input methods, the user can define his/her own extensions.

MapMethod

a non-variable term, which specifies how to process the raw input to get the abstract answer to the query.

For example, the built-in map method `char([yes-"yY", no-"nN"])` expects a code list as raw input, and gives the answer term `yes` or `no` depending on the first non-whitespace character of the input. For another example, the built-in map method `=` requests that the raw input itself be returned as the answer term—this is often used in conjunction with the input method `term(Options)`.

In addition to the built-in map methods the user can define his/her own extensions.

FailureMode

This is used only when the mapping of raw input fails, and the query must be repeated. This happens for example if the user typed a character other than *y* or *n* in case of the `yes_or_no` query class. *FailureMode* determines what to print before re-querying the user. Possible values are:

`help_query`
: print a help message, then print the text of the query again

`help`
: only print the help message

`query`
: only print the text of the query

`none`
: do not print anything

4.16.3.2 Phases of Query Processing

Query processing is done in several phases, described below. We will illustrate what is done in each phase through a simple example: the question put to the user when the solution to the toplevel query '`X is 1+1`' is displayed, requesting a decision whether to find alternative answers or not:

```
| ?- X is 1+1.

X = 2 ? no
Please enter ";" for more choices; otherwise, <return>
 ? ;
```

We focus on the query '`X = 2 ?` ' in the above script.

The example query belongs to the class `next_solution`, its text is described by the message term `solutions([binding("X",2)])`, and its help text by the message term `bindings_help`. Accordingly, such a query is executed by calling:

```
ask_query(next_solution,                /* QueryClass */
          solutions([binding("X",2)]), /* Query */
          bindings_help,               /* Help */
          Answer)
```

In general, execution of `ask_query(`*`QueryClass`*`,` *`Query`*`,` *`Help`*`,` *`Answer`*`)` consists of the following phases:

Preparation phase

The abstract message terms *Query* (for the text of the query) and *Help* (for the help message) are converted to format-command lines via the message generation and line splitting phases (see Section 4.16.1 [Message Processing], page 216). Let us call the results of the two conversions *QueryLines* and *HelpLines*, respectively. The text of the query, *QueryLines* is printed immediately (via the message printing phase, using `query` severity). *HelpLines* may be printed later, and *QueryLines* printed again, in case of invalid user input.

The characteristics of *QueryClass* (described in the previous subsubsection) are retrieved to control the exact behavior of the further phases.

In our example, the following parameters are sent in the preparation phase:

QueryLines = `[[],['~s = '-["X"],write_term(2)]]`
HelpLines =

```
[['Please enter ";" for more choices; otherwise, <return>'-[]]]
```

Prompt = `' ? '`
InputMethod = `line`
MapMethod = `char([yes-";", no-[0'\n]])`
FailureMode = `help`

QueryLines is displayed immediately, printing:

```
X = 2
```

(Note that the first element of *QueryLines* is `[]`, therefore the output is preceded by a newline. Also note that no newline is printed at the end of the last line, because the `query` severity is used.)

The subsequent phases will be called repeatedly until the mapping phase succeeds in generating an answer.

Input phase

By default, the input phase is implemented by the hook predicate

```
'SU_messages':query_input(InputMethod, Prompt, RawInput).
```

This phase uses the *Prompt* and *InputMethod* characteristics of the query class. *InputMethod* specifies the method of obtaining input from the user. This method is executed, and the result (*RawInput*) is passed on to the next phase.

The use of *Prompt* may depend on *InputMethod*. For example, the built-in input method `line` prints the prompt unconditionally, while the input method `term(_)` passes *Prompt* to `prompt/2`.

In the example, first the ' `?` ' prompt is displayed. Next, because *InputMethod* is `line`, a line of input is read, and the code list is returned in *RawInput*. Supposing that the user typed *noRET*, *RawInput* becomes `" no" = [32,110,111]`.

Mapping phase

By default, the mapping phase is implemented by the hook predicate

```
'SU_messages':query_map(MapMethod, RawInput,
                        Result, Answer).
```

This phase uses the *MapMethod* parameter to control the method of converting the raw input to the abstract answer.

In some cases *RawInput* is returned as it is, but otherwise it has to be processed (parsed) to generate the answer.

The conversion process may have two outcomes indicated in the *Result* returned:

- success, in which case the query processing is completed with the *Answer* term returned;
- failure, the query has to be repeated.

In the latter case a message describing the cause of failure may be returned, to be printed before the query is repeated.

In our example, the map method is `char([yes-";", no-[0'\n]])`. The mapping phase fails for the *RawInput* passed on by the previous phase of the example, as the first non-whitespace character is *n*, which does not match any of the given characters.

Query restart phase

This phase is executed only if the mapping phase returned with failure.

First, if a message was returned by the mapping, then it is printed. Subsequently, if requested by the *FailureMode* parameter, then the help message *HelpLines* and/or the text of the query *QueryLines* is printed.

The query is then repeated—the input and mapping phase will be called again to try to get a valid answer.

In the above example, the user typed an invalid character, so the mapping failed. The `char(_)` mapping does not return any message in case of failure.

The *FailureMode* of the query class is `help`, so the help message *HelpLines* is printed, but the query is not repeated:

```
Please enter ";" for more choices; otherwise, <return>
```

Having completed the query restart phase, the example script continues by re-entering the input phase: the prompt ‘ `?` ’ is printed, another line is read, and is processed by the mapping phase. If the user types the character `;` this time, then the mapping phase returns successfully and gives the abstract answer term `yes`.

4.16.3.3 Hooks in Query Processing

As explained above, the major parts of query processing are implemented in the `'SU_messages'` module in the file `library('SU_messages')` through the following hook predicates:

- `'SU_messages':query_class(+`*QueryClass*`, -`*Prompt*`, -`*InputMethod*`, -`*MapMethod*`, -`*FailureMode*`)`
- `'SU_messages':query_input(+`*InputMethod*`, +`*Prompt*`, -`*RawInput*`)`
- `'SU_messages':query_map(+`*MapMethod*`, +`*RawInput*`, -`*Result*`, -`*Answer*`)`

This is to enable the user to change the language used, the processing done, etc., simply by changing or replacing the `library('SU_messages')` file.

To give more control to the user and to make the system more robust (for example if the `'SU_messages'` module is corrupt) the so-called *four step procedure* is used in the above three cases—obtaining the query class parameters, performing the query input and performing the mapping. The four steps of this procedure, described below, are tried in the given order until the first one that succeeds. Note that if an exception is raised within the first three steps, then a warning is printed and the step is considered to have failed.

- First, a hook predicate is tried. The name of the hook is derived from the name of the appropriate predicate by appending ‘`_hook`’ to it, e.g. `user:query_class_hook/5` in case of the query class. If this hook predicate exists and succeeds, then it is assumed to have done all necessary processing, and the following steps are skipped.
- Second, the predicate in the `'SU_messages'` module is called (this is the default case, these are the predicates listed above). Normally this should succeed, unless the module is corrupt, or an unknown query-class/input-method/map-method is encountered. These predicates are hook, so new classes and methods can be added easily by the user.
- Third, as a fall-back, a built-in minimal version of the predicates in the original `'SU_messages'` is called. This is necessary because the `library('SU_messages')` file is modifiable by the user, therefore vital parts of the Prolog system (e.g. the toplevel query) could be damaged.
- If all the above steps fail, then nothing more can be done, and an exception is raised.

4.16.3.4 Default Input Methods

The following *InputMethod* types are implemented by the default `'SU_messages':query_input(InputMethod, Prompt, RawInput)` (and these are the input methods known to the third, fall-back step):

`line` The *Prompt* is printed, a line of input is read using `read_line/2` and the code list is returned as *RawInput*.

`term(Options)`
Prompt is set to be the prompt (cf. `prompt/2`), and a Prolog term is read by `read_term/2` using the given *Options*, and is returned as *RawInput*.

`FinalTerm^term(Term,Options)`
A Prolog term is read as above, and is unified with *Term*. *FinalTerm* is returned as *RawInput*. For example, the `T-Vs^term(T,[variable_names(Vs)])` input method will return the term read, paired with the list of variable names.

4.16.3.5 Default Map Methods

The following *MapMethod* types are known to `'SU_messages':query_map(MapMethod, RawInput, Result, Answer)` and to the built-in fall-back mapping:

`char(Pairs)`
In this map method *RawInput* is assumed to be a code list.

Pairs is a list of `Name-Abbreviations` pairs, where *Name* is a ground term, and *Abbreviations* is a code list. The first non-whitespace character of *RawInput* is used for finding the corresponding name as the answer, by looking it up in the abbreviation lists. If the character is found, then *Result* is `success`, and *Answer* is set to the *Name* found; otherwise, *Result* is `failure`.

`=` No conversion is done, *Answer* is equal to *RawInput* and *Result* is `success`.

`debugger` This map method is used when reading a single line debugger command. It parses the debugger command and returns the corresponding abstract command term. If the parse is unsuccessful, then the answer `unknown(Line,Warning)` is returned. This is to allow the user to extend the debugger command language via `debugger_command_hook/2`, see Section 5.5 [Debug Commands], page 241.

The details of this mapping can be obtained from the `library('SU_messages')` file.

Note that the fall-back version of this mapping is simplified, it only accepts parameterless debugger commands.

4.16.3.6 Default Query Classes

Most of the default query classes are designed to support some specific interaction with the user within the Prolog development environment. The full list of query classes can be inspected in the file `library('SU_messages')`. Here, we only describe the two classes defined by `'SU_messages':query_class/5` that may be of general use:

QueryClass	`yes_or_no`	`yes_no_proceed`

Prompt	`' (y or n) '`	`' (y, n, p, s, a, or ?) '`
InputMethod	`line`	`line`
MapMethod	`char([yes-"yY", no-"nN"])`	`char([yes-"yY", no-"nN", proceed-"pP", suppress-"sS", abort-"aA"])`
FailureMode	`help_query`	`help_query`

4.16.4 Query Handling Predicates

`ask_query(+`*QueryClass*`, +`*Query*`, +`*Help*`, -`*Answer*`)` *hookable*

Prints the question *Query*, then reads and processes user input according to *QueryClass*, and returns the result of the processing, the abstract answer term *Answer*. The *Help* message is printed in case of invalid input. See Section 11.3.9 [mpg-ref-ask_query], page 979.

`query_hook(+`*QueryClass*`, +`*Query*`, +`*QueryLines*`, +`*Help*`, +`*HelpLines*`, -`*Answer*`)` *hook*

`user:query_hook(+`*QueryClass*`, +`*Query*`, +`*QueryLines*`, +`*Help*`, +`*HelpLines*`, -`*Answer*`)`

Called by `ask_query/4` before processing the query. If this predicate succeeds, then it is assumed that the query has been processed and nothing further is done.

`query_class_hook(+`*QueryClass*`, -`*Prompt*`, -`*InputMethod*`, -`*MapMethod*`, -`*FailureMode*`)` *hook*

`user:query_class_hook(+`*QueryClass*`, -`*Prompt*`, -`*InputMethod*`, -`*MapMethod*`, -`*FailureMode*`)`

Provides the user with a method of overriding the call to `'SU_messages':query_class/5` in the preparation phase of query processing. This way the default query class characteristics can be changed.

`'SU_messages':query_class(+`*QueryClass*`, -`*Prompt*`, -`*InputMethod*`, -`*MapMethod*`, -`*FailureMode*`)` *hook*

Predefined query class characteristics table.

`'SU_messages':query_abbreviation(+`*QueryClass*`, -`*Prompt*`, -`*Pairs*`)` *hook*

Predefined query abbreviation table.

`query_input_hook(+`*InputMethod*`, +`*Prompt*`, -`*RawInput*`)` *hook*

`user:query_input_hook(+`*InputMethod*`, +`*Prompt*`, -`*RawInput*`)`

Provides the user with a method of overriding the call to `'SU_messages':query_input/3` in the input phase of query processing. This way the implementation of the default input methods can be changed.

`'SU_messages':query_input(+`*InputMethod*`, +`*Prompt*`, -`*RawInput*`)` *hook*

Predefined query input methods.

`query_map_hook(+`*MapMethod*`, +`*RawInput*`, -`*Result*`, -`*Answer*`)` *hook*

`user:query_map_hook(+`*MapMethod*`, +`*RawInput*`, -`*Result*`, -`*Answer*`)`

Provides the user with a method of overriding the call to `'SU_messages':query_map/4` in the mapping phase of query processing. This way the implementation of the default map methods can be changed.

`'SU_messages':query_map(+`*MapMethod*`, +`*RawInput*`, -`*Result*`, -`*Answer*`)` *hook*

Predefined query map methods.

4.16.5 Predicate Summary

`ask_query(+QueryClass, +Query, +Help, -Answer)` *hookable*
: Prints the question *Query*, then reads and processes user input according to *QueryClass*, and returns the result of the processing, the abstract answer term *Answer*. The *Help* message is printed in case of invalid input.

`user:message_hook(+M,+S,+L)` *hook*
: intercept the printing of a message

`'SU_messages':generate_message(+M,?SO,?S)` *hook*
: determines the mapping from a message term into a sequence of lines of text to be printed

`user:generate_message_hook(+M,?SO,?S)` *hook*
: intercept message before it is given to `'SU_messages':generate_message/3`

`goal_source_info(+AGoal, -Goal, -SourceInfo)`
: Decomposes the annotated goal *AGoal* into a *Goal* proper and the *SourceInfo* descriptor term, indicating the source position of the goal.

`user:portray_message(+Severity,+Message)` *hook*
: Tells `print_message/2` what to do.

`print_message(+S,+M)` *hookable*
: print a message M of severity S

`print_message_lines(+S,+P,+L)`
: print the message lines L to stream S with prefix P

`'SU_messages':query_abbreviation(+T,-P)` *hook*
: specifies one letter abbreviations for responses to queries from the Prolog system

`user:query_hook(+QueryClass, +Query, +QueryLines, +Help, +HelpLines, -Answer)` *hook*
: Called by `ask_query/4` before processing the query. If this predicate succeeds, then it is assumed that the query has been processed and nothing further is done.

`'SU_messages':query_class(+QueryClass, -Prompt, -InputMethod, -MapMethod, -FailureMode)` *hook*
: Access the parameters of a given *QueryClass*.

`user:query_class_hook(+QueryClass, -Prompt, -InputMethod, -MapMethod, -FailureMode)` *hook*
: Provides the user with a method of overriding the call to `'SU_messages':query_class/5` in the preparation phase of query processing. This way the default query class characteristics can be changed.

`'SU_messages':query_input(+InputMethod, +Prompt, -RawInput)` *hook*
: Implements the input phase of query processing.

`user:query_input_hook(+InputMethod, +Prompt, -RawInput)` *hook*
: Provides the user with a method of overriding the call to `'SU_messages':query_input/3` in the input phase of query processing. This way the implementation of the default input methods can be changed.

`'SU_messages':query_map(+MapMethod, +RawInput, -Result, -Answer)` *hook*
: Implements the mapping phase of query processing.

`user:query_map_hook(+MapMethod, +RawInput, -Result, -Answer)` *hook*
: Provides the user with a method of overriding the call to `'SU_messages':query_map/4` in the mapping phase of query processing. This way the implementation of the default map methods can be changed.

4.17 Other Topics

This section describes topics that do not fit elsewhere.

4.17.1 System Properties and Environment Variables

SICStus Prolog stores some information in named variables called system properties. System properties are used since release 4.1, whereas previous releases used environment variables.

The default value when reading a system property is taken from the corresponding environment variable. This makes system properties largely backward compatible with how environment variables were used in previous releases. Any exceptions to this rule are explicitly mentioned in the documentation.

You can obtain the value of system properties and environment variables using `system:environ/[2,3]` (see Section 10.45 [lib-system], page 808) and `SP_getenv()`.

Some system properties affect the SICStus Prolog initialization process and must therefore be set before SICStus Prolog has been initialized. There are three ways to affect the initial values of system properties:

1. Set the corresponding environment variable.

   System properties get their default value from the environment so this is often a convenient method. It was the only method available prior to release 4.1.
2. Pass the `-D`*var*`=`*value* option to the `sicstus` command line tool. See Section 13.1 [too-sicstus], page 1430.
3. Pass an option block to `SP_initialize()` if you initialize the SICStus runtime from C. See Section 6.7.4.1 [Initializing the Prolog Engine], page 334.

Looking up system properties follows the platform convention for environment variables. This means that the lookup is case sensitive on UNIX-like platforms and case insensitive on Windows.

On UNIX-like systems, the environment is assumed to use the UTF-8 character encoding; on Windows, the native Unicode encoding is used.

SICStus reads and copies the process environment during initialization, e.g. in `SP_initialize()`. Any subsequent changes to the process environment will not be detected by SICStus. Note that, at least on UNIX-like systems, changing the process environment, e.g. using `setenv()`, has undefined behavior when the process has multiple threads, which is the case for any process running SICStus.

While copying the environment, each entry in the environment is normalized as follows:

- If it does not contain an equal sign, then the entry is ignored.
- On Windows only, if it starts with an equal sign but has no other equal signs, then the entry is ignored.
- If the entry consists of valid UTF-8, then it is kept as is. This is always true on Windows where a Unicode encoding is used internally by the operating system.
- If the entry does not consist of valid UTF-8, then it is treated as Latin-1 and converted to UTF-8. This cannot happen on Windows.
- On Windows only, if the entry starts with an equal sign, then the equal sign is treated as part of the variable name.

In particular, on UNIX-like systems, this means that the environment should preferably be in UTF-8.

4.17.1.1 System Properties Set by SICStus Prolog

The following system properties are set automatically on startup.

`SP_APP_DIR`
: The absolute path to the directory that contains the executable. Also available as the `application` file search path.

`SP_APP_PATH`
: The absolute path to the executable. Unlike `SP_APP_DIR`, this system property may not be available under all circumstances.

`SP_RT_DIR`
: The full path to the directory that contains the SICStus runtime. If the application was linked statically to the SICStus runtime, then `SP_RT_DIR` is the same as `SP_APP_DIR`. Also available as the `runtime` file search path.

`SP_RT_PATH`
: The absolute path to the SICStus runtime. Unlike `SP_RT_DIR`, this system property may not be available under all circumstances, e.g. if the runtime is not a shared library.

`SP_LIBRARY_DIR`
: The absolute path to the directory that contains the SICStus library files. Also available as the initial value of the `library` file search path.

`SP_TEMP_DIR`
: A directory suitable for storing temporary files. It is particularly useful with the `open/4` option `if_exists(generate_unique_name)`. Also available as the `temp` file search path.

`SP_STARTUP_DIR`
: During initialization the `SP_STARTUP_DIR` system property will be set to the working directory used by SICStus.

  Note that this system property can also be set prior to initialization, in order to tell SICStus which working directory to use. See below.

4.17.1.2 System Properties Affecting Initialization

The following system properties can be set before starting SICStus Prolog.

Some of these override the default sizes of certain areas. For variables ending with '`SIZE`', the size is in bytes, but may be followed by '`K`', '`M`', or '`G`' meaning 2**10, 2**20 and 2**30 respectively.

Boolean values true and false are represented by '`yes`' and '`no`', respectively.

See Section 4.10 [ref-mgc], page 148, for more information about the properties that affect memory management.

`SP_PATH` Can be used to specify the location of the Runtime Library. In most cases there is no need to use it, but see Section 6.1 [CPL Notes], page 294.

`SP_STARTUP_DIR`
: The value of this system property, if set, is used as the initial working directory. Note that this system property is also set automatically during initialization; see above.

  This value of this system property is *not* read from the corresponding environment variable.

`SP_ALLOW_CHDIR`
: If this system property is set to '`no`', then SICStus will not change the process's working directory when the SICStus working directory changes. This is useful when embedding SICStus and would probably be the better default behavior except for backwards compatibility.

`GLOBALSTKSIZE`
: Controls the initial size of the global stack. **Please note**: The global stack will not be subsequently trimmed to a size smaller than this initial size.

`LOCALSTKSIZE`
: Controls the initial size of the local stack. **Please note**: The local stack will not be subsequently trimmed to a size smaller than this initial size.

`CHOICESTKSIZE`
: Controls the initial size of the choicepoint stack. **Please note**: The choicepoint stack will not be subsequently trimmed to a size smaller than this initial size.

`TRAILSTKSIZE`
: Controls the initial size of the trail stack. **Please note**: The trail stack will not be subsequently trimmed to a size smaller than this initial size.

`GROWTHFACTOR` *since release 4.0.8*
: Meaningful values are between 10 and 100; the default is 62. Controls the rate at which the Prolog stacks grow when they are expanded. These stacks are stored in two data areas: one holding the global and local stacks; another one holding the choicepoint and trail stacks. In addition, both data areas hold some memory reserved for the garbage collector.

The sizes of the two data areas are constrained to take certain discrete values only. The initial size as well as the size after expansion is constrained to be *w*((1+g)^n)* kilobytes, rounded up to an integral number of words, where *w* is the word length in bits, *g* is `GROWTHFACTOR`/100, and *n* is an integer.

`PROLOGINITSIZE`
: Controls the size of Prolog's initial memory allocation. **Please note**: This initially allocated memory will be kept by the Prolog process until `SP_deinitialize()` is called or the process exits.

`PROLOGMAXSIZE`
: Defines an upper bound on the amount of memory that Prolog will use. If not set, then Prolog will try to use the available address space. Thus if Prolog needs to allocate memory beyond this bound, then a memory resource error will be raised.

`PROLOGINCSIZE`
: Controls the amount of memory Prolog asks the operating system for in any given memory expansion.

`PROLOGKEEPSIZE`
: Defines a lower bound on the amount of memory retained by `trimcore/0`. By default, Prolog gets memory from the O/S as the user program executes, whereas `trimcore/0` endeavors to return free memory back to the O/S. If the programmer knows that their program, once it has grown to a certain size, then is likely to need as much memory for future computations, they can advise Prolog not to return all the free memory back to the operating system by setting this variable. `trimcore/0` only endeavors to return memory that is allocated above and beyond `PROLOGKEEPSIZE`; the rest will be kept. **Please note**: The initially allocated memory will be kept by the Prolog process forever, so it is not meaningful to set `PROLOGKEEPSIZE` smaller than `PROLOGINITSIZE`.

`SP_ULIMIT_DATA_SEGMENT_SIZE`
: Sets the maximum size of the data segment of the Prolog process. The value can be `unlimited` or a numeric value as described in the first paragraph in this section. A numeric value of zero (0) is equivalent to `unlimited`. Not used under Windows.

`SP_USE_MALLOC`
: If `yes`, then `malloc()` et al. will be used for memory management instead of the default memory allocator. This is sometimes useful, e.g$: with debugging tools like `valgrind`.

  Please note: Enabling `malloc()` allocation is not compatible with JIT compilation.

`SP_JIT` *since release 4.3*
: Affects whether the JIT (Just In Time) compiler should be used to compile Prolog code into native (machine) code. One of:

  `yes` JIT compilation is enabled and happens automatically. This is the default on platforms that support JIT compilation.

`no` JIT compilation is enabled but does not happen automatically. Currently, there is no documented way to JIT compile predicates manually.

`disabled` JIT compilation is disabled completely. Please report if you encounter any reason to disable the JIT compiler.

JIT compilation may need to be disabled on certain security-hardened operating systems, e.g. because they do not permit memory to be both writable and executable.

This system property is ignored on platforms that do not support the JIT compiler.

`SP_JIT_COUNTER_LIMIT` *since release 4.3*

Determines how many times a predicate can be called before it is JIT compiled. The default is 0.

The heuristics used in order to decide when, and whether, a predicate should be JIT compiled, is subject to change without notice. In particular, this system property may be treated differently in some future release.

`SP_JIT_CLAUSE_LIMIT` *since release 4.3*

Sets an upper bound on the number of clauses of a predicate for JIT compilation to be attempted. The default is 1024.

`SP_SPTI_PATH` *since release 4.3*

Specify a plugin that will be told when predicates are JIT compiled. The details of writing or using such plugins are currently not documented, and subject to change without notice.

There are two predefined plugins,

`verbose` Write verbose information when a predicate is JIT compiled. This can be useful when troubleshooting problems with JIT compilation, e.g. if some predicate takes too long to JIT-compile.

This plugin can be activated by passing `-DSP_SPTI_PATH=verbose` to `sicstus`.

`perf`

Tell the Linux perf profiler about the location and name of the JIT compiled predicates. This makes it possible to use `perf record` etc. for getting accurate and low-overhead profiling info about JIT compiled code.

This plugin can be activated either by passing `-DSP_SPTI_PATH=perf` to `sicstus`, or, once SICStus has started, with the goal `use_module(library(perf))`.

The `perf` integration is only available on Linux.

4.17.1.3 Other System Properties

In addition some system properties are read during normal execution. In this case the system property is typically not meant to be explicitly set, instead the value is intended to

be taken from the corresponding environment variable. Examples of such system properties include `PATH` and `HOME`.

5 Debugging

This chapter describes the debugging facilities that are available in development systems. The purpose of these facilities is to provide information concerning the control flow of your program.

The main features of the debugging package are as follows:

- The *Procedure Box* model of Prolog execution, which provides a simple way of visualizing control flow, especially during backtracking. Control flow is viewed at the predicate level, rather than at the level of individual clauses.
- The ability to exhaustively trace your program or to selectively set *spypoints*. Spypoints allow you to nominate interesting predicates at which, for example, the program is to pause so that you can interact.
- The ability to set advice points. An advice point allows you to carry out some actions at certain points of execution, independently of the tracing activity. Advice points can be used, e.g. for checking certain program invariants (cf. the assert facility of the C programming language), or for gathering profiling or branch coverage information. Spypoints and advice points are collectively called breakpoints.
- The wide choice of control and information options available during debugging.

The Procedure Box model of execution is also called the Byrd Box model after its inventor, Lawrence Byrd.

Much of the information in this chapter is also in Chapter eight of [Clocksin & Mellish 81], which is recommended as an introduction.

Unless otherwise stated, the debugger prints goals using `write_term/3` with the value of the Prolog flag `debugger_print_options`.

The debugger is not available in runtime systems and the predicates defined in this chapter are undefined; see Section 6.7.1 [Runtime Systems], page 323.

5.1 The Procedure Box Control Flow Model

During debugging, the debugger prints out a sequence of goals in various states of instantiation in order to show the state the program has reached in its execution. However, in order to understand what is occurring it is necessary to understand when and why the debugger prints out goals. As in other programming languages, key points of interest are predicate entry and return, but in Prolog there is the additional complexity of backtracking. One of the major confusions that novice Prolog programmers have to face is the question of what actually happens when a goal fails and the system suddenly starts backtracking. The Procedure Box model of Prolog execution views program control flow in terms of movement about the program text. This model provides a basis for the debugging mechanism in development systems, and enables the user to view the behavior of the program in a consistent way.

Let us look at an example Prolog predicate :

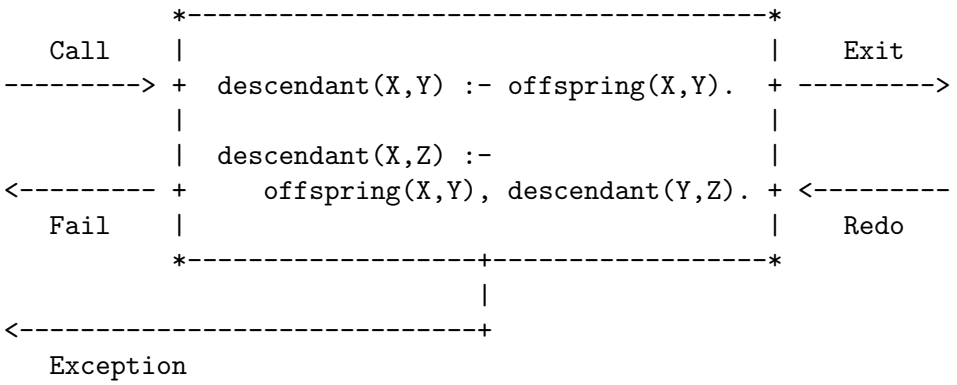

The first clause states that Y is a descendant of X if Y is an offspring of X, and the second clause states that Z is a descendant of X if Y is an offspring of X and if Z is a descendant of Y. In the diagram a box has been drawn around the whole predicate and labeled arrows indicate the control flow in and out of this box. There are five such arrows, which we shall look at in turn.

Call This arrow represents initial invocation of the predicate. When a goal of the form `descendant(X,Y)` is required to be satisfied, control passes through the *Call* port of the descendant box with the intention of matching a component clause and then satisfying the subgoals in the body of that clause. Note that this is independent of whether such a match is possible; i.e. first the box is called, and then the attempt to match takes place. Textually we can imagine moving to the code for descendant when meeting a call to descendant in some other part of the code.

Exit This arrow represents a successful return from the predicate. This occurs when the initial goal has been unified with one of the component clauses and the subgoals have been satisfied. Control now passes out of the *Exit* port of the descendant box. Textually we stop following the code for descendant and go back to the place we came from.

Redo This arrow indicates that a subsequent goal has failed and that the system is backtracking in an attempt to find alternatives to previous solutions. Control passes through the *Redo* port of the descendant box. An attempt will now be made to resatisfy one of the component subgoals in the body of the clause that last succeeded; or, if that fails, to completely rematch the original goal with an alternative clause and then try to satisfy any subgoals in the body of this new clause. Textually we follow the code backwards up the way we came looking for new ways of succeeding, possibly dropping down on to another clause and following that if necessary.

Fail This arrow represents a failure of the initial goal, which might occur if no clause is matched, or if subgoals are never satisfied, or if any solution produced is always rejected by later processing. Control now passes out of the *Fail* port of the descendant box and the system continues to backtrack. Textually we move back to the code that called this predicate and keep moving backwards up the code looking for choicepoints.

Exception This arrow represents an exception that was raised in the initial goal, either by a call to `throw/1` or `raise_exception/1` or by an error in a built-in predicate. See Section 4.15 [ref-ere], page 201. Control now passes out of the *Exception* port of the descendant box and the system continues to pass the exception to outer levels. Textually we move back to the code that called this predicate and keep moving backwards up the code looking for a call to `catch/3` or `on_exception/3`.

In terms of this model, the information we get about the procedure box is only the control flow through these five ports. This means that at this level we are not concerned with identifying the matching clause, and how any subgoals are satisfied, but rather we only wish to know the initial goal and the final outcome. However, it can be seen that whenever we are trying to satisfy subgoals, what we are actually doing is passing through the ports of *their* respective boxes. If we were to follow this, then we would have complete information about the control flow inside the procedure box.

Note that the box we have drawn round the predicate should really be seen as an *invocation box*. That is, there will be a different box for each different invocation of the predicate. Obviously, with something like a recursive predicate, there will be many different *Calls* and *Exits* in the control flow, but these will be for different invocations. Since this might get confusing each invocation box is given a unique integer identifier.

In addition to the five basic ports discussed above, there are two more ports for invocations involving a blocked goal:

Block This port is passed through when a goal is blocked.

Unblock This port is passed through when a previously blocked goal is unblocked.

5.2 Basic Debugging Predicates

Development systems provide a range of built-in predicates for control of the debugging facilities. The most basic predicates are as follows:

`debug` *development*

Switches the debugger on, and ensures that the next time control reaches a spypoint, it will be activated. In basic usage this means that a message will be produced and you will be prompted for a command. In order for the full range of control flow information to be available it is necessary to have the debugger on from the start. When it is off the system does not remember invocations that are being executed. (This is because it is expensive and not required for normal running of programs.) You can switch *Debug Mode* on in the middle of execution, either from within your program or after a `^C` (see `trace/0` below), but information prior to this will be unavailable. See Section 11.3.60 [mpg-ref-debug], page 1042.

`zip` *development*

Same as `debug/0`, except no debugging information is being collected, and so is almost as fast as running with the debugger switched off. See Section 11.3.256 [mpg-ref-zip], page 1293.

`trace` *development*

Switches the debugger on, and ensures that the next time control enters an invocation box, a message will be produced and you will be prompted for a command. The effect of `trace/0` can also be achieved by typing `t` after a `^C` interruption of a program.

At this point you have a number of options. See Section 5.5 [Debug Commands], page 241. In particular, you can just type `RET` to creep (or single-step) into your program. If you continue to creep through your program, then you will see every entry and exit to/from every invocation box, including compiled code, except for code belonging to hidden modules (see Section 4.11 [ref-mod], page 165). You will notice that the debugger stops at all ports. However, if this is not what you want, then the next predicate gives full control over the ports at which you are prompted. See Section 11.3.238 [mpg-ref-trace], page 1270.

`leash(+`*Mode*`)` *development*

Leashing Mode is set to *Mode*. Leashing Mode determines the ports of invocation boxes at which you are to be prompted when you creep through your program. At unleashed ports a tracing message is still output, but program execution does not stop to allow user interaction. Note that `leash/1` does not apply to spypoints, the leashing mode of these can be set using the advanced debugger features; see Section 5.6 [Advanced Debugging], page 247. Block and Unblock ports cannot be leashed. *Mode* can be a subset of the following, specified as a list of the following:

`call` Prompt on Call.

`exit` Prompt on Exit.

`redo` Prompt on Redo.

`fail` Prompt on Fail.

`exception`
Prompt on Exception.

The following shorthands are also allowed:

`leash(all)`
Same as `leash([exception,call,exit,redo,fail])`.

`leash(half)`
Same as `leash([exception,call,redo])`.

`leash(loose)`
Same as `leash([exception,call])`.

`leash(tight)`
Same as `leash([exception,call,redo,fail])`.

`leash(off)`
: Same as `leash([])`.

The initial value of *Leashing Mode* is `[call,exit,redo,fail,exception]` (full leashing). See Section 11.3.110 [mpg-ref-leash], page 1106.

`nodebug` *development*
`notrace` *development*
`nozip` *development*
: Switches the debugger off. Any spypoints set will be kept but will never be activated.

`debugging` *development*
: Prints information about the current debugging state. This will show:

1. Whether undefined predicates are being trapped.
2. What breakpoints have been set (see below).
3. What mode of leashing is in force (see above).

See Section 11.3.62 [mpg-ref-debugging], page 1044.

5.3 Plain Spypoints

For programs of any size, it is clearly impractical to creep through the entire program. Spypoints make it possible to stop the program whenever it gets to a particular predicate of interest. Once there, one can set further spypoints in order to catch the control flow a bit further on, or one can start creeping.

In this section we discuss the simplest form of spypoints, the *plain spypoints*. The more advanced forms, the *conditional* and *generic spypoints* will be discussed later; see Section 5.6 [Advanced Debugging], page 247.

Setting a plain spypoint on a predicate indicates that you wish to see all control flow through the various ports of its invocation boxes, except during skips. When control passes through any port of an invocation box with a spypoint set on it, a message is output and the user is asked to interact. Note that the current mode of leashing does not affect plain spypoints: user interaction is requested on *every* port.

Spypoints are set and removed by the following built-in predicates. The first two are also standard operators:

`spy` *:Spec* *development*
: Sets plain spypoints on all the predicates given by the generalized predicate specification *Spec*.

Examples:

```
| ?- spy [user:p, m:q/2, m:q/3].
| ?- spy m:[p/1, q/1].
```

If you set some spypoints when the debugger is switched off, then it will be automatically switched on, entering zip mode. See Section 11.3.217 [mpg-ref-spy], page 1243.

`nospy` *:Spec* *development*

Similar to `spy` *Spec* except that all the predicates given by *Spec* will have all previously set spypoints removed from them (including conditional spypoints; see Section 5.6.1 [Creating Breakpoints], page 247). See Section 11.3.132 [mpg-ref-nospy], page 1137.

`nospyall` *development*

Removes all the spypoints that have been set, including the conditional and generic ones. See Section 11.3.133 [mpg-ref-nospyall], page 1138.

The commands available when you arrive at a spypoint are described later. See Section 5.5 [Debug Commands], page 241.

5.4 Format of Debugging Messages

We shall now look at the exact format of the message output by the system at a port. All trace messages are output to the standard error stream, using the `print_message/2` predicate; see Section 4.16 [ref-msg], page 216. This allows you to trace programs while they are performing file I/O. The basic format is as follows:

```
N S    23     F6 Call: T foo(hello,there,_123) ?
```

N is only used at Exit ports and indicates whether the invocation could backtrack and find alternative solutions. Unintended nondeterminacy is a source of inefficiency, and this annotation can help spot such efficiency bugs. It is printed as '`?`', indicating that `foo/3` could backtrack and find alternative solutions, or ' ' otherwise.

S is a spypoint indicator. If there is a plain spypoint on `foo/3`, then it is printed as '`+`'. In case of conditional and generic spypoints it takes the form '`*`' and '`#`', respectively. Finally, it is printed as ' ', if there is no spypoint on the predicate being traced.

The first number is the unique invocation identifier. It is increasing regardless of whether or not debugging messages are output for the invocations (provided that the debugger is switched on). This number can be used to cross correlate the trace messages for the various ports, since it is unique for every invocation. It will also give an indication of the number of procedure calls made since the start of the execution. The invocation counter starts again for every fresh execution of a command, and it is also reset when retries (see later) are performed.

Just before the second number is an optional *frame marker*, printed as '`@`' if present. This marks the location of the current frame, the meaning of which is explained in the next section.

The second number is the *current depth*; i.e. the number of direct ancestors this goal has, for which a procedure box has been built by the debugger.

The next word specifies the particular port (Call, Exit, Redo, Fail, or Exception).

T is a subterm trace. This is used in conjunction with the '`^`' command (set subterm), described below. If a subterm has been selected, then *T* is printed as the sequence of

commands used to select the subterm. Normally, however, *T* is printed as ‘ ’, indicating that no subterm has been selected.

The goal is then printed so that you can inspect its current instantiation state.

The final ‘`?`’ is the prompt indicating that you should type in one of the commands allowed (see Section 5.5 [Debug Commands], page 241). If this particular port is unleashed, then you will not get this prompt since you have specified that you do not wish to interact at this point.

At Exception ports, the trace message is preceded by a message about the pending exception, formatted as if it would arrive uncaught at the top level.

Note that calls that are compiled inline are not traced.

Block and Unblock ports are exceptions to the above debugger message format. A message

```
S -  -  Block: p(_133)
```

indicates that the debugger has encountered a blocked goal, i.e. one which is temporarily suspended due to insufficiently instantiated arguments (see Section 4.2.4 [ref-sem-sec], page 78). By default, no interaction takes place at this point, and the debugger simply proceeds to the next goal in the execution stream. The suspended goal will be eligible for execution once the blocking condition ceases to exist, at which time a message

```
S -  -  Unblock: p(_133)
```

is printed. Although Block and Unblock ports are unleashed by default in trace mode, you can make the debugger interact at these ports by using conditional spypoints.

5.5 Commands Available during Debugging

This section describes the particular commands that are available when the system prompts you after printing out a debugging message. All the commands are one or two letter mnemonics, among which some can be optionally followed by an argument. They are read from the standard input stream with any blanks being completely ignored up to the end of the line (`RET`).

While you are typing commands at a given port, the debugger maintains a notion of *current frame* of the ancestor stack. The “current goal”, referred to by many commands, is the goal of the current frame. The current frame is initially at the bottom of the ancestor stack, but can be moved by certain commands. If the current frame is above the bottom of the stack, then the port indicator, displayed in front of the current goal, is replaced by the word Ancestor.

The only command that you really have to remember is ‘`h`’ (followed by `RET`). This provides help in the form of the following list of available commands.

```
RET   creep            c      creep
l     leap             z      zip
s     skip             s <i>  skip i
o     out              o <n>  out n
q     q-skip           q <i>  q-skip i
r     retry            r <i>  retry i
f     fail             f <i>  fail i
j<p>  jump to port     j<p><i>jump to port i
d     display          w      write
p     print            p <n>  print partial
g     ancestors        g <n>  ancestors n
t     backtrace        t <n>  backtrace n
[     frame up         ]      frame down
[ <i> frame i          ] <i>  frame i
v     variables        v <i>  variables i
&     blocked goals    & <n>  nth blocked goal
n     nodebug          =      debugging
+     spy this         *      spy conditionally
-     nospy this       \ <i>  remove brkpoint
D <i> disable brkpoint E <i>  enable brkpoint
a     abort            b      break
@     command          u      unify
e     raise exception  .      find this
<     reset printdepth < <n>  set printdepth
^     reset subterm    ^ <n>  set subterm
?     help             h      help
```

c
RET
: *creep* causes the debugger to single-step to the very next port and print a message. Then if the port is leashed (see Section 5.2 [Basic Debug], page 237), then the user is prompted for further interaction. Otherwise, it continues creeping. If leashing is off, then creep is the same as *leap* (see below) except that a complete trace is printed on the standard error stream.

l
: *leap* causes the debugger to resume running your program, only stopping when a spypoint is reached (or when the program terminates). Leaping can thus be used to follow the execution at a higher level than exhaustive tracing. All you need to do is to set spypoints on an evenly spread set of pertinent predicates, and then follow the control flow through these by leaping from one to the other. Debugging information is collected while leaping, so when a spypoint is reached, it is possible to inspect the ancestor goals, or creep into them upon entry to Redo ports.

z
: *zip* is like *leap*, except no debugging information is being collected while zipping, resulting in significant savings in memory and execution time.

s
: *skip* is only valid for Call and Redo ports. It skips over the entire execution of the predicate. That is, you will not see anything until control comes back to this predicate (at either the Exit port or the Fail port). Skip is particularly

useful while creeping since it guarantees that control will be returned after the (possibly complex) execution within the box. If you skip, then no message at all will appear until control returns. This includes calls to predicates with spypoints set; they will be masked out during the skip. No debugging information is being collected while skipping.

If you supply an integer argument, then this should denote an invocation number of an ancestral goal. The system tries to get you to the Exit or Fail port of the invocation box you have specified.

`o` *out* is a shorthand for skipping to the Exit or Fail port of the immediate ancestor goal. If you supply an integer argument *n*, then it denotes skipping to the Exit or Fail port of the *n*th ancestor goal.

`q` *quasi-skip* is like a combination of *zip* and *skip*: execution stops when either control comes back to this predicate, or a spypoint is reached. No debugging information is being collected while quasi-skipping.

An integer argument can be supplied as for *skip*.

`r` *retry* can be used at any port (although at the Call port it has no effect). It transfers control back to the Call port of the box. This allows you to restart an invocation when, for example, you find yourself leaving with some weird result. The state of execution is exactly the same as when you originally called, (unless you use side effects in your program; i.e. asserts etc. will not be undone). When a retry is performed the invocation counter is reset so that counting will continue from the current invocation number regardless of what happened before the retry. This is in accord with the fact that you have, in executional terms, returned to the state before anything else was called.

If you supply an integer argument, then it should denote an invocation number of an ancestral goal. The system tries to get you to the Call port of the box you have specified. It does this by continuously failing until it reaches the right place. Unfortunately this process cannot be guaranteed: it may be the case that the invocation you are looking for has been cut out of the search space by cuts (`!`) in your program. In this case the system fails to the latest surviving Call port before the correct one.

`f` *fail* can be used at any of the four ports (although at the Fail port it has no effect). It transfers control to the Fail port of the box, forcing the invocation to fail prematurely.

If you supply an integer after the command, then it is taken as specifying an invocation number and the system tries to get you to the Fail port of the invocation box you have specified. It does this by continuously failing until it reaches the right place. Unfortunately this process cannot be guaranteed: it may be the case that the invocation you are looking for has been cut out of the search space by cuts (`!`) in your program. In this case the system fails to the latest surviving Fail port before the correct one.

`j<p>` *jump to port* transfers control back to the prescribed port `<p>`. Here, `<p>` is one of: '`c`', '`e`', '`r`', '`f`', standing for Call, Exit, Redo and Fail ports. Takes an optional integer argument, an invocation number.

Jumping to a Call port is the same as retrying it, i.e. '`jc`' is the same as the '`r`' debugger command; and similarly '`jf`' is the same as '`f`'.

The '`je`' *jump to Exit port* command transfers control back to the Exit port of the box. It can be used at a Redo or an Exit port (although at the latter it has no effect). This allows you to restart a computation following an Exit port, which you first leapt over, but because of its unexpected failure you arrived at the Redo port. If you supply an integer argument, then it should denote an *exact* invocation number of an exited invocation present in the backtrace, and then the system will get you to the specified Exit port. The debugger requires here an exact invocation number so that it does not jump too far back in the execution (if an Exit port is not present in the backtrace, it may be be a better choice to jump to the preceding Call port, rather than to continue looking for another Exit port).

The '`jr`' *jump to Redo port* command transfers control back to the Redo port of the box. It can be used at an Exit or a Redo port (although at the latter it has no effect). This allows you to force the goal in question to try to deliver another solution. If you supply an integer argument, then it should denote an *exact* invocation number of an exited invocation present in the backtrace, and then the system will get you to the specified Redo port.

`d` *display goal* displays the current goal using `display/1`. See Write (below).

`p` *print goal* displays the current goal using `print/1`. An argument will override the default printdepth, treating 0 as infinity.

`w` *write goal* displays the current goal using `writeq/1`.

`g` *print ancestor goals* provides you with a list of ancestors to the current goal, i.e. all goals that are hierarchically above the current goal in the calling sequence. You can always be sure of jumping to the Call or Fail port of any goal in the ancestor list (by using retry etc). If you supply an integer *n*, then only that number of ancestors will be printed. That is to say, the last *n* ancestors will be printed counting back from the current goal. Each entry is displayed just as they would be in a trace message, except the current frame is indicated by a `@` in front of the invocation number.

`t` *print backtrace* is the same as the above, but also shows any goals that have exited nondeterminately and their ancestors. This information shows where there are outstanding choices that the program could backtrack to. If you supply an integer *n*, then only that number of goals will be printed.

Ancestors to the current goal are annotated with the '`Call:`' port, as they have not yet exited, whereas goals that have exited are annotated with the '`Exit:`' port. You can always be sure of jumping to the Exit or Redo port of any goal shown to be exited in the backtrace listing.

The backtrace is a tree rather than a stack: to find the parent of a given goal with depth indicator *d*, look for the closest goal above it with depth indicator *d-1*.

`[` *since release 4.2*

frame up: moves the frame up one step. If you supply an argument, then it should denote an invocation number of an existing goal.

`]` *since release 4.2*

frame down: moves the frame down one step. If you supply an argument, then it should denote an invocation number of an existing goal.

`v` *since release 4.2*

print variable bindings endeavors to print the variable bindings of the clause containing the current goal. This is available for both compiled and interpreted code, if the source code was originally loaded with the `source_info` Prolog flag switched on. The coverage is usually better for compiled code. If you supply an argument, then it should denote an invocation number of an existing goal.

Just like the top level, the debugger displays variable bindings as well as any goals that are blocked on a variable found among those bindings, and prompts for the same one-letter commands as the top level does; see Section 3.4.1 [Queries], page 25. To return to the debugger, simply type *`RET`*.

`&` *print blocked goals* prints a list of the goals that are currently blocked in the current debugging session together with the variable that each such goal is blocked on (see Section 4.2.4 [ref-sem-sec], page 78). The goals are enumerated from 1 and up. If you supply an integer *n*, then only that goal will be printed. Each entry is preceded by the goal number followed by the variable name.

`n` *nodebug* switches the debugger off. Note that this is the correct way to switch debugging off at a trace point. You cannot use the `@` or `b` commands because they always return to the debugger.

`=` *debugging* outputs information concerning the status of the debugging package. See the built-in predicate `debugging/0`.

`+` *spy this* sets a plain spypoint on the current goal.

`*` *spy this conditionally* sets a conditional spypoint on the current goal. Prompts for the *Conditions*, and calls the

```
spy(Func, Conditions)
```

goal, where *Func* is the predicate specification of the current invocation. For `spy/2`, see Section 5.7 [Breakpoint Predicates], page 276.

`-` *nospy this* removes all spypoints applicable to the current goal. Equivalent to `nospy` *`Func`*, where *Func* is the predicate specification of the current invocation.

`\` *remove this* removes the spypoint that caused the debugger to interact at the current port. With an argument *n*, it removes the breakpoint with identifier *n*. Equivalent to `remove_breakpoints(`*`BID`*`)`, where *BID* is the current breakpoint identifier, or the supplied argument (see Section 5.7 [Breakpoint Predicates], page 276).

`D` *disable this* disables the spypoint that caused the debugger to interact at the current port. With an argument *n*, it disables the breakpoint with identifier *n*. Equivalent to `disable_breakpoints(`*`BID`*`)`, where *BID* is the current

breakpoint identifier, or the supplied argument (see Section 5.7 [Breakpoint Predicates], page 276).

`E` *enable this* enables all specific spypoints for the predicate at the current port. With an argument *n*, it enables the breakpoint with identifier *n*. Equivalent to `enable_breakpoints(`*BID*`)`, where *BID* is the breakpoint identifiers for the current predicate, or the supplied argument (see Section 5.7 [Breakpoint Predicates], page 276).

`.` *find this* outputs information about where the predicate being called is defined.

`a` *abort* causes an abort of the current execution. All the execution states built so far are destroyed and you are put right back at the top level. (This is the same as the built-in predicate `abort/0`.)

`b` *break* calls the built-in predicate `break/0`, thus putting you at a recursive top level with the execution so far sitting underneath you. When you end the break (`^D`) you will be reprompted at the port at which you broke. The new execution is completely separate from the suspended one; the invocation numbers will start again from 1 during the break. The debugger is temporarily switched off as you call the break and will be re-switched on when you finish the break and go back to the old execution. However, any changes to the leashing or to spypoints will remain in effect.

`@` *command* gives you the ability to call arbitrary Prolog goals. It is effectively a one-off *break* (see above). The initial message '`| :- `' will be output on the standard error stream, and a command is then read from the standard input stream and executed as if you were at top level. If the term read is of form *Pattern* `^` *Body*, then *Pattern* is unified with the current goal and *Body* is executed. **Please note**:

1. If *Body* is compound, then it should be parenthesized.
2. If the current goal has a module qualifier, then *Pattern* should not include the module qualifier.

`u` *unify* is available at the Call port and gives you the option of providing a solution to the goal from the standard input stream rather than executing the goal. This is convenient e.g. for providing a "stub" for a predicate that has not yet been written. A prompt will be output on the standard error stream, and the solution is then read from the standard input stream and unified with the goal. If the term read in is of the form *Head* `:-` *Body*, then *Head* will be unified with the current goal, and *Body* will be executed in its place.

`e` *raise exception* is available at all ports. A prompt will be output on the standard error stream, and an exception term is then read from the standard input stream and raised in the program being debugged.

`<` This command, without arguments, resets the printdepth to 10. With an argument of *n*, the printdepth is set to *n*, treating 0 as infinity. This command works by changing the value of the `debugger_print_options` Prolog flag.

`^` While at a particular port, a current *subterm* of the current goal is maintained. It is the current subterm that is displayed, printed, or written when prompting for a debugger command. Used in combination with the printdepth, this provides a means for navigating in the current goal for focusing on the part of interest. The current subterm is set to the current goal when arriving at a new port. This command, without arguments, resets the current subterm to the current goal. With an argument of *n* (`>` 0), the current subterm is replaced by its *n*:th subterm. With an argument of 0, the current subterm is replaced by its parent term. With multiple arguments separated by whitespace, the arguments are applied from left to right.

`?`
`h` *help* displays the table of commands given above.

The user can define new debugger commands or modify the behavior of the above ones using the `user:debugger_command_hook/2` hook predicate, see Section 5.7 [Breakpoint Predicates], page 276.

5.6 Advanced Debugging — an Introduction

This section gives an overview of the advanced debugger features. These center around the notion of breakpoint. Breakpoints can be classified as either spypoints (a generalization of the plain spypoint introduced earlier) or advice points (e.g. for checking program invariants independently from tracing). The first five subsections will deal with spypoints only. Nevertheless we will use the term breakpoint, whenever a statement is made that applies to both spypoints and advice points.

Section 5.8 [Breakpoint Processing], page 279, describes the breakpoint processing mechanism in full detail. Reference style details of built-in predicates dealing with breakpoints are given in Section 5.7 [Breakpoint Predicates], page 276, and in Section 5.9 [Breakpoint Conditions], page 281.

5.6.1 Creating Breakpoints

Breakpoints can be created using the `add_breakpoint/2` built-in predicate. Its first argument should contain the description of the breakpoint, the so called *breakpoint specification*. It will return the *breakpoint identifier* (BID) of the created breakpoint in its second argument. For example:

```
| ?- add_breakpoint(pred(foo/2), BID).
% Plain spypoint for user:foo/2 added, BID=1
BID = 1
```

Here, we have a simple breakpoint specification, prescribing that the debugger should stop at all ports of all invocations of the predicate `foo/2`. Thus the above goal actually creates a *plain spypoint*, exactly as `?- spy foo/2.` does.

A slightly more complicated example follows:

```
| ?- add_breakpoint([pred(foo/2),line('/myhome/bar.pl',123)], _).
% Conditional spypoint for user:foo/2 added, BID=1
```

This breakpoint will be activated only for those calls of `foo/2` that occur in line 123 of the Prolog program file `'/myhome/bar.pl'`. Because of the additional condition, this is called a *conditional spypoint*.

The breakpoint identifier (BID) returned by `add_breakpoint/2` is an integer, assigned in increasing order, i.e. more recent breakpoints receive higher identifier values. When looking for applicable breakpoints, the debugger tries the breakpoints in descending order of BIDs, i.e. the most recent applicable breakpoint is used. Breakpoint identifiers can be used for referring to breakpoints to be deleted, disabled or enabled (see later).

Generally, the breakpoint specification is a pair *`Tests-Actions`*. Here, the *Tests* part describes the conditions under which the breakpoint should be activated, while the *Actions* part contains instructions on what should be done at activation. The test part is built from tests, while the action part from actions and tests. Test, actions and composite constructs built from these are generally referred to as *breakpoint conditions*, or simply conditions.

The action part can be omitted, and then the breakpoint specification consists of tests only. For spypoints, the default action part is `[show(print),command(ask)]`. This instructs the debugger to print the goal in question and then ask the user what to do next, exactly as described in Section 5.4 [Debug Format], page 240. To illustrate other possibilities let us explain the effect of the `[show(display),command(proceed)]` action part: this will use `display/1` for presenting the goal (just as the '`d`' debugger command does, see Section 5.5 [Debug Commands], page 241), and will then proceed with execution without stopping (i.e. the spypoint is unleashed).

5.6.2 Processing Breakpoints

We first give a somewhat simplified sketch of how the debugger treats the breakpoints. This description will be refined in the sequel.

The debugger allows us to prescribe some activities to be performed at certain points of execution, namely at the ports of procedure boxes. In principle, the debugger is entered at each port of each procedure invocation. It then considers the current breakpoints one by one, most recent first. The first breakpoint for which the evaluation of the test part succeeds is then activated, and the execution continues according to its action part. The activated breakpoint "hides" the remaining (older) ones, i.e. those are not tried here. If none of the current breakpoints is activated, then the debugger behaves according to the actual debugging mode (trace, debug or zip).

Both the test and the action part can be simple or composite. Evaluating a simple test amounts to checking whether it holds in the current state of execution, e.g. `pred(foo/2)` holds if the debugger is at a port of predicate `foo/2`.

Composite conditions can be built from simple ones by forming lists, or using the '`,`', '`;`', '`->`', and '`\+`' operators, with the usual meaning of conjunction, disjunction, if-then-else and negation. A list of conditions is equivalent to a conjunction of the same conditions.

For example, the condition `[pred(foo/2), \+port(fail)]` will hold for all ports of `foo/2`, except for the Fail port.

5.6.3 Breakpoint Tests

This section gives a tour of the most important simple breakpoint tests. In all examples here the action part will be empty. Note that the examples are independent, so if you want to try out these, then you should get rid of the old breakpoints (e.g. using `?- nospyall.`) before you enter a new one.

The `goal(...)` test is a generalization of the `pred(...)` test, as it allows us to check the arguments of the invocation. For example:

```
| ?- add_breakpoint(goal(foo(1,_)), _).
% Conditional spypoint for user:foo/2 added, BID=1
```

The `goal(G)` breakpoint test specifies that the breakpoint should be applied only if the current goal is an instance of `G`, i.e. `G` and the current goal can be unified without substituting any variables in the latter. This unification is then carried out. The `goal(G)` condition is thus equivalent to the `subsumes(G,CurrentGoal)` test (`subsumes/2` is defined in `library(terms)`, see Section 10.47 [lib-terms], page 902).

In the above example the debugger will stop if `foo/2` is called with `1` as its first argument, but not if the first argument is, say, `2`, nor if it is a variable.

You can use non-anonymous variables in the `goal` test, and then put further constraints on these variables using the `true` condition:

```
| ?- add_breakpoint([goal(foo(X,_)),true(X>1)], _).
% Conditional spypoint for user:foo/2 added, BID=1
```

Here the first test, `goal`, specifies that we are only interested in invocations of `foo/2`, and names the first argument of the goal as `X`. The second, the `true/1` test, specifies a further condition stated as a Prolog goal: `X` is greater than `1` (we assume here that the argument is numeric). Thus this breakpoint will be applicable if and only if the first argument of `foo/2` is *greater* than `1`. Generally, an arbitrary Prolog goal can be placed inside the `true` test: the test will succeed if and only if the goal completes successfully.

Any variable instantiations in the test part will be undone before executing the action part, as the evaluation of the test part is enclosed in a double negation (`\+ \+ (...)`). This ensures that the test part has no effect on the variables of the current goal.

Both the `pred` and the `goal` tests may include a module name. In fact, the first argument of `add_breakpoint` is module name expanded, and the (explicit or implicit) module name of this argument is then inherited by default by the `pred`, `goal`, and `true` tests. Notice the module qualification inserted in front of the breakpoint specification of the last example, as shown in the output of the `debugging/0` built-in predicate:

```
| ?- debugging.
(...)
Breakpoints:
      1 *  user:foo/2 if user:[goal(foo(A,B)),true(A>1)]
```

As no explicit module qualifications were given in the tests, this breakpoint specification is transformed to the following form:

```
[goal(user:foo(A,B)),true(user:(A>1))]
```

For exported predicates, a `pred` or `goal` test will be found applicable for all invocations of the predicate, irrespective of the module the call occurs in. When you add the breakpoint you can use the defining or an importing module name, but this information is not remembered: the module name is "normalized", i.e. it is changed to the defining module. The example below shows this: although the spypoint is placed on `user:append`, the message and the breakpoint list both mention `lists:append`.

```
| ?- use_module(library(lists)).
(...)
% module lists imported into user
(...)
| ?- spy user:append.
% Plain spypoint for lists:append/3 added, BID=1
| ?- debugging.
(...)
Breakpoints:
      1 +  lists:append/3
```

Note that the debugger does not stop inside a library predicate when doing an exhaustive trace. This is because the library modules are declared hidden (see Section 4.11 [ref-mod], page 165), and no trace is produced for calls inside hidden modules that invoke predicates defined in hidden modules. However, a spypoint is always shown in the trace, even if it occurs in a hidden module:

```
 +      1      1 Call: append([1,2],[3,4],_531) ? RET
 +      2      2 Call: lists:append([2],[3,4],_1182) ? RET
 +      3      3 Call: lists:append([],[3,4],_1670) ? RET
 +      3      3 Exit: lists:append([],[3,4],[3,4]) ? RET
(...)
```

You can narrow a breakpoint to calls from within a particular module by using the `module` test, e.g.

```
| ?- add_breakpoint([pred(append/3),module(user)], _).
% The debugger will first zip -- showing spypoints (zip)
% Conditional spypoint for lists:append/3 added, BID=1
% zip
| ?- append([1,2], [3,4], L).
 *      1      1 Call: append([1,2],[3,4],_531) ? RET
 *      1      1 Exit: append([1,2],[3,4],[1,2,3,4]) ? RET
L = [1,2,3,4]
```

With this spypoint, the debugger will only stop at the invocations of `append/3` from the `user` module.

Note that calling module information is not kept by the compiler for the built-in predicates, therefore the `module` test will always unify its argument with `prolog` in case of compiled calls to built-in predicates.

There are two further interesting breakpoint tests related to invocations: `inv(Inv)` and `depth(Depth)`. These unify their arguments with the invocation number and the depth, respectively (the two numbers shown at the beginning of each trace message). Such tests are most often used in more complex breakpoints, but there may be some simple cases when they are useful.

Assume you put a plain spypoint on `foo/2`, and start leaping through your program. After some time, you notice some inconsistency at an Exit port, but you cannot go back to the Call port for retrying this invocation, because of side effects. So you would like to restart the whole top-level goal and get back to the Call port of the suspicious goal as fast as possible. Here is what you can do:

```
| ?- spy foo/2.
% Plain spypoint for user:foo/2 added, BID=1
| ?- debug, foo(23, X).
% The debugger will first leap -- showing spypoints (debug)
 +      1      1 Call: foo(23,_414) ? l
(...)
 +     81     17 Call: foo(7,_9151) ? l
 +     86     18 Call: foo(6,_9651) ? l
 +     86     18 Exit: foo(6,8) ? -
% Plain spypoint for user:foo/2, BID=1, removed (last)
       86     18 Exit: foo(6,8) ? *
Placing spypoint on user:foo/2 with conditions: inv(86).
% Conditional spypoint for user:foo/2 added, BID=1
 *     86     18 Exit: foo(6,8) ? a
% Execution aborted
% source_info
| ?- debug, foo(23, X).
% The debugger will first leap -- showing spypoints (debug)
 *     86     18 Call: foo(6,_2480) ? RET
```

When you reach the Exit port of the suspicious invocation (number 86), you remove the plain spypoint (via the `-` debugger command), and add a conditional one using the '`*`' debugger command. This automatically includes `pred(foo/2)` among the conditions and displays the prompt '`Placing spypoint ... with conditions:`', requesting further ones. You enter here the `inv` test with the invocation number in question, resulting in a breakpoint with the `[pred(foo/2),inv(86)]` conditions. If you restart the original top-level goal in debug mode, then the debugger immediately positions you at the invocation with the specified number.

Note that when the debugger executes a *skip* or a *zip* command, no procedure boxes are built. Consequently, the invocation and depth counters are not incremented. If *skip* and/or *zip* commands were used during the first execution, then the suspicious invocation gets an invocation number higher than 86 in the second run. Therefore it is better to supply the `inv(I),true(I>=86)` condition to the '`*`' debugger command, which will bring you to the first call of `foo/2` at, or after invocation number 86 (which still might not be the suspicious invocation).

In the examples, the `inv` test was used both with a numeric and a variable argument (`inv(86)` and `inv(I)`). This is possible because the debugger *unifies* the given feature with the argument of the test. This holds for most tests, we will mention the exceptions.

Another similar example: if you suspect that a given predicate goes into an infinite recursion, and would like the execution to stop when entering this predicate somewhere inside the recursion, then you can do the following:

```
| ?- add_breakpoint([pred(foo/2),depth(_D),true(_D>=100)], _).
% Conditional spypoint for user:foo/2 added, BID=1
% zip,source_info
| ?- debug, foo(200, X).
% The debugger will first leap -- showing spypoints (debug)
 *    496    100 Call: foo(101,_12156) ?
```

The above breakpoint specification will cause the debugger to stop at the first invocation of `foo/2` at depth 100 or greater. Note again that debug mode has to be entered for this to work (in zip mode no debugging information is kept, so the depth does not change).

We now continue with tests that restrict the breakpoint to an invocation at a specific place in the code.

Assume file `/home/bob/myprog.pl` contains the following Prolog program:

```
                                                % /home/bob/myprog.pl
```

```
p(X, U) :-                              % line 1
        q(X, Y),                        % line 2
        q(Y, Z),                        % line 3
        (   \+ q(Z, _)                  % line 4
        ->  q(Z+1, U)                   % line 5
        ;   q(Z+2, U)                   % line 6
        ).                              % ...

q(X, Y) :-
        X < 10, !, Y is X+1.            % line 10
q(X, Y) :-
        Y is X+2.                       % line 12
```

If you are interested only in the last invocation of `q/2` within `p/2`, then you can use the following breakpoint:

```
| ?- add_breakpoint([pred(q/2),line('/home/bob/myprog.pl',6)], _).
% Conditional spypoint for user:q/2 added, BID=1
```

Generally, the test `line(File,Line)` holds if the current invocation was in line number `Line` of a file whose absolute name is `File`. This test (as well as the `line/1` and `file/1` tests; see below) require the presence of source information: the file in question had to be consulted or compiled with the `source_info` Prolog flag switched on (i.e. set to `on` or `emacs`).

If e.g. `q/2` is called only from a single file, then the file name need not be mentioned and a `line/1` test suffices: `line(6)`. On the other hand, if we are interested in all invocations of a predicate within a file, then we can omit the line number and use the `file(File)` test.

For Prolog programs that are interpreted (consulted or asserted), further positioning information can be obtained, even in the absence of source information. The test `parent_pred(Pred)` unifies the module name expanded `Pred` with a predicate specification (of form *`Module:PredName/Arity`*) identifying the predicate in which the current invocation resides. The test `parent_pred(Pred,N)` will additionally unify `N` with the serial number of the clause containing the current goal.

For example, assuming the above `myprog.pl` file is consulted, the breakpoint below will cause the execution to stop when the call of `is/2` in the second clause of `q/2` is reached:

```
| ?- add_breakpoint([pred(is/2),parent_pred(q/2,2)], _).
% Conditional spypoint for prolog:is/2 added, BID=1
* Predicate prolog:is/2 compiled inline, breakable only in inter-
preted code
% zip,source_info
| ?- p(20, X).
in scope of a goal at line 12 in /home/bob/myprog.pl
 *      1      1 Call: _579 is 20+2 ?
```

Notice the warning issued by `add_breakpoint/2`: there are some built-in predicates (e.g. arithmetic, `functor/3`, `arg/3`, etc.), for which the compiler generates specific inline translation, rather than the generic predicate invocation code. Therefore compiled calls to such predicates are not visible to the debugger.

More exact positioning information can be obtained for interpreted programs by using the `parent_clause(Cl,Sel,I)` test. This unifies `Cl` with the clause containing the current invocation, while `Sel` and `I` both identify the current invocation within the body of this clause. `Sel` is unified with a *subterm selector*, while `I` with the serial number of the call. This test has the variants `parent_clause/[1,2]`, in which only the `Cl` argument, or the `Cl,Sel` arguments are present.

As an example, two further alternatives of putting a breakpoint on the last call of `q/2` within `myprog.pl` (line 6) are shown below, together with a listing showing the selectors and call serial numbers for the body of `p/2`:

```
| ?- add_breakpoint([pred(q/2),parent_clause((p(_,_):-_),[2,2,2])],_).

| ?- add_breakpoint([pred(q/2),parent_clause((p(_,_):-_),_,5)],_).

p(X, U) :-                  % line  % call no.  % subterm selector
        q(X, Y),            %  2        1       [1]
        q(Y, Z),            %  3        2       [2,1]
        (   \+ q(Z, _)      %  4        3       [2,2,1,1,1]
        ->  q(Z+1, U)       %  5        4       [2,2,1,2]
        ;   q(Z+2, U)       %  6        5       [2,2,2]
        ).                  %  7
```

Here, the first argument of the `parent_clause` test ensures that the current invocation is in (the only clause of) `p/2`. If `p/2` had more clauses, then we would have to use an additional test, say `parent_pred(user:p/2,1)`, and then the first argument of `parent_clause` could be an anonymous variable.

In the examples so far the breakpoint tests referred only to the goal in question. Therefore, the breakpoint was found applicable at all ports of the procedure box of the predicate. We can distinguish between ports using the `port` breakpoint test:

```
| ?- add_breakpoint([pred(foo/2),port(call)], _).
```

With this breakpoint, the debugger will stop at the Call port of `foo/2`, but not at other ports. Note that the `port(call)` test can be simplified to `call` — `add_breakpoint/2` will recognize this as a port name, and treat it as if it were enclosed in a `port/1` functor.

Here are two equivalent formulations for a breakpoint that will cause the debugger to stop only at the Call and Exit ports of `foo/2`:

```
| ?- add_breakpoint([pred(foo/2),(call;exit)], _).

| ?-
add_breakpoint([pred(foo/2),port(P),true((P=call;P=exit(_)))], _).
```

In both cases we have to use disjunction. In the first example we have a disjunctive breakpoint condition of the two simple tests `port(call)` and `port(exit)` (with the `port` functor omitted). In the second case the disjunction is inside the Prolog test within the `true` test.

Notice that the two examples refer to the Exit port differently. When you use `port(P)`, where `P` is a variable, then, at an exit port, `P` will be unified with either `exit(nondet)` or `exit(det)`, depending on the determinacy of the exited predicate. However, for convenience, the test `port(exit)` will also succeed at Exit ports. So in the first example above, `exit` can be replaced by `exit(_)`, but the `exit(_)` in the second cannot be replaced by `exit`.

Finally, there is a subtle point to note with respect to activating the debugger at non Call ports. Let us look at the following breakpoint:

```
| ?- add_breakpoint([pred(foo/2),fail], _).
```

The intention here is to have the debugger stop at only the Fail port of `foo/2`. This is very useful if `foo/2` is not supposed to fail, but we suspect that it does. The above breakpoint will behave as expected when the debugger is leaping, but not while zipping. This is because for the debugger to be able to stop at a non Call port, a procedure box has to be built at the Call port of the given invocation. However, no debugging information is collected in zip mode by default, i.e. procedure boxes are not built. Later we will show how to achieve the required effect, even in zip mode.

5.6.4 Specific and Generic Breakpoints

In all the examples so far a breakpoint was put on a specific predicate, described by a `goal` or `pred` test. Such breakpoints are called *specific*, as opposed to *generic* ones.

Generic breakpoints are the ones that do not specify a concrete predicate. This can happen when the breakpoint specification does not contain `goal` or `pred` tests at all, or their argument is not sufficiently instantiated. Here are some examples of generic breakpoints:

```
| ?- add_breakpoint(line('/home/bob/myprog.pl',6), _).
% Generic spypoint added, BID=1
| ?- add_breakpoint(pred(foo/_), _).
% Generic spypoint added, BID=2
| ?- add_breakpoint([goal(G),true((arg(1,G,X),X==bar))], _).
% Generic spypoint added, BID=3
```

The first breakpoint will stop at all calls in line 6 of the given file, the second at all calls of a predicate `foo`, irrespective of the number of arguments, while the third one will stop at any predicate with `bar` as its first argument. However, there is an additional implicit condition: the module name expansion inserts the type-in module as the default module name in the

`goal` and `pred` conditions. Consequently, the second and third breakpoint applies only to predicates in the type-in module (`user` by default). If you would like the breakpoint to cover all modules, then you have to include an anonymous module prefix in the argument of the `goal` or `pred` test:

```
| ?- add_breakpoint(pred(_:foo/_), _).
% Generic spypoint added, BID=1
% zip
| ?- add_breakpoint([goal(_:G),true((arg(1,G,X),X==bar))], _).
% Generic spypoint added, BID=2
```

Generic breakpoints are very powerful, but there is a price to pay: the zip mode is slowed down considerably.

As said earlier, in principle the debugger is entered at each port of each procedure invocation. As an optimization, the debugger can request the underlying Prolog engine to run at full speed and invoke the debugger only when one of the specified predicates is called. This optimization is used in zip mode, provided there are no generic breakpoints. In the presence of generic breakpoints, however, the debugger has to be entered at each call, to check their applicability. Consequently, with generic breakpoints, zip mode execution will not give much speed-up over debug mode, although its space requirements will still be much lower.

It is therefore advisable to give preference to specific breakpoints over generic ones, whenever possible. For example, if your program includes predicates `foo/2` and `foo/3`, then it is much better to create two specific breakpoints, rather than a single generic one with conditions `[pred(foo/_),...]`.

`spy/2` is a built-in predicate that will create specific breakpoints only. Its first argument is a generalized predicate specification, much like in `spy/1`, and the second argument is a breakpoint specification. `spy/2` will expand the first argument to one or more predicate specifications, and for each of these will create a breakpoint, with a `pred` condition added to the *test* part of the supplied breakpoint specifications. For example, in the presence of predicates `foo/2` and `foo/3`

```
| ?- spy(foo/_, file(...))
```

is equivalent to:

```
| ?- add_breakpoint([pred(foo/2),file(...)], _),
     add_breakpoint([pred(foo/3),file(...)], _).
```

Note that with `spy/[1,2]` it is not possible to put a breakpoint on a (yet) undefined predicate. On the other hand, `add_breakpoint/2` is perfectly capable of creating such breakpoints, but warns about them.

5.6.5 Breakpoint Actions

The action part of a breakpoint specification supplies information to the debugger as to what should be done when the breakpoint is activated. This is achieved by setting the

three so called *debugger action variables*. These are listed below, together with their most important values.

- The `show` variable prescribes how the debugged goal should be displayed:

  `print` write the goal according to the `debugger_print_options` Prolog flag.

  `silent` do not display the goal.

- The `command` variable prescribes what the debugger should do:

  `ask` ask the user.

  `proceed` continue the execution without stopping, creating a procedure box for the current goal at the Call port,

  `flit` continue the execution without stopping, without creating a procedure box for the current goal at the Call port.

- The `mode` variable prescribes in what mode the debugger should continue the execution:

  `trace` creeping.

  `debug` leaping.

  `zip` zipping.

  `off` without debugging.

For example, the breakpoint below specifies that whenever the Exit port of `foo/2` is reached, no trace message should be output, no interaction should take place and the debugger should be switched off.

```
| ?- add_breakpoint([pred(foo/2),port(exit)]-
                    [show(silent),command(proceed),mode(off)], _).
```

Here, the action part consists of three actions, setting the three action variables. This breakpoint specification can be simplified by omitting the wrappers around the variable values, as the sets of possible values of the variables are all disjoint. If we use `spy/2`, then the `pred` wrapper goes away, too, resulting in a much more concise, equivalent formulation of the above breakpoint:

```
| ?- spy(foo/2,exit-[silent,proceed,off]).
```

Let us now revisit the process of breakpoint selection. When the debugger arrives at a port it first initializes the action variables according to the current debugging and leashing modes, as shown below:

debugging mode	leashing mode	Action variables: show	command	mode
trace	at leashed port	print	ask	trace
trace	at unleashed port	print	proceed	trace
debug	-	silent	proceed	debug
zip	-	silent	flit	zip

It then considers each breakpoint, most recent first, until it finds a breakpoint whose test part succeeds. If such a breakpoint is found, then its action part is evaluated, normally changing the action variable settings. A failure of the action part is ignored, in the sense that the breakpoint is still treated as the selected one. However, as a side effect, a procedure box will always be built in such cases. More precisely, the failure of the action part causes the `flit` command value to be changed to `proceed`, all other command values being left unchanged. This is to facilitate the creation of breakpoints that stop at non-Call ports (see below for an example).

If no applicable breakpoint is found, then the action variables remain unchanged.

The debugger then executes the actions specified by the action variables. This process, referred to as the *action execution*, means the following:

- The current debugging mode is set to the value of the `mode` action variable.
- A trace message is displayed according to the `show` variable.
- The program continues according to the `command` variable.

Specifically, if `command` is `ask`, then the user is prompted for a debugger command, which in turn is converted to new assignments to the action variables. The debugger will then repeat the action execution process, described above. For example, the '`c`' (creep) interactive command is converted to `[silent,proceed,trace]`, the '`d`' (display) command to `[display,ask]` (when command is `ask`, the mode is irrelevant), etc.

The default values of the action variables correspond to the standard debugger behavior described in Section 5.2 [Basic Debug], page 237. For example, when an unleashed port is reached in trace mode, a trace message is printed and the execution proceeds in trace mode, without stopping. In zip mode, no trace message is shown, and execution continues in zip mode, without building procedure boxes at Call ports.

Note that a spypoint action part that is empty (`[]` or not present) is actually treated as `[print,ask]`. Again, this is the standard behavior of spypoints, as described in Section 5.2 [Basic Debug], page 237.

If an action part is nonempty, but it does not set the action variables, then the only effect it will have is to hide the remaining older spypoints, as the debugger will behave in the

standard way, according to the debugging mode. Still, such breakpoints may be useful if they have side effects, for example:

```
| ?- spy(foo/2, -[parent_pred(P),
                  goal(G),
                  true(format('~q called from:~w~n',[G,P]))]).
% The debugger will first zip -- showing spypoints (zip)
% Conditional spypoint for user:foo/2 added, BID=1
true
% zip
| ?- foo(3,X).
foo(2,_701) called from:bar/3
foo(1,_1108) called from:bar/3
foo(0,_1109) called from:bar/3
foo(1,_702) called from:bar/3
X = 2 ? ;
no
```

This spypoint produces some output at ports of `foo/2`, but otherwise will not influence the debugger. Notice that a breakpoint specification with an empty test part can be written *-Actions*.

Let us look at some simple examples of what other effects can be achieved by appropriate action variable settings:

```
| ?- spy(foo/2, -[print,proceed]).
```

This is an example of an unleashed spypoint: it will print a trace message passing each port of `foo/2`, but will not stop there. Note that because of the `proceed` command a procedure box will be built, even in zip mode, and so the debugger will be activated at non-Call ports of `foo/2`.

The next example is a variant of the above:

```
| ?- spy(foo/2, -[print,flit]).
```

This will print a trace message at the Call port of `foo/2` and will then continue the execution in the current debugging mode, without building a procedure box for this call. This means that the debugger will not be able to notice any other ports of `foo/2`.

Now let us address the task of stopping at a specific non-Call port of a predicate. For this to work in zip mode, one has to ensure that a procedure box is built at the Call port. In the following example, the first spypoint causes a box to be built for each call of `foo/2`, while the second one makes the debugger stop when the Fail port of `foo/2` is reached.

```
| ?- spy(foo/2, call-proceed), spy(foo/2, fail).
% Conditional spypoint for user:foo/2 added, BID=1
% Conditional spypoint for user:foo/2 added, BID=2
```

You can achieve the same effect with a single spypoint, by putting the `fail` condition (which is a shortcut for `port(fail)`) in the *action* part, rather than in the *test* part.

```
| ?- spy(foo/2, -[fail,print,ask]).
```

Here, when the execution reaches the Call port of `foo/2`, the test part (which contains the `pred(foo/2)` condition only) succeeds, so the breakpoint is found applicable. However, the action part fails at the Call port. This has a side effect in zip mode, as the default `flit` command value is changed to `proceed`. In other modes the action variables are unaffected. The net result is that a procedure box is always built for `foo/2`, which means that the debugger will actually reach the Fail port of this predicate. When this happens, the action part succeeds, and executing the actions `print,ask` will cause the debugger to stop.

Note that we have to explicitly mention the `print,ask` actions here, because the action part is otherwise nonempty (contains the `fail` condition). It is only the empty or missing action part, which is replaced by the default `[print,ask]`. If you want to include a condition in the action part, then you have to explicitly mention all action variable settings you need.

To make this simpler, the debugger handles breakpoint condition macros, which expand to other conditions. For example `leash` is a macro that expands to `[print,ask]`. Consequently, the last example can be simplified to:

```
| ?- spy(foo/2, -[fail,leash]).
```

Similarly, the macro `unleash` expands to `[print,proceed]`, while `hide` to `[silent,proceed]`.

We now briefly describe further possible settings to the action variables.

The `mode` variable can be assigned the values `skip(`*Inv*`)` and `qskip(`*Inv*`)`, meaning skipping and quasi-skipping until a port is reached whose invocation number is less or equal to *Inv*. When the debugger arrives at this port it sets the `mode` variable to `trace`.

It may be surprising that `skip(...)` is a mode, rather than a command. This is because commands are executed and immediately forgotten, but skipping has a lasting effect: the program is to be run with no debugging until a specific point, without creating new procedure boxes, and ignoring the existing ones in the meantime.

Here is an example using the `skip` mode:

```
| ?- spy(foo/2,call-[print,proceed,inv(Inv),skip(Inv)]).
```

This breakpoint will be found applicable at Call ports of `foo/2`. It will print a trace message there and will skip over to the Exit or Fail port without stopping. Notice that the number of the current invocation is obtained in the action part, using the `inv` condition with a variable argument. A variant of this example follows:

```
| ?- spy(foo/2,-[silent,proceed,
                        (   call -> inv(Inv), skip(Inv)
                        ;   true
                        )]).
```

This spypoint makes `foo/2` invisible in the output of the debugger: at all ports we silently proceed (i.e. display nothing and do not stop). Furthermore, at the Call port we perform a skip, so neither `foo/2` itself, nor any predicate called within it will be shown by the debugger.

Notice the use of the `true/0` test in the above conditional! This is a breakpoint test that always succeeds. The debugger also recognizes `false` as a test that always fails. Note that while `false` and `fail` are synonyms as built-in predicates, they are completely different as breakpoint conditions: the latter is a shortcut for `port(fail)`.

The `show` variable has four additional value patterns. Setting it to `display`, `write`, or `write_term(`*`Options`*`)` will result in the debugged goal *G* being shown using `display(`*`G`*`)`, `writeq(`*`G`*`)`, or `write_term(`*`G, Options`*`)`, respectively. The fourth pattern, *`Method-Sel`*, can be used for replacing the goal in the trace message by one of its subterms, the one pointed to by the selector *Sel*.

For example, the following spypoint instructs the debugger to stop at each port of `foo/2`, and to only display the first argument of `foo/2` in the trace message, instead of the complete goal.

```
| ?- spy(foo/2, -[print-[1],ask]).
% Conditional spypoint for user:foo/2 added, BID=1
| ?- foo(5,X).
 *      1      1 Call: ^1 5 ?
```

The `command` variable has several further value patterns. The variable can be set to `proceed(`*`OldGoal,NewGoal`*`)`. At a Call port this instructs the debugger to first build a procedure box for the current goal, then to unify it with *OldGoal* and finally execute *NewGoal* in its place (cf. the '`u`' (unify) interactive debugger command). At non-Call ports this command first goes back to the Call port (cf. the '`r`' (retry) command), and then does the above activities.

A variant of the `proceed/2` command is `flit(`*`OldGoal,NewGoal`*`)`. This has the same effect, except for not building a procedure box for *OldGoal*.

We now just briefly list further command values (for the details, see Section 5.9.9 [Action Variables], page 286). Setting `command` to `raise(`*`E`*`)` will raise an exception *E*, `abort` will abort the execution. The values `retry(`*`Inv`*`)`, `reexit(`*`Inv`*`)`, `redo(`*`Inv`*`)`, `fail(`*`Inv`*`)` will cause the debugger to go back to an earlier Call, Exit, Redo, or Fail port with invocation number *Inv* (cf. the '`j`' (jump) interactive debugger command).

Sometimes it may be useful to access the value of an action variable. This can be done with the `get` condition: e.g. `get(mode(M))` will unify `M` with the current execution mode. The

`get(...)` wrapper can be omitted in the test part, but not in the action part (since there a `mode(M)` action will set, rather than read, the mode action variable). For example:

```
| ?- spy(foo/2, mode(trace)-show(print-[1])).
```

This spypoint will be found applicable only in trace mode (and will cause the first argument of `foo/2` to appear in the trace message). (The `mode` and `show` wrappers can also be omitted in the above example, they are used only to help with interpreting the breakpoint specification.)

5.6.6 Advice points

As mentioned earlier, there are two kinds of breakpoints: spypoints and advice points. The main purpose of spypoints is to support interactive debugging. In contrast with this, advice points can help you to perform non-interactive debugging activities. For example, the following advice point will check a program invariant: whether the condition `Y-X<3` always holds at exit from `foo(X,Y)`.

```
| ?- add_breakpoint([pred(foo/2),advice]
                    -[exit,goal(foo(X,Y)),\+true(Y-X<3),trace], _).
% Conditional advice point for user:foo/2 added, BID=1
% advice
| ?- foo(4, Y).
Y = 3
% advice
| ?- foo(9, Y).
        3      3 Exit: foo(7,13) ? n
        2      2 Exit: foo(8,21) ?
```

The test part of the above breakpoint contains a `pred` test, and the `advice` condition, making it an advice point. (You can also include the `debugger` condition in spypoint specs, although this is the default interpretation.)

The action part starts with the `exit` port condition. Because of this the rest of the action part is evaluated only at Exit ports. By placing the port condition in the action part, we ensure the creation of a procedure box at the Call port, as explained earlier.

Next, we get hold of the goal arguments using the `goal` condition, and use the `\+true(Y-X<3)` test to check if the invariant is violated. If this happens, then the last condition sets the `mode` action variable to `trace`, switching on the interactive debugger.

Following the `add_breakpoint/2` call the above example shows two top-level calls to `foo/2`. The invariant holds within the first goal, but is violated within the second. Notice that the advice mechanism works with the interactive debugger switched off.

You can ask the question, why do we need advice points? The same task could be implemented using a spypoint. For example:

```
| ?- add_breakpoint(pred(foo/2)
                    -[exit,goal(foo(X,Y)),\+true(Y-X<3),leash], _).
% The debugger will first zip -- showing spypoints (zip)
% Conditional spypoint for user:foo/2 added, BID=1
% zip
| ?- foo(4, X).
X = 3
% zip
| ?- foo(9, X).
 *      3      3 Exit: foo(7,13) ? z
 *      2      2 Exit: foo(8,21) ?
```

The main reason to have a separate advice mechanism is to be able to perform checks independently of the interactive debugging. With the second solution, if you happen to start some interactive debugging, then you cannot be sure that the invariant is always checked. For example, no spypoints will be activated during a skip. In contrast with this, the advice mechanism is watching the program execution all the time, independently of the debugging mode.

Advice points are handled in very much the same way as spypoints are. When arriving at a port, advice point selection takes place first, followed by spypoint selection. This can be viewed as the debugger making two passes over the current breakpoints, considering advice points only in the first pass, and spypoints only in the second.

In both passes the debugger tries to find a breakpoint that can be activated, checking the test and action parts, as described earlier. However, there are some differences between the two passes:

- Advice processing is performed if there are any (non-disabled) advice points. Spypoint processing is only done if the debugger is switched on, and is not doing a skip.
- For advice points, the action variables are initialized as follows: `mode` is set to current debugging mode, `command = proceed`, `show = silent`. Note that this is done independently of the debugging mode (in contrast with the spypoint search initialization).
- The default action part for advice points is `[]`. This means that if no action part is given, then the only effect of the advice point will be to build a procedure box (because of the `command = proceed` initialization).
- If no advice point was found applicable, then `command` is set to `flit`.

Having performed advice processing, the debugger inspects the `command` variable. The command values different from `proceed` and `flit` are called *divertive*, as they alter the normal flow of control (e.g. `proceed(...,...)`), or involve user interaction (`ask`). If the `command` value is divertive, then the prescribed action is performed immediately, without executing the spypoint selection process. Otherwise, if `command = proceed`, then it is noted that the advice part requests the building of a procedure box. Next, the second, spypoint processing pass is carried out, and possible user interaction takes place, as described earlier. A procedure box is built if either the advice point or the spypoint search requests this.

Let us conclude this section by another example, a generic advice point for collecting branch coverage information:

```
| ?- add_breakpoint(
      (advice,call) -
          (   line(F,L) -> true(assert(line_reached(F,L))), flit
          ;   flit
          ), _).
% Generic advice point added, BID=1
% advice,source_info
| ?- foo(4,X).
X = 3 ? ;
no
% advice,source_info
| ?- setof(X, line_reached(F,X), S).
F = '/home/bob/myprog.pl',
S = [31,33,34,35,36]
```

This advice point will be applicable at every Call port. It will then assert a fact with the file name and the line number if source information is available. Finally, it will set the `command` variable to `flit` on both branches of execution. This is to communicate the fact that the advice point does not request the building of a procedure box.

It is important to note that this recording of the line numbers reached is performed independently of the interactive debugging.

In this example we used the `','/2` operator, rather than list notation, for describing the conjunction of conditions, as this seems to better fit the if-then-else expression used in the action part. We could have still used lists in the tests part, and in the "then" part of the actions. Note that if we omit the "else" branch, then the action part will fail if no source information is available for the given call. This will cause a procedure box to be built, which is an unnecessary overhead. An alternative solution, using the `line/2` test twice, is the following:

```
| ?- add_breakpoint([advice,call,line(_,_)]-
                    [line(F,L),true(assert(line_reached(F,L))),flit], _).
```

Further examples of advice points are available in `library(debugger_examples)`.

5.6.7 Built-in Predicates for Breakpoint Handling

This section introduces built-in predicates for evaluating breakpoint conditions, and for retrieving, deleting, disabling and enabling breakpoints.

The breakpoint specification of the last advice point example was quite complex. And, to be practical, it should be improved to assert only line numbers not recorded so far. For this you will write a Prolog predicate for the conditional assertion of file/line information, `assert_line_reached(File,Line)`, and use it instead of the `assert(line_reached(F,L))` condition.

Because of the complexity of the breakpoint specification, it looks like a good idea to move the if-then-else condition into Prolog code. This requires that we test the `line(F,L)` condition from Prolog. The built-in predicate `execution_state/1` serves for this purpose. It takes a simple or a composite breakpoint condition as its argument and evaluates it, as if in the test part of a breakpoint specification. The predicate will succeed if and only if the breakpoint condition evaluates successfully. Thus `execution_state/1` allows you to access debugging information from within Prolog code. For example, you can write a Prolog predicate, `assert_line_reached/0`, which queries the debugger for the current line information and then processes the line number:

```
assert_line_reached :-
        (   execution_state(line(F,L)) -> assert_line_reached(F,L).
        ;   true
        ).

| ?- add_breakpoint([advice,call]-
[true(assert_line_reached),flit], _).
```

Arbitrary tests can be used in `execution_state/1`, if it is called from within a `true` condition. It can also be called from outside the debugger, but then only a subset of conditions is available. Furthermore, the built-in predicate `execution_state/2` allows accessing information from past debugger states (see Section 5.6.8 [Accessing Past Debugger States], page 266). See Section 11.3.74 [mpg-ref-execution_state], page 1057.

The built-in predicates `remove_breakpoints(`*BIDs*`)`, `disable_breakpoints(`*BIDs*`)` and `enable_breakpoints(`*BIDs*`)` serve for removing, disabling and enabling the given breakpoints. Here *BIDs* can be a single breakpoint identifier, a list of these, or one of the atoms `all`, `advice`, `debugger`.

We now show an application of `remove_breakpoints/1` for implementing one-off breakpoints, i.e. breakpoints that are removed when first activated.

For this we need to get hold of the currently selected breakpoint identifier. The `bid(BID)` condition serves for this purpose: it unifies its argument with the identifier of the breakpoint being processed. The following is an example of a one-off breakpoint.

```
| ?- spy(foo/2, -[bid(BID),true(remove_breakpoints(BID)),leash]).
% Conditional spypoint for user:foo/2 added, BID=1
% zip
| ?- foo(2, X).
% Conditional spypoint for user:foo/2, BID=1, removed (last)
        1      1 Call: foo(2,_402) ? z
X = 1
```

The action part of the above breakpoint calls the `bid` test to obtain the breakpoint identifier. It then uses this number as the argument to the built-in predicate `remove_breakpoints/1`, which removes the activated breakpoint. See Section 11.3.190 [mpg-ref-remove_breakpoints], page 1209.

The built-in predicate `current_breakpoint(`*`Spec`*`, `*`BID`*`, `*`Status`*`, `*`Kind`*`, `*`Type`*`)` enumerates all breakpoints present in the debugger. For example, if we call `current_breakpoint/5` before the invocation of `foo/2` in the last example, then we get this:

```
| ?- current_breakpoint(Spec, BID, Status, Kind, Type).
Spec = [pred(user:foo/2)]-
[bid(_A),true(remove_breakpoints(_A)),leash],
BID = 1,
Status = on,
Kind = conditional(user:foo/2),
Type = debugger
```

Here *Spec* is the breakpoint specification of the breakpoint with identifier *BID*. *Status* is `on` for enabled breakpoints and `off` for disabled ones. *Kind* is one of `plain(`*`MFunc`*`)`, `conditional(`*`MFunc`*`)` or `generic`, where *MFunc* is the module qualified functor of the specific breakpoint. Finally *Type* is the breakpoint type: `debugger` or `advice`.

The *Spec* returned by `current_breakpoint/5` is exactly the same as the one given in `add_breakpoint/2`. If the breakpoint was created by `spy/2`, then the test part is extended by a `pred` condition, as exemplified above. Earlier we described some preprocessing steps that the specification goes through, such as moving the module qualification of the specification to certain conditions. These transformations are performed on the copy of the breakpoint used for testing. Independently of this, the debugger also stores the original breakpoint, which is returned by `current_breakpoint/5`. See Section 11.3.48 [mpg-ref-current_breakpoint], page 1028.

5.6.8 Accessing Past Debugger States

In this section we introduce the built-in predicates for accessing past debugger states, and the breakpoint conditions related to these.

The debugger collects control flow information about the goals being executed, more precisely about those goals, for which a procedure box is built. This collection of information, the backtrace, includes the invocations that were called but not exited yet, as well as those that exited nondeterminately. For each invocation, the main data items present in the backtrace are the following: the goal, the module, the invocation number, the depth and the source information, if any.

Furthermore, as you can enter a new break level from within the debugger, there can be multiple backtraces, one for each active break level.

You can access all the information collected by the debugger using the built-in predicate `execution_state(`*`Focus`*`, `*`Tests`*`)`. Here *Focus* is a ground term specifying which break level and which invocation to access. It can be one of the following:

- `break_level(`*`BL`*`)` selects the *current* invocation within the break level *BL*.
- `inv(`*`Inv`*`)` selects the invocation number *Inv* within the current break level.
- A list containing the above two elements, selects the invocation with number *Inv* within break level *BL*.

Note that the top level counts as break level 0, while the invocations are numbered from 1 upwards.

The second argument of `execution_state/2`, *Tests*, is a simple or composite breakpoint condition. Most simple tests can appear inside *Tests*, with the exception of the `port`, `bid`, `advice`, `debugger`, and `get` tests. These tests will be interpreted in the context of the specified past debugger state. Specifically, if a `true/1` condition is used, then any `execution_state/1` queries appearing in it will be evaluated in the past context.

To illustrate the use of `execution_state/2`, we now define a predicate `last_call_arg(ArgNo, Arg)`, which is to be called from within a break, and which will look at the last debugged goal of the previous break level, and return in `Arg` the `ArgNo`th argument of this goal.

```
last_call_arg(ArgNo, Arg) :-
        execution_state(break_level(BL1)),
        BL is BL1-1,
        execution_state(break_level(BL), goal(Goal)),
        arg(ArgNo, Goal, Arg).
```

We see two occurrences of the term `break_level(...)` in the above example. Although these look very similar, they have different roles. The first one, in `execution_state/1`, is a breakpoint test, which unifies the current break level with its argument. Here it is used to obtain the current break level and store it in `BL1`. The second use of `break_level(...)`, in the first argument of `execution_state/2`, is a focus condition, whose argument has to be instantiated, and which prescribes the break level to focus on. Here we use it to obtain the goal of the current invocation of the previous break level.

Note that the goal retrieved from the backtrace is always in its latest instantiation state. For example, it is not possible to get hold of the goal instantiation at the Call port, if the invocation in question is at the Exit port.

Here is an example run, showing how `last_call_arg/2` can be used:

```
        5      2 Call: _937 is 13+8 ? b
% Break level 1
% 1
| ?- last_call_arg(2, A).
A = 13+8
```

There are some further breakpoint tests that are primarily used in looking at past execution states.

The test `max_inv(`*`MaxInv`*`)` returns the maximal invocation number within the current (or selected) break level. The test `exited(`*`Boolean`*`)` unifies *Boolean* with `true` if the invocation has exited, and with `false` otherwise.

The following example predicate lists those goals in the backtrace, together with their invocation numbers, that have exited. These are the invocations that are listed by the `t`

interactive debugger command (print backtrace), but not by the *g* command (print ancestor goals). Note that the predicate `between(`N, M, I`)` enumerates all integers such that $N \leq I \leq M$.

```
exited_goals :-
     execution_state(max_inv(Max)),
     between(1, Max, Inv),
     execution_state(inv(Inv), [exited(true),goal(G)]),
     format('~t~d~6| ~p\n', [Inv,G]),
     fail.
exited_goals.
(...)

?*     41     11 Exit: foo(2,1) ? @
| :- exited_goals.
    26 foo(3,2)
    28 bar(3,1,1)
    31 foo(2,1)
    33 bar(2,1,0)
    36 foo(1,1)
    37 foo(0,0)
    39 foo(1,1)
    41 foo(2,1)
    43 bar(2,1,0)
    46 foo(1,1)
    47 foo(0,0)
?*     41     11 Exit: foo(2,1) ?
```

Note that similar output can be obtained by entering a new break level and calling `exited_goals` from within an `execution_state/2`:

```
% 1
| ?- execution_state(break_level(0), true(exited_goals)).
```

The remaining two breakpoint tests allow you to find parent and ancestor invocations in the backtrace. The `parent_inv(`*Inv*`)` test unifies *Inv* with the invocation number of the youngest ancestor present in the backtrace, called *debugger-parent* for short. The test `ancestor(`*AncGoal*`,`*Inv*`)` looks for the youngest ancestor in the backtrace that is an instance of *AncGoal*. It then unifies the ancestor goal with *AncGoal* and its invocation number with *Inv*.

Assume you would like to stop at all invocations of `foo/2` that are somewhere within `bar/1`, possibly deeply nested. The following two breakpoints achieve this effect:

```
| ?- spy(bar/1, advice), spy(foo/2, ancestor(bar(_),_)).
% Plain advice point for user:bar/1 added, BID=3
% Conditional spypoint for user:foo/2 added, BID=4
```

We added an advice point for `bar/1` to ensure that all calls to it will have procedure boxes built, and so become part of the backtrace. advice points are a better choice than spypoints for this purpose, as with `?- spy(bar/1, -proceed)` the debugger will not stop at the call port of `bar/1` in trace mode. Note that it is perfectly all right to create an advice point using `spy/2`, although this is a bit of terminological inconsistency.

See Section 11.3.74 [mpg-ref-execution_state], page 1057. Further examples of accessing past debugger states can be found in `library(debugger_examples)`.

5.6.9 Storing User Information in the Backtrace

The debugger allows the user to store some private information in the backtrace. It allocates a Prolog variable in each break level and in each invocation. The breakpoint test `private(Priv)` unifies *Priv* with the private information associated with the break level, while the test `goal_private(GPriv)` unifies *GPriv* with the Prolog variable stored in the invocation.

Both variables are initially unbound, and behave as if they were passed around the program being debugged in additional arguments. This implies that any variable assignments done within these variables are undone on backtracking.

In practice, the `private` condition gives you access to a Prolog variable shared by all invocations of a break level. This makes it possible to remember a term and look at it later, in a possibly more instantiated form, as shown by the following example.

```
memory(Term) :-
        execution_state(private(P)),
        memberchk(myterm(Term), P).

| ?- trace, append([1,2,3,4], [5,6], L).
        1      1 Call: append([1,2,3,4],[5,6],_514) ? @
| :- append(_,_,L)^memory(L).
        1      1 Call: append([1,2,3,4],[5,6],_514) ? c
        2      2 Call: append([2,3,4],[5,6],_2064) ? c
        3      3 Call: append([3,4],[5,6],_2422) ? c
        4      4 Call: append([4],[5,6],_2780) ? @
| :- memory(L), writeq(L), nl.
[1,2,3|_2780]
        4      4 Call: append([4],[5,6],_2780) ?
```

The predicate `memory/1` receives the term to be remembered in its argument. It gets hold of the private field associated with the break level in variable `P`, and calls `memberchk/2` (see Section 10.25 [lib-lists], page 643), with the term to be remembered, wrapped in `myterm`, as the list element, and the private field, as the list. Thus the latter, initially unbound variable, is used as an open-ended list. For example, when `memory/1` is called for the first time, the private field gets instantiated to `[myterm(Term)|_]`. If later you call `memory/1` with an uninstantiated argument, then it will retrieve the term remembered earlier and unify it with the argument.

The above trace excerpt shows how this utility predicate can be used to remember an interesting Prolog term. Within invocation number 1 we call `memory/1` with the third, output argument of `append/3`, using the '`@`' command (see Section 5.5 [Debug Commands], page 241). A few tracing steps later, we retrieve the term remembered and print it, showing its current instantiation. Being able to access the instantiation status of some terms of interest can be very useful in debugging. In `library(debugger_examples)` we describe new debugger commands for naming Prolog variables and providing name-based access to these variables, based on the above technique.

We could have avoided the use of `memberchk/2` in the example by simply storing the term to be remembered in the private field itself (`memory(Term) :- execution_state(private(Term)).`). But this would have made the private field unusable for other purposes. For example, the finite domain constraint debugger (see Section 10.14 [lib-fdbg], page 547) would stop working, as it relies on the private fields.

There is only a single private variable of both kinds within the given scope. Therefore the convention of using an open ended list for storing information in private fields, as shown in the above example, is very much recommended. The different users of the private field are distinguished by the wrapper they use (e.g. `myterm/1` above, `fdbg/1` for the constraint debugger, etc.). Future releases may enforce this convention by providing appropriate breakpoint tests.

We now present an example of using the goal private field. Earlier we have shown a spypoint definition that made a predicate invisible in the sense that its ports are silently passed through and it is automatically skipped over. However, with that earlier solution, execution always continues in trace mode after skipping. We now improve the spypoint definition: the mode in which the Call port was reached is remembered in the goal private field, and the mode action variable is reset to this value at the Exit port.

```
mode_memory(Mode) :-
        execution_state(goal_private(GP)),
        memberchk(mymode(Mode), GP).

| ?- spy(foo/2, -[silent,proceed,
                  true(mode_memory(MM)),
                 (   call -> get(mode(MM)), inv(Inv), skip(Inv)
                 ;   exit -> mode(MM)
                 ;   true
                 )]).
```

Here, we first define an auxiliary predicate `mode_memory/1`, which uses the open list convention for storing information in the goal private field, applying the `mymode/1` wrapper. We then create a spypoint for `foo/2`, whose action part first sets the `print` and `command` action variables. Next, the `mode_memory/1` predicate is called, unifying the mode memory with the `MM` variable. We then branch in the action part: at Call ports the uninstantiated `MM` is unified with the current mode, and a `skip` command is issued. At Exit ports `MM` holds the mode saved at the Call port, so the `mode(MM)` action re-activates this mode. At all other ports we just silently proceed without changing the debugger mode.

5.6.10 Hooks Related to Breakpoints

There are two hooks related to breakpoints.

The hook `breakpoint_expansion(Macro,Body)` makes it possible for the user to extend the set of allowed conditions. This hook is called, at breakpoint addition time, with each simple test or action within the breakpoint specification, as the *Macro* argument. If the hook succeeds, then the term returned in the *Body* argument is substituted for the original test or action. Note that *Body* cannot span both the test and the action part, i.e. it cannot contain the `-/2` operator. The whole *Body* will be interpreted either as a test or as an action, depending on the context of the original condition. See Section 11.3.28 [mpg-ref-breakpoint_expansion], page 1004.

We now give a few examples for breakpoint macros. The last example defines a condition making a predicate invisible, a reformulation of the last example of the previous subsection.

```
:- multifile user:breakpoint_expansion/2.
user:breakpoint_expansion(
            skip, [inv(I),skip(I)]).

user:breakpoint_expansion(
            gpriv(Value),
            [goal_private(GP),true(memberchk(Value,GP))]).

user:breakpoint_expansion(
            invisible,
            [silent,proceed,
                (   call -> get(mode(M)), gpriv(mymode(M)), skip
                ;   exit -> gpriv(mymode(MM)), mode(MM)
                ;   true
                )]).

| ?- spy(foo/2, -invisible).
```

We first define the `skip` macro, instructing the debugger to skip the current invocation. This macro is only meaningful in the action part.

The second clause defines the `gpriv/2` macro, a generalization of the earlier `mode_memory/1` predicate. For example, `gpriv(mymode(M))` expands to `goal_private(GP),true(memberchk(mymode(M),GP))`. This embodies the convention of using open-ended lists for the goal private field.

Finally, the last clause implements the action macro `invisible/0`, which makes the predicate in question disappear from the trace. The last line shows how this macro can be used to make `foo/2` invisible.

Below is an alternative implementation of the same macro. Here we use a Prolog predicate that returns the list of action variable settings to be applied at the given port. Notice that a variable can be used as a breakpoint condition, as long as this variable gets instantiated

to a (simple or composite) breakpoint condition by the time it is reached in the process of breakpoint evaluation.

```
user:breakpoint_expansion(invisible,
                          [true(invisible(Settings)),Settings]).

invisible([proceed,silent,NewMode]) :-
        execution_state([mode(M),port(P),inv(Inv),goal_private(GP)]),
        memberchk(mymode(MM), GP),
        (   P == call -> MM = M, NewMode = skip(Inv)
        ;   P = exit(_) -> NewMode = MM
        ;   NewMode = M
        ).
```

The second hook related to breakpoints is `debugger_command_hook(`*`DCommand`*`, `*`Actions`*`)`. This hook serves for customizing the behavior of the interactive debugger, i.e. for introducing new interactive debugger commands. The hook is called for each debugger command read in by the debugger. *DCommand* contains the abstract format of the debugger command read in, as returned by the query facility (see Section 4.16.3 [Query Processing], page 220). If the hook succeeds, then it should return in *Actions* an action part to be evaluated as the result of the command.

If you want to redefine an existing debugger command, then you should study `library('SU_messages')` to learn the abstract format of this command, as returned by the query facility. If you want to add a new command, then it suffices to know that unrecognized debugger commands are returned as `unknown(Line,Warning)`. Here, `Line` is the code list typed in, with any leading whitespace removed, and `Warning` is a warning message.

The following example defines the '`S`' interactive debugger command to behave as skip at Call and Redo ports, and as creep otherwise:

```
:- multifile user:debugger_command_hook/2.
user:debugger_command_hook(unknown([0'S|_],_), Actions) :-
        execution_state([port(P),inv(I)]),
        Actions = [Mode,proceed,silent],
        (   P = call -> Mode = skip(I)
        ;   P = redo -> Mode = skip(I)
        ;   Mode = trace
        ).
```

Note that the `silent` action is needed above; otherwise, the trace message will be printed a second time, before continuing the execution.

See Section 11.3.61 [mpg-ref-debugger_command_hook], page 1043. `library(debugger_examples)` contains some of the above hooks, as well as several others.

5.6.11 Programming Breakpoints

We will show two examples using the advanced features of the debugger.

The first example defines a `hide_exit(Pred)` predicate, which will hide the Exit port for `Pred` (i.e. it will silently proceed), provided the current goal was already ground at the Call port, and nothing was traced inside the given invocation. The `hide_exit(Pred)` goal creates two spypoints for predicate `Pred`:

```
:- meta_predicate hide_exit(:).
hide_exit(Pred) :-
        add_breakpoint([pred(Pred),call]-
                        true(save_groundness), _),
        add_breakpoint([pred(Pred),exit,true(hide_exit)]-hide, _).
```

The first spypoint is applicable at the Call port, and it calls `save_groundness` to check if the given invocation was ground, and if so, then it stores a term `hide_exit(ground)` in the `goal_private` attribute of the invocation.

```
save_groundness :-
        execution_state([goal(_:G),goal_private(Priv)]),
        ground(G), !, memberchk(hide_exit(ground), Priv).
save_groundness.
```

The second spypoint created by `hide_exit/1` is applicable at the Exit port and it checks whether the `hide_exit/0` condition is true. If so, then it issues a `hide` action, which is a breakpoint macro expanding to `[silent,proceed]`.

```
hide_exit :-
        execution_state([inv(I),max_inv(I),goal_private(Priv)]),
        memberchk(hide_exit(Ground), Priv), Ground == ground.
```

Here, `hide_exit` encapsulates the tests that the invocation number be the same as the last invocation number used (`max_inv`), and that the `goal_private` attribute of the invocation be identical to `ground`. The first test ensures that nothing was traced inside the current invocation.

If we load the above code, as well as the small example below, then the following interaction, discussed below, can take place. Note that the `hide_exit` predicate is called with the `_:_` argument, resulting in generic spypoints being created.

```
| ?- consult(user).
| cnt(0) :- !.
| cnt(N) :-
        N > 0, N1 is N-1, cnt(N1).
| ^D
% consulted user in module user, 0 msec 424 bytes

| ?- hide_exit(_:_), trace, cnt(1).
% The debugger will first zip -- showing spypoints (zip)
% Generic spypoint added, BID=1
% Generic spypoint added, BID=2
% The debugger will first creep -- showing everything (trace)
 #      1      1 Call: cnt(1) ? c
 #      2      2 Call: 1>0 ? c
 #      3      2 Call: _2019 is 1-1 ? c
        3      2 Exit: 0 is 1-1 ? c
 #      4      2 Call: cnt(0) ? c
        1      1 Exit: cnt(1) ? c

% trace
| ?-
```

Invocation 1 is ground, its Exit port is not hidden, because further goals were traced inside it. On the other hand, Exit ports of ground invocations 2 and 4 are hidden.

Our second example defines a predicate `call_backtrace(Goal, BTrace)`, which will execute `Goal` and build a backtrace showing the successful invocations executed during the solution of `Goal`.

The advantages of such a special backtrace over the one incorporated in the debugger are the following:

- it has much lower space consumption;
- the user can control what is put on and removed from the backtrace (e.g. in this example all goals are kept, even the ones that exited determinately);
- the interactive debugger can be switched on and off without affecting the "private" backtrace being built.

The `call_backtrace/2` predicate is based on the advice facility. It uses the variable accessible via the `private(_)` condition to store a mutable (see Section 4.8.9 [ref-lte-mut], page 135) holding the backtrace. Outside the `call_backtrace` predicate the mutable will have the value `off`.

The example is a module file, so that internal invocations can be identified by the module name. We load the `lists` library, because `memberchk/2` will be used in the handling of the private field.

```
:- module(backtrace, [call_backtrace/2]).
:- use_module(library(lists)).

:- meta_predicate call_backtrace(0, ?).
call_backtrace(Goal, BTrace) :-
        Spec = [advice,call]
               -[true((goal(M:G),store_goal(M,G))),flit],
        (   current_breakpoint(Spec, _, on, _, _) -> B = []
        ;   add_breakpoint(Spec, B)
        ),
        call_cleanup(call_backtrace1(Goal, BTrace),
                     remove_breakpoints(B)).
```

`call_backtrace(Goal, BTrace)` is a meta-predicate, which first sets up an appropriate advice point for building the backtrace. The advice point will be activated at each Call port and will call the `store_goal/2` predicate with arguments containing the module and the goal in question. Note that the advice point will not build a procedure box (cf. the `flit` command in the action part).

The advice point will be added just once: any further (recursive) calls to `call_backtrace/2` will notice the existence of the breakpoint and will skip the `add_breakpoint/2` call.

Having ensured the appropriate advice point exists, `call_backtrace/2` calls `call_backtrace1/2` with a cleanup operation that removes the breakpoint added, if any.

```
:- meta_predicate call_backtrace1(0, ?).
call_backtrace1(Goal, BTrace) :-
        execution_state(private(Priv)),
        memberchk(backtrace_mutable(Mut), Priv),
        (   mutable(Mut) -> get_mutable(Old, Mut),
            update_mutable([], Mut)
        ;   create_mutable([], Mut), Old = off
        ),
        call(Goal),
        get_mutable(BTrace, Mut), update_mutable(Old, Mut).
```

The predicate `call_backtrace1/2` retrieves the private field of the execution state and uses it to store a mutable, wrapped in `backtrace_mutable`. When first called within a top level, the mutable is created with the value `[]`. In later calls, the mutable is re-initialized to `[]`. Having set up the mutable, `Goal` is called. In the course of the execution of the `Goal`, the debugger will accumulate the backtrace in the mutable. Finally, the mutable is read, its value is returned in `BTrace`, and it is restored to its old value (or `off`).

```
store_goal(M, G) :-
        M \== backtrace,
        G \= call(_),
        execution_state(private(Priv)),
        memberchk(backtrace_mutable(Mut), Priv),
        mutable(Mut),
        get_mutable(BTrace, Mut),
        BTrace \== off, !,
        update_mutable([M:G|BTrace], Mut).
store_goal(_, _).
```

`store_goal/2` is the predicate called by the advice point, with the module and the goal as arguments. We first ensure that calls from within the `backtrace` module and those of `call/1` get ignored. Next, the module qualified goal term is prepended to the mutable value retrieved from the private field, provided the mutable exists and its value is not `off`.

Below is an example run, using a small program:

```
| ?- consult(user).
| cnt(N):- N =< 0, !.
| cnt(N) :-
     N > 0, N1 is N-1, cnt(N1).
| ^D
% consulted user in module user, 0 msec 424 bytes

| ?- call_backtrace(cnt(1), B).
% Generic advice point added, BID=1
% Generic advice point, BID=1, removed (last)

B = [user:(0=<0),user:cnt(0),user:(0 is 1-1),user:(1>0),user:cnt(1)]

| ?-
```

Note that the backtrace produced by `call_backtrace/2` can not contain any information regarding failed branches. For example, the very first invocation within the above execution, `1 =< 0`, is first put on the backtrace at its Call port, but this is immediately undone because the goal fails. If you would like to build a backtrace that preserves failed branches, then you have to use side effects, e.g. dynamic predicates.

Further examples of complex breakpoint handling are contained in `library(debugger_examples)`.

This concludes the tutorial introduction of the advanced debugger features.

5.7 Breakpoint Handling Predicates

This section describes the advanced built-in predicates for creating and removing breakpoints.

`add_breakpoint(:Spec, ?BID)` *development*

Adds a breakpoint with a spec *Spec*, the breakpoint identifier assigned is unified with *BID*. *Spec* is one of the following:

Tests`-`*Actions*

Tests standing for *Tests*`-[]`

`-`*Actions* standing for `[]-`*Actions*

Here, both *Tests* and *Actions* are either a simple *Condition*, see Section 5.9 [Breakpoint Conditions], page 281, or a composite Condition. Conditions can be composed by forming lists, or by using the '`,`', '`;`', '`->`', and '`\+`' operators, with the usual meaning of conjunction, disjunction, if-then-else, and negation, respectively. A list of conditions is equivalent to a conjunction of the same conditions (`[A|B]` is treated as `(A,B)`).

The `add_breakpoint/2` predicate performs some transformations and checks before adding the breakpoint. All condition macros invoked are expanded into their bodies, and this process is repeated for the newly introduced bodies. The `goal` and `pred` conditions are then extracted from the outermost conjunctions of the *test* part and moved to the beginning of the conjunction. If these are inconsistent, then a consistency error is signaled. Module name expansion is performed for certain tests, as described below.

Both the original and the transformed breakpoint specification is recorded by the debugger. The original is returned in `current_breakpoint/5`, while the transformed specification is used in determining the applicability of breakpoints.

There can only be a single plain spypoint for each predicate. If a plain spypoint is added, and there is already a plain spypoint for the given predicate, then:

a. the old spypoint is deleted and a new added as the most recent breakpoint, if this change affects the breakpoint selection mechanism.

b. otherwise, the old spypoint is kept and enabled if needed.

See Section 11.3.5 [mpg-ref-add_breakpoint], page 973.

`spy(:PredSpec, :Spec)` *development*

Adds a conditional spypoint with a breakpoint specification formed by adding `pred(Pred)` to the test part of *Spec*, for each predicate *Pred* designated by the generalized predicate specification *PredSpec*. See Section 11.3.217 [mpg-ref-spy], page 1243.

`current_breakpoint(:Spec, ?BID, ?Status, ?Kind, ?Type)` *development*

There is a breakpoint with breakpoint specification *Spec*, identifier *BID*, status *Status*, kind *Kind*, and type *Type*. *Status* is one of `on` or `off`, referring to enabled and disabled breakpoints. *Kind* is one of `plain(MFunc)`, `conditional(MFunc)` or `generic`, where *MFunc* is the module qualified functor of the specific breakpoint. *Type* is the breakpoint type: `debugger` or `advice`.

`current_breakpoint/5` enumerates all breakpoints on backtracking.

The *Spec* as returned by `current_breakpoint/5` is exactly the same as supplied at the creation of the breakpoint. See Section 11.3.48 [mpg-ref-current_breakpoint], page 1028.

`remove_breakpoints(+BIDs)` *development*
`disable_breakpoints(+BIDs)` *development*
`enable_breakpoints(+BIDs)` *development*

Removes, disables or enables the breakpoints with identifiers specified by *BIDs*. *BIDs* can be a number, a list of numbers or one of the atoms: `all`, `debugger`, `advice`. The atoms specify all breakpoints, debugger type breakpoints and advice type breakpoints, respectively.

`execution_state(:Tests)` *development*

Tests are satisfied in the current state of the execution. Arbitrary tests can be used in this predicate, if it is called from inside the debugger, i.e. from within a `true` condition. Otherwise only those tests can be used, which query the data stored in the backtrace. An exception is raised if the latter condition is violated, i.e. a non-backtraced test (see Section 5.9 [Breakpoint Conditions], page 281) occurs in a call of `execution_state/1` from outside the debugger.

`execution_state(+FocusConditions, :Tests)` *development*

Tests are satisfied in the state of the execution pointed to by *FocusConditions* (see Section 5.9.7 [Past States], page 286). An exception is raised if there is a non-backtraced test among *Tests*.

Note that the predicate arguments holding a breakpoint specification (*Spec* or *Tests* above) are subject to module name expansion. The first argument within simple tests `goal(_)`, `pred(_)`, `parent_pred(_)`, `parent_pred(_,_)`, `ancestor(_,_)`, and `true(_)` will inherit the module name from the (module name expanded) breakpoint specification/tests predicate argument, if there is no explicit module qualification within the simple test. Within the `proceed(Old,New)` and `flit(Old,New)` command value settings, *Old* will get the module name from the `goal` or `pred` condition by default, while *New* from the whole breakpoint specification argument. See Section 11.3.74 [mpg-ref-execution_state], page 1057.

The following hook predicate can be used to customize the behavior of the interactive debugger.

`debugger_command_hook(+DCommand,?Actions)` *hook,development*
`user:debugger_command_hook(+DCommand,?Actions)`

This predicate is called for each debugger command that SICStus Prolog reads. The first argument is the abstract format of the debugger command *DCommand*, as returned by the query facility (see Section 4.16.3 [Query Processing], page 220). If it succeeds, then *Actions* is taken as the list of actions (see Section 5.9.6 [Action Conditions], page 285) to be done for the given debugger command. If it fails, then the debugger command is interpreted in the standard way.

Note that if a line typed in response to the debugger prompt cannot be parsed as a debugger command, then `debugger_command_hook/2` is called with the term `unknown(Line,Warning)`. Here, `Line` is the code list typed in, with any leading whitespace removed, and `Warning` is a warning message. This allows the user to define new debugger commands, see Section 5.6.10 [Hooks

Related to Breakpoints], page 271, for an example. See Section 11.3.61 [mpg-ref-debugger_command_hook], page 1043.

5.8 The Processing of Breakpoints

This section describes in detail how the debugger handles the breakpoints. For the purpose of this section disabled breakpoints are not taken into account: whenever we refer to the existence of some breakpoint(s), we always mean the existence of *enabled* breakpoint(s).

The Prolog engine can be in one of the following three states with respect to the debugger:

no debugging
: if there are no advice points and the debugger is either switched off, or doing a skip;

full debugging
: if the debugger is in trace or debug mode (creeping or leaping), or there are any generic breakpoints;

selective debugging
: in all other cases.

In the *selective debugging* state only those predicate invocations are examined, for which there exists a specific breakpoint. In the *full debugging* state all invocations are examined, except those calling a predicate of a hidden module (but even these will be examined, if there is a specific breakpoint for them). In the *no debugging* state the debugger is not entered at predicate invocations.

Now we describe what the debugger does when examining an invocation of a predicate, i.e. executing its Call port. The debugger activities can be divided into three stages: advice point processing, spypoint processing and interaction with the user. The last stage may be repeated several times before program execution continues.

The first two stages are similar, as they both search for an applicable breakpoint (spypoint or advice point). This common breakpoint search is carried out as follows. The debugger considers all breakpoints of the given type, most recent first. For each breakpoint, the test part of the specification is evaluated, until one successful is found. Any variable bindings created in this successful evaluation are then discarded (this is implemented by enclosing it in double negation). The first breakpoint, for which the evaluation of the test part succeeds is selected. If such a breakpoint can be found, then the breakpoint search is said to have completed successfully, otherwise it is said to have failed.

If a breakpoint has been selected, then its action part is evaluated, normally setting some debugger action variables. If the action part fails, then as a side effect, it is ensured that a procedure box will be built. This is achieved by changing the value of the `command` action variable from `flit` to `proceed`.

Having described the common breakpoint search, let us look at the details of the first stage, advice point processing. This stage is executed only if there are any advice points set. First, the debugger action variables are initialized: `mode` is set to the current debugger

mode, `command` to `proceed` and `show` to `silent`. Next, advice point search takes place. If this fails, then `command` is set to `flit`, otherwise its value is unchanged.

After completing the advice point search the `command` variable is examined. If its value is divertive, i.e. different from `proceed` and `flit`, then the spypoint search stage is omitted, and the debugger continues with the third stage. Otherwise, it is noted that the advice point processing has requested the building of a procedure box (i.e. `command = proceed`), and the debugger continues with the second stage.

The second stage is spypoint processing. This stage is skipped if the debugger is switched off or doing a skip (`mode` is `off` or `skip(_)`). First the `show` and `command` variables are re-assigned, based on the hiddenness of the predicate being invoked, the debugger mode, and the leashing status of the port. If the predicate is both defined in, and called from a hidden module, then their values will be `silent` and `flit`. An example of this is when a built-in predicate is called from a hidden module, e.g. from a library. Otherwise, in trace mode, their values are `print` and `ask` for leashed ports, and `print` and `proceed` for unleashed ports. In debug mode, the variables are set to `silent` and `proceed`, while in zip mode to `silent` and `flit` (Section 5.6.5 [Breakpoint Actions], page 256, contains a tabulated listing of these initialization values).

Having initialized the debugger action variables, the spypoint search phase is performed. If an empty action part has been selected in a successful search, then `show` and `command` are set to `print` and `ask`. The failure of the search is ignored.

The third stage is the interactive part. First, the goal in question is displayed according to the value of `show`. Next, the value of `command` is checked: if it is other than `ask`, then the interactive stage ends. Otherwise, (it is `ask`), the variable `show` is re-initialized to `print`, or to `print-`*`Sel`*, if its value was of form *`Method-Sel`*. Next, the debugger prompts the user for a command, which is interpreted either in the standard way, or through `user:debugger_command_hook/2`. In both cases the debugger action variables are modified as requested, and the interactive part is repeated.

After the debugger went through all the three stages, it decides whether to build a procedure box. This will happen if either the advice point stage or the other two stages require it. The latter is decided by checking the `command` variable: if that is `flit` or `flit(`*`Old`*`,`*`New`*`)`, then no procedure box is required by the spypoint part. If the advice point does require the building of a procedure box, then the above `command` values are replaced by `proceed` and `proceed(`*`Old`*`,`*`New`*`)`, respectively.

At the end of the process the value of `mode` will be the new debugging mode, and `command` will determine what the debugger will do; see Section 5.9.9 [Action Variables], page 286.

A similar three-stage process is carried out when the debugger arrives at a non-Call port of a predicate. The only difference is that the building of a procedure box is not considered (`flit` is equivalent to `proceed`), and the hiddenness of the predicate is not taken into account.

While the Prolog system is executing the above three-stage process for any of the ports, it is said to be *inside the debugger*. This is relevant, because some of the conditions can only be evaluated in this context.

5.9 Breakpoint Conditions

This section describes the format of simple breakpoint conditions. We first list the tests that can be used to inquire the state of execution. We then proceed to describe the conditions usable in the action part and the options for focusing on past execution states. Finally, we describe condition macros and the format of the values of the debugger action variables.

We distinguish between two kinds of tests, based on whether they refer to information stored in the backtrace or not. The latter category, the *non-backtraced tests*, contains the conditions related to the current port (`port`, `bid`, `mode`, `show`, `command`, `get`) and the breakpoint type selection conditions (`advice` and `debug`). All remaining tests refer to information stored in the backtrace.

Non-backtraced tests will raise an exception, if they appear in calls to `execution_state/1` from outside the debugger, or in queries about past execution state, in `execution_state/2`.

Backtraced tests are allowed both inside and outside the debugger. However such tests can fail if the given query is not meaningful in the given context, e.g. if `execution_state(goal(G))` is queried before any breakpoints were encountered.

Note that if a test is used in the second argument of `execution_state/2`, then the term *current*, in the following descriptions, should be interpreted as referring to the execution state focused on (described by the first argument of `execution_state/2`).

5.9.1 Tests Related to the Current Goal

The following tests give access to basic information about the current invocation.

`inv(`*`Inv`*`)` The invocation number of the current goal is *Inv*. Invocation numbers start from 1.

`depth(`*`Depth`*`)`
The current execution depth is *Depth*.

`goal(`*`MGoal`*`)`
The current goal is an instance of the module name expanded *MGoal* template. The current goal and *MGoal* are unified. This condition is equivalent to `subsumes(`*`MGoal`*`,`*`CurrentGoal`*`)` (`subsumes/2` is defined in `library(terms)`, see Section 10.47 [lib-terms], page 902).

`pred(`*`MFunc`*`)`
The module name expanded *MFunc* template matches (see notes below) the functor (M`:`F`/`N) of the current goal. The unification required for matching is carried out.

`module(`*`Module`*`)`
The current goal is invoked from module *Module*. For compiled calls to built-in predicates *Module* will always be `prolog`.

`goal_private(`*GoalPriv*`)`
: The private information associated with the current goal is *GoalPriv*. This is initialized to an unbound variable at the Call port. It is strongly recommended that *GoalPriv* be used as an open ended list, see Section 5.6.9 [Storing User Information in the Backtrace], page 269.

`exited(`*Boolean*`)`
: *Boolean* is `true` if the current invocation has exited, and `false` otherwise. This condition is mainly used for looking at past execution states.

`parent_inv(`*Inv*`)`
: The invocation number of the *debugger-parent* (see notes below) of the current goal is *Inv*.

`ancestor(`*AncGoal*`,`*Inv*`)`
: The youngest debugger-ancestor of the current goal, which is an instance of the module name expanded *AncGoal* template, is at invocation number *Inv*. The unification required for matching is carried out.

Notes:

The *debugger-parent* of a goal is the youngest ancestor of the goal present on the backtrace. This will differ from the ordinary parent if not all goals are traced, e.g. if the goal in question is reached in zip mode. A *debugger-ancestor* of a goal is any of its ancestors on the backtrace.

In the `goal` and `ancestor` tests above, there is a given module qualified goal template, say *ModT*:*GoalT*, and it is matched against a concrete goal term *Mod*:*Goal* in the execution state. This matching is carried out as follows:

a. It is checked that *Goal* is an instance of *GoalT*.
b. *Goal* and *GoalT* are unified.
c. It is checked that *Mod* and *ModT* are either unifiable (and are unified), or name such modules in which *Goal* has the same meaning, i.e. either one of *Mod*:*Goal* and *ModT*:*Goal* is an exported variant of the other, or both are imported from the same module.

Similar matching rules apply for predicate functors, in the `pred` condition. In this test the argument holds a module qualified functor template, say *ModT*:*Name/Arity*, and this is matched against a concrete goal term *Mod*:*Goal* in the execution state.

a. It is checked that the functor of *Goal* unifies with *Name/Arity*, and this unification is carried out.
b. It is checked that *Mod* and *ModT* are either unifiable (and are unified), or name such modules in which *Goal* has the same meaning.

5.9.2 Tests Related to Source Information

These tests provide access to source related information. The `file` and `line` tests will fail if no source information is present. The `parent_clause` and `parent_pred` tests are available for interpreted code only, they will fail in compiled code.

`file(File)`
: The current goal is invoked from a file whose absolute name is *File*.

`line(File,Line)`
: The current goal is invoked from line *Line*, from within a file whose absolute name is *File*.

`line(Line)`
: The current goal is invoked from line *Line*.

`parent_clause(Cl)`
: The current goal is invoked from clause *Cl*.

`parent_clause(Cl,Sel)`
: The current goal is invoked from clause *Cl* and within its body it is pointed to by the subterm selector *Sel*.

`parent_clause(Cl,Sel,I)`
: The current goal is invoked from clause *Cl*, it is pointed to by the subterm selector *Sel* within its body, and it is the *I*th goal within it. The goals in the body are counted following their textual occurrence.

`parent_pred(Pred)`
: The current goal is invoked from predicate *Pred*.

`parent_pred(Pred,N)`
: The current goal is invoked from predicate *Pred*, clause number *N*.

The `parent_pred` tests match their first argument against the functor of the parent predicate in the same way as the `pred` test does; see the notes in the previous section (Section 5.9.1 [Goal Tests], page 281).

5.9.3 Tests Related to the Current Port

These tests can only be used inside the debugger and only when focused on the current invocation. If they appear in `execution_state/2` or in `execution_state/1` called from outside the debugger, then an exception will be raised.

The notion of port in breakpoint handling is more general than outlined earlier in Section 5.1 [Procedure Box], page 235. Here, the following terms are used to describe a port:

```
call, exit(nondet), exit(det), redo, fail,
exception(Exception), block, unblock
```

Furthermore, the atoms `exit` and `exception` can be used in the `port` condition (see below), to denote either of the two exit ports and an arbitrary exception port, respectively.

`port(Port)`
: The current execution port matches *Port* in the following sense: either *Port* and the current port unify, or *Port* is the functor of the current port (e.g. `port(exit)` holds for both `exit(det)` and `exit(nondet)` ports).

  As explained earlier, the port condition for a non Call port is best placed in the action part. This is because the failure of the action part will cause the

debugger to pass through the Call port silently, and to build a procedure box, even in zip mode. The following idiom is suggested for creating breakpoints at non Call ports:

```
add_breakpoint(Tests-[port(Port),Actions], BID).
```

`bid(BID)` The breakpoint being examined has a breakpoint identifier *BID*. (*BID* = `off` if no breakpoint was selected.)

`mode(Mode)`
Mode is the value of the `mode` variable, which normally reflects the current debugger mode.

`command(Command)`
Command is the value of the `command` variable, which is the command to be executed by default, if the breakpoint is selected.

`show(Show)`
Show is the value of the `show` variable, i.e. the default show method (the method for displaying the goal in the trace message).

The last three of the above tests access the *debugger action variables*. These breakpoint conditions have a different meaning in the action part. For example, the condition `mode(trace)`, if it occurs in the tests, *checks* if the current debugger mode is `trace`. On the other hand, if the same term occurs within the action part, then it *sets* the debugger mode to `trace`.

To support the querying of the action variables in the action part, the following breakpoint condition is provided:

`get(ActVar)`
Equivalent to *ActVar*, where this is an action variable test, i.e. one of the terms `mode(Mode)`, `command(Command)`, `show(Show)`. It has this meaning in the action part as well.

For the `port`, `mode`, `command` and `show` conditions, the condition can be replaced by its argument, if that is not a variable. For example the condition `call` can be used instead of `port(call)`. Conditions matching the terms listed above as valid port values will be converted to a `port` condition. Similarly, any valid value for the three debugger action variables is converted to an appropriate condition. These valid values are described in Section 5.9.9 [Action Variables], page 286.

5.9.4 Tests Related to the Break Level

These tests can be used both inside and outside the condition evaluation process, and also can be used in queries about past break levels.

`break_level(N)`
We are at (or focused on) break level N ($N = 0$ for the outermost break level).

`max_inv(MaxInv)`
: The last invocation number used within the current break level is *MaxInv*. Note that this invocation number may not be present in the backtrace (because the corresponding call exited determinately).

`private(Priv)`
: The private information associated with the break level is *Priv*. Similarly to `goal_private/1`, this condition refers initially to an unbound variable and can be used to store an arbitrary Prolog term. However, it is strongly recommended that *Priv* be used as an open ended list, see Section 5.6.9 [Storing User Information in the Backtrace], page 269.

5.9.5 Other Conditions

The following conditions are for prescribing or checking the breakpoint type. They cause an exception if used outside the debugger or in `execution_state/2`.

`advice` The breakpoint in question is of advice type.

`debugger` The breakpoint in question is of debugger type.

The following construct converts an arbitrary Prolog goal into a condition.

`true(Cond)`
: The Prolog goal *Cond* is true, i.e. `once(Cond)` is executed and the condition is satisfied if and only if this completes successfully. If an exception is raised during execution, then an error message is printed and the condition fails.

  The substitutions done on executing *Cond* are carried out. *Cond* is subject to module name expansion. If used in the test part of spypoint conditions, then the goal should not have any side effects, as the test part may be evaluated several times.

The following conditions represent the Boolean constants.

`true`

`[]` A condition that is always true. Useful e.g. in conditionals.

`false` A condition that is always false.

5.9.6 Conditions Usable in the Action Part

The meaning of the following conditions, if they appear in the action part, is different from their meaning in the test part.

`mode(Mode)`
: Set the debugger mode to *Mode*.

`command(Command)`
: Set the command to be executed to *Command*.

`show(Show)`
: Set the show method to *Show*.

The values admissible for *Mode*, *Command* and *Show* are described in Section 5.9.9 [Action Variables], page 286.

Furthermore, any other condition can be used in the action part, except for the ones specifying the breakpoint type (`advice` and `debugger`). Specifically, the `get` condition can be used to access the value of an action variable.

5.9.7 Options for Focusing on a Past State

The following ground terms can be used in the first argument of `execution_state/2` (see Section 5.7 [Breakpoint Predicates], page 276). Alternatively, a list containing such terms can be used. If a given condition occurs multiple times, then only the last one is considered. The order of conditions within the list does not matter.

`break_level(`*BL*`)`
: Focus on the current invocation of break level *BL*. *BL* is the break level number, the top level being `break_level(0)`. For past break levels, the current invocation is the one from which the next break level was entered.

`inv(`*Inv*`)` Focus on the invocation number *Inv* of the currently focused break level.

5.9.8 Condition Macros

There are a few condition macros expanding to a list of other conditions:

`unleash` Expands to `[show(print),command(proceed)]`

`hide` Expands to `[show(silent),command(proceed)]`

`leash` Expands to `[show(print),command(ask)]`

The user can also define condition macros using the hook predicate below.

`breakpoint_expansion(+`*Macro*`, -`*Body*`)` *hook,development*
`user:breakpoint_expansion(+`*Macro*`, -`*Body*`)`
: This predicate is called with each (non-composite) breakpoint test or action, as its first argument. If it succeeds, then the term returned in the second argument (`Body`) is substituted for the original condition. The expansion is done at the time the breakpoint is added.

  Note that *Body* can be composite, but it cannot be of form *`Tests-Actions`*. This means that the whole *Body* will be interpreted as being in either the test or the action part, depending on the context.

  The built-in breakpoint conditions cannot be redefined using this predicate. See Section 11.3.28 [mpg-ref-breakpoint_expansion], page 1004.

5.9.9 The Action Variables

In this section we list the possible values of the debugger action variables, and their meaning.

Note that the Prolog terms, supplied as values, are copied when a variable is set. This is relevant primarily in the case of the `proceed/2` and `flit/2` values.

Values allowed in the `show` condition:

`print` Write using options stored in the `debugger_print_options` Prolog flag.

`silent` Display nothing.

`display` Write using `display`.

`write` Write using `writeq`.

`write_term(`*Options*`)`
Write using options *Options*.

Method-Sel
Display only the subterm selected by *Sel*, using *Method*. Here, *Method* is one of the methods above, and *Sel* is a subterm selector.

Values allowed in the `command` condition:

`ask` Ask the user what to do next.

`proceed` Continue the execution without interacting with the user (cf. unleashing).

`flit` Continue the execution without building a procedure box for the current goal (and consequently not encountering any other ports for this invocation). Only meaningful at Call ports, at other ports it is equivalent to `proceed`.

`proceed(`*Goal*`,`*New*`)`
Unless at call port, first go back to the call port (retry the current invocation; see the `retry(`*Inv*`)` command value below). Next, unify the current goal with *Goal* and execute the goal *New* in its place. Create (or keep) a procedure box for the current goal.

This construct is used by the '`u`' (unify) interactive debugger command.

Both the *Goal* and *New* arguments are module name expanded when the breakpoint is added: the module of *Goal* defaults to the module of the current goal, while that of *New* to the module name of the breakpoint specification. If the command value is created during run time, then the module name of both arguments defaults to the module of the current goal.

The term `proceed(`*Goal*`,`*New*`)` will be copied when the `command` action variable is set. Therefore breakpoint specs of form

```
Tests - [goal(foo(X)),...,proceed(_,bar(X))]
```

should be avoided, and

```
Tests - [goal(foo(X)),...,proceed(foo(Y),bar(Y))
```

should be used instead. The first variant will not work as expected if `X` is non-ground, as the variables in the `bar/1` call will be detached from the original ones in `foo/1`. Even if `X` is ground, the first variant may be much less efficient, as it will copy the possibly huge term `X`.

`flit(`*Goal*`,`*New*`)`
Same as `proceed(`*Goal*`,`*New*`)`, but do not create (or discard) a procedure box for the current goal. (Consequently no other ports will be encountered for this invocation.)

Notes for `proceed/2`, on module name expansion and copying, also apply to `flit/2`.

`raise(`*E*`)` Raise the exception *E*.

`abort` Abort the execution.

`retry(`*Inv*`)`
Retry the most recent goal in the backtrace with an invocation number less or equal to *Inv* (go back to the Call port of the goal). This is used by the interactive debugger command '`r`', retry; see Section 5.5 [Debug Commands], page 241.

`reexit(`*Inv*`)`
Re-exit the invocation with number *Inv* (go back to the Exit port of the goal). *Inv* must be an exact reference to an exited invocation present in the backtrace (exited nondeterminately, or currently being exited). This is used by the interactive debugger command '`je`', jump to Exit port; see Section 5.5 [Debug Commands], page 241.

`redo(`*Inv*`)`
Redo the invocation with number *Inv* (go back to the Redo port of the goal). *Inv* must be an exact reference to an exited invocation present in the backtrace. This is used by the interactive debugger command '`jr`', jump to Redo port; see Section 5.5 [Debug Commands], page 241.

`fail(`*Inv*`)`
Fail the most recent goal in the backtrace with an invocation number less or equal to *Inv* (transfer control back to the Fail port of the goal). This is used by the interactive debugger command '`f`', fail; see Section 5.5 [Debug Commands], page 241.

Values allowed in the `mode` condition:

`qskip(`*Inv*`)`
Quasi-skip until the first port with invocation number less or equal to *Inv* is reached. Having reached that point, `mode` is set to `trace`. Valid only if $Inv \geq 1$ and furthermore $Inv \leq CurrInv$ for entry ports (Call, Redo), and $Inv < CurrInv$ for all other ports, where *CurrInv* is the invocation number of the current port.

`skip(`*Inv*`)`
Skip until the first port with invocation number less or equal to *Inv* is reached, and set `mode` to `trace` there. *Inv* should obey the same rules as for `qskip`.

`trace` Creep.

`debug` Leap.

`zip` Zip.

`off` Continue without debugging.

5.10 Consulting during Debugging

It is possible, and sometimes useful, to consult a file whilst in the middle of program execution. Predicates that have been successfully executed and are subsequently redefined by a consult and are later reactivated by backtracking, will not notice the change of their definitions. In other words, it is as if every predicate, when called, creates a copy of its definition for backtracking purposes.

5.11 Catching Exceptions

Usually, exceptions that occur during debugging sessions are displayed only in trace mode and for invocation boxes for predicates with spypoints on them, and not during skips. However, it is sometimes useful to make exceptions trap to the debugger at the earliest opportunity instead. The hook predicate `user:error_exception/1` provides such a possibility:

`error_exception(+`*`Exception`*`)` *hook*
`user:error_exception(+`*`Exception`*`)`
: This predicate is called at all Exception ports. If it succeeds, then the debugger enters trace mode and prints an exception port message. Otherwise, the debugger mode is unchanged and a message is printed only in trace mode or if a spypoint is reached, and not during skips. See Section 11.3.73 [mpg-ref-error_exception], page 1056.

Note that this hook takes effect when the debugger arrives at an Exception port. For this to happen, procedure boxes have to be built, e.g. by running (the relevant parts of) the program in debug mode.

A useful definition that ensures that all standard error exceptions causes the debugger to enter trace mode, is as follows:

```
:- multifile user:error_exception/1.
user:error_exception(error(_,_)).
```

(this example would not have worked prior to release 4.0.5).

5.12 Predicate Summary

`add_breakpoint(+`*`Conditions`*`, -`*`BID`*`)` *development*
: Creates a breakpoint with *Conditions* and with identifier *BID*.

`user:breakpoint_expansion(+`*`Macro`*`, -`*`Body`*`)` *hook,development*
: defines debugger condition macros

`coverage_data(?`*`Data`*`)` *since release 4.2,development*
: *Data* is the coverage data accumulated so far

`current_breakpoint(?`*`Conditions`*`, ?`*`BID`*`, ?`*`Status`*`, ?`*`Kind`*`, ?`*`Type`*`)` *development*
: There is a breakpoint with conditions *Conditions*, identifier *BID*, enabledness *Status*, kind *Kind*, and type *Type*.

`debug` *development*
switch on debugging

`user:debugger_command_hook(+`*DCommand*`,-`*Actions*`)` *hook*,*development*
Allows the interactive debugger to be extended with user-defined commands.

`debugging` *development*
display debugging status information

`disable_breakpoints(+`*BIDs*`)` *development*
Disables the breakpoints specified by *BIDs*.

`enable_breakpoints(+`*BIDs*`)` *development*
Enables the breakpoints specified by *BIDs*.

`user:error_exception(+`*Exception*`)` *hook*
Exception is an exception that traps to the debugger if it is switched on.

`execution_state(+`*Tests*`)` *development*
Tests are satisfied in the current state of the execution.

`execution_state(+`*FocusConditions*`, +`*Tests*`)` *development*
Tests are satisfied in the state of the execution pointed to by *FocusConditions*.

`leash(+`*M*`)` *development*
set the debugger's leashing mode to *M*

`nodebug` *development*
switch off debugging

`nospy(:`*P*`)` *development*
remove spypoints from the procedure(s) specified by *P*

`nospyall` *development*
remove all spypoints

`notrace` *development*
switch off debugging (same as `nodebug/0`)

`nozip` *development*
switch off debugging (same as `nodebug/0`)

`print_coverage` *since release 4.2*,*development*
`print_coverage(?`*Data*`)` *since release 4.2*,*development*
The coverage data *Data* is displayed in a hierarchical format. *Data* defaults to the coverage data accumulated so far.

`print_profile` *since release 4.2*,*development*
`print_profile(?`*Data*`)` *since release 4.2*,*development*
The profiling data *Data* is displayed in a format similar to `gprof(1)`. *Data* defaults to the profiling data accumulated so far.

`profile_data(?`*Data*`)` *since release 4.2*,*development*
Data is the profiling data accumulated so far

`profile_reset` *since release 4.2*,*development*
All profiling data is reset.

`remove_breakpoints(+BIDs)` *development*
: Removes the breakpoints specified by *BIDs*.

`spy(:P)` *development*
`spy(:P,:C)`
: set spypoints on the procedure(s) specified by P with conditions C

`trace` *development*
: switch on debugging and start tracing immediately

`unknown(-O,+N)` *development*
: Changes action on undefined predicates from O to N.

`user:unknown_predicate_handler(+G,+M,-N)` *hook*
: handle for unknown predicates.

`zip` *development*
: switch on debugging in zip mode

6 Mixing C/C++ and Prolog

SICStus Prolog provides several ways of interfacing with code written in other languages:

- A uni-directional, loosely coupled interface from client components written in any language to a Prolog server. This is `library('jsonrpc/jsonrpc_server')` (see Section 10.21 [lib-jsonrpc], page 623). It uses JSON in its process communication. This is probably the easiest way to expose a Prolog program to a client written in some other programming language.
- A uni-directional, loosely coupled interface from client components written in Java or .NET to a Prolog server. This is `library(prologbeans)` (see Section 10.36 [lib-prologbeans], page 766). It uses a custom protocol in its process communication.
- A bi-directional, tightly coupled interface between program components written in Java and Prolog. This is `library(jasper)` (see Section 10.19 [lib-jasper], page 589).
- A bi-directional, tightly coupled interface for program components written in C/C++ and Prolog. This is the topic of the current chapter.

The C side of the interface defines a number of functions and macros for various operations. On the Prolog side, you have to supply declarations specifying the names and argument/value types of C functions being called as predicates. These declarations are used by the predicate `load_foreign_resource/1`, which performs the actual binding of functions to predicates. They are also needed when the functions are unloaded, for example when SICStus is halted.

In most cases, the argument/value type declarations suffice for making the necessary conversions of data automatically as they are passed between C and Prolog. However, it is possible to declare the type of an argument to be a Prolog term, in which case the receiving function will see it as a "handle" object, called an *SP_term_ref*, for which access functions are provided.

The C support routines are available in a development system as well as in runtime systems. The support routines include:

- Static and dynamic linking of C code into the Prolog environment.
- Automatic conversion between Prolog terms and C data with `foreign/[2,3]` declarations.
- Functions for accessing and creating Prolog terms, and for creating and manipulating SP_term_refs.
- The Prolog system may call C predicates, which may call Prolog back without limits on recursion. Predicates that call C may be defined dynamically from C.
- Support for creating stand-alone executables.
- Support for creating user defined Prolog streams.
- Functions to read and write on Prolog streams from C.
- Functions to install interrupt handlers that can safely call Prolog.
- Functions for manipulating mutual exclusion locks.

- User hooks that can be used to perform user defined actions e.g. for customizing the memory management bottom layer.

In addition to the interface described in this chapter, `library(structs)` and `library(objects)` (see Section 10.44 [lib-structs], page 799, and Section 10.30 [lib-objects], page 671) allow Prolog to hold pointers to C data structures and arrays and access and store into fields in those data structures in a very efficient way, allowing the programmer to stay completely inside Prolog.

6.1 Notes

The SP_PATH variable

It is normally not necessary, nor desirable, to set this system property (or environment variable), but its value will be used, as a fall-back, at runtime if it cannot be determined automatically during initialization of a runtime or development system. In this chapter, `SP_PATH` is used as a shorthand, as follows.

On Windows, `SP_PATH` is a shorthand for the SICStus Prolog installation directory, whose default location for SICStus 4.10.2 is `C:\Program Files\SICStus Prolog VC16 4.10.2\`.

On UNIX, the default installation directory for SICStus 4.10.2 is `/usr/local/sicstus4.10.2/` and `SP_PATH` is a shorthand for the subdirectory `lib/sicstus-4.10.2/` of the installation directory, e.g.: `/usr/local/sicstus4.10.2/lib/sicstus-4.10.2/`.

See Section 4.17.1 [System Properties and Environment Variables], page 228, for more information.

Definitions and declarations

Type definitions and function declarations for the interface are found in the header file `<sicstus/sicstus.h>`.

Error Codes

The value of many support functions is a return code, namely: `SP_SUCCESS` for success, `SP_FAILURE` for failure, `SP_ERROR` if an error condition occurred, or if an uncaught exception was raised during a call from C to Prolog. If the value is `SP_ERROR`, then the macro `SP_errno` will return a value describing the error condition:

```
int SP_errno
```

The function `SP_error_message()` returns a pointer to the diagnostic message corresponding to a specified error number.

Wide Characters

The foreign interface supports wide characters. Whenever a sequence of possibly wide character codes is to be passed to or from a C function it is encoded as a sequence of bytes, using the UTF-8 encoding. Unless noted otherwise the encoded form is terminated by a NUL byte. This sequence of bytes will be called an *encoded string*, representing the given sequence of character codes. Note that it is a property of the UTF-8 encoding that it does not change ASCII character code sequences.

If a foreign function is specified to return an encoded string, then an exception will be raised if, on return to Prolog, the actual string is malformed (is not a valid sequence of UTF-8 encoded characters). The exception raised is `error(representation_error(mis_encoded_string),representation_error(...,...,mis_encoded_string))`.

6.2 Calling C from Prolog

Functions written in the C language may be called from Prolog using an interface in which automatic type conversions between Prolog terms and common C types are declared as Prolog facts. Calling without type conversion can also be specified, in which case the arguments and values are passed as SP_term_refs. This interface is partly modeled after Quintus Prolog.

The functions installed using this foreign language interface may invoke Prolog code and use the support functions described in the other sections of this chapter.

Functions, or their equivalent, in any other language having C compatible calling conventions may also be interfaced using this interface. When referring to C functions in the following, we also include such other language functions. Note however that a C compiler is needed since a small amount of glue code (in C) must be generated for interfacing purposes.

As an alternative to this interface, `SP_define_c_predicate()` defines a Prolog predicate such that when the Prolog predicate is called it will call a C function with a term corresponding to the Prolog goal. For details, see Section 12.3.11 [cpg-ref-SP_define_c_predicate], page 1313.

6.2.1 Foreign Resources

A *foreign resource* is a set of C functions, defined in one or more files, installed as an atomic operation. The name of a foreign resource, the *resource name*, is an atom, which should uniquely identify the resource. Thus, two foreign resources with the same name cannot be installed at the same time, even if they correspond to different files.

The resource name of a foreign resource is derived from its file name by deleting any leading path and the suffix. Therefore the resource name is not the same as the absolute file name. For example, the resource name of both `~john/foo/bar.so` and `~ringo/blip/bar.so` is `bar`. If `load_foreign_resource('~john/foo/bar')` has been done, then `~john/foo/bar.so` will be unloaded if either `load_foreign_resource('~john/foo/bar')` or `load_foreign_resource('~ringo/blip/bar')` is subsequently called.

It is recommended that a resource name be all lowercase, starting with '`a`' to '`z`' followed by a sequence consisting of '`a`' to '`z`', underscore ('`_`'), and digits. The resource name is used to construct the file name containing the foreign resource.

For each foreign resource, a `foreign_resource/2` fact is used to declare the interfaced functions. For each of these functions, a `foreign/[2,3]` fact is used to specify conver-

sions between predicate arguments and C-types. These conversion declarations are used for creating the necessary interface between Prolog and C.

The functions making up the foreign resource, the automatically generated glue code, and any libraries, are compiled and linked, using the `splfr` tool (see Section 6.2.5 [The Foreign Resource Linker], page 300), to form a *linked foreign resource*. A linked foreign resource can be either *static* or *dynamic*. A static resource is simply a relocatable object file containing the foreign code. A dynamic resource is a shared library ('`.so`' under most UNIX dialects, '`.dll`' under Windows), which is loaded into the Prolog executable at runtime.

Foreign resources can be linked into the Prolog executable either when the executable is built (*prelinked*), or at runtime. Prelinking can only be done using static resources. Runtime-linking can only be done using dynamic resources. Dynamic resources can also be unlinked.

In all cases, the declared predicates are installed by the built-in predicate `load_foreign_resource/1`. If the resource was prelinked, then only the predicate names are bound; otherwise, runtime-linking is attempted (using `dlopen()`, `LoadLibrary()`, or similar).

6.2.2 Conversion Declarations

Conversion declaration predicates:

`foreign_resource(+`*`ResourceName`*`,+`*`Functions`*`)` *hook*

Specifies that a set of foreign functions, to be called from Prolog, are to be found in the resource named by *ResourceName*. *Functions* is a list of functions exported by the resource. Only functions that are to be called from Prolog and optionally one *init function* and one *deinit function* should be listed. The init and deinit functions are specified as `init(`*`Function`*`)` and `deinit(`*`Function`*`)` respectively (see Section 6.2.6 [Init and Deinit Functions], page 301). This predicate should be defined entirely in terms of facts (unit clauses) and will be called in the relevant module, i.e. not necessarily in the `user` module. For example:

```
foreign_resource('terminal', [scroll,pos_cursor,ask]).
```

specifies that functions `scroll()`, `pos_cursor()` and `ask()` are to be found in the resource `terminal`. See Section 11.3.84 [mpg-ref-foreign_resource], page 1070.

`foreign(+`*`CFunctionName`*`, +`*`Predicate`*`)` *hook*
`foreign(+`*`CFunctionName`*`, +`*`Language`*`, +`*`Predicate`*`)` *hook*

Specify the Prolog interface to a C function. *Language* is at present constrained to the atom `c`, so there is no advantage in using `foreign/3` over `foreign/2`. *CFunctionName* is the name of a C function. *Predicate* specifies the name of the Prolog predicate that will be used to call *CFunction()*. *Predicate* also specifies how the predicate arguments are to be translated to and from the corresponding C arguments. These predicates should be defined entirely in terms of facts (unit clauses) and will be called in the relevant module, i.e. not necessarily in the `user` module. For example:

```
foreign(pos_cursor, c, move_cursor(+integer, +integer)).
```

The above example says that the C function `pos_cursor()` has two integer value arguments and that we will use the predicate `move_cursor/2` to call this function. A goal `move_cursor(5, 23)` would translate into the C call `pos_cursor(5,23);`.

The third argument of the predicate `foreign/3` specifies how to translate between Prolog arguments and C arguments. A call to a foreign predicate will throw an Instantiation Error if an input arguments is uninstantiated, a Type Error if an input arguments has the wrong type, or a Domain Error if an input arguments is in the wrong domain. The call will fail upon return from the function if the output arguments do not unify with the actual arguments.

The available conversions are listed in the next subsection. See Section 11.3.83 [mpg-ref-foreign], page 1069.

6.2.3 Conversions between Prolog Arguments and C Types

The following table lists the possible values for the arguments in the predicate specification of `foreign/[2,3]`. The value declares which conversion between corresponding Prolog argument and C type will take place.

`Prolog: +integer`
`C: SP_integer`
: The argument should be a number. It is converted to a C `SP_integer` and passed to the C function. If the number does not fit in a `SP_integer`, an exception is thrown.

`Prolog: +float`
`C: double`
: The argument should be a number. It is converted to a C `double` and passed to the C function. If the number is a large integer that does not fit in a `double`, then an exception is thrown.

`Prolog: +atom`
`C: SP_atom`
: The argument should be an atom. Its canonical representation is passed to the C function.

`Prolog: +codes`
`C: char const *`
: The argument should be a code list. The C function will be passed the address of an array with the encoded string representation of these characters. The array is subject to reuse by other support functions, so if the value is going to be used on a more than temporary basis, then it must be moved elsewhere.

`Prolog: +string`
`C: char const *`
: The argument should be an atom. The C function will be passed the address of an encoded string representing the characters of the atom. **Please note**: The C function must not overwrite the string.

`Prolog: +address`
`C: void *`
: The value passed will be a `void *` pointer.

`Prolog: +address(`*`TypeName`*`)`
`C: `*`TypeName`*` *`
: The value passed will be a *`TypeName`*` *` pointer.

`Prolog: +term`
`C: SP_term_ref`
: The argument could be any term. The value passed will be the internal representation of the term.

`Prolog: -integer`
`C: SP_integer *`
: The C function is passed a reference to an uninitialized `SP_integer`. The value returned will be converted to a Prolog integer.

`Prolog: -float`
`C: double *`
: The C function is passed a reference to an uninitialized `double`. The value returned will be converted to a Prolog float. If the value returned is not finite, i.e. it is infinite or NaN, then an exception is thrown.

`Prolog: -atom`
`C: SP_atom *`
: The C function is passed a reference to an uninitialized `SP_atom`. The value returned should be the canonical representation of a Prolog atom.

`Prolog: -codes`
`C: char const **`
: The C function is passed the address of an uninitialized `char *`. The returned encoded string will be converted to a Prolog code list.

`Prolog: -string`
`C: char const **`
: The C function is passed the address of an uninitialized `char *`. The returned encoded string will be converted to a Prolog atom. Prolog will copy the string to a safe place, so the memory occupied by the returned string may be reused during subsequent calls to foreign code.

`Prolog: -address`
`C: void **`
: The C function is passed the address of an uninitialized `void *`.

`Prolog: -address(`*`TypeName`*`)`
`C: `*`TypeName`*` **`
: The C function is passed the address of an uninitialized *`TypeName`*` *`.

`Prolog: -term`
`C: SP_term_ref`
: The C function is passed a new SP_term_ref, and is expected to set its value to a suitable Prolog term. Prolog will try to unify the value with the actual argument.

`Prolog: [-integer]`
`C: SP_integer F()`
: The C function should return an `SP_integer`. The value returned will be converted to a Prolog integer.

`Prolog: [-float]`
`C: double F()`
: The C function should return a `double`. The value returned will be converted to a Prolog float. If the value returned is not finite, i.e. it is infinite or NaN, then an exception is thrown.

`Prolog: [-atom]`
`C: SP_atom F()`
: The C function should return an `SP_atom`. The value returned must be the canonical representation of a Prolog atom.

`Prolog: [-codes]`
`C: char const *F()`
: The C function should return a `char *`. The returned encoded string will be converted to a Prolog code list.

`Prolog: [-string]`
`C: char const *F()`
: The C function should return a `char *`. The returned encoded string will be converted to a Prolog atom. Prolog will copy the string to a safe place, so the memory occupied by the returned string may be reused during subsequent calls to foreign code.

`Prolog: [-address]`
`C: void *F()`
: The C function should return a `void *`, which will be converted to a Prolog integer.

`Prolog: [-address(`*`TypeName`*`)]`
`C:` *`TypeName`* `*F()`
: The C function should return a *`TypeName`* `*`.

`Prolog: [-term]`
`C: SP_term_ref F()`
: The C function should return an SP_term_ref. Prolog will try to unify its value with the actual argument.

6.2.4 Interface Predicates

`load_foreign_resource(`*`:Resource`*`)`
: Unless a foreign resource with the same name as *Resource* has been statically linked, the linked foreign resource specified by *Resource* is linked into the Prolog load image. In both cases, the predicates defined by *Resource* are installed, and any init function is called. Dynamic linking is not possible if the foreign resource was linked using the `--static` option.

If a resource with the same name has been previously loaded, then it will be unloaded, as if `unload_foreign_resource(`*`Resource`*`)` were called, before *Resource* is loaded.

An example of usage of `load_foreign_resource/1` can be found in its reference page, Section 11.3.118 [mpg-ref-load_foreign_resource], page 1118.

`unload_foreign_resource(`*`:ResourceName`*`)`

Any deinit function associated with *ResourceName*, a resource name, is called, and the predicates defined by *ResourceName* are uninstalled. If *ResourceName* has been dynamically linked, then it is unlinked from the Prolog load image.

If no resource named *`ResourceName`* is currently loaded, then an existence error is raised.

For backward compatibility, *ResourceName* can also be of the same type as the argument to `load_foreign_resource/1`. In that case the resource name will be derived from the absolute file name in the same manner as for `load_foreign_resource/1`. Also for backward compatibility, `unload_foreign_resource/1` is a meta-predicate, but the module is ignored. See Section 11.3.246 [mpg-ref-unload_foreign_resource], page 1279.

> **Please note**: all foreign resources are unloaded before Prolog exits. This implies that the C library function `atexit(`*`func`*`)` cannot be used if *func* is defined in a dynamically linked foreign resource.

6.2.5 The Foreign Resource Linker

The foreign resource linker, `splfr`, is used for creating foreign resources (see Section 6.2.1 [Foreign Resources], page 295). `splfr` reads terms from a Prolog file extracting any `foreign_resource/2` fact with first argument matching the resource name and all `foreign/[2,3]` facts. Based on this information, it generates the necessary glue code, including a header file that the user code should include, and combines it with any additional C or object files provided by the user into a linked foreign resource. The output file name will be the resource name with a suitable extension.

Note that no pathnames passed to `splfr` should contain spaces. Under Windows, this can be avoided by using the short version of pathnames as necessary.

See Section 13.6 [too-splfr], page 1442, for detailed information about `splfr` options etc..

6.2.5.1 Customizing `splfr`.

The `splfr` tool reads a configuration file at start-up that contains default values for many configurable parameters. It is sometimes useful to modify these in order to adapt to local variations.

Both `splfr` and `spld` use the same configuration file and use the same options for changing the default parameters. See Section 6.7.3.1 [Customizing spld], page 327, for details.

6.2.5.2 Creating Linked Foreign Resources Manually under UNIX

The only supported method for building foreign resources is by compiling and linking them with `splfr`. However, this is sometimes inconvenient, for instance when writing a Makefile

for use with `make`. To figure out what needs to be done to build a foreign resource, you should build it once with `splfr --verbose --keep ...`, note what compiler and linker flags are used, and save away any generated files. You can then mimic the build commands used by `splfr` in your `Makefile`. You should repeat this process each time you upgrade SICStus Prolog.

6.2.5.3 Windows-specific splfr issues

`splfr` needs to be able to invoke the C compiler from the command line. On Windows, this will only work if the command line environment has been properly set up. See Section 6.7.3.3 [Setting up the C compiler on Windows], page 331, for Windows-specific information about getting the C compiler to work.

6.2.6 Init and Deinit Functions

An init function and/or a deinit function can be declared by `foreign_resource/2`. If this is the case, then these functions should have the prototype:

`void` *`FunctionName`* `(int when)`

The init function is called by `load_foreign_resource/1` after the resource has been loaded and the interfaced predicates have been installed. If the init function fails (using `SP_fail()`) or raises an exception (using `SP_raise_exception()`), then the failure or exception is propagated by `load_foreign_resource/1` and the foreign resource is unloaded (without calling any deinit function). However, using `SP_fail()` is not recommended, and operations that may require `SP_raise_exception()` are probably better done in an init function that is called explicitly after the foreign resource has been loaded.

The deinit function is called by `unload_foreign_resource/1` before the interfaced predicates have been uninstalled and the resource has been unloaded. If the deinit function fails or raises an exception, then the failure or exception is propagated by `unload_foreign_resource/1`, but the foreign resource is still unloaded. However, neither `SP_fail()` nor `SP_raise_exception()` should be called in a deinit function. Complex deinitialization should be done in an explicitly called deinit function instead.

The init and deinit functions may use the C-interface to call Prolog etc.

Foreign resources are unloaded when the saved state is restored; see Section 3.10 [Saving], page 30. Foreign resources are also unloaded when exiting Prolog execution. The parameter `when` reflects the context of the `(un)load_foreign_resource/1` and is set as follows for init functions:

`SP_WHEN_EXPLICIT`
: Explicit call to `load_foreign_resource/1`.

`SP_WHEN_RESTORE`
: Resource is reloaded after restore.

For deinit functions:

`SP_WHEN_EXPLICIT`
: Explicit call to `unload_foreign_resource/1` or a call to `load_foreign_resource/1` with the name of an already loaded resource.

`SP_WHEN_EXIT`
: Resource is unloaded before exiting Prolog.

6.2.7 Creating the Linked Foreign Resource

Suppose we have a Prolog source file `ex.pl` containing:

```
                                                        % ex.pl
foreign(f1, p1(+integer,[-integer])).
foreign(f2, p2(+integer,[-integer])).
foreign_resource(ex, [f1,f2]).
:- load_foreign_resource(ex).
```

and a C source file `ex.c` with definitions of the functions `f1` and `f2`, both returning `SP_integer` and having an `SP_integer` as the only parameter. The conversion declarations in `ex.pl` state that these functions form the foreign resource `ex`. Normally, the C source file should contain the following two line near the beginning (modulo the resource name):

```
#include <sicstus/sicstus.h>
/* ex_glue.h is generated by splfr from the foreign/[2,3] facts.
   Always include the glue header in your foreign resource code.
*/
#include "ex_glue.h"
```

To create the linked foreign resource, simply type (to the Shell):

```
% splfr ex.pl ex.c
```

The linked foreign resource `ex.so` (file suffix `.so` is system dependent) has been created. It will be dynamically linked by the directive `:- load_foreign_resource(ex).` when the file `ex.pl` is loaded. For a full example, see Section 6.2.8 [Foreign Code Examples], page 302.

Dynamic linking of foreign resources can also be used by runtime systems.

6.2.8 Foreign Code Examples

Given: a Prolog file `ex.pl` and a C file `ex.c` shown below.

ex.pl

```
foreign_resource(ex, [c1, c2, c11, c21, c3, c4, c5, c6]).

foreign(c1,  c, c1(+integer, [-integer])).
foreign(c2,  c, c2(-integer)).
foreign(c11, c, c11(+atom, [-atom])).
foreign(c21, c, c21(+atom, -atom)).
foreign(c3,  c, c3(+float, [-float])).
foreign(c4,  c, c4(-float)).
foreign(c5,  c, c5(+string,[-string])).
foreign(c6,  c, c6(-string)).

:- load_foreign_resource(ex).
```

ex.c

```
#include <sicstus/sicstus.h>
/* ex_glue.h is generated by splfr from the foreign/[2,3] facts.
   Always include the glue header in your foreign resource code.
*/
#include "ex_glue.h"

/* c1(+integer, [-integer]) */
SP_integer c1(SP_integer a)
{
   return(a+9);
}

/* c2(-integer) */
void c2(SP_integer *a)
{
   *a = 99;
}

/* c11(+atom, [-atom]) */
SP_atom c11(SP_atom a)
{
   return(a);
}

/* c21(+atom, -atom) */
void c21(SP_atom a, SP_atom *b)
{
   *b = a;
}

/* c3(+float, [-float]) */
double c3(double a)
{
   return(a+9.0);
}
/* c4(-float) */
void c4(double *a)
{
   *a = 9.9;
}
/* c5(string, [-string]) */
char const * c5(char const * a)
{
   return(a);
}
/* c6(-string) */
void c6(char const * *a)
{
   *a = "99";
}
```

Dialog at the command level:

```
% splfr ex.pl ex.c
% sicstus -l ex
% compiling /home/matsc/sicstus4/ex.pl...
%  loading foreign resource /home/matsc/sicstus4/ex.so in module user
% compiled /home/matsc/sicstus4/ex.pl in mod-
ule user, 0 msec 3184 bytes
SICStus 4.10.2 ...
Licensed to SICS
| ?- c1(1,X1), c2(X2), c11(foo,X11), c21(foo,X21),
     c3(1.5,X3), c4(X4), c5(foo,X5), c6(X6).
X1 = 10,
X2 = 99,
X3 = 10.5,
X4 = 9.9,
X5 = foo,
X6 = '99',
X11 = foo,
X21 = foo ? RET
yes
```

6.3 Calling C++ from Prolog

Functions in C++ files that should be called from Prolog must use C linkage, e.g.

```
extern "C" {
void myfun(SP_integer i)
{...};
};
```

On Windows, C++ is a first class citizen and no special steps are needed in order to mix C++ and C code.

On other platforms, to build a dynamically linked foreign resource with C++ code, you may have to explicitly include certain libraries and you may need to use an executable compiled and linked with a C++ compiler. The details are platform and C++ compiler dependent and outside the scope of this manual.

6.4 Support Functions

The support functions include functions to manipulate SP_term_refs, functions to convert data between the basic C types and Prolog terms, functions to test whether a term can be converted to a specific C type, and functions to unify or compare two terms.

6.4.1 Creating and Manipulating SP_term_refs

Normally, C functions only have indirect access to Prolog terms via SP_term_refs. C functions may receive arguments as unconverted Prolog terms, in which case the actual argu-

ments received will have the type `SP_term_ref`. Also, a C function may return an unconverted Prolog term, in which case it must create an SP_term_ref. Finally, any temporary Prolog terms created by C code must be handled as SP_term_refs.

SP_term_refs are motivated by the fact that SICStus Prolog's memory manager must have a means of reaching all live Prolog terms for memory management purposes, including such terms that are being manipulated by the user's C code. Previous releases provided direct access to Prolog terms and the ability to tell the memory manager that a given memory address points to a Prolog term, but this approach was too low level and highly error-prone. The current design is modeled after and largely compatible with Quintus Prolog release 3.

SP_term_refs are created dynamically. At any given time, an SP_term_ref has a value (a Prolog term, initially `[]`). This value can be examined, accessed, and updated by the support functions described in this section.

A new SP_term_ref is created by calling `SP_new_term_ref()`.

An SP_term_ref can be assigned the value of another SP_term_ref by calling `SP_put_term()`.

It is important to understand the rules governing the scope of SP_term_refs, and the terms they hold, in conjunction with calls from Prolog to C and vice versa. This is explained in Section 6.5.2 [Finding Multiple Solutions of a Call], page 311.

6.4.2 Atoms in C

Each Prolog atom is represented internally by a unique integer, its *canonical representation*, with the corresponding C type `SP_atom`. This mapping between atoms and integers depends on the execution history. Certain functions require this representation as opposed to an SP_term_ref. It can be obtained by a special argument type declaration when calling C from Prolog, by calling `SP_get_atom()`, or by looking up an encoded string `s` in the Prolog symbol table by calling `SP_atom_from_string(s)` which returns the atom, or zero if the given string is malformed (is not a valid sequence of UTF-8 encoded characters).

The encoded string containing the characters of a Prolog atom `a` can be obtained by calling `SP_string_from_atom()`.

The length of the encoded string representing a Prolog atom `a` can be obtained by calling `SP_atom_length()`.

Prolog atoms, and the space occupied by their print names, are subject to garbage collection when the number of atoms has reached a certain threshold, under the control of the `agc_margin` Prolog flag, or when the atom garbage collector is called explicitly. The atom garbage collector will find all references to atoms from the Prolog specific memory areas, including SP_term_refs and arguments passed from Prolog to foreign language functions. However, atoms created by `SP_atom_from_string()` and merely stored in a local variable are endangered by garbage collection. The functions `SP_register_atom()` and `SP_unregister_atom()` make it possible to protect an atom while it is in use. The operations are implemented using reference counters to support multiple, independent use of the same atom in different foreign resources.

6.4.3 Creating Prolog Terms

The following functions create a term and store it as the value of an SP_term_ref, which must exist prior to the call. They return zero if the conversion fails (as far as failure can be detected), and a nonzero value otherwise, assigning to `t` the converted value.

`SP_put_variable()`
: Creates a variable.

`SP_put_integer()`
: Creates an integer.

`SP_put_float()`
: Creates a float.

`SP_put_atom()`
: Creates an atom.

`SP_put_string()`
: Creates an atom.

`SP_put_address()`
: Creates an integer representing a pointer.

`SP_put_list_codes()`
: Creates a char list.

`SP_put_list_n_codes()`
: Creates a char list.

`SP_put_list_n_bytes()`
: Creates a byte list.

`SP_put_integer_bytes()`
: Creates an arbitrarily sized integer.

`SP_put_number_codes()`
: Creates a char list denoting a number.

`SP_put_functor()`
: Creates a compound term.

`SP_put_list()`
: Creates a list.

`SP_cons_functor()`
: Creates a compound term with arguments filled in.

`SP_cons_list()`
: Creates a list with arguments filled in.

`SP_read_from_string()` (`C function`)
: Reads a term from its textual representation, replacing variables by specified terms.

6.4.4 Accessing Prolog Terms

The following functions will take an SP_term_ref and convert it to C data. They return zero if the conversion fails, and a nonzero value otherwise, and store the C data in output arguments, except the last two, which merely decompose compound terms.

`SP_get_integer()`
: Accesses an integer.

`SP_get_float()`
: Accesses a float.

`SP_get_atom()`
: Accesses an atom.

`SP_get_string()`
: Accesses an atom.

`SP_get_address()`
: Accesses an integer representing a pointer.

`SP_get_list_codes()`
: Accesses a code list.

`SP_get_list_n_codes()`
: Accesses a code list.

`SP_get_list_n_bytes()`
: Accesses a byte list.

`SP_get_number_codes()`
: Accesses a code list denoting a number.

`SP_get_integer_bytes()`
: Accesses an arbitrarily sized integer.

`SP_get_functor()`
: Accesses a compound term.

`SP_get_list()`
: Accesses a list.

`SP_get_arg()`
: Accesses an argument of a compound term.

6.4.5 Testing Prolog Terms

There is one general function for type testing of Prolog terms as well as a set of specialized, more efficient, functions—one for each term type:

`SP_term_type()`
: Accesses term type.

`SP_is_variable()`
: Checks whether term is a variable.

`SP_is_integer()`
: Checks whether term is an integer.

`SP_is_float()`
: Checks whether term is a float.

`SP_is_atom()`
: Checks whether term is an atom.

`SP_is_compound()`
: Checks whether term is compound.

`SP_is_list()`
: Checks whether term is a list cell.

`SP_is_atomic()`
: Checks whether term is atomic.

`SP_is_number()`
: Checks whether term is a number.

6.4.6 Unifying and Comparing Terms

The two functions are:

`SP_unify()`
: Unify terms.

`SP_compare()`
: Compare terms.

6.4.7 Operating System Services

6.4.7.1 Memory Management

The standard C library memory allocation functions (`malloc`, `calloc`, `realloc`, and `free`) are available in foreign code, but cannot reuse any free memory that SICStus Prolog's memory manager may have available, and so may contribute to memory fragmentation.

The following functions provide the same services via SICStus Prolog's memory manager.

`SP_malloc()`
: Allocates a piece of memory.

`SP_calloc()`
: Allocates memory for an array of elements, and clears the allocated memory.

`SP_realloc()`
: Changes the size of an allocated piece of memory.

`SP_free()`
: Deallocates a piece of memory.

`SP_strdup()`
: Makes a copy of a string in allocated memory.

6.4.7.2 File System

SICStus Prolog caches the name of the current working directory. To take advantage of the cache and to keep it consistent, foreign code should call the following interface functions instead of calling `chdir()` and `getcwd()` directly:

`SP_set_current_dir()`
: Obtains the absolute name of the current working directory.

`SP_get_current_dir()`
: Sets the current working directory.

6.4.7.3 Threads

When running more that one SICStus runtime in the same process it is often necessary to protect data with mutual exclusion locks. The following functions implement recursive mutual exclusion locks, which only need static initialization.

`SP_mutex_lock()`
: Locks the mutex.

`SP_mutex_unlock()`
: Unlocks the mutex.

A (recursive) mutual exclusion lock is declared as type `SP_mutex`. It should be initialized to (the static initializer) `SP_MUTEX_INITIALIZER` before use.

Note that the SICStus runtime is not thread safe in general.

A dynamic foreign resource that is used by multiple SICStus runtimes in the same process may need to maintain a global state that is kept separate for each SICStus runtime. Each SICStus runtime maintains a location (containing a `void*`) for each foreign resource. By calling `SP_foreign_stash()`, a foreign resource can then access this location to store any data that is specific to the calling SICStus runtime.

6.5 Calling Prolog from C

In development and runtime systems alike, Prolog and C code may call each other to arbitrary depths.

Before calling a predicate from C you must look up the predicate definition by module, name, and arity. The function `SP_predicate()` will return a pointer to this definition or return `NULL` if the predicate is not visible in the module. This definition can be used in more than one call to the same predicate.

The function `SP_pred()` may be used as an alternative to the above. The only difference is that the name and module arguments are passed as Prolog atoms rather than strings, and the module argument is mandatory. This saves the cost of looking up the two arguments in the Prolog symbol table. This cost dominates the cost of the operation.

6.5.1 Finding One Solution of a Call

The easiest way to call a predicate if you are only interested in the first solution is to call the function `SP_query()`. It will create a goal from the predicate definition and the arguments, call it, and commit to the first solution found, if any.

If you are only interested in the side effects of a predicate, then you can call `SP_query_cut_fail()`. It will try to prove the predicate, cut away the rest of the solutions, and finally fail. This will reclaim any memory used after the call, and throw away any solution found.

6.5.2 Finding Multiple Solutions of a Call

If you are interested in more than one solution, then a more complicated scheme is used. You find the predicate definition as above, but you do not call the predicate directly.

1. Set up a call with `SP_open_query()`
2. Call `SP_next_solution()` to find a solution. Call this predicate again to find more solutions if there are any.
3. Terminate the call with `SP_close_query()` or `SP_cut_query()`

The function `SP_open_query()` will return an identifier of type `SP_qid` that you use in successive calls. Note that if a new query is opened while another is already open, then the new query must be terminated before exploring the solutions of the old one. That is, queries must be strictly nested.

The function `SP_next_solution()` will cause the Prolog engine to backtrack over any current solution of an open query and look for a new one.

A query must be terminated in either of two ways. The function `SP_cut_query()` will discard the choices created since the corresponding `SP_open_query()`, like the goal `!`. The current solution is retained in the arguments until backtracking into any enclosing query.

Alternatively, the function `SP_close_query()` will discard the choices created since the corresponding `SP_open_query()`, and then backtrack into the query, throwing away any current solution, like the goal `!, fail`.

A simple way to call arbitrary Prolog code, whether for one solution or for multiple solutions, is to use `SP_read_from_string()` (see Section 6.4.3 [Creating Prolog Terms], page 307) to create an argument to `call/1`. It is a good idea to always explicitly specify the module context when using `call/1` or other meta-predicates from C.

It is important to understand the rules governing the scope of SP_term_refs, and the terms they hold, in conjunction with calls from Prolog to C and vice versa. SP_term_refs are internally stored on a stack, which is manipulated by the various API functions as follows:

`SP_new_term_ref()`
: The new SP_term_ref is pushed onto the stack.

calling C from Prolog
`SP_query()`
`SP_query_cut_fail()`
: The top of the stack is saved on call and restored upon return.

`SP_open_query()`
: The top of the stack is saved in the new query.

`SP_close_query()`
`SP_cut_query()`
`SP_next_solution()`
: The top of the stack is restored from the query argument.

Among other things, this means that an SP_term_ref cannot be saved across multiple calls from Prolog to C. Thus it makes no sense to declare an SP_term_ref as a static C variable.

Prolog terms are also generally stored on a stack, which keeps growing until the execution backtracks, either spontaneously or by calling `SP_close_query()` or `SP_next_solution()`. It is an abuse of the `SP_open_query()` API to assign a term to an SP_term_ref, and then backtrack over the term while the SP_term_ref is still live. Such abuse results in a dangling pointer that can potentially crash SICStus Prolog. The API typically follows the pattern:

```
...
SP_pred_ref pred = SP_predicate(...);
SP_term_ref ref1 = SP_new_term_ref();
SP_qid goal = SP_open_query(pred,ref1,...);
/*
 * PART A: perform some initializations, and
 * loop through all solutions.
 */
while (SP_next_solution(goal)==SP_SUCCESS) {
  /*
   * PART B: perform some action on the current solution.
   */
}

SP_close_query(goal);
...
```

In order to avoid dangling pointer hazards, we recommend some simple coding rules:

PART A In this part of the code, do not call `SP_new_term_ref()` or the functions in Section 6.4.3 [Creating Prolog Terms], page 307, at all.

PART B In this part of the code, do not call `SP_new_term_ref()` except to initialize any SP_term_refs declared locally to Part B. Do Not call the functions in Section 6.4.3 [Creating Prolog Terms], page 307, except to set SP_term_refs declared locally to Part B.

6.5.3 Backtracking Loops

If you want to call Prolog multiple times in a loop for side effect, for example over the elements of a list, then some care is required in order not to cause a memory leak by creating more and more SP_term_refs. The recommended coding scheme is to use a backtracking loop (see Section 9.4.4 [Terminating a Backtracking Loop], page 363). For example, suppose that you want the C equivalent of the following code:

```
process_list(L) :-
        member(X, L),
        once(process(X)),
        fail.
process_list(_).

process(X) :- ...
```

That can be encoded as follows, where `refL` is the SP_term_ref that holds `L`:

```
...
SP_qid goal;
SP_pred_ref member2 = SP_predicate("member", 2, "user");
SP_pred_ref process1 = SP_predicate("process", 1, "user");
SP_term_ref refX = SP_new_term_ref();
SP_put_variable(refX);
goal = SP_open_query(member2, refX, refL);
while (SP_next_solution(goal)==SP_SUCCESS)
  SP_query_cut_fail(process1, refX);
SP_close_query(goal);
...
```

This programming style is particularly relevant in a stand-alone executable, where the top level iterates over some transactions to be processed.

6.5.4 Calling Prolog Asynchronously

If you wish to call Prolog back from a signal handler or a thread other than the thread that called `SP_initialize()`, that is, the *main thread*, then you cannot use `SP_query()` etc. directly. The call to Prolog has to be delayed until such time that the Prolog execution can accept an interrupt and the call has to be performed from the main thread (the Prolog execution thread). The function `SP_event()` serves this purpose, and installs the function `func` to be called from Prolog (in the main thread) when the execution can accept a callback.

A queue of functions, with corresponding arguments, is maintained; that is, if several calls to `SP_event()` occur before Prolog can accept an interrupt, then the functions are queued and executed in turn at the next possible opportunity. A `func` installed with `SP_event()` will not be called until SICStus is actually running. One way of ensuring that all pending functions installed with `SP_event()` are run is to call, from the main thread, some dummy goal, such as, `SP_query_cut_fail(SP_predicate("true",0,"user"))`.

While `SP_event()` is safe to call from any thread, it is not safe to call from arbitrary signal handlers. If you want to call `SP_event()` when a signal is delivered, then you need to install your signal handler with `SP_signal()` (see below).

Note that `SP_event()` is one of the *very* few functions in the SICStus API that can safely be called from another thread than the main thread.

6.5.4.1 Signal Handling

As noted above it is not possible to call e.g. `SP_query()` or even `SP_event()` from an arbitrary signal handler. That is, from signal handlers installed with `signal` or `sigaction`. Instead you need to install the signal handler using `SP_signal()`.

When the OS delivers a signal `sig` for which `SP_signal(sig,func,user_data)` has been called SICStus will *not* call `func` immediately. Instead the call to `func` will be delayed until it is safe for Prolog to do so, in much the same way that functions installed by `SP_event()` are handled (this is an incompatible change as of release 3.9).

Since the signal handling function `func` will not be called immediately upon delivery of the signal to the process it only makes sense to use `SP_signal()` to handle certain asynchronous signals such as `SIGINT`, `SIGUSR1`, `SIGUSR2`. Other asynchronous signals handled specially by the OS, such as `SIGCHLD` are not suitable for handling via `SP_signal()`. Note that the development system installs a handler for '`SIGINT`', and, under Windows, '`SIGBREAK`', to catch keyboard interrupts. As of release 4.4, `library(timeout)` no longer uses any signals.

When `func` is called, it cannot call any SICStus API functions except `SP_event()`. Note that `func` will be called in the main thread.

6.5.5 Exception Handling in C

When an exception has been raised, the functions `SP_query()`, `SP_query_cut_fail()` and `SP_next_solution()` return `SP_ERROR`. To access the *exception term* (the argument of the call to `raise_exception/1`), which is asserted when the exception is raised, the function `SP_exception_term()` is used. As a side effect, the exception term is retracted, so if your code wants to pass the exception term back to Prolog, then use `SP_raise_exception()`.

To raise an exception from a C function called from Prolog, just call `SP_raise_exception()`. Upon return, Prolog will detect that an exception has been raised, any value returned from the function will be ignored, and the exception will be passed back to Prolog. **Please note**: this should only be called right before returning to Prolog.

To propagate failure to Prolog, call `SP_fail()`. Upon return, Prolog will backtrack. **Please note**: this should only be called right before returning to Prolog.

Prolog error handling is mostly done by raising and catching exceptions. However, some *faults* are of a nature such that when they occur, the internal program state may be corrupted, and it is not safe to merely raise an exception. In runtime systems, the C macro `SP_on_fault()` provides an environment for handling faults.

The function `SP_raise_fault()` can be used to raise a fault with an encoded string explaining the reason.

6.5.6 Reading a goal from a string

A simple way to call arbitrary Prolog code is to use `SP_read_from_string()` (see Section 6.4.3 [Creating Prolog Terms], page 307) to create an argument to `call/1`. It is a good idea to always explicitly specify the module context when using `call/1` or other meta-predicates from C.

This example calls a compound goal (without error checking):

```
SP_pred_ref call_pred = SP_predicate("call", 1, "prolog");
SP_term_ref x = SP_new_term_ref();
SP_term_ref goal = SP_new_term_ref();
SP_term_ref vals[] = {x, 0 /* zero termination */};
SP_integer len;

SP_put_variable(x);
/* The X=_ is a trick to ensure that X is the first variable
   in the depth-first order and thus corresponds to vals[0] (x).
   There are no entries in vals for _,L1,L2.
*/
SP_read_from_string(goal,
   "user:(X=_, length([0,1,2],L1), length([3,4],L2), X is L1+L2).", vals);

SP_query(call_pred, goal);
SP_get_integer(x, &len);
/* here len is 5 */
```

6.6 SICStus Streams

With the SICStus Prolog C interface, the user can define his/her own streams as well as from C read or write on the predefined streams. The stream interface provides:

- C functions to perform I/O on Prolog streams. This way you can use the same stream from Prolog and C code.
- User defined streams. You can define your own Prolog streams in C.
- Bidirectional streams. A SICStus stream supports reading or writing or both.
- Hookable standard input/output/error streams.

6.6.1 Prolog Streams

From the Prolog level there is a unique number that identifies a stream. This identifier can be converted from/to a Prolog stream:

`stream_code(?Stream,?StreamCode)`
: *StreamCode* is the C stream identifier (an integer) corresponding to the Prolog stream *Stream*. This predicate is only useful when streams are passed between Prolog and C. See Section 11.3.219 [mpg-ref-stream_code], page 1245.

The *`StreamCode`* is a Prolog integer representing an `SP_stream *` pointer.

To read or write on a Prolog stream from C, the following functions and macros can be used:

`SP_get_byte()`
: Read one byte from a binary stream.

`SP_get_code()`
: Read one character code from a text stream.

`SP_put_byte()`
: Write one byte to a binary stream.

`SP_put_code()`
: Write one character code to a text stream.

`SP_put_bytes()`
: Write multiple bytes to a binary stream.

`SP_put_codes()`
: Write multiple character codes to a text stream.

`SP_put_encoded_string()`
: Write a `NUL` terminated encoded string to a text stream.

`SP_printf()`
`SP_fprintf()`
: Perform formatted output.

`SP_flush_output()`
: Flush buffered data of an output stream.

`SP_fclose()`
: Close a stream.

The following predefined streams are accessible from C:

`SP_stdin` Standard input. Refers to the same stream as `user_input` in Prolog. Which stream is referenced by `user_input` is controlled by the Prolog flag `user_input`.

`SP_stdout`
: Standard output. Refers to the same stream as `user_output` in Prolog. Which stream is referenced by `user_output` is controlled by the Prolog flag `user_output`.

`SP_stderr`
: Standard error. Refers to the same stream as `user_error` in Prolog. Which stream is referenced by `user_error` is controlled by the flag `user_error`.

`SP_curin` Current input. It is initially set equal to `SP_stdin`. It can be changed with the predicates `see/1` and `set_input/1`.

`SP_curout`
Current output. It is initially set equal to `SP_stdout`. It can be changed with the predicates `tell/1` and `set_output/1`.

Note that these variables are read only.

6.6.2 Defining a New Stream

The following steps are required to define a new stream in C:

- Define low level functions (byte or character reading, writing etc).
- Initialize and open your stream.
- Allocate memory needed for your particular stream.
- Initialize and install a Prolog stream with `SP_create_stream()`.

The following sample makes it possible to create read-only binary streams that use the C `FILE*` API.

```
#include <sicstus/sicstus.h>
#include <stdio.h>
#include <string.h>
#include <errno.h>

struct stdio_t_stream {
  FILE *f;
};
typedef struct stdio_t_stream stdio_t_stream;

static spio_t_error_code SPCDECL stdio_read(void *user_data,
                                            void *buf,
                                            size_t *pbuf_size,
                                            spio_t_bits read_options)
{
  spio_t_error_code ecode = SPIO_E_ERROR;
  stdio_t_stream *s;
  size_t res;

  if (read_options & SPIO_DEVICE_READ_OPTION_NONBLOCKING) {
    ecode = SPIO_E_NOT_SUPPORTED;
    goto barf;
  }

  s = (stdio_t_stream *)user_data;

  res = fread(buf, 1, *pbuf_size, s->f);
  if (res == 0) {                 /* error */
    if (feof(s->f)) {
      ecode = SPIO_E_END_OF_FILE;
    } else {                      /* some other error */
      ecode = SPIO_E_OS_ERROR;
    }
    goto barf;
  }
  *pbuf_size = res;             /* number of bytes read */

  return SPIO_S_NOERR;

 barf:
  return ecode;
}
```

```
static spio_t_error_code SPCDECL stdio_close(void **puser_data, spio_t_bits close_opti
{
  stdio_t_stream *s;

  s = (stdio_t_stream *)*puser_data;
  /* we can ignore SPIO_DEVICE_CLOSE_OPTION_FORCE */

  if (close_options & SPIO_DEVICE_CLOSE_OPTION_READ) {
    *puser_data = NULL;       /* tell caller we are gone */
    if (fclose(s->f) != 0) {
      ;          /* ignore errors */
    }
  }
  return SPIO_S_NOERR;
}
```

```
/* Identify our streams with (an arbitrary) pointer that is unique to us */
#define STDIO_STREAM_CLASS ((void*)&stdio_open_c)

int stdio_open_c(char const *path,
                 char const *direction,
                 SP_stream **pstream)
{
  spio_t_error_code ecode = SPIO_E_ERROR;
  stdio_t_stream *s = NULL;
  SP_stream *stream = NULL;

  if (strcmp(direction, "read") != 0) goto not_supported;

  /* read */
  s = (stdio_t_stream*)SP_malloc(sizeof *s);
  if (s == NULL) goto out_of_memory;

  /* open binary */
  s->f = fopen(path, "rb");
  if (s->f == NULL) {
    ecode = SPIO_E_OPEN_ERROR;
    goto barf;
  }
  ecode = SP_create_stream((void*)s,
                           STDIO_STREAM_CLASS,
                           stdio_read,
                           NULL, /* write */ NULL, /* flush_output */ NULL, /* seek */
                           stdio_close,
                           NULL, /* interrupt */ NULL, /* ioctl */ NULL, /* args */
                           SP_CREATE_STREAM_OPTION_BINARY,
                           &stream);
  if (SPIO_FAILED(ecode)) goto barf;

  *pstream = stream;
  return 0;                     /* success */

 barf:
  if (s != NULL) {
    if (s->f != NULL) fclose(s->f);
    SP_free(s);
  }
  return ecode;
 out_of_memory:
  ecode = SPIO_E_OUT_OF_MEMORY;
  goto barf;
 not_supported:
  ecode = SPIO_E_NOT_IMPLEMENTED;
  goto barf;
}
```

Calling `stdio_open_c("foo", "read", &stream)` will open the file `foo` as binary stream that can be read by all SICStus stream operations.

There are several stream implementions in the SICStus Prolog library that can serve as sample, e.g. `library(codesio)` and `library(tcltk)`.

See Section 12.3.9 [cpg-ref-SP_create_stream], page 1310, for details.

6.6.2.1 Low Level I/O Functions

For each new stream the appropriate low level I/O functions have to be defined. Error handling, prompt handling and character counting is handled in a layer above these functions. They all operate on a user defined private data structure specified when the stream is created.

user_read()
: Should fill a buffer with data available from the stream. See Section 12.3.106 [cpg-ref-user_read], page 1424.

user_write()
: Should write data from a buffer to the stream. See Section 12.3.107 [cpg-ref-user_write], page 1426.

user_flush_output()
: Should flush the (output) stream.

user_close()
: Should close the stream in the specified directions. Note that bi-directional streams can be closed one direction at a time.

Please note: A foreign resource that defines user defined streams must ensure that all its streams are closed when the foreign resource is unloaded. Failure to do this will lead to crashes when SICStus tries to close the stream using a `user_close` method that is no longer present.

The easiest way to ensure that all user defined streams of a particular class is closed is to use `SP_fclose` with the `SP_FCLOSE_OPTION_USER_STREAMS`. Another way is to use `SP_next_stream` and `SP_get_stream_user_data` to find all your streams and close them one by one. See Section 12.3.18 [cpg-ref-SP_fclose], page 1324, Section 12.3.60 [cpg-ref-SP_next_stream], page 1373, and Section 12.3.41 [cpg-ref-SP_get_stream_user_data], page 1352.

6.6.3 Hookable Standard Streams

The standard I/O streams (input, output, and error) are hookable, i.e. the streams can be redefined by the user by calling `SP_set_user_stream_hook()` and/or `SP_set_user_stream_post_hook()`. These hook functions must be called before `SP_initialize()` (see Section 6.7.4.1 [Initializing the Prolog Engine], page 334). In custom built systems, they may be called in the hook function `SU_initialize()`. See Section 6.7.3 [The Application Builder], page 327.

6.6.3.1 Writing User-stream Hooks

The user-stream hook is, if defined, called during `SP_initialize()`. It has the following prototype:

```
SP_stream *user_stream_hook(void *user_data, int which)
```

If the hook is not defined, then SICStus will attempt to open the standard TTY/console versions of these streams. If they are unavailable (such as for non-console executables under Windows), then the result is undefined.

It is called once for each stream. The `which` argument indicates which stream it is called for. The value of `which` is one of the following:

`SP_STREAMHOOK_STDIN`
: Create stream for standard input.

`SP_STREAMHOOK_STDOUT`
: Create stream for standard output.

`SP_STREAMHOOK_STDERR`
: Create stream for standard error.

The set of possible values for `which` may be expanded in the future.

The hook should return a standard SICStus I/O stream, as described in Section 6.6.2 [Defining a New Stream], page 317.

See Section 12.3.93 [cpg-ref-SP_set_user_stream_hook], page 1408, for details.

6.6.3.2 Writing User-stream Post-hooks

If defined, then the user-stream post-hook is called after all the streams have been defined, once for each of the standard streams. It has a slightly different prototype:

```
void user_stream_post_hook(void *user_data, int which, SP_stream *str)
```

where `str` is a pointer to the corresponding `SP_stream` structure. There are no requirements as to what this hook must do; the default behavior is to do nothing at all.

The post-hook is intended to be used to do things that may require that all streams have been created.

See Section 12.3.94 [cpg-ref-SP_set_user_stream_post_hook], page 1409, for details.

6.7 Stand-Alone Executables

So far, we have only discussed foreign code as pieces of code loaded into a Prolog executable. This is often not the desired situation. Instead, one often wants to create *stand-alone executables*, i.e. an application where Prolog is used as a component, accessed through the API described in the previous sections.

6.7.1 Runtime Systems

Stand-alone applications containing debugged Prolog code and destined for end-users are typically packaged as runtime systems. No SICStus license is needed by a runtime system. A runtime system has the following limitations:

- No top level. The executable will restore a saved state and/or load code, and call `user:runtime_entry(start)`. Alternatively, you may supply a main program and explicitly initialize the Prolog engine with `SP_initialize()`. `break/0` and `require/1` are unavailable.
- No debugger. `debugging`, `debug` and `debugger_print_options` have no effect. Predicates annotated as *[development]* in the reference pages are unavailable.
- Except in extended runtime systems: no compiler; compiling is replaced by consulting. Extended runtime systems do provide the compiler.
- The `discontiguous_warnings`, `single_var_warnings`, `redefine_warnings`, and `informational` Prolog flags are off by default, suppressing warnings about clauses not being together, singleton variables, queries and warnings about name clashes and redefinitions, and informational messages. Note that they can be switched on though, to enable such warnings, queries and messages.
- No profiler or coverage analysis. The predicates `profile_reset/0`, `profile_data/1`, `print_profile/[0,1] coverage_data/1`, and `print_coverage/[0,1]` are unavailable. The Prolog flag `profiling` is unavailable.
- No signal handling except as installed by `SP_signal()`.

It is possible to tell a runtime system to start a development system instead, for debugging purposes. See Section 6.9 [Debugging Runtime Systems], page 346, for details.

6.7.2 Runtime Systems on Target Machines

When a runtime system is delivered to the end user, chances are that the user does not have an existing SICStus installation. To deliver such an executable, you need:

the executable
: This is your executable program, usually created by `spld` (see Section 6.7.3 [The Application Builder], page 327).

the runtime kernel
: This is a shared object or a DLL, usually `libsprt4-10-2.so` under UNIX, or `sprt4-10-2.dll` under Windows.

the (extended) runtime library
: The saved state `sprt.sav` contains the built-in predicates written in Prolog. It is restored into the program at runtime by the function `SP_initialize()`. Extended runtime systems restore `spre.sav` instead, which requires a license, available from RISE as an add-on product. See also Section "Managing Extended Runtime License Information" in *SICStus Prolog Release Notes*.

your Prolog code
: As a saved state, '`.po`' files, or source code ('`.pl`' files). They must be explicitly loaded by the program at runtime (see Section 6.7.4.2 [Loading Prolog Code], page 335).

your linked foreign resources
: Any dynamically linked foreign resources, including any linked foreign resources for library modules located in `$SP_PATH/library`.

The following two sections describe how to package the above components for UNIX and Windows *target machines*, i.e. machines that do not have SICStus Prolog installed, respectively. It is also possible to package all the above components into a single executable file, an all-in-one executable. See Section 6.7.3.2 [All-in-one Executables], page 328.

6.7.2.1 Runtime Systems on UNIX Target Machines

In order to build a runtime system for distribution on a target machine, the option `--moveable` must be passed to `spld`. This option prevents `spld` from hardcoding any (absolute) paths into the executable. As of release 4.2, `--moveable` is the default on most platforms, including Linux and Mac OS X.

Next, in order for SICStus to be able to locate all relevant files, the following directory structure should be used.

```
myapp.exe
sp-4.10.2/
+--- libsprt4-10-2.so
+--- sicstus-4.10.2/
     +--- bin/
     |    +--- sprt.sav
     +--- library/
          +--- <files from $SP_PATH/library>
```

If support for multiple SICStus instances is needed, then the runtimes named e.g. `libsprt4-10-2_instance_01_.so` need to be available as well, in the same place as `libsprt4-10-2.so`.

If SICStus Prolog is installed on the target machine, then a symbolic link named `sp-4.10.2` can be used, in which case it should point to the directory of the SICStus installation that contains the `libsprt4-10-2.so` (or equivalent).

If the runtime system needs to be debugged, then the above file system layout should be complemented as follows: The file `spds.sav` from the development system should be copied and placed in the same folder as `sprt.sav` and the license information must be made available. See Section 6.9 [Debugging Runtime Systems], page 346, for details.

`myapp.exe` is typically created by a call to `spld`:

```
% spld --main=user --moveable [...] -o ./myapp.exe
```

On most platforms, the above directory layout will enable the executable to find the SICStus runtime (e.g., `libsprt4-10-2.so`) as well as the boot file `sprt.sav` (`spre.sav`). In addition, application specific files, e.g. a `.sav` file, can be found using the automatically set system properties `SP_APP_DIR` or `SP_RT_DIR`. On some platforms a wrapper script, generated by `spld`, is needed to ensure that the files are found.

Unless the `--static` option is passed to `spld`, it might also be necessary to set `LD_LIBRARY_PATH` (or equivalent) to `/home/joe/lib` (in the example above) in order for the dynamic linker to find `libsprt4-10-2.so`. If the `--static` option is used, then this is not necessary. Setting `LD_LIBRARY_PATH` is not recommended unless it is really needed.

When a runtime system is redistributed to third parties, only the following files may be included in the distribution. All filenames are relative to `<prefix>/lib/sicstus-4.10.2`:

`../*.{a,so,sl,dylib}`
`bin/sprt.sav`
`bin/spre.sav`
`bin/jasper.jar`
`bin/prologbeans.jar`
`bin/sprt` (generic runtime system)

`bin/sprti`
(generic runtime system)

`library/*.{tcl,po,pl}`
Except `license.pl`!

`library/*/*.{s.o,so,sl,dylib}`
`library/*/*.{po,pl}`
`sp_platform`
(Located with `InstallSICStus`)

Please note: you cannot redistribute `spds.sav` or `license.pl`.

6.7.2.2 Runtime Systems on Windows Target Machines

In order to locate all relevant files, the following directory structure should be used:

```
myapp.exe
sprt4-10-2.dll
sp-4.10.2\
+--- bin\
|    +--- sprt.sav
+--- library\
     +--- <files from %SP_PATH%\library>
```

If support for multiple SICStus instances is needed, then the runtimes named e.g. `sprt4-10-2_instance_01_.dll` need to be available as well, in the same place as `sprt4-10-2.dll`.

If the runtime system needs to be debugged, then the above file system layout should be complemented as follows: The file `spds.sav` from the development system should be copied

and placed in the same folder as `sprt.sav` and the license information must be made available. See Section 6.9 [Debugging Runtime Systems], page 346, for details.

`myapp.exe` is typically created by a call to `spld`:

```
% spld --main=user [...] -o ./myapp.exe
```

If the directory containing `sprt4-10-2.dll` contains a directory called `sp-4.10.2`, then SICStus assumes that it is part of a runtime system as described in the picture below. The (extended) runtime library, `sprt.sav` (`spre.sav`), is then looked up in the directory (`sp-4.10.2/bin`), as in the picture. Furthermore, the initial `library_directory/1` fact will be set to the same directory with `sp-4.10.2/library` appended.

The directory structure under `library/` should look like in a regularly installed SICStus, including the platform-specific subdirectory (`x86-win32-nt-4` in this case). If your application needs to use `library(timeout)`[1] and `library(random)`, then your directory structure may look like:

```
myapp.exe
sprt4-10-2.dll
sp-4.10.2\
+--- bin\
|    +--- sprt.sav
+--- library\
     +--- random.po
     +--- timeout.po
     +--- x86-win32-nt-4 \
          +--- random.dll
```

The `sp*` files can also be put somewhere else in order to be shared by several applications provided the `sprt4-10-2.dll` can be located by the DLL search.

Naming the files with version number enables applications using different SICStus versions to install the `sp*` files in the same directory.

When a runtime system is redistributed to third parties, only the following files may be included in the distribution. All filenames are relative to `%SP_PATH%`:

`bin\sprt.sav`
`bin\spre.sav`
`bin\jasper.jar`
`bin\prologbeans.jar`
`bin/sprt.exe`
: (generic runtime system)

`bin/sprti.exe`
: (generic runtime system)

[1] Prior to release 4.4, `library(timeout)` also used a foreign resource. This is no longer the case.

`bin/sprtw.exe`
(generic runtime system)

`bin\*.dll`
`bin\*.po`

`library\*.{tcl,po,pl,bas}`
Except `license.pl`!

`library\*\*.dll`
`library\*\*.{po,pl}`

Please note: you cannot redistribute `spds.sav` or `license.pl`.

6.7.3 The Application Builder

The application builder, `spld`, is used for creating stand-alone executables. `spld` takes the files specified on the command line and combines them into an executable file, much like the UNIX `ld` or the Windows `link` commands.

Note that no pathnames passed to `spld` should contain spaces. Under Windows, this can be avoided by using the short version of pathnames as necessary.

See Section 13.5 [too-spld], page 1435, for detailed information about `spld` options etc.

6.7.3.1 Customizing `spld`

The `spld` tool reads a configuration file at start-up that contains default values for many configurable parameters. It is sometimes useful to modify these in order to adapt to local variations.

The following methods can be used also with the `splfr` command, Section 6.2.5 [The Foreign Resource Linker], page 300.

There are two methods

- Override some parameters with `--conf` *VAR=VALUE*.

  This is useful when only a few parameters need to be changed, e.g. the C compiler. You can override multiple parameters by specified `--conf` more than once.

  For instance, to use a non-default C compiler you can pass `--conf CC=/home/joe/bin/mycc`.

  The option `--conf` was introduced in release 4.0.3.
- Use a modified configuration file with `--config`=*File*.

  It may sometimes be convenient to use a separate, possibly modified, configuration file. This should seldom be needed, use `--conf` instead.

  To use a modified configuration file, follow these instructions:

  1. Locate the configuration file `spconfig-`*`version`*. It should be located in the same directory as `spld`.
  2. Make a copy for `spconfig-`*`version`*; let us call it `hacked_spld.config`. Do Not edit the original file.

3. The configuration file contains lines on the form `CFLAGS=-g -O2`. Edit these according to your needs. Do Not add or remove any options.
4. You may now use the modified `spconfig-`*`version`* together with `spld` like this:

```
% spld [...] --config=/path/to/hacked_spld.config
```

5. Replace `/path/to` with the actual path to the hacked configuration file.

6.7.3.2 All-in-one Executables

It is possible to embed saved states into an executable (or shared object). Together with static linking, this gives an all-in-one executable, an executable (or shared object) that does not depend on external SICStus files.

In the simplest case, creating an all-in-one executable `main.exe` from a saved state `main.sav` can be done with a command like:

```
% spld --output=main.exe --static main.sav
```

This will automatically embed the saved state, any foreign resources needed by the saved state as well the SICStus runtime and its runtime saved state.

Creating a shared object is similar, e.g.

```
% spld --output=main.dll --shared --static main.sav
```

but the following examples cover the more common case of creating an ordinary executable.

The keys to this feature are:

- Static linking. By linking an application with a static version of the SICStus runtime, you avoid any dependency on e.g. `sprt4-10-2.dll` (Windows) or `libsprt4-10-2.so` (UNIX).

  If the application needs foreign resources (predicates written in C code), as used for example by `library(random)` and `library(clpfd)`, then these foreign resources can be linked statically with the application as well.

  The remaining component is the Prolog code itself; see the next item.

- Data Resources (in-memory files). It is possible to link an application with data resources that can be read directly from memory. In particular, saved states can be embedded in an application and used when restoring the saved state of the application.

  An application needs two saved states:

  1. The SICStus runtime system (`sprt.sav`).

     This is added automatically when `spld` is invoked with the `--static` (or `-S`) option unless the `spld`-option `--no-embed-rt-sav` is specified. It can also be added explicitly with the option `--embed-rt-sav`.

  2. The user written code of the application as well as any SICStus libraries.

     This saved state is typically created by loading all application code using `compile/1` and then creating the saved state with `save_program/2`.

Data resources are added by specifying their internal name and the path to a file as part of the comma separated list of resources passed with the `spld` option `--resources`. Each data resource is specified as *file*=*name* where *file* is the path to the file containing the data (it must exist during the call to `spld`) and *name* is the name used to access the content of *file* during runtime. A typical choice of *name* would be the base name, i.e. without directories, of *file*, preceded by a slash (`/`). *name* should begin with a slash (`/`) and look like an ordinary lowercase file path made up of '`/`'-separated, non-empty, names consisting of '`a`' to '`z`', underscore ('`_`', period ('`.`'), and digits.

Typically, you would use `spld --main=restore`, which will automatically restore the first '`.sav`' argument. To manually restore an embedded saved state you should use the syntax `URL:x-sicstus-resource:`*name*, e.g. `SP_restore("URL:x-sicstus-resource:/main.sav")`.

An example will make this clearer. Suppose we create a runtime system that consists of a single file `main.pl` that looks like:

```
                                                                    % main.pl
:- use_module(library(random)).
:- use_module(library(clpfd)).

% This will be called when the application starts:
user:runtime_entry(start) :-
   %% You may consider putting some other code here...
   write('hello world'),nl,
   write('Getting a random value:'),nl,
   random(1,10,R),                  % from random
   writeq(R),nl,
   ( all_different([3,9]) ->        % from clpfd
       write('3 != 9'),nl
   ; otherwise ->
       write('3 = 9!?'),nl
   ).
```

Then create the saved state `main.sav`, which will contain the compiled code of `main.pl` as well as the Prolog code of `library(random)` and `library(clpfd)` and other Prolog libraries needed by `library(clpfd)`:

```
% sicstus -i -f
SICStus 4.10.2 ...
Licensed to SICS
| ?- compile(main).
% compiling .../main.pl...
% ... loading several library modules
| ?- save_program('main.sav').
% .../main.sav created in 201 msec

| ?- halt.
```

Finally, tell `spld` to build an executable statically linked with the SICStus runtime and the foreign resources needed by `library(random)` and `library(clpfd)`. Also, embed the Prolog runtime saved state and the application specific saved state just created.

As noted above, it is possible to build the all-in-one executable with the command line:

```
% spld --output=main.exe --static main.sav
```

but for completeness the example below uses all options as if no options were added automatically.

The example is using Cygwin `bash` (`http://www.cygwin.com`) under Windows but would look much the same on other platforms. The command should be given on a single line; it is broken up here for better layout:

```
% spld
  --output=main.exe
  --static
  --embed-rt-sav
  --main=restore
  --resources=main.sav=/main.sav,clpfd,random
```

The arguments in the example are as follows:

`--output=main.exe`
: This tells `spld` where to put the resulting executable.

`--static`
: Link statically with the SICStus runtime and foreign resources (`clpfd` and `random`, in this case).

`--embed-rt-sav`
: This option embeds the SICStus runtime '`.sav`' file (`sprt.sav`). This option is not needed since it is added automatically by `--static`.

`--main=restore`
: Start the application by restoring the saved state and calling `user:runtime_entry(start)`. This is not strictly needed in the above example since it is the

default if any file with extension '`.sav`' or a data resource with a *name* where the extension is '`.sav`' is specified.

`--resources=...`
: This is followed by comma-separated resource specifications:

  `main.sav=/main.sav`
  : This tells `spld` to make the content (at the time `spld` is invoked) of the file `main.sav` available at runtime in a data resource named `/main.sav`. That is, the data resource name corresponding to `"URL:x-sicstus-resource:/main.sav"`.

    Alternatively, `spld` can create a default data resource specification when passed a '`.sav`' file argument and the option `--embed-sav-file` (which is the default with `--static`).

  `clpfd`
  `random`
  : These tell `spld` to link with the foreign resources (that is, C-code) associated with `library(clpfd)` and `library(random)`. Since `--static` was specified the static versions of these foreign resources will be used.

    Alternatively, `spld` can extract the information about the required foreign resources from the saved state (`main.sav`). This feature is enabled by adding the option `--resources-from-sav` (which is the default with `--static`). Using `--resources-from-sav` instead of an explicit list of foreign resources is preferred since it is hard to know what foreign resources are used by the SICStus libraries.

  Since both `--embed-sav-file` and `--resources-from-sav` are the default when `--static` is used the example can be built simply by doing:

  ```
  % spld --output=main.exe --static main.sav
  ```

Finally, we may run this executable on any machine, even if SICStus is not installed:

```
bash-2.04$ ./main.exe
hello world
Getting a random value:
4
3 != 9
bash-2.04$
```

6.7.3.3 Setting up the C compiler on Windows

`spld` (and `splfr`) are command line tools and need to have access to a working C compiler and linker. This is typically not a problem on UNIX-like systems but on Windows there are some special steps needed in order to set up the environment so that the C compiler can be used.

The easiest way to get a command prompt where the C compiler works is to open the '`Visual Studio 2005 Command Prompt`' from the Start menu. On Windows Vista this is located under '`All Programs/Microsoft Visual Studio 2005/Visual Studio Tools/`'. This opens

up a command prompt where `cl.exe` (the C compiler) can be found via the `PATH` environment variable.

An alternative is to run the Visual Studio set up script from the command prompt, something like:

```
C:\>"C:\Program Files\Microsoft Visual Studio 8\VC\vcvarsall.bat" x86
```

This is in fact what the '`Visual Studio 2005 Command Prompt`' shortcut does.

Similar steps will work for other versions of Visual Studio. Note that there are different versions of SICStus Prolog for different versions of Visual Studio. This is necessary since each version of Visual Studio comes with its own version of the C library.

Once the environment is set up for using the C compiler you should be able to use the `spld` (and `splfr`) tools without problem.

6.7.3.4 Extended Runtime Systems

An extended runtime system is a variant of a runtime system with additional capabilities, including the presence of the Prolog compiler. Extended runtime systems are created with `spld` in a way similar to how ordinary runtime systems are created. An extended runtime system requires a license; see Section "Managing Extended Runtime License Information" in *SICStus Prolog Release Notes* for details about managing such license information.

6.7.3.5 Examples

1. The character-based SICStus development system executable (`sicstus`) can be created using:

   ```
   % spld --main=prolog -o sicstus
   ```

   This will create a development system that is dynamically linked and has no prelinked foreign resources.

2.

   ```
   % spld --static -D --resources=random -o main
   ```

   This will create a statically linked executable called `main` that has the resource `random` prelinked (statically).

3. An all-in-one executable with a home-built foreign resource.

   This example is similar to the example in Section 6.7.3.2 [All-in-one Executables], page 328, with the addition of a foreign resource of our own.

```
                                                                    % bar.pl
:- use_module(library(random)).
:- use_module(library(clpfd)).


% This will be called when the application starts:
user:runtime_entry(start) :-
   %% You may consider putting some other code here...
   write('hello world'),nl,
   write('Getting a random value:'),nl,
   random(1, 10, R),                % from random
   writeq(R),nl,
   ( all_different([3,9]) ->        % from clpfd
       write('3 != 9'),nl
   ; otherwise ->
       write('3 = 9!?'),nl
   ),
   '$pint'(4711).                   % from our own foreign resource 'bar'

foreign(print_int, '$pint'(+integer)).
foreign_resource(bar, [print_int]).
:- load_foreign_resource(bar).
                                                          /* bar.c */
#include <sicstus/sicstus.h>
#include <stdio.h>
/* bar_glue.h is generated by splfr from the foreign/[2,3] facts.
   Always include the glue header in your foreign resource code.
*/
#include "bar_glue.h"

extern void print_int(SP_integer a);

void print_int(SP_integer a)
{
  /* Note the use of SPRIdINTEGER to get a format specifier corresponding
     to the SP_integer type. For most platforms this corresponds
     to "ld" and long, respectively. */
  printf("a=%" SPRIdINTEGER "\n", (SP_integer)a);
}
```

To create the saved state `bar.sav` we will compile the file `bar.pl` and save it with `save_program('bar.sav')`. When compiling the file the directive `:- load_foreign_resource(bar).` is called so a dynamic foreign resource must be present.

Thus, first we build a dynamic foreign resource.

```
% splfr bar.c bar.pl
```

Then, we create the saved state.

```
% sicstus --goal "compile(bar), save_program('bar.sav'), halt."
```

We also need a static foreign resource to embed in our all-in-one executable.

```
% splfr --static bar.c bar.pl
```

Finally, we build the all-in-one executable with `spld`. We do not need to list the foreign resources needed. `spld` will extract their names from the `.sav` file. Adding the `--verbose` option will make `spld` output lots of progress information, among which are the names of the foreign resources that are needed. Look for "Found resource name" in the output.

```
% spld --verbose --static --main=restore --respath=. --
resources=bar.sav=/mystuff/bar.sav --output=bar
```

In this case four foreign resource names are extracted from the `.sav` file: `bar`, `clpfd`, and `random`. The source file `bar.pl` loads the foreign resource named `bar`. It also uses the `library(random)` module, which loads the foreign resource named `random`, and the `library(clpfd)` module, which loads the foreign resource named `clpfd`.

By not listing foreign resources when running `spld`, we avoid the risk of omitting a required resource.

6.7.4 User-defined Main Programs

Runtime systems may or may not have an automatically generated main program. This is controlled by the `--main` option to `spld`. If `--main=user` is given, then a function `user_main()` must be supplied:

```
int user_main(int argc, char *argv[])
```

`user_main()` is responsible for initializing the Prolog engine, loading code, and issuing any Prolog queries. An alternative is to use `--main=none` and write your own `main()` function.

6.7.4.1 Initializing the Prolog Engine

The Prolog Engine is initialized by calling `SP_initialize()`. This must be done before any interface functions are called, except those marked '`preinit`' in this manual.

The function will allocate data areas used by Prolog and load the Runtime Library.

It will also initialize command line arguments so that they can be accessed by the `argv` Prolog flag but it may be preferable to use `SP_set_argv()` for this.

To unload the SICStus emulator, `SP_deinitalize()` can be called.

You may also call `SP_force_interactive()` before calling `SP_initialize()`. This will force the I/O built-in predicates to treat the standard streams as a interactive, even if they do not appear to be connected to a terminal or console. Same as the `-i` option in development systems (see Section 3.1 [Start], page 23).

The SICStus Prolog memory manager has a two-layer structure. The top layer has roughly the same functionality as the standard UNIX functions `malloc` and `free`, whereas the bottom layer is an interface to the operating system. It is the bottom layer that can be customized by setting these hooks.

6.7.4.2 Loading Prolog Code

You can load your Prolog code with the call `SP_load()`. This is the C equivalent of the Prolog predicate `load_files/1`.

Alternatively, you can restore a saved state with the call `SP_restore()`, which is the C equivalent of the Prolog predicate `restore/1`.

6.7.5 Generic Runtime Systems

There are three ready-made runtime systems provided with the distributions, `sprt.exe`, `sprti.exe`, and (only on Windows) `sprtw.exe`. These have been created using `spld`:

```
$ spld --main=restore '$SP_APP_DIR/main.sav' -o sprt.exe
$ spld --main=restore '$SP_APP_DIR/main.sav' -i -o sprti.exe
$ spld --main=restore '$SP_APP_DIR/main.sav' --window -o sprtw.exe
```

These are provided for users who do not have a C-compiler available. Each program launches a runtime system by restoring the saved state `main.sav` (located in the same folder as the program).

The saved state is created by `save_program/[1,2]`. If it was created by `save_program/2`, then the given startup goal is run. Then, `user:runtime_entry(start)` is run. The program exits with 0 upon normal temination and with 1 on failure or exception.

The program `sprti.exe` assumes that the standard streams are connected to a terminal, even if they do not seem to be (useful under Emacs, for example). On Windows only, `sprtw.exe` is a windowed executable, corresponding to `spwin.exe`.

6.8 Mixing C and Prolog Examples

6.8.1 Train Example (connections)

This is an example of how to create a runtime system. The Prolog program `train.pl` will display a route from one train station to another. The C program `train.c` calls the Prolog code and writes out all the routes found between two stations:

```
                                                        % train.pl
connected(From, From, [From], _):- !.
connected(From, To, [From| Way], Been):-
        (   no_stop(From, Through)
        ;
            no_stop(Through, From)
        ),
        not_been_before(Been, Through),
        connected(Through, To, Way, Been).

no_stop('Stockholm', 'Katrineholm').
no_stop('Stockholm', 'Vasteras').
no_stop('Katrineholm', 'Hallsberg').
no_stop('Katrineholm', 'Linkoping').
no_stop('Hallsberg', 'Kumla').
no_stop('Hallsberg', 'Goteborg').
no_stop('Orebro', 'Vasteras').
no_stop('Orebro', 'Kumla').

not_been_before(Way, _) :- var(Way),!.
not_been_before([Been| Way], Am) :-
        Been \== Am,
        not_been_before(Way, Am).
```

```
                                                        /* train.c */
#include <stdio.h>
#include <stdlib.h>
#include <sicstus/sicstus.h>

static void write_path(SP_term_ref path)
{
  char const *text = NULL;
  SP_term_ref
    tail = SP_new_term_ref(),
    via = SP_new_term_ref();

  SP_put_term(tail,path);

  while (SP_get_list(tail,via,tail)) {
    if (text)
      printf(" -> ");

    SP_get_string(via, &text);
    printf("%s",text);
  }
  printf("\n");
}

int user_main(int argc, char **argv)
{
  int rval;
  SP_pred_ref pred;
  SP_qid goal;
  SP_term_ref from, to, path;

  /* Initialize Prolog engine. The third arg to SP_initialize is
     an option block and can be NULL, for default options. */
  if (SP_FAILURE == SP_initialize(argc, argv, NULL)) {
    fprintf(stderr, "SP_initialize failed: %s\n",
            SP_error_message(SP_errno));
    exit(1);
  }

  rval = SP_restore("train.sav");

  if (rval == SP_ERROR || rval == SP_FAILURE) {
    fprintf(stderr, "Could not restore \"train.sav\".\n");
    exit(1);
  }
```

```
                                                              /* train.c */
  /* Look up connected/4. */
  if (!(pred = SP_predicate("connected",4,"user"))) {
    fprintf(stderr, "Could not find connected/4.\n");
    exit(1);
  }

  /* Create the three arguments to connected/4. */
  SP_put_string(from = SP_new_term_ref(), "Stockholm");
  SP_put_string(to = SP_new_term_ref(), "Orebro");
  SP_put_variable(path = SP_new_term_ref());

  /* Open the query. In a development system, the query would look like:
   *
   * | ?- connected('Stockholm','Orebro',X).
   */
  if (!(goal = SP_open_query(pred,from,to,path,path))) {
    fprintf(stderr, "Failed to open query.\n");
    exit(1);
  }

  /*
   * Loop through all the solutions.
   */
  while (SP_next_solution(goal)==SP_SUCCESS) {
    printf("Path: ");
    write_path(path);
  }

  SP_close_query(goal);

  exit(0);
}
```

Create the saved state containing the Prolog code:

```
% sicstus
SICStus 4.10.2 ...
Licensed to SICS
| ?- compile(train),save_program('train.sav').
% compiling [...]/train.pl...
% compiled [...]/train.pl in module user, 10 msec 2848 bytes
% [...]/train.sav created in 0 msec

| ?- halt.
```

Create the executable using the application builder:

```
% spld --main=user train.c -o train.exe
```

And finally, run the executable:

```
% ./train
Path: Stockholm -> Katrineholm -> Hallsberg -> Kumla -> Orebro
Path: Stockholm -> Vasteras -> Orebro
```

6.8.2 Building for a Target Machine

The following example shows how to build an application with a dynamically loaded foreign resource in such a way that it can be deployed into an arbitrary folder on a target system that does not have SICStus installed. The example is run on Linux but it would be very similar on other platforms.

The example consists of three source files, one top-level file (`main.pl`) which in turn loads a module file (`b.pl`). The latter also loads a foreign resource (`b.c`).

The initial directory structure, and the contents of the source files can be seen from the following transcript:

```
$ find build/
build/
build/myfiles
build/myfiles/main.pl
build/myfiles/b.pl
build/myfiles/b.c
$ cat build/myfiles/main.pl
:- module(main, [main/0]).

:- use_module(b,
              [b_foreign/1]).

main :-
  b_foreign(X),
  write(X), nl.

user:runtime_entry(start) :-
  main.

$ cat build/myfiles/b.pl
:- module(b, [b_foreign/1]).

foreign(b_foreign_c, b_foreign([-string])).

foreign_resource(b, [
        b_foreign_c]).

:- load_foreign_resource(b).

$ cat build/myfiles/b.c
#include <sicstus/sicstus.h>
/* b_glue.h is generated by splfr from the foreign/[2,3] facts.
   Always include the glue header in your foreign resource code.
*/
#include "b_glue.h"

char const * SPCDECL b_foreign_c(void)
{
  return "Hello World!";
}
```

The following transcript shows how the foreign resource and the SICStus runtime executable is built:

```
$ cd build/myfiles/
$ splfr b.pl b.c
$ cd ..
$ sicstus --nologo
% optional step for embedding source info in saved state.
| ?- set_prolog_flag(source_info, on).
yes
% source_info
| ?- compile('myfiles/main.pl').
% compiling .../build/myfiles/main.pl...
%  module main imported into user
%  compiling .../build/myfiles/b.pl...
%   module b imported into main
%   loading foreign resource .../build/myfiles/b.so in module b
%  compiled .../build/myfiles/b.pl in module b, 0 msec 3104 bytes
% compiled .../build/myfiles/main.pl in module main, 0 msec 5344 bytes
yes
% source_info
| ?- save_program('main.sav').
% .../build/main.sav created in 20 msec
yes
% source_info
| ?- halt.
$ spld '$SP_APP_DIR/main.sav' -o main.exe
Created "main.exe"
```

(instead of creating `main.exe` you could use the generic runtime system `sprt.exe` provided as part of the installation (see Section 6.7.5 [Generic Runtime Systems], page 335)).

Please note: it is important that `main.sav` be saved to a folder that is the "root" of the folder tree. The folder in which the saved state is created (`.../build/` above) is treated specially by `save_program/[1,2]` and by `restore/1`. This special handling ensures that `myfiles/b.so` will be found relative to the location of `main.sav` when `main.sav` is restored on the target system. See Section 3.10 [Saving], page 30, for details.

Next, the necessary runtime files must be copied from the SICStus installation:

```
$ mkdir -p sp-4.10.2/sicstus-4.10.2/bin
$ cp /usr/local/sicstus4.10.2/lib/libsprt4-10-2.so sp-4.10.2/
$ cp /usr/local/sicstus4.10.2/lib/sicstus-4.10.2/bin/sprt.sav \
     sp-4.10.2/sicstus-4.10.2/bin/sprt.sav
```

The resulting folder contents can be seen by running the `find` command:

```
$ find . -print
.
./sp-4.10.2
./sp-4.10.2/libsprt4-10-2.so
./sp-4.10.2/sicstus-4.10.2
./sp-4.10.2/sicstus-4.10.2/bin
./sp-4.10.2/sicstus-4.10.2/bin/sprt.sav
./myfiles
./myfiles/b.so
./myfiles/main.pl
./myfiles/b.pl
./myfiles/b.c
./main.sav
./main.exe
```

It is possible to run the program from its current location:

```
$ ./main.exe
Hello World!
```

The folder `build/myfiles/` contains some files that do not need to be present on the target machine, i.e. the source files. The following transcript shows how a new folder, `target/`, is created that contains only the files that need to be present on the target system.

```
$ cd ..
$ mkdir target
$ mkdir target/myfiles
$ cp build/main.sav target
$ cp build/main.exe target
$ cp build/myfiles/b.so target/myfiles/
$ cp -R build/sp-4.10.2 target
$ find target/ -print
target/
target/myfiles
target/myfiles/b.so
target/main.sav
target/main.exe
target/sp-4.10.2
target/sp-4.10.2/sicstus-4.10.2
target/sp-4.10.2/sicstus-4.10.2/bin
target/sp-4.10.2/sicstus-4.10.2/bin/sprt.sav
target/sp-4.10.2/libsprt4-10-2.so
$ target/main.exe
Hello World!
```

Note that `target/myfiles/b.so` was found since its location relative the directory containing the saved state (`main.sav`) is the same on the target system as on the build system.

The folder `target/` can now be moved to some other system and `target/main.exe` will not depend on any files of the build machine.

As a final example, the following transcripts show how the runtime system can be debugged on the build machine. It is possible to do this on the target system as well, if the necessary files are made available. See Section 6.9 [Debugging Runtime Systems], page 346, for more information.

First, the development system files and the license file must be made available:

```
$ mkdir sp-4.10.2/sicstus-4.10.2/library
$ cp /usr/local/sicstus4.10.2/lib/sicstus-
4.10.2/library/SU_messages.po \
     sp-4.10.2/sicstus-4.10.2/library/
$ cp /usr/local/sicstus4.10.2/lib/sicstus-4.10.2/bin/spds.sav \
     sp-4.10.2/sicstus-4.10.2/bin/
$ cp /usr/local/sicstus4.10.2/lib/sicstus-4.10.2/library/license.pl \
     sp-4.10.2/sicstus-4.10.2/library/
```

As before, the resulting folder contents can be seen by running the `find` command:

```
$ find . -print
.
./sp-4.10.2
./sp-4.10.2/libsprt4-10-2.so
./sp-4.10.2/sicstus-4.10.2
./sp-4.10.2/sicstus-4.10.2/library
./sp-4.10.2/sicstus-4.10.2/library/SU_messages.po
./sp-4.10.2/sicstus-4.10.2/library/license.pl
./sp-4.10.2/sicstus-4.10.2/bin
./sp-4.10.2/sicstus-4.10.2/bin/spds.sav
./sp-4.10.2/sicstus-4.10.2/bin/sprt.sav
./myfiles
./myfiles/b.so
./myfiles/main.pl
./myfiles/b.pl
./myfiles/b.c
./main.sav
./main.exe
$
```

To tell the runtime system to start a development system. you can set the `SP_USE_DEVSYS` environment variable as shown below. You could also set `SP_ATTACH_SPIDER` and debug in the SICStus IDE (see Section 6.9 [Debugging Runtime Systems], page 346).

```
$ SP_USE_DEVSYS=yes
$ export SP_USE_DEVSYS
$ ./main.exe
% The debugger will first creep -- showing everything (trace)
        1      1 Call: restore('$SP_APP_DIR/main.sav') ? RET
% restoring .../build/main.sav...
% .../build/main.sav restored in 10 msec 5600 bytes
        1      1 Exit: restore('$SP_APP_DIR/main.sav') ? RET
        2      1 Call: runtime_entry(start) ? RET
in scope of a goal at line 12 in .../build/myfiles/main.pl
        3      2 Call: main:main ? RET
in scope of a goal at line 7 in .../build/myfiles/main.pl
        4      3 Call: main:b_foreign(_2056) ? RET
in scope of a goal at line 7 in .../build/myfiles/main.pl
        4      3 Exit: main:b_foreign('Hello World!') ? v
Local variables (hit RET to return to debugger)
X = 'Hello World!' ? RET
in scope of a goal at line 7 in .../build/myfiles/main.pl
        4      3 Exit: main:b_foreign('Hello World!') ? n
Hello World!
$
```

Please note: source info is available, since we used `set_prolog_flag(source_info, on)` before we compiled `main.pl` and created the saved state `main.sav`.

6.8.3 Exceptions from C

Consider, for example, a function returning the square root of its argument after checking that the argument is valid. If the argument is invalid, then the function should raise an exception instead.

```
                                                                    /* math.c */
#include <math.h>
#include <stdio.h>
#include <sicstus/sicstus.h>
/* math_glue.h is generated by splfr from the foreign/[2,3] facts.
   Always include the glue header in your foreign resource code.
*/
#include "math_glue.h"

extern double sqrt_check(double d);
double sqrt_check(double d)
{
  if (d < 0.0) {    /* build a domain_error/4 exception term */
    SP_term_ref culprit=SP_new_term_ref();
    SP_term_ref argno=SP_new_term_ref();
    SP_term_ref expdomain=SP_new_term_ref();
    SP_term_ref t1=SP_new_term_ref();

    SP_put_float(culprit, d);
    SP_put_integer(argno, 1);
    SP_put_string(expdomain, ">=0.0");
    SP_cons_functor(t1, SP_atom_from_string("sqrt"), 1, culprit);
    SP_cons_functor(t1, SP_atom_from_string("domain_error"), 4,
                    t1, argno, expdomain, culprit);
    SP_raise_exception(t1);    /* raise the exception */
    return 0.0;
  }
  return sqrt(d);
}
```

The Prolog interface to this function is defined in a file `math.pl`. The function uses the `sqrt()` library function, and so the math library `-lm` has to be included:

```
                                                                    % math.pl
foreign_resource(math, [sqrt_check]).

foreign(sqrt_check, c, sqrt(+float, [-float])).

:- load_foreign_resource(math).
```

A linked foreign resource is created:

```
% splfr math.pl math.c -lm
```

A simple session using this function could be:

```
$ sicstus
SICStus 4.10.2 ...
Licensed to SICS
| ?- [math].
% compiling .../math.pl...
%  loading foreign resource .../math.so in module user
% compiled .../math.pl in module user, 0 msec 2400 bytes
yes
| ?- sqrt(5.0,X).
X = 2.23606797749979 ?
yes
| ?- sqrt(a,X).
! Type error in argument 1 of user:sqrt/2
! expected a number, but found a
! goal:  user:sqrt(a,_110)
| ?- sqrt(-5,X).
! Domain error in argument 1 of user:sqrt/1
! expected '>=0.0', but found -5.0
! goal:  sqrt(-5.0)
```

6.8.4 Stream Example

See Section 6.6.2 [Defining a New Stream], page 317, for a simple example of defining a stream that reads from a C `FILE` stream.

For a more realistic example, `library(codesio)` implements a stream that can return a list of all characters written to it. The source code for this library is located in `library/codesio.pl` and `library/codesio.c` and can serve as a useful sample for user defined streams both for input and output. That code also illustrates other important features of user defined streams, for instance ensuring that all the streams have been closed when the foreign resource is unloaded.

6.9 Debugging Runtime Systems

A runtime system does not contain the Prolog debugger by default. This makes it hard to troubleshoot problems that only occur when the code is embedded in some other application.

As of release 4.2, it is possible to tell a runtime system to start the full development system instead. This way, the Prolog debugger, compiler etc. can be used to debug the application, either from the command line or by attaching to the SICStus Prolog IDE (SPIDER). In the simplest case, this feature is enabled by setting the system property (or environment variable) `SP_USE_DEVSYS` to `yes` before starting the runtime system. This will cause the runtime system to become a development system and it will start the debugger, as if by a call to `trace/0`. See Section 6.8.2 [Building for a Target Machine], page 339, for a complete example.

For best effect, you should ensure that any compiled prolog code (‘`.sav`’ and ‘`.po`’ files) has been compiled with the Prolog flag `source_info` enabled, i.e. with `set_prolog_flag(source_info, on)`.

When the runtime system is started as a development system in this way, it needs to be able to find the file that makes up an ordinary development system, i.e. `spds.sav`; see Section 6.7.2.1 [Runtime Systems on UNIX Target Machines], page 324, and Section 6.7.2.2 [Runtime Systems on Windows Target Machines], page 325, above. It also needs to find the license information for the development system; see Section 6.9.1 [Locating the License Information], page 347, below.

6.9.1 Locating the License Information

The license information for debugged runtime systems can be provided in several ways. Most of them can also be used as alternative ways for providing the license information to extended runtime systems (see Section "Managing Extended Runtime License Information" in *SICStus Prolog Release Notes*).

On Windows only, if you have installed the SICStus Prolog development system on the machine where the runtime system is to be debugged, then the license information will be found in the Windows registry and no extra steps need to be performed. This method cannot be used for providing an extended runtime system license since the license information for the full development system is not the same as for an extended runtime system.

If you have the license in a file `license.pl`, i.e. you are using a UNIX platform or have manually created a `license.pl` file on Windows, then you can make this file available to the debugged runtime system in one of two ways:

- Set the system property or environment variable `SP_LICENSE_FILE` to the absolute path of the `license.pl` file of a SICStus Prolog installation, or
- Copy the `license.pl` file into the appropriate location relative to the runtime system executable, i.e. to `sp-4.10.2/sicstus-4.10.2/library/license.pl` on UNIX or `sp-4.10.2\library\license.pl` on Windows.

Please note: you cannot redistribute `license.pl`.

The final alternative, available on all platforms, is to set the following system properties or environment variables

`SP_LICENSE_SITE`
: Set to the site name part of your license.

`SP_LICENSE_CODE`
: Set to the code part of your license, e.g. something like `a111-b222-c333-d444-e444`.

`SP_LICENSE_EXPIRATION`
: Set to the expiration part of your license, e.g. `permanent` if you have a permanent (non-evaluation) license.

6.9.2 Customizing the Debugged Runtime System

It is possible to fine-tune the behavior of the debugged runtime system in various ways, both at compile time (setting C preprocessor symbols and passing system properties to `SP_initialize()`) and at runtime (passing system properties as environment variables).

The system properties and environment variables that affect the debugged runtime system are:

`SP_USE_DEVSYS`
: if set to `yes`, then the runtime system will try to start a development system, as described above.

`SP_ATTACH_SPIDER`
: if set to `yes`, then this has the same effect as `SP_USE_DEVSYS=yes` and in addition tries to attach to the SICStus Prolog IDE (SPIDER). You have to tell SPIDER to '`Attach to Prolog Process`', i.e. listen for an incoming connection. This command is available from the SICStus top-level view menu in SPIDER.

`SP_DEVSYS_NO_TRACE`
: if set to `yes`, then this will prevent the runtime system from calling `trace/0` at initialization. This is useful if you prefer to manually enable the debugger later from your C or Prolog code.

`SP_ALLOW_DEVSYS`
: if set to `no`, then this will prevent the runtime system from starting as a development system. This may be useful in order to prevent inheriting `SP_USE_DEVSYS` or `SP_ATTACH_SPIDER` from the environment. The same effect can be obtained by passing the option `--no-allow-devsys` to `spld` when building the runtime system.

`SP_LICENSE_FILE`
`SP_LICENSE_SITE`
`SP_LICENSE_CODE`
`SP_LICENSE_EXPIRATION`
: These are described in Section 6.9.1 [Locating the License Information], page 347, above.

If your C code calls `SP_initialize()`, then you can pass these system properties in the call to `SP_initialize()` (see Section 12.3.44 [SP_initialize], page 1356). You can also pass these options to `SP_initialize()` by setting the `SPLD_DSP` C macro. See the definition of `SP_initialize()` in the header file `sictus/sicstus.h` for details.

6.9.3 Examples of Debugging Runtime Systems

The following examples show how to start Prolog debugging when SICStus is run from within Java via Jasper. The examples assume that the SICStus files are part of a development system installation.

The first example initializes the SICStus system property `SP_USE_DEVSYS` by setting the environment variable with the same name. This method of passing SICStus system properties also works well when SICStus is embedded in some other, non-Java, program.

```
$ SP=/usr/local/sicstus4.10.2
$ SP_USE_DEVSYS=yes
$ export SP_USE_DEVSYS
$ java -jar \
       "$SP/lib/sicstus-4.10.2/bin/jasper.jar"
Trying to load SICStus.
% The debugger will first creep -- showing everything (trace)
        1      1 Call: write('If you see this message, you have suc-
cessfully') ? RET
If you see this message, then you have successfully
        1      1 Exit: write('If you see this message, you have suc-
cessfully') ? n

initialized the SICStus Prolog engine.
$ unset SP_USE_DEVSYS
```

The second example initializes the SICStus system property `SP_USE_DEVSYS` by setting the Java system property `se.sics.sicstus.property.SP_USE_DEVSYS`. This method of passing SICStus system properties is specific to Jasper.

```
$ SP='/usr/local/sicstus4.10.2'
$ java -Dse.sics.sicstus.property.SP_USE_DEVSYS=yes \
       -jar "$SP/lib/sicstus-4.10.2/bin/jasper.jar"
Trying to load SICStus.
% The debugger will first creep -- showing everything (trace)
        1      1 Call: write('If you see this message, you have suc-
cessfully') ? n
If you see this message, then you have successfully
initialized the SICStus Prolog engine.
$
```

7 Interfacing .NET and Java

SICStus Prolog supports two different ways of interfacing a Prolog program with a Java client, and one for interfacing with a .NET client.

SICStus Prolog provides a uniform way of interfacing to Java and .NET clients via the *PrologBeans* (see Section 10.36 [lib-prologbeans], page 766) interface. This is a loosely coupled interface, which means that the client code runs in a different process from the Prolog code. In fact, the client program and the Prolog program can run on separate machines, since the communication is done via TCP/IP sockets. This design has the following advantages over a tightly coupled interface, where they run in the same process:

- There is no competition for memory or other process-wide resources between the virtual machines of the client (.NET or JVM) and of Prolog.
- Distribution over a network is trivial when using PrologBeans. The application is distributable from the beginning.
- PrologBeans has support for user session handling both at the Java level (with support for HTTP sessions and JNDI lookup) and at the Prolog level. This makes it easy to integrate Prolog applications into applications based on Java servers.

The main limitation of the design is that callbacks from Prolog to the client is not provided for.

PrologBeans is the recommended package unless you have special needs and are interfacing with Java in which case you may consider using *Jasper*.

For interfacing to Java clients SICStus Prolog also provides *Jasper* (see Section 10.19 [lib-jasper], page 589), a "tightly coupled" interface. This means that everything runs in the same process (the necessary code is loaded at run time via dynamic linking).

Advantages of Jasper:

- Jasper is bi-directional. Callbacks are possible (limited in levels only by memory), and queries can backtrack.

8 Multiple SICStus Runtimes in a Process

It is possible to have more than one SICStus runtime in a single process. These are completely independent (except that they dynamically load the same foreign resources; see Section 8.3 [Foreign Resources and Multiple SICStus Runtimes], page 355).

Even though the SICStus runtime can only be run in a single thread, it is now possible to start several SICStus runtimes, optionally each in its own thread.

SICStus runtimes are rather heavy weight and you should not expect to be able to run more than a handful.

8.1 Multiple SICStus Runtimes in Java

In Java, you can now create more than one `se.sics.jasper.SICStus` object. Each will correspond to a completely independent copy of the SICStus runtime. Note that a SICStus runtime is not deallocated when the corresponding SICStus object is no longer used. Thus, the best way to use multiple SICStus objects is to create them early and then re-use them as needed.

It is probably useful to create each in its own separate thread. One reason would be to gain speed on a multi-processor machine.

8.2 Multiple SICStus Runtimes in C

Unless otherwise noted, this section documents the behavior when using dynamic linking to access a SICStus runtime.

The key implementation feature that makes it possible to use multiple runtimes is that all calls from C to the SICStus API (`SP_query()`, etc.) go through a dispatch vector. Two runtimes can be loaded at the same time since their APIs are accessed through different dispatch vectors.

By default, there will be a single dispatch vector, referenced from a global variable (`sp_GlobalSICStus`). A SICStus API functions, such as `SP_query()`, is then defined as a macro that expands to something similar to `sp_GlobalSICStus->SP_query_pointer`. The name of the global dispatch vector is subject to change without notice; it should not be referenced directly. If you need to access the dispatch vector, then use the C macro `SICStusDISPATCHVAR` instead; see below.

8.2.1 Using a Single SICStus Runtime

When building an application with `spld`, by default only one SICStus runtime can be loaded in the process. This is similar to what was the case before release 3.9. For most applications built with `spld`, the changes necessary to support multiple SICStus runtimes should be invisible, and old code should only need to be rebuilt with `spld`.

In order to maintain backward compatibility, the global dispatch vector is automatically set up implicitly by `SP_initialize()` and explicitly by `SP_setup_dispatch()`. Other SICStus API functions will not set up the dispatch vector, and will therefore lead to memory

access errors if called before `SP_initialize()`. Currently, hook functions such as `SP_set_user_stream_hook()` also set up the dispatch vector to allow them to be called before `SP_initialize()`. However, only `SP_initialize()` and `SP_setup_dispatch()` are guaranteed to set up the dispatch vector. The hook installation functions may change to use a different mechanism in the future. The SICStus API functions that perform automatic setup of the dispatch vector are marked with `SPEXPFLAG_PREINIT` in `sicstus.h`.

8.2.2 Using More than One SICStus Runtime

Using more than one SICStus runtime in a process is only supported when the dynamic library version of the SICStus runtime is used (e.g. `sprt4-10-2.dll`, `libsprt4-10-2.so`).

An application that wants to use more than one SICStus runtime needs to be built using the `--multi-sp-aware` option to `spld`. C-code compiled by `spld --multi-sp-aware` will have the C preprocessor macro `MULTI_SP_AWARE` defined and non-zero.

Unlike the single runtime case described above, an application built with `--multi-sp-aware` will not have a global variable that holds the dispatch vector. Instead, your code will have to take steps to ensure that the appropriate dispatch vector is used when switching between SICStus runtimes.

There are several steps needed to access a SICStus runtime from an application built with `--multi-sp-aware`.

1. You must obtain the dispatch vector of the initial SICStus runtime using `SP_get_dispatch()`. Note that this function is special in that it is not accessed through the dispatch vector; instead, it is exported in the ordinary manner from the SICStus runtime dynamic library (`sprt4-10-2.dll` under Windows and, typically, `libsprt4-10-2.so` under UNIX).

2. You must ensure that `SICStusDISPATCHVAR` expands to something that references the dispatch vector obtained in step 1.

   The C preprocessor macro `SICStusDISPATCHVAR` should expand to a `SICSTUS_API_STRUCT_TYPE *`, that is, a pointer to the dispatch vector that should be used. When `--multi-sp-aware` is not used `SICStusDISPATCHVAR` expands to `sp_GlobalSICStus` as described above. When using `--multi-sp-aware` it is probably best to let `SICStusDISPATCHVAR` expand to a local variable.

3. Once you have access to the SICStus API of the initial SICStus runtime you can call the SICStus API function `SP_load_sicstus_run_time()` to load additional runtimes.

```
SICSTUS_API_STRUCT_TYPE *SP_get_dispatch(void *reserved);
```

`SP_get_dispatch()` returns the dispatch vector of the SICStus runtime. The argument `reserved` should be `NULL`. This function can be called from any thread.

```
typedef SICSTUS_API_STRUCT_TYPE *SP_get_dispatch_type(void *);

int SP_load_sicstus_run_time(SP_get_dispatch_type **ppfunc, void *reserved);
```

`SP_load_sicstus_run_time()` loads a new SICStus runtime. If a new runtime could be loaded, then a positive value is returned and the address of the `SP_get_dispatch()` function of the newly loaded SICStus runtime is stored at the address `ppfunc`. The second argument, `phandle`, is reserved and should be `NULL`.

As a special case, if `SP_load_sicstus_run_time()` is called from a SICStus runtime that has not been initialized (with `SP_initialize()`) and that has not previously been loaded as the result of calling `SP_load_sicstus_run_time()`, then no new runtime is loaded. Instead, the `SP_get_dispatch()` of the runtime itself is returned. In particular, the first time `SP_load_sicstus_run_time()` is called on the initial SICStus runtime, and if this happens before the initial SICStus runtime is initialized, then no new runtime is loaded.

Calling `SP_load_sicstus_run_time()` from a particular runtime can be done from any thread.

An application that links statically with the SICStus runtime should not call `SP_load_sicstus_run_time()`.

You should not use prelinked foreign resources when using multiple SICStus runtimes in the same process.

For an example of loading and using multiple SICStus runtimes, see `library/jasper/spnative.c` that implements this functionality for the Java interface Jasper.

8.3 Foreign Resources and Multiple SICStus Runtimes

Foreign resources access the SICStus C API in the same way as an embedding application, that is, through a dispatch vector. As for applications, the default and backward compatible mode is to only support a single SICStus runtime. An alternative mode makes it possible for a foreign resource to be shared between several SICStus runtimes in the same process.

Unless otherwise noted, this section documents the behavior when using dynamically linked foreign resources. That is, shared objects (e.g.: .so-files) under UNIX, dynamic libraries (DLLs) under Windows.

8.3.1 Foreign Resources Supporting Only One SICStus Runtime

A process will only contain one instance of the code and data of a (dynamic) foreign resource even if the foreign resource is loaded and used from more than one SICStus runtime.

This presents a problem in the likely event that the foreign resource maintains some state, e.g. global variables, between invocations of functions in the foreign resource. The global state will probably need to be separate between SICStus runtimes. Requiring a foreign resource to maintain its global state on a per SICStus runtime basis would be an incompatible change. Instead, by default, only the first SICStus runtime that loads a foreign resource will be allowed to use it. If a subsequent SICStus runtime (in the same process) tries to load the foreign resource, then an error will be reported to the second SICStus runtime.

When `splfr` builds a foreign resource, it will also generate glue code. When the foreign resource is loaded, the glue code will set up a global variable pointing to the dispatch vector used in the foreign resource to access the SICStus API. This is similar to how an embedding application accesses the SICStus API.

The glue code will also detect if a subsequent SICStus runtime in the same process tries to initialize the foreign resource. In this case, an error will be reported.

This means that pre 3.9 foreign code should only need to be rebuilt with `splfr` to work with the latest version of SICStus. However, a recommended change is that all C files of a foreign resource include the header file generated by `splfr`. Inclusion of this generated header file may become mandatory in a future release. See Section 6.2.5 [The Foreign Resource Linker], page 300.

8.3.2 Foreign Resources Supporting Multiple SICStus Runtimes

A foreign resource that wants to be shared between several SICStus runtimes must somehow know which SICStus runtime is calling it so that it can make callbacks using the SICStus API into the right SICStus runtime. In addition, the foreign resource may have global variables that should have different values depending on which SICStus runtime is calling the foreign resource.

A header file is generated by `splfr` when it builds a foreign resource (before any C code is compiled). This header file provides prototypes for any `foreign`-declared function, but it also provides other things needed for multiple SICStus runtime support. This header file must be included by any C file that contains code that either calls any SICStus API function or that contains any of the functions called by SICStus. See Section 6.2.5 [The Foreign Resource Linker], page 300.

8.3.2.1 Full Support for Multiple SICStus Runtimes

To fully support multiple SICStus runtimes, a foreign resource should be built with `splfr --multi-sp-aware`.

C code compiled by `splfr --multi-sp-aware` will have the C preprocessor macro `MULTI_SP_AWARE` defined to a non-zero value.

Full support for multiple SICStus runtimes means that more than one SICStus runtime can execute code in the foreign resource at the same time. This rules out the option to use any global variables for information that should be specific to each SICStus runtime. In particular, the SICStus dispatch vector cannot be stored in a global variable. Instead, the SICStus dispatch vector is passed as an extra first argument to each foreign function.

To ensure some degree of link time type checking, the name of each foreign function will be changed (using `#define` in the generated header file).

The extra argument is used in the same way as when using multiple SICStus runtimes from an embedding application. It must be passed on to any function that needs access to the SICStus API.

To simplify the handling of this extra argument, several macros are defined so that the same foreign resource code can be compiled both with and without support for multiple SICStus runtimes:

- `SPAPI_ARG0`
- `SPAPI_ARG`
- `SPAPI_ARG_PROTO_DECL0`
- `SPAPI_ARG_PROTO_DECL`

Their use is easiest to explain with an example. Suppose the original foreign code looked like:

```
static int f1(void)
{
        some SICStus API calls
}

static int f2(SP_term_ref t, int x)
{
        some SICStus API calls
}

/* :- foreign(foreign_fun, c, foreign_pred(+integer)). */
void foreign_fun(SP_integer x)
{
  ... some SICStus API calls ...
  f1();
  ...
  f2(SP_new_term_ref(), 42);
  ...
}
```

Assuming no global variables are used, the following change will ensure that the SICStus API dispatch vector is passed around to all functions:

```
static int f1(SPAPI_ARG_PROTO_DECL0) // _DECL<ZERO> for no-arg functions
{
        some SICStus API calls
}

static int f2(SPAPI_ARG_PROTO_DECL SP_term_ref t, int x) // Note: no comma
{
        some SICStus API calls
}

/* :- foreign(foreign_fun, c, foreign_pred([-integer])). */
void foreign_fun(SPAPI_ARG_PROTO_DECL SP_integer x) // Note: no comma
{
  ... some SICStus API calls ...
  f1(SPAPI_ARG0);               // ARG<ZERO> for no-arg functions
  ...
  f2(SPAPI_ARG SP_new_term_ref(), 42);       // Note: no comma
  ...
}
```

If `MULTI_SP_AWARE` is not defined, i.e. `--multi-sp-aware` is not specified to `splfr`, then all these macros expand to nothing, except `SPAPI_ARG_PROTO_DECL0`, which will expand to `void`.

You can use `SP_foreign_stash()` to get access to a location, initially set to NULL, where the foreign resource can store a `void*`. Typically this would be a pointer to a C struct that holds all information that need to be stored in global variables. This struct can be allocated and initialized by the foreign resource init function. It should be deallocated by the foreign resource deinit function. See Section 6.4.7.3 [OS Threads], page 310, for details.

Most foreign resources that come with SICStus fully support multiple SICStus runtimes. For a particularly simple example, see the code for `library(random)`. For an example that hides the passing of the extra argument by using the C preprocessor, see the files in `library/clpfd/`.

8.4 Multiple Runtimes and Threads

Perhaps the primary reason to use more than one SICStus runtime in a process is to have each runtime running in a separate thread. To this end, a few mutual exclusion primitives are available. See Section 6.4.7 [Operating System Services], page 309, for details on mutual exclusion locks.

> **Please note**: the SICStus runtime is not thread safe in general. See Section 6.5.4 [Calling Prolog Asynchronously], page 313, for ways to safely interact with a running SICStus from arbitrary threads.

9 Writing Efficient Programs

9.1 Overview

This chapter gives a number of tips on how to organize your programs for increased efficiency. A lot of clarity and efficiency is gained by sticking to a few basic rules. This list is necessarily very incomplete. The reader is referred to textbooks such as [O'Keefe 90] for a thorough exposition of the elements of Prolog programming style and techniques.

- Do Not write code in the first place if there is a library predicate that will do the job.
- Write clauses representing base case before clauses representing recursive cases.
- Input arguments before output arguments in clause heads and goals.
- Use pure data structures instead of database changes.
- Use cuts sparingly, and *only* at proper places (see Section 4.2.3.1 [ref-sem-ctr-cut], page 68). A cut should be placed at the exact point that it is known that the current choice is the correct one: no sooner, no later.
- Make cuts as local in their effect as possible. If a predicate is intended to be determinate, then define *it* as such; do not rely on its callers to prevent unintended backtracking.
- Binding output arguments before a cut is a common source of programming errors. If a predicate is not steadfast, then it is usually for this reason.
- Replace cuts by if-then-else constructs if the test is simple enough (see Section 9.10 [Conditionals and Disjunction], page 377).
- Use disjunctions sparingly, *always* put parentheses around them, *never* put parentheses around the individual disjuncts, *never* put the '`;`' at the end of a line.
- Write the clauses of a predicate so that they discriminate on the principal functor of the first argument (see below). For maximum efficiency, avoid "defaulty" programming ("catch-all" clauses).
- Do Not use lists (`[...]`), "round lists" (`(...)`), or braces (`{...}`) to represent compound terms, or "tuples", of some fixed arity. The name of a compound term comes for free.
- Before trying to optimize your program for speed, use execution profiling to get an idea of where most of the time is being spent, and, more importantly, why.

9.2 Execution Profiling

Execution profiling is a common aid for improving software performance. As of release 4.2, execution profiling is available for compiled as well as interpreted code. Execution profiling requires no recompilation with instrumentation. Execution profiling is either globally *on* or globally *off* for all compiled code. This is reflected by the `profiling` Prolog flag. When the flag is on, the information gathered depends on the execution mode:

compiled code
: Execution profiling counts the number of calls per caller-callee pair, the number of instructions executed, and the number of choicepoint accesses per predicate.

Calls that succeed nondeterminately are detected. Compiled codes runs 2-10 times slower with execution profiling than without.

interpreted code
: Execution profiling counts the number of calls per caller-callee pair if the `source_info` Prolog flag was on when the code was loaded; otherwise, the number of calls per predicate. Calls that succeed nondeterminately are detected.

A typical query pattern is:

```
| ?- [Load some code.]
| ?- prolog_flag(profiling,_,on).
| ?- [Run some queries.]
| ?- prolog_flag(profiling,_,off).
| ?- print_profile.
```

The predicate `profile_data/1` makes the accumulated data available as a Prolog term. The predicate `print_profile/0` prints the execution profile in a format similar to `gprof(1)`. It can also be given an argument which should be of the same type as the output of `profile_data/1`. The predicate `profile_reset/0` clears all profiling data. For the details, see the respective reference page. See also the Gauge graphical user interface for inspecting execution profiles (see Section 10.16 [lib-gauge], page 577) and the SICStus Prolog IDE (see Section 3.11 [SPIDER], page 32) which both can visualize the profiling information.

`profile_reset` *since release 4.2,development*
: Resets all profiling data. See Section 11.3.166 [mpg-ref-profile_reset], page 1181.

`profile_data(-`*Data*`)` *since release 4.2,development*
: *Data* is the profiling data accumulated so far. See Section 11.3.165 [mpg-ref-profile_data], page 1180.

`print_profile` *since release 4.2,development*
`print_profile(+`*Data*`)` *since release 4.2,development*
: The profiling data *Data* is displayed in a format similar to `gprof(1)`. *Data* defaults to the profiling data accumulated so far. See Section 11.3.164 [mpg-ref-print_profile], page 1179.

9.3 Coverage Analysis

Coverage analysis is the gathering of information about which points in the code, or *coverage sites*, were executed, and how many times, during a particular run of the program. It is available as of release 4.2, for compiled as well as interpreted code, provided that such code was loaded with the `source_info` Prolog flag switched on. In fact, it uses the same underlying support as execution profiling: while the program is running with execution profiling switched on, the data accumulated can be used for both purposes. Roughly, coverage sites correspond to points in the code at which the debugger would stop in `trace` mode, plus one site at entry to every clause. A typical query pattern is:

```
| ?- [Load some code.]
| ?- prolog_flag(profiling,_,on).
| ?- [Run some queries.]
| ?- prolog_flag(profiling,_,off).
| ?- print_coverage.
```

The predicate `coverage_data/1` makes the accumulated data available as a Prolog term. The predicate `print_coverage/0` prints the execution coverage in a hierarchical format. It can also be given an argument which should be of the same type as the output of `coverage_data/1`. The collected coverage information can be presented by the SICStus Prolog IDE, SPIDER (see Section 3.11 [SPIDER], page 32). The Emacs interface also has commands for code coverage highlighting of source code buffers (see Section 3.12.3 [Usage], page 37). For the details, see the respective reference page.

`profile_reset` *since release 4.2,development*

Resets all profiling and coverage data. See Section 11.3.166 [mpg-ref-profile_reset], page 1181.

`coverage_data(-Data)` *since release 4.2,development*

Data is the coverage data accumulated so far. See Section 11.3.45 [mpg-ref-coverage_data], page 1025.

`print_coverage` *since release 4.2,development*
`print_coverage(+Data)` *since release 4.2,development*

The coverage data *Data* is displayed in a hierarchical format. *Data* defaults to the profiling data accumulated so far. See Section 11.3.161 [mpg-ref-print_coverage], page 1174.

9.4 The Cut

9.4.1 Overview

One of the more difficult things to master when learning Prolog is the proper use of the cut. Often, when beginners find unexpected backtracking occurring in their programs, they try to prevent it by inserting cuts in a rather random fashion. This makes the programs harder to understand and sometimes stops them from working.

During program development, each predicate in a program should be considered *independently* to determine whether or not it should be able to succeed more than once. In most applications, many predicates should at most succeed only once; that is, they should be determinate. Having decided that a predicate should be determinate, it should be verified that, in fact, it is. The debugger can help in verifying that a predicate is determinate (see Section 9.7 [The Determinacy Checker], page 367).

9.4.2 Making Predicates Determinate

Consider the following predicate, which calculates the factorial of a number:

```
fac(0, 1).
fac(N, X) :-
        N1 is N - 1,
        fac(N1, Y),
        X is N * Y.
```

The factorial of 5 can be found by typing:

```
| ?- fac(5, X).

X = 120
```

However, backtracking into the above predicate by typing a semicolon at this point, causes an infinite loop because the system starts attempting to satisfy the goals `fac(-1, X).`, `fac(-2, X).`, etc. The problem is that there are two clauses that match the goal `fac(0, F).`, but the effect of the second clause on backtracking has not been taken into account. There are at least three possible ways of fixing this:

1. Efficient solution: rewrite the first clause as

   ```
   fac(0,1) :- !.
   ```

   Adding the cut essentially makes the first solution the only one for the factorial of 0 and hence solves the immediate problem. This solution is space-efficient because as soon as Prolog encounters the cut, it knows that the predicate is determinate. Thus, when it tries the second clause, it can throw away the information it would otherwise need in order to backtrack to this point. Unfortunately, if this solution is implemented, then typing '`fac(-1, X)`' still generates an infinite search.

2. Robust solution: rewrite the second clause as

   ```
   fac(N, X) :-
           N > 0,
           N1 is N - 1,
           fac(N1, Y),
           X is N * Y.
   ```

   This also solves the problem, but it is a more robust solution because this way it is impossible to get into an infinite loop.

   This solution makes the predicate *logically* determinate—there is only one possible clause for any input—but the Prolog system is unable to detect this and must waste space for backtracking information. The space-efficiency point is more important than it may at first seem; if `fac/2` is called from another determinate predicate, and if the cut is omitted, then Prolog cannot detect the fact that `fac/2` is determinate. Therefore, it will not be able to detect the fact that the calling predicate is determinate, and space will be wasted for the calling predicate as well as for `fac/2` itself. This argument applies again if the calling predicate is itself called by a determinate predicate, and so on, so that the cost of an omitted cut can be very high in certain circumstances.

3. Preferred solution: rewrite the entire predicate as the single clause

```
fac(N, X) :-
    (   N > 0 ->
            N1 is N - 1,
            fac(N1, Y),
            X is N * Y
    ;   N =:= 0 ->
            X = 1
    ).
```

This solution is as robust as solution 2, and more efficient than solution 1, since it exploits conditionals with arithmetic tests (see Section 9.10 [Conditionals and Disjunction], page 377, for more information on optimization using conditionals).

9.4.3 Placement of Cuts

Programs can often be made more readable by the placing of cuts as early as possible in clauses. For example, consider the predicate `p/0` defined by

```
p :- a, b, !, c, d.
p :- e, f.
```

Suppose that `b/0` is a test that determines which clause of `p/0` applies; `a/0` may or may not be a test, but `c/0` and `d/0` are not supposed to fail under any circumstances. A cut is most appropriately placed after the call to `b/0`. If in fact `a/0` is the test and `b/0` is not supposed to fail, then it would be much clearer to move the cut before the call to `b/0`.

A tool to aid in determinacy checking is included in the distribution. It is described in depth in Section 9.7 [The Determinacy Checker], page 367.

9.4.4 Terminating a Backtracking Loop

Cut is also commonly used in conjunction with the generate-and-test programming paradigm. For example, consider the predicate `find_solution/1` defined by

```
find_solution(X) :-
        candidate_solution(X),
        test_solution(X),
        !.
```

where `candidate_solution/1` generates possible answers on backtracking. The intent is to stop generating candidates as soon as one is found that satisfies `test_solution/1`. If the cut were omitted, then a future failure could cause backtracking into this clause and restart the generation of candidate solutions. A similar example is shown below:

```
process_file(F) :-
        see(F),
        repeat,
            read(X),
            process_and_fail(X),
        !,
        seen.

process_and_fail(end_of_file) :- !.
process_and_fail(X) :-
        process(X),
        fail.
```

The cut in `process_file/1` is another example of terminating a generate-and-test loop. In general, a cut should always be placed after a `repeat/0` so that the backtracking loop is clearly terminated. If the cut were omitted in this case, then on later backtracking Prolog might try to read another term after the end of the file had been reached.

The cut in `process_and_fail/1` might be considered unnecessary because, assuming the call shown is the only call to it, the cut in `process_file/1` ensures that backtracking into `process_and_fail/1` can never happen. While this is true, it is also a good safeguard to include a cut in `process_and_fail/1` because someone may unwittingly change `process_file/1` in the future.

9.5 Indexing

9.5.1 Overview

In SICStus Prolog, predicates are indexed on their first arguments. This means that when a predicate is called with an instantiated first argument, a hash table is used to gain fast access to only those clauses having a first argument with the same primary functor as the one in the predicate call. If the first argument is atomic, then only clauses with a matching first argument are accessed. Indexes are maintained automatically by the built-in predicates manipulating the Prolog database (for example, `assert/1`, `retract/1`, and `compile/1`.

Keeping this feature in mind when writing programs can help speed their execution. Some hints for program structuring that will best use the indexing facility are given below. Note that interpreted, e.g. dynamic, predicates as well as compiled predicates are indexed. The programming hints given in this section apply equally to compiled and to interpreted code.

9.5.2 Data Tables

The major advantage of indexing is that it provides fast access to tables of data. For example, a table of employee records might be represented as shown below in order to gain fast access to the records by employee name:

```
%  employee(LastName,FirstNames,Department,Salary,DateOfBirth)

employee('Smith', ['John'], sales,       20000, 1-1-59).
employee('Jones', ['Mary'], engineering, 30000, 5-28-56).
...
```

If fast access to the data via department is also desired, then the data can be organized little differently. The employee records can be indexed by some unique identifier, such as employee number, and additional tables can be created to facilitate access to this table, as shown in the example below. For example,

```
%  employee(Id,LastName,FirstNames,Department,Salary,DateOfBirth)

employee(1000000, 'Smith', ['John'], sales,       20000, 1-1-59).
employee(1000020, 'Jones', ['Mary'], engineering, 30000, 5-28-56).
...

%  employee_name(LastName,EmpId)

employee_name('Smith', 1000000).
employee_name('Jones', 1000020).
...

%  department_member(Department,EmpId)

department_member(sales,       1000000).
department_member(engineering, 1000020).
...
```

Indexing would now allow fast access to the records of every employee named Smith, and these could then be backtracked through looking for John Smith. For example:

```
| ?- employee_name('Smith', Id),
     employee(Id, 'Smith', ['John'], Dept, Sal, DoB).
```

Similarly, all the members of the engineering department born since 1965 could be efficiently found like this:

```
| ?- department_member(engineering, Id),
     employee(Id, LN, FN, engineering, _, M-D-Y),
     Y > 65.
```

9.5.3 Determinacy Detection

The other advantage of indexing is that it often makes possible early detection of determinacy, even if cuts are not included in the program. For example, consider the following simple predicate, which joins two lists together:

```
concat([], L, L).
concat([X|L1], L2, [X|L3]) :- concat(L1, L2, L3).
```

If this predicate is called with an instantiated first argument, then the first argument indexing of SICStus Prolog will recognize that the call is determinate—only one of the two clauses for `concat/3` can possibly apply. Thus, the Prolog system knows it does not have to store backtracking information for the call. This significantly reduces memory use and execution time.

Determinacy detection can also reduce the number of cuts in predicates. In the above example, if there was no indexing, then a cut would not strictly be needed in the first clause as long as the predicate was always to be called with the first argument instantiated. If the first clause matched, then the second clause could not possibly match; discovery of this fact, however, would be postponed until backtracking. The programmer might thus be tempted to use a cut in the first clause to signal determinacy and recover space for backtracking information as early as possible.

With indexing, if the example predicate is always called with its first argument instantiated, then backtracking information is *never* stored. This gives substantial performance improvements over using a cut rather than indexing to force determinacy. At the same time greater flexibility is maintained: the predicate can now be used in a nondeterminate fashion as well, as in

```
| ?- concat(L1, L2, [a,b,c,d]).
```

which will generate on backtracking all the possible partitions of the list `[a,b,c,d]` on backtracking. If a cut had been used in the first clause, then this would not work.

For interpreted code, but not for compiled code, a filtering similar to indexing is done for *all* argument positions. The primary benefit of this filtering is that it makes it possible to detect determinacy in more cases. This filtering is currently not using hashing techniques, so it is not as performant as the first argument indexing.

We may improve indexing and other filtering techniques in future releases, which may decrease the number of choicepoints created.

9.6 Last Clause Determinacy Detection

Even if the determinacy detection made possible by indexing is unavailable to a predicate call, SICStus Prolog still can detect determinacy before determinate exit from the predicate. Space for backtracking information can thus be recovered as early as possible, reducing memory requirements and increasing performance. For instance, the predicate `member/2` (found in the SICStus Prolog library) could be defined by:

```
member(Element, [Element|_]).
member(Element, [_|Rest]) :-
        member(Element, Rest).
```

`member/2` might be called with an instantiated first argument in order to check for membership of the argument in a list, which is passed as a second argument, as in

```
| ?- member(4, [1,2,3,4]).
```

The first arguments of both clauses of `member/2` are variables, so first argument indexing cannot be used. However, determinacy can still be detected before determinate exit from the predicate. This is because on entry to the last clause of a nondeterminate predicate, a call becomes effectively determinate; it can tell that it has no more clauses to backtrack to. Thus, backtracking information is no longer needed, and its space can be reclaimed. In the example, each time a call fails to match the first clause and backtracks to the second (last) clause, backtracking information for the call is automatically deleted.

Because of last clause determinacy detection, a cut is never needed as the first subgoal in the last clause of a predicate. Backtracking information will have been deleted before a cut in the last clause is executed, so the cut will have no effect except to waste time.

Note that last clause determinacy detection is exploited by dynamic code as well as static code in SICStus Prolog.

9.7 The Determinacy Checker

Please note: the Determinacy Checker tool is mostly superseded by the analysis performed by the SICStus Prolog IDE, SPIDER (see Section 3.11 [SPIDER], page 32). SPIDER will analyze the source code fully automatically and will annotate the edited source code to highlight unwanted nondeterminism. The analysis performed by SPIDER is more precise than the analysis implemented by the determinism checker described below.

The determinacy checker can help you spot unwanted nondeterminacy in your programs. This tool examines your program source code and points out places where nondeterminacy may arise. It is not in general possible to find exactly which parts of a program will be nondeterminate without actually running the program, best with the execution profiler, which endeavors to find exactly those parts. However, this tool can find most unwanted nondeterminacy. Unintended nondeterminacy should be eradicated because:

1. it may give you wrong answers on backtracking
2. it may cause a lot of memory to be wasted

9.7.1 Using the Determinacy Checker

There are two different ways to use the determinacy checker, either as a stand-alone tool, or during compilation. You may use it whichever way fits best with the way you work. Either way, it will discover the same nondeterminacy in your program.

The stand-alone determinacy checker is called `spdet`, and is run from the shell prompt, specifying the names of the Prolog source files you wish to check.

The determinacy checker can also be integrated into the compilation process, so that you receive warnings about unwanted nondeterminacy along with warnings about singleton variables or discontiguous clauses. To make this happen, simply insert the line

```
:- load_files(library(detcheck),
              [when(compile_time), if(changed)]).
```

Once this line is added, every time that file is loaded, it will be checked for unwanted nondeterminacy.

9.7.2 Declaring Nondeterminacy

Some predicates are intended to be nondeterminate. By declaring intended nondeterminacy, you avoid warnings about predicates you intend to be nondeterminate. Equally importantly, you also inform the determinacy checker about nondeterminate predicates. It uses this information to identify unwanted nondeterminacy.

Nondeterminacy is declared by putting a declaration of the form

```
:- name/arity is nondet.
```

using an `is/2`-declaration (see Section 10.18 [lib-is_directives], page 582), or the legacy form

```
:- nondet name/arity.
```

in your source file. This is similar to a `dynamic` or `discontiguous` declaration. You may have multiple `is` or `nondet` declarations, and a single declaration may mention several predicates, separating them by commas.

Similarly, a predicate P/N may be classified as nondeterminate by the checker, whereas in reality it is determinate. This may happen e.g. if P/N calls a dynamic predicate that in reality never has more than one clause. To prevent false alarms arising from this, you can inform the checker about determinate predicates by declarations of the form:

```
:- name/arity is det.
```

using an `is/2`-declaration (see Section 10.18 [lib-is_directives], page 582), or the legacy form

```
:- det name/arity.
```

If you wish to include the legacy `det` and `nondet` declarations in your file and you plan to use the stand-alone determinacy checker, then you must include the line

```
:- load_files(library(nondetdecl),
              [when(compile_time), if(changed)]).
```

near the top of each file that contains such declarations. If you instead use the recommended `is/2`-declarations, or the integrated determinacy checker, then you do not need (and should not have) this line.

9.7.3 Checker Output

The output of the determinacy checker is quite simple. For each clause containing unexpected nondeterminacy, a single line is printed showing the module, name, arity, and clause number (counting from 1). The form of the information is:

```
* Non-determinate: module:name/arity (clause number)
```

A second line for each nondeterminate clause indicates the cause of the nondeterminacy. The recognized causes are:

- The clause contains a disjunction that is not forced to be determinate with a cut or by ending the clause with a call to `fail/0` or `throw/1`.
- The clause calls a nondeterminate predicate. In this case the predicate is named.
- There is a later clause for the same predicate whose first argument has the same principal functor (or one of the two clauses has a variable for the first argument), and this clause does not contain a cut or end with a call to `fail/0` or `throw/1`. In this case, the clause number of the other clause is mentioned.
- If the predicate is multifile, then clause indexing is not considered sufficient to ensure determinacy. This is because other clauses may be added to the predicate in other files, so the determinacy checker cannot be sure it has seen all the clauses for the predicate. It is good practice to include a cut (or fail) in every clause of a multifile predicate.

The determinacy checker also occasionally prints warnings when declarations are made too late in the file or not at all. For example, if you include a `dynamic`, `nondet`, or `discontiguous` declaration for a predicate after some clauses for that predicate, or if you put a `dynamic` or `nondet` declaration for a predicate after a clause that includes a call to that predicate, then the determinacy checker may have missed some nondeterminacy in your program. The checker also detects undeclared discontiguous predicates, which may also have undetected nondeterminacy. Finally, the checker looks for goals in your program that indicate that predicates are dynamic; if no `dynamic` declaration for those predicates exists, then you will be warned.

These warnings take the following form:

```
! warning: predicate module:name/arity is property.
!          Some nondeterminacy may have been missed.
!          Add (or move) the directive
!              :- property module:name/arity.
!          near the top of this file.
```

9.7.4 Example

Here is an example file:

```
:- load_files(library(detcheck),
              [when(compile_time), if(changed)]).

parent(abe, rob).
parent(abe, sam).
parent(betty, rob).
parent(betty, sam).

is_parent(Parent) :- parent(Parent, _).
```

The determinacy checker notices that the first arguments of clauses 1 and 2 have the same principal functor, and similarly for clauses 3 and 4. It reports:

```
* Non-determinate: user:parent/2 (clause 1)
*     Indexing cannot distinguish this from clause 2.
* Non-determinate: user:parent/2 (clause 3)
*     Indexing cannot distinguish this from clause 4.
```

In fact, `parent/2` should be nondeterminate, so we should add the declaration

```
:- parent/2 is nondet.
```

before the clauses for `parent/2`. If run again after modifying file, then the determinacy checker prints:

```
* Non-determinate: user:is_parent/1 (clause 1)
*     This clause calls user:parent/2, which may be nondeterminate.
```

It no longer complains about `parent/2` being nondeterminate, since this is declared. But now it notices that because `parent/2` is nondeterminate, then so is `is_parent/1`.

9.7.5 Options

When run from the command line, the determinacy checker has a few options to control its workings.

The `-r` option specifies that the checker should recursively check files in such a way that it finds nondeterminacy caused by calls to other nondeterminate predicates, whether they are declared so or not. Also, predicates that appear to be determinate will be treated as such, whether declared `nondet` or not. This option is quite useful when first running the checker on a file, as it will find all predicates that should be either made determinate or declared `nondet` at once. Without this option, each time a `nondet` declaration is added, the checker may find previously unnoticed nondeterminacy.

For example, if the original example above, without any `nondet` declarations, were checked with the `-r` option, then the output would be:

```
* Non-determinate: user:parent/2 (clause 1)
*     Indexing cannot distinguish this from clause 2.
* Non-determinate: user:parent/2 (clause 3)
*     Indexing cannot distinguish this from clause 4.
* Non-determinate: user:is_parent/1 (clause 1)
*     Calls nondet predicate user:parent/2.
```

The `-d` option causes the tool to print out the needed `nondet` declarations. These can be readily pasted into the source files. Note that it only prints the `nondet` declarations that are not already present in the files. However, these declarations should not be pasted into your code without each one first being checked to see if the reported nondeterminacy is intended.

The `-D` option is like `-d`, except that it prints out all `nondet` declarations that should appear, whether they are already in the file or not. This is useful if you prefer to replace all old `nondet` declarations with new ones.

Your code will probably rely on operator declarations and possibly term expansion. The determinacy checker handles this in the following way: you must supply an initialization file, using the `-i` *ifile* option. `spdet` will execute any operator declaration it encounters.

9.7.6 What is Detected

As mentioned earlier, it is not in general possible to find exactly which places in a program will lead to nondeterminacy. The determinacy checker gives predicates the benefit of the doubt: when it is possible that a predicate will be determinate, it will not be reported. The checker will only report places in your program that will be nondeterminate regardless of which arguments are bound. Despite this, the checker catches most unwanted nondeterminacy in practice.

The determinacy checker looks for the following sources of nondeterminacy:

- Multiple clauses that cannot be distinguished by the principal functor of the first arguments, and are not made determinate with an explicit cut, `fail/0`, `false/0`, or `throw/1`. First argument indexing is not considered for multifile predicates, because another file may have a clause for this predicate with the same principal functor of its first argument.
- A clause with a disjunction not forced to be determinate by a cut, `fail/0`, `false/0`, or `throw/1` in each arm of the disjunction but the last, or where the whole disjunction is followed by a cut, `fail/0`, `false/0`, or `throw/1`.
- A clause that calls something known to be nondeterminate, other than when it is followed by a cut, `fail/0`, `false/0`, or `throw/1`, or where it appears in the condition of an if-then-else construct. Known nondeterminate predicates include hooks and those declared nondeterminate or dynamic (since they can be modified, dynamic predicates are assumed to be nondeterminate), plus the following built-in predicates:
  - `absolute_file_name/3`, when the options list contains `solutions(all)`.
  - `atom_concat/3`, when the first two arguments are variables not appearing earlier in the clause (including the clause head).
  - `bagof/3`, when the second argument contains any variables not appearing earlier in the clause (including the clause head).
  - `clause/[2,3]`.
  - `current_op/3`, when any argument contains any variables not appearing earlier in the clause (including the clause head).
  - `current_key/2`, when the second argument contains any variables not appearing earlier in the clause (including the clause head).
  - `current_predicate/2`, when the second argument contains any variables not appearing earlier in the clause (including the clause head).
  - `length/2`, when both arguments are variables not appearing earlier in the clause (including the clause head).

- `predicate_property/2`, when either argument contains any variables not appearing earlier in the clause (including the clause head).
- `recorded/3`.
- `repeat/0`.
- `retract/1`.
- `setof/3`, when the second argument contains any variables not appearing earlier in the clause (including the clause head).
- `source_file/[1,2]` when the last argument contains any variables not appearing earlier in the clause (including the clause head).
- `sub_atom/5`, when at least two of the second, fourth and fifth arguments are variables not appearing earlier in the clause (including the clause head).

9.8 Last Call Optimization

Another important efficiency feature of SICStus Prolog is last call optimization. This is a space optimization technique, which applies when a predicate is determinate at the point where it is about to call the last goal in the body of a clause. For example,

```
% for(Int, Lower, Upper)
% Lower and Upper should be integers such that Lower =< Upper.
% Int should be uninstantiated; it will be bound successively on
% backtracking to Lower, Lower+1, ... Upper.

for(Int, Int, _Upper).
for(Int, Lower, Upper) :-
        Lower < Upper,
        Next is Lower + 1,
        for(Int, Next, Upper).
```

This predicate is determinate at the point where the recursive call is about to be made, since this is the last clause and the preceding goals `(<)/2` and `is/2`) are determinate. Thus last call optimization can be applied; effectively, the stack space being used for the current predicate call is reclaimed before the recursive call is made. This means that this predicate uses only a constant amount of space, no matter how deep the recursion.

9.8.1 Accumulating Parameters

To take best advantage of this feature, make sure that goals in recursive predicates are determinate, and whenever possible put the recursive call at the end of the predicate.

This is not always possible, but often can be done through the use of *accumulating parameters*. An accumulating parameter is an added argument to a predicate that builds up the result as computation proceeds. For example, in our factorial example, the last goal in the body of the recursive case is `is/2`, not the recursive call to `fac/2`.

```
fac(N, X) :-
    (   N > 0 ->
            N1 is N - 1,
            fac(N1, Y),
            X is N * Y
    ;   N =:= 0 ->
            X = 1
    ).
```

This can be corrected by adding another argument to `fac/2` to accumulate the factorial.

```
fac(N, X) :- fac(N, 1, X).

%  fac(+N, +M, -X)
%  X is M * the factorial of N.

fac(N, M, X) :-
    (   N > 0 ->
            N1 is N - 1,
            M1 is N * M,
            fac(N1, M1, X)
    ;   N =:= 0 ->
            X = M
    ).
```

Here, we do the multiplication before calling `fac/3` recursively. Note that we supply the base case, 1, at the start of the computation, and that we are multiplying by decreasing numbers. In the earlier version, `fac/2`, we multiply after the recursive call, and so we multiply by increasing numbers. Effectively, the new version builds the result backwards. This is correct because multiplication is associative.

9.8.2 Accumulating Lists

This technique becomes much more important when extended to lists, as in this case it can save much building of unneeded lists through unnecessary calls to append sublists together. For example, the naive way to reverse a list is:

```
nreverse([], []).
nreverse([H|T], L) :-
        nreverse(T, L1),
        append(L1, [H], L).
```

This is very wasteful, since each call to `append/3` copies the initial part of the list, and adds one element to it. Fortunately, this can be very easily rewritten to use an accumulating parameter:

```
reverse(L1, L2) :- reverse(L1, [], L2).

%  reverse(+X, +Y, -Z)
%  Z is X reversed, followed by Y
reverse([], Z, Z).
reverse([H|T], L0, L) :-
        reverse(T, [H|L0], L).
```

This version of reverse is many times faster than the naive version, and uses much less memory. The key to understanding the behavior of this predicate is the observation made earlier: using an accumulating parameter, we build the result backwards.

Do Not let this confuse you. Building a list forward is easy. For example, a predicate returning a list L of consecutive numbers from 1 to N could be written in two different ways: counting up and collecting the resulting list forward, or counting down and accumulating the result backward.

```
iota1(N, L) :- iota1(1, N, L).
iota1(N, Max, L) :-
        (   N > Max ->
                L = []
        ;   N1 is N+1,
            L = [N|L1],
            iota1(N1, Max, L1)
        ).
```

or,

```
iota2(N, L) :- iota2(N, [], L).
iota2(N, L0, L) :-
        (   N =< 0 ->
                L = L0
        ;   N1 is N-1,
            iota2(N1, [N|L0], L)
        ).
```

Both versions generate the same results, and neither waste any space. The second version is slightly faster. Choose whichever approach you prefer.

9.9 Building and Dismantling Terms

The built-in predicate `(=..)/2` is a clear way of building terms and taking them apart. However, it is almost never the most efficient way. `functor/3` and `arg/3` are generally much more efficient, though less direct. The best blend of efficiency and clarity is to write a clearly-named predicate that implements the desired operation and to use `functor/3` and `arg/3` in that predicate.

Here is an actual example. The task is to reimplement the built-in predicate `(==)/2`. The first variant uses `(=..)/2` (this symbol is pronounced "univ" for historical reasons). Some Prolog textbooks recommend code similar to this.

```
ident_univ(X, Y) :-
        var(X),                 % If X is a variable,
        !,
        var(Y),                 % so must Y be, and
        samevar(X, Y).          % they must be the same.
ident_univ(X, Y) :-             % If X is not a variable,
        nonvar(Y),              % neither may Y be;
        X =.. [F|L],            % they must have the
        Y =.. [F|M],            % same function symbol F
        ident_list(L, M).       % and identical arguments

ident_list([], []).
ident_list([H1|T1], [H2|T2]) :-
        ident_univ(H1, H2),
        ident_list(T1, T2).

samevar(29, Y) :-               % If binding X to 29
        var(Y),                 % leaves Y unbound,
        !,                      % they were not the same
        fail.                   % variable.
samevar(_, _).                  % Otherwise they were.
```

This code performs the function intended; however, every time it touches a non-variable term of arity *N*, it constructs a list with *N+1* elements, and if the two terms are identical, then these lists are reclaimed only when backtracked over or garbage collected.

Better code uses `functor/3` and `arg/3`.

```
ident_farg(X, Y) :-
        (   var(X) ->           % If X is a variable,
                var(Y),         % so must Y be, and
                samevar(X, Y)   % they must be the same;
        ;   nonvar(Y),          % otherwise Y must be nonvar
            functor(X, F, N),   % The principal functors of X
            functor(Y, F, N),   % and Y must be identical,
            ident_farg(N, X, Y) % including the last N args.
        ).

ident_farg(0, _, _) :- !.
ident_farg(N, X, Y) :-          % The last N arguments are
        arg(N, X, Xn),          % identical
        arg(N, Y, Yn),          % if the Nth arguments
        ident_farg(Xn, Yn),     % are identical,
        M is N-1,               % and the last N-1 arguments
        ident_farg(M, X, Y).    % are also identical.
```

This approach to walking through terms using `functor/3` and `arg/3` avoids the construction of useless lists.

The pattern shown in the example, in which a predicate of arity *K* calls an auxiliary predicate of the same name of arity *K+1* (the additional argument denoting the number of items remaining to process), is very common. It is not necessary to use the same name for this auxiliary predicate, but this convention is generally less prone to confusion.

In order to simply find out the principal function symbol of a term, use

```
| ?- the_term_is(Term),
|    functor(Term, FunctionSymbol, _).
```

The use of `(=..)/2`, as in

```
| ?- the_term_is(Term),
|    Term =.. [FunctionSymbol|_].
```

is wasteful, and should generally be avoided. The same remark applies if the arity of a term is desired.

`(=..)/2` should not be used to locate a particular argument of some term. For example, instead of

```
Term =.. [_F,_,ArgTwo|_]
```

you should write

```
arg(2, Term, ArgTwo)
```

It is generally easier to get the explicit number "2" right than to write the correct number of anonymous variables in the call to `(=..)/2`. Other people reading the program will find the call to `arg/3` a much clearer expression of the program's intent. The program will also be more efficient. Even if several arguments of a term must be located, it is clearer and more efficient to write

```
arg(1, Term, First),
arg(3, Term, Third),
arg(4, Term, Fourth)
```

than to write

```
Term =.. [_,First,_,Third,Fourth|_]
```

Finally, `(=..)/2` should not be used when the functor of the term to be operated on is known (that is, when both the function symbol and the arity are known). For example, to make a new term with the same function symbol and first arguments as another term, but one additional argument, the obvious solution might seem to be to write something like the following:

```
add_date(OldItem, Date, NewItem) :-
        OldItem =.. [item,Type,Ship,Serial],
        NewItem =.. [item,Type,Ship,Serial,Date].
```

However, this could be expressed more clearly and more efficiently as

```
add_date(OldItem, Date, NewItem) :-
        OldItem = item(Type,Ship,Serial),
        NewItem = item(Type,Ship,Serial,Date).
```

or even

```
add_date(item(Type,Ship,Serial),
         Date,
         item(Type,Ship,Serial,Date)
        ).
```

9.10 Conditionals and Disjunction

There is an efficiency advantage in using conditionals whose test part consists only of arithmetic comparisons or type tests. Consider the following alternative definitions of the predicate `type_of_character/2`. In the first definition, four clauses are used to group characters on the basis of arithmetic comparisons.

```
type_of_character(Ch, Type) :-
        Ch >= "a", Ch =< "z",
        !,
        Type = lowercase.
type_of_character(Ch, Type) :-
        Ch >= "A", Ch =< "Z",
        !,
        Type = uppercase.
type_of_character(Ch, Type) :-
        Ch >= "0", Ch =< "9",
        !,
        Type = digit.
type_of_character(_Ch, Type) :-
        Type = other.
```

In the second definition, a single clause with a conditional is used. The compiler generates equivalent, optimized code for both versions.

```
type_of_character(Ch, Type) :-
        (   Ch >= "a", Ch =< "z" ->
                Type = lowercase
        ;   Ch >= "A", Ch =< "Z" ->
                Type = uppercase
        ;   Ch >= "0", Ch =< "9" ->
                Type = digit
        ;   otherwise ->
                Type = other
        ).
```

Following is a list of built-in predicates that are compiled efficiently in conditionals:

- `atom/1`
- `atomic/1`
- `callable/1`
- `compound/1`
- `db_reference/1`
- `float/1`
- `ground/1`
- `integer/1`
- `nonvar/1`
- `mutable/1`
- `number/1`
- `simple/1`
- `var/1`
- `</2`

- `=</2`
- `=:=/2`
- `=\=/2`
- `>=/2`
- `>/2`
- `@</2`
- `@=</2`
- `==/2`
- `\==/2`
- `@>=/2`
- `@>/2`

This optimization is actually somewhat more general than what is described above. A sequence of guarded clauses:

```
Head1 :- Guard1, !, Body1.
...
Headm :- Guardm, !, Bodym.
Headn :- Bodym.
```

is eligible for the same optimization, provided that the arguments of the clause heads are all unique variables and that the "guards" are simple tests as listed above.

9.11 Programming Examples

The rest of this chapter contains a number of simple examples of Prolog programming, illustrating some of the techniques described above.

9.11.1 Simple List Processing

The goal `concatenate(`*L1*`,`*L2*`,`*L3*`)` is true if list *L3* consists of the elements of list *L1* concatenated with the elements of list *L2*. The goal `member(`*X*`,`*L*`)` is true if *X* is one of the elements of list *L*. The goal `reverse(`*L1*`,`*L2*`)` is true if list *L2* consists of the elements of list *L1* in reverse order.

```
concatenate([], L, L).
concatenate([X|L1], L2, [X|L3]) :- concatenate(L1, L2, L3).

member(X, [X|_]).
member(X, [_|L]) :- member(X, L).

reverse(L, L1) :- reverse_concatenate(L, [], L1).

reverse_concatenate([], L, L).
reverse_concatenate([X|L1], L2, L3) :-
        reverse_concatenate(L1, [X|L2], L3).
```

9.11.2 Family Example (descendants)

The goal `descendant(X,Y)` is true if Y is a descendant of X.

```
descendant(X, Y) :- offspring(X, Y).
descendant(X, Z) :- offspring(X, Y), descendant(Y, Z).

offspring(abraham, ishmael).
offspring(abraham, isaac).
offspring(isaac, esau).
offspring(isaac, jacob).
```

If for example the query

```
| ?- descendant(abraham, X).
```

is executed, then Prolog's backtracking results in different descendants of Abraham being returned as successive instances of the variable X, i.e.

```
X = ishmael
X = isaac
X = esau
X = jacob
```

9.11.3 Association List Primitives

These predicates implement "association list" primitives. They use a binary tree representation. Thus the time complexity for these predicates is *O(lg N)*, where N is the number of keys. These predicates also illustrate the use of `compare/3` for case analysis.

The goal `get_assoc(Key, Assoc, Value)` is true when *Key* is identical to one of the keys in *Assoc*, and *Value* unifies with the associated value.

```
get_assoc(Key, t(K,V,L,R), Val) :-
        compare(Rel, Key, K),
        get_assoc(Rel, Key, V, L, R, Val).

get_assoc(=, _, Val, _, _, Val).
get_assoc(<, Key, _, Tree, _, Val) :-
        get_assoc(Key, Tree, Val).
get_assoc(>, Key, _, _, Tree, Val) :-
        get_assoc(Key, Tree, Val).
```

9.11.4 Differentiation

The goal `d(E1, X, E2)` is true if expression *E2* is a possible form for the derivative of expression *E1* with respect to X.

```
d(X, X, D) :- atomic(X), !, D = 1.
d(C, X, D) :- atomic(C), !, D = 0.
d(U+V, X, DU+DV) :- d(U, X, DU), d(V, X, DV).
d(U-V, X, DU-DV) :- d(U, X, DU), d(V, X, DV).
d(U*V, X, DU*V+U*DV) :- d(U, X, DU), d(V, X, DV).
d(U**N, X, N*U**N1*DU) :- integer(N), N1 is N-1, d(U, X, DU).
d(-U, X, -DU) :- d(U, X, DU).
```

9.11.5 Use of Meta-Logical Predicates

This example illustrates the use of the meta-logical predicates `var/1`, `arg/3`, and `functor/3`. The goal `variables(`*Term*`, `*L*`, [])` instantiates variable *L* to a list of all the variable occurrences in *Term*. E.g.:

```
| ?- variables(d(U*V, X, DU*V+U*DV), L, []).

L = [U,V,X,DU,V,U,DV]

variables(X, [X|L0], L) :- var(X), !, L = L0.
variables(T, L0, L) :-
%       nonvar(T),
        functor(T, _, A),
        variables(0, A, T, L0, L).

variables(A, A, _, L0, L) :- !, L = L0.
variables(A0, A, T, L0, L) :-
%       A0<A,
        A1 is A0+1,
        arg(A1, T, X),
        variables(X, L0, L1),
        variables(A1, A, T, L1, L).
```

9.11.6 Prolog in Prolog

This example shows how simple it is to write a Prolog interpreter in Prolog, and illustrates the use of a variable goal. In this mini-interpreter, goals and clauses are represented as ordinary Prolog data structures (i.e. terms). Terms representing clauses are specified using the predicate `my_clause/1`, e.g.:

```
my_clause( (grandparent(X, Z) :- parent(X, Y), parent(Y, Z)) ).
```

A unit clause will be represented by a term such as

```
my_clause( (parent(john, mary) :- true) ).
```

The mini-interpreter consists of three clauses:

```
execute((P,Q)) :- !, execute(P), execute(Q).
execute(P) :- predicate_property(P, built_in), !, P.
execute(P) :- my_clause((P :- Q)), execute(Q).
```

The second clause enables the mini-interpreter to cope with calls to ordinary Prolog predicates, e.g. built-in predicates. The mini-interpreter needs to be extended to cope with the other control structures, i.e. `!`, `(P;Q)`, `(P->Q)`, `(P->Q;R)`, `(\+ P)`, and `if(P,Q,R)`.

9.11.7 Translating English Sentences into Logic Formulae

The following example of a definite clause grammar defines in a formal way the traditional mapping of simple English sentences into formulae of classical logic. By way of illustration, if the sentence

> Every man that lives loves a woman.

is parsed as a sentence by the call

```
| ?- phrase(sentence(P), [every,man,that,lives,loves,a,woman]).
```

then P will get instantiated to

```
all(X):(man(X)&lives(X) => exists(Y):(woman(Y)&loves(X,Y)))
```

where `:`, `&` and `=>` are infix operators defined by

```
:- op(900, xfx, =>).
:- op(800, xfy, &).
:- op(550, xfy, :). /* predefined */
```

The grammar follows:

```
sentence(P) --> noun_phrase(X, P1, P), verb_phrase(X, P1).

noun_phrase(X, P1, P) -->
        determiner(X, P2, P1, P), noun(X, P3), rel_clause(X, P3, P2).
noun_phrase(X, P, P) --> name(X).

verb_phrase(X, P) --> trans_verb(X, Y, P1), noun_phrase(Y, P1, P).
verb_phrase(X, P) --> intrans_verb(X, P).

rel_clause(X, P1, P1&P2) --> [that], verb_phrase(X, P2).
rel_clause(_, P, P) --> [].

determiner(X, P1, P2, all(X):(P1=>P2)) --> [every].
determiner(X, P1, P2, exists(X):(P1&P2)) --> [a].

noun(X, man(X)) --> [man].
noun(X, woman(X)) --> [woman].

name(john) --> [john].

trans_verb(X, Y, loves(X,Y)) --> [loves].
intrans_verb(X, lives(X)) --> [lives].
```

9.12 The Cross-Referencer

9.12.1 Introduction

Please note: the Cross-References tool is mostly superseeded by the SICStus Prolog IDE, SPIDER (see Section 3.11 [SPIDER], page 32). SPIDER will analyze the source code fully automatically and will annotate the edited source code to highlight unused and undefined predicates. The cross-reference analysis performed by SPIDER is more precise than the analysis implemented by the cross-referencer described below.

The main purpose of the cross-referencer, `spxref`, is to find undefined predicates and unreachable code. To this end, it begins by looking for initializations, hooks and `public` directives to start tracing the reachable code from. If an entire application is being checked, then it also traces from `user:runtime_entry/1`. If individual module files are being checked, then it also traces from their export lists.

A second function of `spxref` is to aid in the formation of module statements. `spxref` can list all of the required `module/2` and `use_module/2` statements by file.

The cross-referencer is called `spxref`, and is run from the shell prompt, specifying the names of the Prolog source files you wish to check.

9.12.2 Practice and Experience

Your code will probably rely on operator declarations and possibly term expansion. The cross-referencer handles this in the following way: you must supply an initialization file, using the `-i` *ifile* option. `spxref` will execute any operator declaration it encounters.

Supply meta-predicate declarations for your meta-predicates. Otherwise, the cross-referencer will not follow the meta-predicates' arguments. Be sure the cross-referencer encounters the meta-predicate declarations *before* it encounters calls to the declared predicates.

The cross-referencer traces from initializations, hooks, predicates declared `public`, and optionally from `user:runtime_entry/1` and module declarations. The way it handles meta-predicates requires that your application load its module files before its non-module files.

This cross-referencer was written in order to tear out the copious dead code from the application that the author became responsible for. If you are doing such a thing, then the cross-referencer is an invaluable tool. Be sure to save the output from the first run that you get from the cross referencer: this is very useful resource to help you find things that you've accidentally ripped out and that you really needed after all.

There are situations where the cross-referencer does not follow certain predicates. This can happen if the predicate name is constructed on the fly, or if it is retrieved from the database. In this case, add `public` declarations for these. Alternatively, you could create term expansions that are peculiar to the cross-referencer.

10 The Prolog Library

The Prolog library comprises a number of packages that are thought to be useful in a number of applications. Note that the predicates in the Prolog library are not built-in predicates. One has to explicitly load each package to get access to its predicates.

As opposed to built-in predicates, predicates exported by library modules generally do not check their arguments, although some do to a lesser or greater extent. Input arguments that are lists are usually supposed to be proper lists, i.e., not end with an unbound variable. Input arguments that are trees are usually not supposed to have uninstantiated leaves, and so on.

To load a library package *Package*, you will normally enter a query:

```
| ?- use_module(library(Package)).
```

A library package normally consists of one or more hidden (see Section 4.11 [ref-mod], page 165) modules. There are packages for many different purposes, such as providing an abstract data type, database access, constraint solvers, I/O, interoperability with other software, file and operating system access, object-oriented programming, a unit-test framework, random numbers, and statistics.

Among the first category, several packages provide array-like functionality, because arrays are not part of the Prolog language. If you are about to choose an array representation, the following comparison of their key properties may be helpful. Prolog lists are included in the comparison. In the table, *read cost* is the cost of looking up an element given a key; *update cost* is the cost of replacing an element given a key, creating a new array-like term; *sparse* means that the set of keys does not have to be known up front:

representation	*read cost*	*update cost*	*sparse*
Prolog list	*O(n)*	*O(n)*	no
`library(assoc)`	*O(n)*	*O(n)*	yes
`library(avl)`	*O(log n)*	*O(log n)*	yes
`library(logarr)`	*O(log n)*	*O(log n)*	yes
`library(mutarray)`	*O(1)*	*O(1)*	no
`library(trees)`	*O(log n)*	*O(log n)*	no

Please note: `library(mutarray)` updates run in *O(1)* time for all indices in the best case, and in *O(n)* time otherwise.

Following is the list of provided packages, in alphabetic order:

`aggregate` (see Section 10.1 [lib-aggregate], page 390)
: provides an aggregation operator for data-base-style queries.

`assoc` (see Section 10.2 [lib-assoc], page 394)
: uses unbalanced binary trees trees to implement dictionaries, i.e. extendible mappings from terms to terms. Can be used as sparse arrays with linear read and update cost.

`atts` (see Section 10.3 [lib-atts], page 397)
: provides a means of associating with variables arbitrary attributes, i.e. named properties that can be used as storage locations as well as hooks into Prolog's unification.

`avl` (see Section 10.4 [lib-avl], page 405)
: uses AVL trees to implement dictionaries, i.e. extendible finite mappings from terms to terms. Can be used as sparse arrays with logarithmic read and update cost.

`bags` (see Section 10.5 [lib-bags], page 409)
: defines operations on bags, or multisets

`between` (see Section 10.6 [lib-between], page 413)
: provides some means of generating integers.

`chr` (see Section 10.7 [lib-chr], page 414)
: provides Constraint Handling Rules

`clpb` (see Section 10.8 [lib-clpb], page 423) *since release 4.0.7, unsupported*
: provides constraint solving over Booleans

`clpfd` (see Section 10.9 [lib-clpfd], page 428)
: provides constraint solving over Finite (Integer) Domains

`clpq` (see Section 10.10 [lib-clpqr], page 513) *unsupported*
`clpr` (see Section 10.10 [lib-clpqr], page 513) *unsupported*
: provides constraint solving over Q (Rationals) or R (Reals)

`codesio` (see Section 10.11 [lib-codesio], page 538)
: defines I/O predicates that read from, or write to, a code list.

`csv` (see Section 10.12 [lib-csv], page 539)
: defines I/O predicates that read from, or write to, comma-separated values (CSV) files and strings.

`comclient` (see Section 10.13 [lib-comclient], page 542)
: An interface to Microsoft COM automaton objects.

`fdbg` (see Section 10.14 [lib-fdbg], page 547)
: provides a debugger for finite domain constraint programs

`file_systems` (see Section 10.15 [lib-file_systems], page 571)
: accesses files and directories.

`gauge` (see Section 10.16 [lib-gauge], page 577)
: A profiling tool for Prolog programs with a graphical interface based on `tcltk`.

`heaps` (see Section 10.17 [lib-heaps], page 580)
: implements binary heaps, the main application of which are priority queues.

`is_directives` (see Section 10.18 [lib-is_directives], page 582)
: Access information about predicates that have been declared with `is/2` directives.

`jasper` (see Section 10.19 [lib-jasper], page 589) *since release 4.0.3*
: Access Prolog from Java.

`json` (see Section 10.20 [lib-json], page 619) *since release 4.5.0*
: defines I/O predicates that read and write using the JSON serialization format.

`jsonrpc_server` (see Section 10.21 [lib-jsonrpc], page 623) *since release 4.8.0*
: provides a way, using the standardized JSON-RPC protocol, for other programming languages to communicate with SICStus.

`simple_jsonrpc_server` (see Section 10.22 [lib-simple-jsonrpc], page 630) *since release 4.8.0*
: provides a simplified way to develop servers using the JSON-RPC library.

`linda/client` (see Section 10.24 [lib-linda], page 638)
`linda/server` (see Section 10.24 [lib-linda], page 638)
: provides an implementation of the Linda concept for process communication.

`lists` (see Section 10.25 [lib-lists], page 643)
: provides basic operations on lists.

`lmdb` (see Section 10.26 [lib-lmdb], page 659)
: provides an interface to LMDB, for storage and retrieval of terms on disk files with user-defined multiple indexing.

`logarr` (see Section 10.27 [lib-logarr], page 666)
: provides a binary tree implementation of dense arrays with logarithmic read and update cost.

`mutarray` (see Section 10.28 [lib-mutarray], page 667) *since release 4.7*
: provides an implementation of mutable, dense arrays with constant read cost and update cost for all indices in the best case.

`mutdict` (see Section 10.29 [lib-mutdict], page 669) *since release 4.7*
: provides an implementation of mutable, extendible dictionaries, i.e. mutable extendible finite mappings from terms to terms, with constant lookup and update cost for all keys in the best case.

`objects` (see Section 10.30 [lib-objects], page 671)
: provides a package for object-oriented programming, and can be regarded as a high-level alternative to `library(structs)`.

`odbc` (see Section 10.31 [lib-odbc], page 734) *since release 4.1*
: provides an interface to an ODBC database driver.

`ordsets` (see Section 10.32 [lib-ordsets], page 744)
: defines operations on sets represented as lists with the elements ordered in Prolog standard order.

`pillow` (see Section 10.33 [lib-pillow], page 747) *unsupported*
: The PiLLoW Web Programming Library,

`plunit` (see Section 10.34 [lib-plunit], page 748) *since release 4.1.3*
A Prolog unit-test framework.

`process` (see Section 10.35 [lib-process], page 756)
provides process creation primitives.

`prologbeans` (see Section 10.36 [lib-prologbeans], page 766)
Access Prolog from Java and .NET.

`queues` (see Section 10.37 [lib-queues], page 781)
defines operations on queues (FIFO stores of information).

`random` (see Section 10.38 [lib-random], page 784)
provides a random number generator.

`rem` (see Section 10.39 [lib-rem], page 786)
provides Rem's algorithm for maintaining equivalence classes.

`samsort` (see Section 10.40 [lib-samsort], page 787)
provides generic stable sorting and merging.

`sets` (see Section 10.41 [lib-sets], page 788)
defines operations on sets represented as lists with the elements unordered.

`sockets` (see Section 10.42 [lib-sockets], page 792)
provides an interface to sockets.

`statistics` (see Section 10.43 [lib-statistics], page 796) *since release 4.3.4*
provides commonly used sample and population statistics functions.

`structs` (see Section 10.44 [lib-structs], page 799)
provides access to C data structures, and can be regarded as a low-level alternative to `library(objects)`.

`system` (see Section 10.45 [lib-system], page 808)
provides access to operating system services.

`tcltk` (see Section 10.46 [lib-tcltk], page 809)
An interface to the Tcl/Tk language and toolkit.

`terms` (see Section 10.47 [lib-terms], page 902)
provides a number of operations on terms.

`timeout` (see Section 10.48 [lib-timeout], page 908)
Meta-call with limit on execution time.

`trees` (see Section 10.49 [lib-trees], page 909)
provides a binary tree implementation of dense arrays with logarithmic read and update cost.

`types` (see Section 10.50 [lib-types], page 910)
Provides type checking.

`ugraphs` (see Section 10.51 [lib-ugraphs], page 913)
Provides an implementation of directed and undirected graphs with unlabeled edges.

`varnumbers` (see Section 10.52 [lib-varnumbers], page 916)
: An inverse of `numbervars/3`.

`wgraphs` (see Section 10.53 [lib-wgraphs], page 918)
: provides an implementation of directed and undirected graphs where each edge has an integral weight.

`xml` (see Section 10.54 [lib-xml], page 921)
: provides an XML parser.

`zinc` (see Section 10.55 [lib-zinc], page 923) *since release 4.0.5*
: provides an interpreter for FlatZinc programs

For the purpose of migrating code from release 3, the following **deprecated** library modules are also provided. For documentation, please see the release 3 documentation for the corresponding library module with the trailing '3' removed from its name:

`arrays3`

`assoc3`

`lists3`

`queues3`

`random3`

`system3`

10.1 An Aggregation Operator for Data-Base-Style Queries—`library(aggregate)`

Data base query languages usually provide so-called "aggregation" operations. Given a relation, aggregation specifies

- a column of the relation
- an operation, one of {sum,max,min,ave,var} or more

One might, for example, ask

```
PRINT DEPT,SUM(AREA) WHERE OFFICE(_ID,DEPT,AREA,_OCCUPANT)
```

and get a table of <*Department*,*TotalArea*> pairs. The Prolog equivalent of this might be

```
dept_office_area(Dept, TotalArea) :-
        aggregate(sum(Area),
            I^O^office(I,Dept,Area,O), TotalArea).
```

where *Area* is the column and `sum(_)` is the aggregation operator. We can also ask who has the smallest office in each department:

```
smallest_office(Dept, Occupant) :-
        aggregate(min(Area),
                I^O^office(I,Dept,Area,O), MinArea),
        office(_, Dept, MinArea, Occupant).
```

This module provides an aggregation operator in Prolog:

```
aggregate(Template, Generator, Results)
```

where:

- *Template* is *operator*(*expression*) or *constructor*(*arg*,...,*arg*)
- each *arg* is *operator*(*expression*)
- *operator* is `sum | min | max` {for now}
- *expression* is an arithmetic expression

Results is unified with a form of the same structure as *Template*.

Things like mean and standard deviation can be calculated from sums, e.g. to find the average population of countries (defined as "if you sampled people at random, what would be the mean size of their answers to the question 'what is the population of your country?'?") we could do

```
?-  aggregate(x(sum(Pop),sum(Pop*Pop)),
              Country^population(Country,Pop),
              x(People,PeopleTimesPops)),
    AveragePop is PeopleTimesPops/People.
```

Note that according to this definition, `aggregate/3` FAILS if there are no solutions. For `max(_)`, `min(_)`, and many other operations (such as `mean(_)`) this is the only sensible definition (which is why `bagof/3` works that way). Even if *bagof/3* yielded an empty list, *aggregate/3* would still fail.

Concerning the minimum and maximum, it is convenient at times to know Which term had the minimum or maximum value. So we write

```
min(Expression, Term)
max(Expression, Term)
```

and in the constructed term we will have

```
min(MinimumValue, TermForThatValue)
max(MaximumValue, TermForThatValue)
```

So another way of asking who has the smallest office is

```
smallest_office(Dept, Occupant) :-
        aggregate(min(Area,O),
                I^office(I,Dept,Area,O), min(_,Occupant)).
```

Consider queries like

```
aggregate(sum(Pay), Person^pay(Person,Pay), TotalPay)
```

where for some reason `pay/2` might have multiple solutions. (For example, someone might be listed in two departments.) We need a way of saying "treat identical instances of the Template as a single instance, UNLESS they correspond to different instances of a Discriminator." That is what

```
aggregate(Template, Discriminator, Generator, Results)
```

does.

Operations available:

`count`	`sum(1)`
`sum(`*E*`)`	sum of values of *E*
`min(`*E*`)`	minimum of values of *E*
`min(`*E*`,`*X*`)`	`min(`*E*`)` with corresponding instance of *X*
`max(`*E*`)`	maximum of values of *E*
`max(`*E*`,`*X*`)`	`max(`*E*`)` with corresponding instance of *X*
`set(`*X*`)`	ordered set of instances of *X*
`bag(`*X*`)`	list of instances of *X* in generated order.

```
bagof(X, G, B) :- aggregate(bag(X),    G, L).
setof(X, G, B) :- aggregate(set(X), X, G, L).
```

Exported predicates:

`forall(:Generator, :Goal)`
: succeeds when *Goal* is provable for each true instance of *Generator*. Note that there is a sort of double negation going on in here (it is in effect a nested pair of failure-driven loops), so it will never bind any of the variables which occur in it.

`foreach(:Generator, :Goal)`
: for each proof of Generator in turn, we make a copy of *Goal* with the appropriate substitution, then we execute these copies in sequence. For example, `foreach(between(1,3,I), p(I))` is equivalent to `p(1), p(2), p(3)`.

  Note that this is not the same as `forall/2`. For example, `forall(between(1,3,I), p(I))` is equivalent to `\+ \+ p(1), \+ \+ p(2), \+ \+ p(3)`.

  The trick in `foreach/2` is to ensure that the variables of *Goal* which do not occur in *Generator* are restored properly. (If there are no such variables, you might as well use `forall/2`.)

  Like `forall/2`, this predicate does a failure-driven loop over the *Generator*. Unlike `forall/2`, the *Goals* are executed as an ordinary conjunction, and may succeed in more than one way.

`aggregate(+Template, +Discriminator, :Generator, -Result)`
: is a generalization of `setof/3` which lets you compute sums, minima, maxima, and so on.

`aggregate(+Template, :Generator, -Result)`
: is a generalization of `findall/3` which lets you compute sums, minima, maxima, and so on.

`aggregate_all(+Template, +Discriminator, :Generator, -Result)`
: is like `aggregate/4` except that it will find at most one solution, and does not bind free variables in the *Generator*.

`aggregate_all(+Template, :Generator, -Result)`
: is like `aggregate/3` except that it will find at most one solution, and does not bind free variables in the *Generator*.

`free_variables(:Goal, +Bound, +Vars0, -Vars)`
: binds *Vars* to the union of *Vars0* with the set of *free* variables in *Goal*, that is the set of variables which are captured neither by *Bound* nor by any internal quantifiers or templates in *Goal*. We have to watch out for `setof/3` and `bagof/3` themselves, for the explicit existential quantifier `Vars^Goal`, and for things like `\+(_)` which might look as though they bind variables but can't.

`term_variables(+Term, +Vars0, -Vars)`
: binds *Vars* to a union of *Vars0* and the variables which occur in *Term*. This doesn't take quantifiers into account at all.

  New code should consider the built in `term_variables/2` which is likely to be faster, and works for cyclic terms.

Could be defined as:

```
term_variables(Term, Vars0, Vars) :-
    nonvar(Term), !,
    (   foreacharg(Arg,Term),
        fromto(Vars0,S0,S,Vars)
    do  term_variables(Arg, S0, S)
    ).
term_variables(Term, Vars0, Vars) :-
    (   foreach(X,Vars0),
        param(Term)
    do  X\==Term
    ), !,
    Vars = [Term|Vars0].
term_variables(_, Vars, Vars).
```

10.2 Association Lists—`library(assoc)`

This library provides a binary tree implementation of "association lists". The binary tree is *not* kept balanced, as opposed to `library(avl)`, which provides similar functionality based on balanced AVL trees.

Exported predicates:

`empty_assoc(?Assoc)`
: is true when *Assoc* is an empty assoc.

`assoc_to_list(+Assoc, -List)`
: assumes that *Assoc* is a proper "assoc" tree, and is true when *List* is a list of *Key-Value* pairs in ascending order with no duplicate *Keys* specifying the same finite function as *Assoc*. Use this to convert an assoc to a list.

`gen_assoc(?Key, +Assoc, ?Value)`
: assumes that *Assoc* is a proper "assoc" tree, and is true when *Key* is associated with *Value* in *Assoc*. Use this to enumerate *Keys* and *Values* in the *Assoc*, or to find *Keys* associated with a particular *Value*. If you want to look up a particular *Key*, you should use `get_assoc/3`. Note that this predicate is not determinate. If you want to maintain a finite bijection, it is better to maintain two assocs than to drive one both ways. The *Keys* and *Values* are enumerated in ascending order of *Keys*.

`get_assoc(+Key, +Assoc, -Value)`
: assumes that *Assoc* is a proper "assoc" tree. It is true when *Key* is identical to (`==`) one of the keys in *Assoc*, and Value unifies with the associated value. Note that since we use the term ordering to identify keys, we obtain logarithmic access, at the price that it is not enough for the *Key* to unify with a key in *Assoc*, it must be identical. This predicate is determinate. The argument order follows the pattern established by the built-in predicate `arg/3` (called the `arg/3`, or selector, rule):

```
predicate(indices, structure, element).
```

The analogy with `arg(N, Term, Element)` is that

```
Key:N :: Assoc:Term :: Value:Element.
```

`get_next_assoc(+Key, +Assoc, -Knext, -Vnext)`
: is true when *Knext* is the smallest key in *Assoc* such that *Knext*@>*Key*, and *Vnext* is the value associated with *Knext*. If there is no such *Knext*, `get_next_assoc/4` naturally fails. It assumes that *Assoc* is a proper assoc. *Key* should normally be ground. Note that there is no need for *Key* to be in the association at all. You can use this predicate in combination with `min_assoc/3` to traverse an association tree; but if there are *N* pairs in the tree the cost will be *O(N lg N)*. If you want to traverse all the pairs, calling `assoc_to_list/2` and walking down the list will take *O(N)* time.

`get_prev_assoc(+Key, +Assoc, -Kprev, -Vprev)`
: is true when *Kprev* is the largest key in *Assoc* such that *Kprev*@<*Key*, and *Vprev* is the value associated with *Kprev*. You can use this predicate in com-

bination with `max_assoc/3` to traverse an assoc. See the notes on `get_next_assoc/4`.

`is_assoc(+`*`Thing`*`)`
: is true when *Thing* is a (proper) association tree. If you use the routines in this file, you have no way of constructing a tree with an unbound tip, and the heading of this file explicitly warns against using variables as keys, so such structures are NOT recognized as being association trees. Note that the code relies on variables (to be precise, the first anonymous variable in `is_assoc/1`) being `@<` than any non-variable.

`list_to_assoc(+`*`List`*`, -`*`Assoc`*`)`
: is true when *List* is a proper list of *Key-Val* pairs (in any order) and *Assoc* is an association tree specifying the same finite function from *Keys* to *Values*. Note that the list should not contain any duplicate keys. In this release, `list_to_assoc/2` doesn't check for duplicate keys, but the association tree which gets built won't work.

`ord_list_to_assoc(+`*`List`*`, -`*`Assoc`*`)`
: is a version of `list_to_assoc/2` which trusts you to have sorted the list already. If you pair up an ordered set with suitable values, calling this instead will save the sort.

`map_assoc(:`*`Pred`*`, +`*`Assoc`*`)`
: is true when *Assoc* is a proper association tree, and for each *Key->Val* pair in *Assoc*, the proposition *Pred(Val)* is true. *Pred* must be a closure, and *Assoc* should be proper. There should be a version of this predicate which passes *Key* to *Pred* as well as *Val*, but there isn't.

`map_assoc(:`*`Pred`*`, ?`*`OldAssoc`*`, ?`*`NewAssoc`*`)`
: is true when *OldAssoc* and *NewAssoc* are association trees of the same shape (at least one of them should be provided as a proper assoc, or `map_assoc/3` may not terminate), and for each *Key*, if *Key* is associated with *Old* in *OldAssoc* and with *New* in *NewAssoc*, the proposition *Pred(Old,New)* is true. Normally we assume that *Pred* is a function from *Old* to *New*, but the code does not require that. There should be a version of this predicate which passes *Key* to *Pred* as well as *Old* and *New*, but there isn't. If you'd have a use for it, please tell us.

`max_assoc(+`*`Assoc`*`, -`*`Key`*`, -`*`Val`*`)`
: is true when *Key* is the largest *Key* in *Assoc*, and *Val* is the associated value. It assumes that *Assoc* is a proper assoc. This predicate is determinate. If *Assoc* is empty, it just fails quietly; an empty set can have no largest element!

`min_assoc(+`*`Assoc`*`, -`*`Key`*`, -`*`Val`*`)`
: is true when *Key* is the smallest *Key* in *Assoc*, and *Val* is the associated value. It assumes that *Assoc* is a proper assoc. This predicate is determinate. If *Assoc* is empty, it just fails quietly; an empty set can have no smallest element!

`portray_assoc(+`*`Assoc`*`)`
: writes an association tree to the current output stream in a pretty form so that you can easily see what it is. Note that an association tree written out this way

can NOT be read back in. For that, use `writeq/1`. The point of this predicate is to get association trees displayed nicely by `print/1`.

`put_assoc(+`*`Key`*`, +`*`OldAssoc`*`, +`*`Val`*`, -`*`NewAssoc`*`)`
is true when *OldAssoc* and *NewAssoc* define the same finite function, except that *NewAssoc* associates *Val* with *Key*. *OldAssoc* need not have associated any value at all with Key,

10.3 Attributed Variables—`library(atts)`

This package implements attributed variables. It provides a means of associating with variables arbitrary attributes, i.e. named properties that can be used as storage locations as well as to extend the default unification algorithm when such variables are unified with other terms or with each other. This facility was primarily designed as a clean interface between Prolog and constraint solvers, but has a number of other uses as well. The basic idea is due to Christian Holzbaur and he was actively involved in the final design. For background material, see the dissertation [Holzbaur 90].

The package provides a means to declare and access named attributes of variables. The attributes are compound terms whose arguments are the actual attribute values. The attribute names are *private* to the module in which they are defined. They are defined with a declaration

```
:- attribute AttributeSpec, ..., AttributeSpec.
```

where each *AttributeSpec* has the form (*Name*/*Arity*). There must be at most one such declaration in a module *Module*. At most 255 modules can declare attributes at the same time.

Having declared some attribute names, these attributes can now be added, updated and deleted from unbound variables. For each declared attribute name, any variable can have at most one such attribute (initially it has none).

The declaration causes the following two access predicates to become defined by means of the `goal_expansion/5` mechanism. They take a variable and an *AccessSpec* as arguments where an *AccessSpec* is either `+(Attribute)`, `-(Attribute)`, or a list of such. The '`+`' prefix may be dropped for convenience. *Attribute* must be nonvariable at compile time. The meaning of the '`+`'/'`-`' prefix is documented below:

Module`:get_atts(-`*Var*`, ?`*AccessSpec*`)`

Gets the attributes of *Var*, which must be a variable, according to *AccessSpec*. If *AccessSpec* was unbound at compile time, it will be bound to a list of all present attributes of *Var*, otherwise the elements of *AccessSpec* have the following meaning:

`+(`*Attribute*`)`

The corresponding actual attribute must be present and is unified with *Attribute*. The '`+`' prefix may be dropped for convenience.

`-(`*Attribute*`)`

The corresponding actual attribute must be absent. The arguments of *Attribute* are ignored, only the name and arity are relevant.

Module`:put_atts(-`*Var*`, +`*AccessSpec*`)`

Sets the attributes of *Var*, which must be a variable, according to *AccessSpec*. The effects of `put_atts/2` are undone on backtracking.

`+(`*Attribute*`)`
: The corresponding actual attribute is set to *Attribute*. If the actual attribute was already present, it is simply replaced. The '`+`' prefix may be dropped for convenience.

`-(`*Attribute*`)`
: The corresponding actual attribute is removed. If the actual attribute was already absent, nothing happens.

A module that contains an attribute declaration has an opportunity to extend the default unification algorithm by defining the following predicate:

Module`:verify_attributes(-`*Var*`, +`*Value*`, -`*Goals*`)` *hook*
: This predicate is called whenever a variable *Var* that might have attributes in *Module* is about to be bound to *Value* (it might have none). The unification resumes after the call to `verify_attributes/3`. *Value* is a nonvariable, or another attributed variable. *Var* might have no attributes present in *Module*; the unification extension mechanism is not sophisticated enough to filter out exactly the variables that are relevant for *Module*.

  `verify_attributes/3` is called *before* *Var* has actually been bound to *Value*. If it fails, the unification is deemed to have failed. It may succeed nondeterminately, in which case the unification might backtrack to give another answer. It is expected to return, in *Goals*, a list of goals to be called *after* *Var* has been bound to *Value*. Finally, after calling *Goals*, goals blocked on *Var* may have become unblocked, in which case they are called.

  `verify_attributes/3` may invoke arbitrary Prolog goals, but it should not do anything that would lead to a recursive invokation of `verify_attributes/3` of any module. In particular, neither *Var* nor any other attributed variable should be bound by it. Breaking these rules results in undefined behavior.

  Contrary to other hook predicates, any exception raised by `verify_attributes/3` is propagated and not caught locally.

  If *Value* is a nonvariable, `verify_attributes/3` will typically inspect the attributes of *Var* and check that they are compatible with *Value* and fail otherwise. If *Value* is another attributed variable, `verify_attributes/3` will typically copy the attributes of *Var* over to *Value*, or merge them with *Value*'s, in preparation for *Var* to be bound to *Value*. In either case, `verify_attributes/3` may determine *Var*'s current attributes by calling `get_atts(`*Var*`,`*List*`)` with an unbound *List*.

  In the case when a single unification binds multiple attributed variables, first all such bindings are *undone*, then the following actions are carried out for each relevant variable:

  1. For each relevant module *M*, *M*`:verify_attributes/3` is called, collecting a list of returned *Goals*.
  2. The variable binding is *redone*.
  3. Any *Goals* are called.

4. Any goals blocked on the variable, that has now become unblocked, are called.

An important use for attributed variables is in implementing coroutining facilities as an alternative or complement to the built-in coroutining mechanisms. In this context it might be useful to be able to interpret some of the attributes of a variable as a goal that is blocked on that variable. Certain built-in predicates (`frozen/2`, `copy_term/3`) and the Prolog top level need to access blocked goals, and so need a means of getting the goal interpretation of attributed variables by calling:

Module:`attribute_goal(-Var, -Goal)` *hook*

This predicate is called in each module that contains an attribute declaration, when an interpretation of the attributes as a goal is needed, in particular in `frozen/2`, `copy_term/3` and the Prolog top level. It should unify *Goal* with the interpretation, or merely fail if no such interpretation is available.

Contrary to other hook predicates, any exception raised by `attribute_goal/2` is propagated and not caught locally.

An important use for attributed variables is to provide an interface to constraint solvers. An important function for a constraint solver in the constraint logic programming paradigm is to be able to perform projection of the residual constraints onto the variables that occurred in the top-level query. A module that contains an attribute declaration has an opportunity to perform such projection of its residual constraints by defining the following predicate:

Module:`project_attributes(+QueryVars, +AttrVars)` *hook*

This predicate is called by the Prolog top level in each module that contains an attribute declaration. *QueryVars* is the list of variables occurring in the query, or in terms bound to such variables, and *AttrVars* is a list of possibly attributed variables created during the execution of the query. The two lists of variables may or may not be disjoint.

If the attributes on *AttrVars* can be interpreted as constraints, this predicate will typically "project" those constraints onto the relevant *QueryVars*. Ideally, the residual constraints will be expressed entirely in terms of the *QueryVars*, treating all other variables as existentially quantified. Operationally, `project_attributes/2` must remove all attributes from *AttrVars*, and add transformed attributes representing the projected constraints to some of the *QueryVars*.

Projection has the following effect on the Prolog top level. When the top-level query has succeeded, `project_attributes/2` is called first. The top level then prints the answer substitution and residual constraints. While doing so, it searches for attributed variables created during the execution of the query. For each such variable, it calls `attribute_goal/2` to get a printable representation of the constraint encoded by the attribute. Thus, `project_attributes/2` is a mechanism for controlling how the residual constraints should be displayed at top level.

The exact definition of `project_attributes/2` is constraint system dependent, but see Section 10.9.10 [Answer Constraints], page 487, and see Section 10.10.5

[CLPQR Projection], page 526, for details about projection in CLPFD and CLP(Q,R) respectively.

In the following example we sketch the implementation of a finite domain "solver". Note that an industrial strength solver would have to provide a wider range of functionality and that it quite likely would utilize a more efficient representation for the domains proper. The module exports a single predicate `domain(-Var,?Domain)`, which associates *Domain* (a list of terms) with *Var*. A variable can be queried for its domain by leaving *Domain* unbound.

We do not present here a definition for `project_attributes/2`. Projecting finite domain constraints happens to be difficult.

```
                                                        % domain.pl
:- module(domain, [domain/2]).

:- use_module(library(atts)).
:- use_module(library(ordsets), [
        ord_intersection/3,
        ord_intersect/2,
        list_to_ord_set/2
   ]).

:- attribute dom/1.

verify_attributes(Var, Other, Goals) :-
        get_atts(Var, dom(Da)), !,          % are we involved?
        (   var(Other) ->                   % must be attributed then
            (   get_atts(Other, dom(Db)) -> %   has a domain?
                ord_intersection(Da, Db, Dc),
                Dc = [El|Els],              % at least one element
                (   Els = [] ->             % exactly one element
                    Goals = [Other=El]      % implied binding
                ;   Goals = [],
                    put_atts(Other, dom(Dc))% rescue intersection
                )
            ;   Goals = [],
                put_atts(Other, dom(Da))    % rescue the domain
            )
        ;   Goals = [],
            ord_intersect([Other], Da)      % value in domain?
        ).
verify_attributes(_, _, []).                % unification triggered
                                            % because of attributes
                                            % in other modules

attribute_goal(Var, domain(Var,Dom)) :-     % interpretation as goal
        get_atts(Var, dom(Dom)).

domain(X, Dom) :-
        var(Dom), !,
        get_atts(X, dom(Dom)).
domain(X, List) :-
        list_to_ord_set(List, Set),
        Set = [El|Els],                     % at least one element
        (   Els = [] ->                     % exactly one element
            X = El                          % implied binding
        ;   put_atts(Fresh, dom(Set)),
            X = Fresh                       % may call
                                            % verify_attributes/3
        ).
```

Note that the "implied binding" `Other=El` was deferred until after the completion of `verify_attribute/3`. Otherwise, there might be a danger of recursively invoke `verify_attribute/3`, which might bind `Var`, which is not allowed inside the scope of `verify_attribute/3`. Deferring unifications into the third argument of `verify_attribute/3` effectively serializes the calls to `verify_attribute/3`.

Assuming that the code resides in the file `domain.pl`, we can load it via:

```
| ?- use_module(domain).
```

Let's test it:

```
| ?- domain(X,[5,6,7,1]), domain(Y,[3,4,5,6]), domain(Z,[1,6,7,8]).

domain(X,[1,5,6,7]),
domain(Y,[3,4,5,6]),
domain(Z,[1,6,7,8])

| ?- domain(X,[5,6,7,1]), domain(Y,[3,4,5,6]), domain(Z,[1,6,7,8]),
     X=Y.

Y = X,
domain(X,[5,6]),
domain(Z,[1,6,7,8])

| ?- domain(X,[5,6,7,1]), domain(Y,[3,4,5,6]), domain(Z,[1,6,7,8]),
     X=Y, Y=Z.

X = 6,
Y = 6,
Z = 6
```

To demonstrate the use of the *Goals* argument of `verify_attributes/3`, we give an implementation of `freeze/2`. We have to name it `myfreeze/2` in order to avoid a name clash with the built-in predicate of the same name.

```
                                                        % myfreeze.pl
:- module(myfreeze, [myfreeze/2]).

:- use_module(library(atts)).

:- meta_predicate myfreeze(*, 0).

:- attribute frozen/1.

verify_attributes(Var, Other, Goals) :-
      get_atts(Var, frozen(Fa)), !,            % are we involved?
      (   var(Other) ->                        % must be attributed then
          (   get_atts(Other, frozen(Fb))      % has a pending goal?
          ->
              put_atts(Other, frozen((Fa,Fb))) % rescue conjunction
          ;   put_atts(Other, frozen(Fa))      % rescue the pending goal
          ),
          Goals = []
      ;   Goals = [Fa]                         % wake our frozen goal
      ).
verify_attributes(_, _, []).

attribute_goal(Var, myfreeze(Var,Goal)) :- % interpretation as goal
      get_atts(Var, frozen(Goal)).

myfreeze(X, Goal) :-
      put_atts(Fresh, frozen(Goal)),
      Fresh = X.
```

Assuming that this code lives in file `myfreeze.pl`, we would use it via:

```
| ?- use_module(myfreeze).
| ?- myfreeze(X,print(bound(x,X))), X=2.

bound(x,2)                    % side-effect
X = 2                         % bindings
```

The two solvers even work together:

```
| ?- myfreeze(X,print(bound(x,X))), domain(X,[1,2,3]),
     domain(Y,[2,10]), X=Y.

bound(x,2)                    % side-effect
X = 2,                        % bindings
Y = 2
```

The two example solvers interact via bindings to shared attributed variables only. More complicated interactions are likely to be found in more sophisticated solvers. The cor-

responding `verify_attributes/3` predicates would typically refer to the attributes from other known solvers/modules via the module prefix in *`Module`*`:get_atts/2`.

10.4 AVL Trees—`library(avl)`

This library module provides an AVL tree implementation of "association lists". The binary tree *is* kept balanced, as opposed to `library(assoc)`, which provides similar functionality based on binary trees that are not kept balanced.

Exported predicates:

`empty_avl(?AVL)`
: is true when *AVL* is an empty AVL tree.

`avl_to_list(+AVL, -List)`
: assumes that *AVL* is a proper AVL tree, and is true when *List* is a list of *Key-Value* pairs in ascending order with no duplicate keys specifying the same finite function as *AVL*. Use this to convert an *AVL* to an ordered list.

`is_avl(+AVL)`
: is true when *AVL* is a (proper) AVL tree. It checks both the order condition (that the keys are in ascending order as you go from left to right) and the height balance condition. This code relies on variables (to be precise, the first anonymous variable in is_avl/1) being `@<` than any non-variable. in strict point of fact you *can* construct an AVL tree with variables as keys, but `is_avl/1` doesn't believe it, and it is not good taste to do so.

`avl_domain(+AVL, -Domain)`
: unifies *Domain* with the ordered set representation of the domain of the AVL tree (the keys of it). As the keys are in ascending order with no duplicates, we just read them off like `avl_to_list/2`.

`avl_range(+AVL, -Range)`
: unifies *Range* with the ordered set representation of the range of the AVL (the values associated with its keys, not the keys themselves). Note that the cardinality (length) of the domain and the range are seldom equal, except of course for trees representing invertible maps.

`avl_min(+AVL, -Key)`
: is true when *Key* is the smallest key in *AVL*.

`avl_min(+AVL, -Key, -Val)`
: is true when *Key* is the smallest key in *AVL* and *Val* is its value.

`avl_max(+AVL, -Key)`
: is true when *Key* is the greatest key in *AVL*.

`avl_max(+AVL, -Key, -Val)`
: is true when *Key* is the greatest key in *AVL* and *Val* is its value.

`avl_height(+AVL, -Height)`
: is true when *Height* is the height of the given AVL tree, that is, the longest path in the tree has *Height* 'node's on it.

`avl_size(+AVL, -Size)`
: is true when *Size* is the size of the AVL tree, the number of 'node's in it.

`portray_avl(+AVL)`
: writes an AVL tree to the current output stream in a pretty form so that you can easily see what it is. Note that an AVL tree written out this way can NOT be read back in; for that use `writeq/1`. The point of this predicate is to get AVL trees displayed nicely by `print/1`.

`avl_member(?Key, +AVL)`
: is true when *Key* is one of the keys in the given AVL. This predicate should be used to enumerate the keys, not to look for a particular key (use `avl_fetch/2` or `avl_fetch/3` for that). The *Keys* are enumerated in ascending order.

`avl_member(?Key, +AVL, ?Val)`
: is true when *Key* is one of the keys in the given AVL and *Val* is the value the AVL associates with that *Key*. This predicate should be used to enumerate the keys and their values, not to look up the value of a known key (use `avl_fetch/3`) for that. The *Keys* are enumerated in ascending order.

`avl_fetch(+Key, +AVL)`
: is true when the (given) *Key* is one of the keys in the (given) AVL. Use this to test whether a known Key occurs in *AVL* and you don't want to know the value associated with it.

`avl_fetch(+Key, +AVL, -Val)`
: is true when the (given) *Key* is one of the keys in the (given) AVL and the value associated with it therein is *Val*. It should be used to look up *known* keys, not to enumerate keys (use either `avl_member/2` or `avl_member/3` for that).

`avl_next(+Key, +AVL, -Knext)`
: is true when *Knext* is the next key after *Key* in *AVL*; that is, *Knext* is the smallest key in *AVL* such that *Knext* `@>` *Key*.

`avl_next(+Key, +AVL, -Knext, -Vnext)`
: is true when *Knext* is the next key after *Key* in *AVL* and *Vnext* is the value associated with *Knext* in *AVL*. That is, *Knext* is the smallest key in *AVL* such that *Knext* `@>` *Key*, and `avl_fetch(Knext, AVL, Vnext)`.

`avl_prev(+Key, +AVL, -Kprev)`
: is true when *Kprev* is the key previous to *Key* in *AVL*; that is, *Kprev* is the greatest key in *AVL* such that *Kprev* `@<` *Key*.

`avl_prev(+Key, +AVL, -Kprev, -Vprev)`
: is true when *Kprev* is the key previous to Key in *AVL* and *Vprev* is the value associated with *Kprev* in *AVL*. That is, *Kprev* is the greatest key in *AVL* such that *Kprev* `@<` *Key*, and `avl_fetch(Kprev, AVL, Vprev)`.

`avl_change(+Key, ?AVL1, ?Val1, ?AVL2, ?Val2)`
: is true when *AVL1* and *AVL2* are avl trees of exactly the same shape, *Key* is a key of both of them, *Val1* is the value associated with *Key* in *AVL1* and *Val2* is the value associated with it in *AVL2*, and when *AVL1* and *AVL2* are identical except perhaps for the value they assign to *Key*. Use this to change the value associated with a *Key* which is already present, not to insert a new *Key* (it won't).

`ord_list_to_avl(+List, -AVL)`
: is given a list of *Key-Val* pairs where the *Keys* are already in standard order with no duplicates (this is not checked) and returns an AVL representing the same associations. This takes *O(N)* time, unlike `list_to_avl/2` which takes *O(N lg N)*.

`list_to_avl(+Pairs, -AVL)`
: is given a proper list of *Key-Val* pairs where the *Keys* are in no particular order (but are sufficiently instantiated to be told apart) and returns an AVL representing the same associations. This works by starting with an empty tree and inserting the elements of the list into it. This takes *O(N lg N)* time. Since it is possible to read off a sorted list in *O(N)* time from the result, *O(N lg N)* is as good as can possibly be done. If the same *Key* appears more than once in the input, the last value associated with it will be used. Could be defined as:

```
list_to_avl(Pairs, AVL) :-
    (   foreach(K-V,Pairs),
        fromto(empty,AVL0,AVL1,AVL)
    do  avl_store(K, AVL0, V, AVL1)
    ).
```

`avl_store(+Key, +OldAVL, +Val, ?NewAVL)`
: is true when *OldAVL* and *NewAVL* define the same finite function except that *NewAVL* associates *Val* with *Key*. *OldAVL* need not have associated any value at all with *Key*. When it didn't, you can read this as "insert *(Key->Val)* into *OldAVL* giving *NewAVL*".

`avl_incr(+Key, +OldAVL, +Incr, +NewAVL)`
: if *Key* is not present in *OldAVL*, adds *Key->Incr*. if *Key->N* is present in *OldAvl*, changes it to *Key->N+Incr*.

`avl_delete(+Key, +OldAVL, -Val, -NewAVL)`
: is true when *OldAVL* and *NewAVL* define the same finite function except that *OldAVL* associates *Key* with *Val* and *NewAVL* doesn't associate *Key* with any value.

`avl_del_min(+OldAVL, -Key, -Val, -NewAVL)`
: is true when *OldAVL* and *NewAVL* define the same finite function except that *OldAVL* associates *Key* with *Val* and *NewAVL* doesn't associate *Key* with any value and *Key* precedes all other keys in *OldAVL*.

`avl_del_max(+OldAVL, -Key, -Val, -NewAVL)`
: is true when *OldAVL* and *NewAVL* define the same finite function except that *OldAVL* associates *Key* with *Val* and *NewAVL* doesn't associate *Key* with any value and *Key* is preceded by all other keys in *OldAVL*.

`avl_map(:Pred, +AVL)`
: is true when *AVL* is an association tree, and for each *Key*, if *Key* is associated with *Value* in *AVL*, *Pred(Value)* is true.

`avl_map(:Pred, +OldAVL, -NewAVL)`
: is true when *OldAVL* and *NewAVL* are association trees of the same shape, and for each *Key*, if *Key* is associated with *Old* in *OldAVL* and with *New* in *NewAVL*, *Pred(Old,New)* is true.

10.5 Bags, or Multisets—`library(bags)`

This library module provides operations on bags. Bags are also known as multisets. A bag B is a function from a set `dom(B)` to the non-negative integers. For the purposes of this module, a bag is constructed from two functions:

`bag` creates an empty bag

`bag(E,M,B)`
: extends the bag B with a *new* element E which occurs with multiplicity M, and which precedes all elements of B in Prolog's order.

A bag is represented by a Prolog term mirroring its construction. There is one snag with this: what are we to make of

```
bag(f(a,Y), 1, bag(f(X,b), 1, bag))     ?
```

As a term it has two distinct elements, but `f(a,b)` will be reported as occurring in it twice. But according to the definition above,

```
bag(f(a,b), 1, bag(f(a,b), 1, bag))
```

is not the representation of any bag, that bag is represented by

```
bag(f(a,b), 2, bag)
```

alone. We are apparently stuck with a scheme which is only guaranteed to work for "sufficiently instantiated" terms, but then, that's true of a lot of Prolog code.

The reason for insisting on the order is to make union and intersection linear in the sizes of their arguments. `library(ordsets)` does the same for ordinary sets.

Exported predicates:

`is_bag(+Bag)`
: recognizes proper well-formed bags. You can pass variables to `is_bag/1`, and it will reject them.

`portray_bag(+Bag)`
: writes a bag to the current output stream in a pretty form so that you can easily see what it is. Note that a bag written out this way can *not* be read back in. For that, use `write_canonical/1`. The point of this predicate is to have bags displayed nicely by print/1 and the debugger. This will print things which are not fully instantiated, which is mainly of interest for debugging this module.

`checkbag(:Pred, +Bag)`
: is true when *Bag* is a *Bag{E1:M1, ..., En:Mn}* with elements *Ei* of multiplicity *Mi*, and *Pred(Ei, Mi)* is true for each *i*.

`mapbag(:Pred, +Bag)`
: is true when *Bag* is a *Bag{E1:M1, ..., En:Mn}* with elements *Ei* of multiplicity *Mi*, and *Pred(Ei)* is true for each element *Ei*. The multiplicities are ignored: if you don't want this, use `checkbag/2`.

`mapbag(:Pred, +OldBag, -NewBag)`
: is true when *OldBag* is a *Bag{E1:M1, ..., En:Mn}* and *NewBag* is a *Bag{F1:M'1, ..., Fn:M'n}* and the elements of *OldBag* and *NewBag* are related by *Pred(Ei, Fj)*. What happens is that the elements of *OldBag* are mapped, and then the result is converted to a bag, so there is no positional correspondence between *Ei* and *Fj*. Even when *Pred* is bidirectional, `mapbag/3` is *not*. *OldBag* should satisfy `is_bag/1` before `mapbag/3` is called.

`somebag(:Pred, +Bag)`
: is true when *Bag* is a *Bag{E1:M1, ..., En:Mn}* with elements *Ei* of multiplicity *Mi* and *Pred(Ei, Mi)* is true of some element *Ei* and its multiplicity. There is no version which ignores the *Mi*.

`somechkbag(:Pred, +Bag)`
: is like `somebag(Pred, Bag)`, but commits to the first solution it finds. For example, if `p(X,X,_)`, `somechk(p(X), Bag)` would be an analogue of `memberchk/2` for bags.

`bag_to_list(+Bag, -List)`
: converts a *Bag{E1:M1, ..., En:Mn}* to a list where each element appears as many times as its multiplicity requires. For example, `Bag{a:1, b:3, c:2}` would be converted to `[a,b,b,b,c,c]`.

`bag_to_ord_set(+Bag, -Ordset)`
: converts a *Bag{E1:M1, ..., En:Mn}* to a list where each element appears once without its multiplicity. The result is always an ordered (representation of a) set, suitable for processing by `library(ordsets)`. See also `bag_to_list/2`.

`bag_to_ord_set(+Bag, +Threshold, -Ordset)`
: given a *Bag{E1:M1, ..., En:Mn}* returns a list in standard order of the set of elements *{Ei | Mi >= Threshold}*. The result is an Ordset.

`list_to_bag(+List, -Bag)`
: converts a proper list *List* to a *Bag* representing the same multi-set. Each element of the List appears once in the *Bag* together with the number of times it appears in the *List*.

`bag_to_set(+Bag, -Set)`
: converts a *Bag{E1:M1, ..., En:Mn}* to a list which represents the *Set {E1, ..., En}*. The order of elements in the result is not defined: for a version where the order is defined use `bag_to_ord_set/2`.

`bag_to_set(+Bag, +Threshold, -Set)`
: given a *Bag{E1:M1, ..., En:Mn}* returns a list which represents the *Set* of elements *{Ei | Mi >= Threshold}*. Because the *Bag* is sorted, the result is necessarily an ordered set.

`empty_bag(?Bag)`
: is true when *Bag* is the representation of an empty bag. It can be used both to make and to recognize empty bags.

`bag_member(?Element, ?Multiplicity, +Bag)`
`member(?Element, ?Multiplicity, +Bag)`
: is true when *Element* appears in the multi-set represented by *Bag* with the indicated *Multiplicity*. *Bag* should be instantiated, but *Element* and *Multiplicity* may severally be given or solved for.

  The name `member/3` has been deprecated and may be removed in a future release.

`bag_memberchk(+Element, ?Multiplicity, +Bag)`
`memberchk(+Element, ?Multiplicity, +Bag)`
: is true when *Element* appears in the multi-set represented by *Bag*, with the indicated *Multiplicity*. It should only be used to check whether a given element occurs in the *Bag*, or whether there is an element with the given *Multiplicity*. Note that guessing the multiplicity and getting it wrong may force the wrong choice of clause, but the result will be correct if `is_bag(Bag)`.

  The name `memberchk/3` has been deprecated and may be removed in a future release.

`bag_max(+Bag, -CommonestElement)`
: unifies *CommonestElement* with the element of *Bag* which occurs most often, picking the leftmost element if several have this multiplicity. To find the multiplicity as well, use `bag_max/3`. `bag_max/2` and `bag_min/2` break ties the same way.

`bag_min(+Bag, -RarestElement)`
: unifies *RarestElement* with the element of *Bag* which occurs least often, picking the leftmost element if several have this multiplicity. To find the multiplicity as well, use `bag_min/3`. `bag_max/2` and `bag_min/2` break ties the same way, so

  ```
  bag_max(Bag, Elt), bag_min(Bag, Elt)
  ```

  is true only when all the elements of *Bag* have the same multiplicity.

`bag_max(+Bag, -CommonestElement, -Multiplicity)`
: unifies *CommonestElement* with the element of *Bag* which occurs most often, and *Multiplicity* with the multiplicity of that element. If there are several elements with the same greatest multiplicity, the left-most is returned. `bag_min/3` breaks ties the same way.

`bag_min(+Bag, -RarestElement)`
: unifies *RarestElement* with the element of *Bag* which occurs least often, and *Multiplicity* with the multiplicity of that element. If there are several elements with the same least multiplicity, the left-most is returned. `bag_max/3` breaks ties the same way, so

  ```
  bag_max(Bag, Elt, Mult), bag_min(Bag, Elt, Mult)
  ```

  is true only when all the elements of *Bag* have multiplicity *Mult*.

`bag_length(+`*Bag*`, -`*BagCardinality*`, -`*SetCardinality*`)`
`length(+`*Bag*`, -`*BagCardinality*`, -`*SetCardinality*`)`
: unifies *BagCardinality* with the total cardinality of the multi-set *Bag* (the sum of the multiplicities of its elements) and *SetCardinality* with the number of distinct elements.

  The name `length/3` has been deprecated and may be removed in a future release.

`make_sub_bag(+`*Bag*`, -`*SubBag*`)`
: enumerates the sub-bags of *Bag*, unifying *SubBag* with each of them in turn. The order in which the sub-bags are generated is such that if SB2 is a sub-bag of SB1 which is a sub-bag of Bag, SB1 is generated before SB2. In particular, Bag is enumerated first and bag last.

`test_sub_bag(+`*Bag*`, +`*SubBag*`)`
: is true when *SubBag* is (already) a sub-bag of *Bag*. That is, each element of SubBag must occur in *Bag* with at least the same multiplicity. If you know *SubBag*, you should use this to test, not `make_sub_bag/2`.

`bag_union(+`*Bag1*`, +`*Bag2*`, -`*Union*`)`
: unifies *Union* with the multi-set union of bags *Bag1* and *Bag2*.

`bag_union(+`*ListOfBags*`, -`*Union*`)`
: is true when *ListOfBags* is given as a proper list of bags and *Union* is their multi-set union. Letting K be the length of *ListOfBags*, and N the sum of the sizes of its elements, the cost is *O(N lg K)*.

`bag_intersection(+`*Bag1*`, +`*Bag2*`, -`*Intersection*`)`
: unifies *Intersection* with the multi-set intersection of bags *Bag1* and *Bag2*.

`bag_intersection(+`*ListOfBags*`, -`*Intersection*`)`
: is true when *ListOfBags* is given as a non-empty proper list of Bags and *Intersection* is their intersection. The intersection of an empty list of Bags would be the universe with infinite multiplicities!

`bag_intersect(+`*Bag1*`, +`*Bag2*`)`
: is true when the multi-sets *Bag1* and *Bag2* have at least one element in common.

`bag_add_element(+`*Bag1*`, +`*Element*`, +`*Multiplicity*`, -`*Bag2*`)`
: computes *Bag2 = Bag1 U {Element:Multiplicity}*. *Multiplicity* must be an integer.

`bag_del_element(+`*Bag1*`, +`*Element*`, +`*Multiplicity*`, -`*Bag2*`)`
: computes *Bag2 = Bag1 \ {Element:Multiplicity}*. *Multiplicity* must be an integer.

`bag_subtract(+`*Bag1*`, +`*Bag2*`, -`*Difference*`)`
: is true when *Difference* is the multiset difference of *Bag1* and *Bag2*.

10.6 Generating Integers—`library(between)`

This library module provides some means of generating integers. Exported predicates:

`between(+Lower, +Upper, -Number)`
: is true when *Lower*, *Upper*, and *Number* are integers, and *Lower* =< *Number* =< *Upper*. If *Lower* and *Upper* are given, *Number* can be tested or enumerated. If either *Lower* or *Upper* is absent, there is not enough information to find it, and an error will be reported.

`gen_nat(?N)`
: is true when N is a natural number. If N is a variable, it will enumerate the natural numbers 0,1,2,... and of course not terminate. It is not meant to be applied to anything but integers and variables.

`gen_int(?I)`
: is true when I is an integer. If I is a variable, it will enumerate the integers in the order 0, 1, -1, 2, -2, 3, -3, &c. Of course this sequence has no end. It is not meant to be applied to anything but integers and variables.

`repeat(+N)`
: (where N is a non-negative integer) succeeds exactly N times. You can only understand it procedurally, and really it is only included for compatibility with some other Prologs.

`numlist(?Upper, ?List)`
: is true when *List* is the list of integers *[1, ..., Upper]*. For example, `numlist(3,L)` binds `L = [1,2,3]`.

`numlist(?Lower, ?Upper, ?List)`
: is true when *List* is *[Lower, ..., Upper]*, *Lower* and *Upper* integers. For example, `numlist(1, 3, L)` binds `L = [1,2,3]`.

`numlist(?Lower, ?Step, ?Upper, ?Length, ?List)`
: is true when *List* is the list of integers *[Lower, Lower+Step, ..., Upper]* and of length *Length*. For example, `numlist(Lower,2,Upper,Length,[1,X,Y,Z])` binds `Lower=1, Upper=7, Length=4, X=3, Y=5, Z=7`.

10.7 Constraint Handling Rules—`library(chr)`

This section is written by Tom Schrijvers, K.U. Leuven, and adjustments by Jan Wielemaker.

The CHR system of SICStus Prolog is the K.U.Leuven CHR system. The runtime environment is written by Christian Holzbaur and Tom Schrijvers while the compiler is written by Tom Schrijvers. Both are integrated with SICStus Prolog and licensed under compatible conditions with permission from the authors.

The main reference for the CHR system is [Schrijvers & Demoen 04].

10.7.1 Introduction

Constraint Handling Rules (CHR) is a committed-choice rule-based language embedded in Prolog. It is designed for writing constraint solvers and is particularly useful for providing application-specific constraints. It has been used in many kinds of applications, like scheduling, model checking, abduction, type checking among many others.

CHR has previously been implemented in other Prolog systems (SICStus, Eclipse, Yap), Haskell and Java. This CHR system is based on the compilation scheme and runtime environment of CHR in SICStus.

In this documentation we restrict ourselves to giving a short overview of CHR in general and mainly focus on elements specific to this implementation. For a more thorough review of CHR we refer the reader to [Fruehwirth 98].

In Section 10.7.2 [CHR Syntax and Semantics], page 414, we present the syntax of CHR in Prolog and explain informally its operational semantics. Next, Section 10.7.3 [CHR in Prolog Programs], page 417, deals with practical issues of writing and compiling Prolog programs containing CHR. Section 10.7.4 [CHR Debugging], page 419, explains the currently primitive CHR debugging facilities. Section 10.7.4.3 [CHR Debugging Predicates], page 420, provides a few useful predicates to inspect the constraint store and Section 10.7.5 [CHR Examples], page 421, illustrates CHR with two example programs. Finally, Section 10.7.6 [CHR Guidelines], page 422, concludes with a few practical guidelines for using CHR.

10.7.2 Syntax and Semantics

10.7.2.1 Syntax

The syntax of CHR rules is the following:

rules ::= *rule rules*
rules ::= *empty*
rule ::= *name actual_rule pragma* `.`
name ::= *atom* `@`
name ::= *empty*
actual_rule ::= *simplification_rule*
actual_rule ::= *propagation_rule*
actual_rule ::= *simpagation_rule*
simplification_rule ::= *head* `<=>` *guard body*

propagation_rule ::= *head* `==>` *guard body*
simpagation_rule ::= *head* `\` *head* `<=>` *guard body*
head ::= *constraints*
constraints ::= *constraint constraint_id*
constraints ::= *constraint constraint_id* `,` *constraints*
constraint ::= *compound_term*
constraint_id ::= *empty*
constraint_id ::= `#` *variable*
guard ::= *empty*
guard ::= *goal disj*
body ::= *goal*
pragma ::= *empty*
pragma ::= `pragma` *actual_pragmas*
actual_pragmas ::= *actual_pragma*
actual_pragmas ::= *actual_pragma* `,` *actual_pragmas*
actual_pragma ::= `passive(`*variable*`)`
disj ::= `;` | `|` { read as `;` unless `|` is declared infix }

Note that the guard of a rule may not contain any goal that binds a variable in the head of the rule with a non-variable or with another variable in the head of the rule. It may however bind variables that do not appear in the head of the rule, e.g. an auxiliary variable introduced in the guard.

Note also that, unless `|` has been declared as an operator, `|` and `;` are indistinguishable as infix operators—both are read as `;` (see Section 4.1.7.3 [ref-syn-syn-sen], page 57). So if e.g. a simplification rule is given as:

head `<=> (`*P* `;` *Q*`)`

then CHR will break the ambiguity by treating *P* as the guard and *Q* as the body, which is probably not what you want. To get the intended interpretation, you must supply a dummy guard '`true |`':

head `<=> true | (`*P* `;` *Q*`)`

Please note: the above is true as long as you do not declare `|` as an infix operator, which is possible since release 4.3 for ISO compliance. Declaring `|` as an infix operator will confuse CHR.

10.7.2.2 Semantics

In this subsubsection the operational semantics of CHR in Prolog are presented informally. They do not differ essentially from other CHR systems.

When a constraint is called, it is considered an active constraint and the system will try to apply the rules to it. Rules are tried and executed sequentially in the order they are written.

A rule is conceptually tried for an active constraint in the following way. The active constraint is matched with a constraint in the head of the rule. If more constraints appear in the head, then they are looked for among the suspended constraints, which are called passive constraints in this context. If the necessary passive constraints can be found and all match with the head of the rule and the guard of the rule succeeds, then the rule is committed and the body of the rule executed. If not all the necessary passive constraint can be found, then the matching fails or the guard fails, the body is not executed and the process of trying and executing simply continues with the following rules. If for a rule, there are multiple constraints in the head, then the active constraint will try the rule sequentially multiple times, each time trying to match with another constraint.

This process ends either when the active constraint disappears, i.e. it is removed by some rule, or after the last rule has been processed. In the latter case the active constraint becomes suspended.

A suspended constraint is eligible as a passive constraint for an active constraint. The other way it may interact again with the rules, is when a variable appearing in the constraint becomes bound to either a non-variable or another variable involved in one or more constraints. In that case the constraint is triggered, i.e. it becomes an active constraint and all the rules are tried.

Rule Types. There are three different kinds of rules, each with their specific semantics:

simplification
: The simplification rule removes the constraints in its head and calls its body.

propagation
: The propagation rule calls its body exactly once for the constraints in its head.

simpagation
: The simpagation rule removes the constraints in its head after the `\` and then calls its body. It is an optimization of simplification rules of the form:

```
constraints_1, constraints_2 <=> constraints_1, body
```

namely, in the simpagation form:

```
constraints_1 \ constraints_2 <=> body
```

the *constraints_1* constraints are not called in the body.

Rule Names. Naming a rule is optional and has no semantical meaning. It only functions as documentation for the programmer.

Pragmas. The semantics of the pragmas are:

`passive(`*Identifier*`)`
: The constraint in the head of a rule *Identifier* can only match a passive constraint in that rule.

Additional pragmas may be released in the future.

Options.

It is possible to specify options that apply to all the CHR rules in the module. Options are specified with the `chr_option/2` declaration:

```
:- chr_option(Option,Value).
```

and may appear in the file anywhere after the first constraints declaration.

Available options are:

`check_guard_bindings`
: This option controls whether guards should be checked for (illegal) variable bindings or not. Possible values for this option are `on`, to enable the checks, and `off`, to disable the checks. If this option is on, then any guard fails when it binds a variable that appears in the head of the rule. When the option is off, the behavior of a binding in the guard is undefined.

`optimize`
: This option controls the degree of optimization. Possible values are `full`, to enable all available optimizations, and `off` (the default), to disable all optimizations. If optimization is enabled, then debugging must be disabled.

`debug`
: This options enables or disables the possibility to debug the CHR code. Possible values are `on` (the default) and `off`. See Section 10.7.4 [CHR Debugging], page 419, for more details on debugging.

10.7.3 CHR in Prolog Programs

10.7.3.1 Embedding in Prolog Programs

The CHR constraints defined in a `.pl` file are associated with a module. The default module is `user`. One should never load different `.pl` files with the same CHR module name.

10.7.3.2 Constraint Declaration

Every constraint used in CHR rules has to be declared with a `chr_constraint/1` declaration by the *constraint specifier*. For convenience multiple constraints may be declared at once with the same `chr_constraint/1` declaration followed by a comma-separated list of constraint specifiers.

A constraint specifier is, in its compact form, *F/A* where *F* and *A* are respectively the functor name and arity of the constraint, e.g.

```
:- chr_constraint foo/1.
:- chr_constraint bar/2, baz/3.
```

In its extended form, a constraint specifier is `c(A_1,...,A_n)` where *c* is the constraint's functor, *n* its arity and the *A_i* are argument specifiers. An argument specifier is a mode, optionally followed by a type. E.g.

```
:- chr_constraint get_value(+,?).
:- chr_constraint domain(?int,+list(int)),
                  alldifferent(?list(int)).
```

A mode is one of the following:

`-` The corresponding argument of every occurrence of the constraint is always unbound.

`+` The corresponding argument of every occurrence of the constraint is always ground.

`?` The corresponding argument of every occurrence of the constraint can have any instantiation, which may change over time. This is the default value.

A type can be a user-defined type or one of the built-in types. A type comprises a (possibly infinite) set of values. The type declaration for a constraint argument means that for every instance of that constraint the corresponding argument is only ever bound to values in that set. It does not state that the argument necessarily has to be bound to a value.

The built-in types are:

`int` The corresponding argument of every occurrence of the constraint is an integer.

`float` ... a floating point number.

`number` ... a number.

`natural` ... a positive integer.

`any` The corresponding argument of every occurrence of the constraint can have any type. This is the default value.

User-defined types are algebraic data types, similar to those in Haskell or the discriminated unions in Mercury. An algebraic data type is defined using

```
:- chr_type type ---> body.
```

If the type term is a functor of arity zero (i.e. one having zero arguments), then it names a *monomorphic* type. Otherwise, it names a *polymorphic* type; the arguments of the functor must be distinct type variables. The body term is defined as a sequence of constructor definitions separated by semi-colons.

Each constructor definition must be a functor whose arguments (if any) are types. Discriminated union definitions must be transparent: all type variables occurring in the body must also occur in the type.

Here are some examples of algebraic data type definitions:

```
:- chr_type color ---> red ; blue ; yellow ; green.
:- chr_type tree --->  empty ; leaf(int) ; branch(tree, tree).
:- chr_type list(T) --->    [] ; [T | list(T)].
:- chr_type pair(T1, T2) ---> (T1 - T2).
```

Each algebraic data type definition introduces a distinct type. Two algebraic data types that have the same bodies are considered to be distinct types (name equivalence).

Constructors may be overloaded among different types: there may be any number of constructors with a given name and arity, so long as they all have different types.

Aliases can be defined using '==='. For example, if your program uses lists of lists of integers, then you can define an alias as follows:

```
:- chr_type lli == list(list(int)).
```

10.7.3.3 Compilation

The Prolog CHR compiler exploits `user:term_expansion/6` rules to translate the constraint handling rules to plain Prolog. These rules are loaded from `library(chr)`. They are activated after finding a declaration of the format:

```
:- chr_constraint ...
```

It is advised to define CHR rules in a module file, where the module declaration is immediately followed by loading `library(chr)` as exemplified below:

```
:- module(zebra, [ zebra/0 ]).
:- use_module(library(chr)).

:- chr_constraint ...
```

10.7.4 Debugging

The CHR debugging facilities are currently rather limited. Only tracing is currently available. To use the CHR debugging facilities for a CHR file it must be compiled for debugging. Generating debug info is controlled by the CHR option `debug`, whose default is derived from the CHR flag `generate_debug_info`.

10.7.4.1 Ports

For CHR constraints the four standard ports are defined:

`call` A new constraint is called and becomes active.

`exit` An active constraint exits: it has either been inserted in the store after trying all rules or has been removed from the constraint store.

`fail` An active constraint fails.

`redo` An active constraint starts looking for an alternative solution.

In addition to the above ports, CHR constraints have five additional ports:

`wake` A suspended constraint is woken and becomes active.

`insert` An active constraint has tried all rules and is suspended in the constraint store.

`remove` An active or passive constraint is removed from the constraint store.

`try` An active constraints tries a rule with possibly some passive constraints. The try port is entered just before committing to the rule.

`apply` An active constraints commits to a rule with possibly some passive constraints. The apply port is entered just after committing to the rule.

10.7.4.2 Tracing

Tracing is enabled with the `chr_trace/0` predicate and disabled with the `chr_notrace/0` predicate.

When enabled, the tracer will step through the `call`, `exit`, `fail`, `wake` and `apply` ports, accepting debug commands, and simply write out the other ports.

The following debug commands are currently supported:

```
CHR debug options:

        <cr>    creep           c       creep
        s       skip
        g       ancestors
        n       nodebug
        b       break
        a       abort
        f       fail
        ?       help            h       help
```

Their meaning is:

`creep` Step to the next port.

`skip` Skip to exit port of this call or wake port.

`ancestors`
Print list of ancestor call and wake ports.

`nodebug` Disable the tracer.

`break` Enter a recursive Prolog top level. See `break/0`.

`abort` Exit to the top level. See `abort/0`.

`fail` Insert failure in execution.

`help` Print the above available debug options.

10.7.4.3 Debugging Predicates

The `chr` module exports several predicates that allow inspecting and printing the content of the constraint store.

`chr_trace/0`
Activate the CHR tracer. By default the CHR tracer is activated and deactivated automatically by the Prolog predicates `trace/0` and `notrace/0`.

`chr_notrace/0`
De-activate the CHR tracer. By default the CHR tracer is activated and deactivated automatically by the Prolog predicates `trace/0` and `notrace/0`.

`chr_leash(+`*Spec*`)`
Define the set of CHR ports on which the CHR tracer asks for user intervention (i.e. stops). *Spec* is either a list of ports as defined in Section 10.7.4.1 [CHR

Ports], page 419, or a predefined alias. Defined aliases are: `full` to stop at all ports, `none` or `off` to never stop, and `default` to stop at the `call`, `exit`, `fail`, `wake` and `apply` ports. See also `leash/1`.

`chr_flag(+`*`FlagName`*`, ?`*`OldValue`*`, ?`*`NewValue`*`)`
OldValue is the value of the CHR flag *FlagName*, and the new value of *FlagName* is set to *NewValue*. The valid CHR flag are the following:

`toplevel_show_store`
If `on` (the default), then the Prolog top level displays the constraint store at the end of each query. If `off`, then the top level does not display this.

`generate_debug_info`
Provides the default if the `debug` option is not given. The valid values are `true` and `false` (the default).

`optimize` Provides the default if the `optimize` option is not given. The valid values are `full` and `off` (the default).

`chr_show_store(+`*`Mod`*`)`
Prints all suspended constraints of module *Mod* to the current output stream.

`find_chr_constraint(-`*`Constraint`*`)` *since release 4.3.2*
Unifies *Constraint* with a constraint in the store.

10.7.5 Examples

Here are two example constraint solvers written in CHR.

1. The program below defines a solver with one constraint, `leq/2`, which is a less-than-or-equal constraint, also known as a partial order constraint.

```
:- module(leq,[leq/2]).
:- use_module(library(chr)).

:- chr_constraint leq/2.
reflexivity  @ leq(X,X) <=> true.
antisymmetry @ leq(X,Y), leq(Y,X) <=> X = Y.
idempotence  @ leq(X,Y) \ leq(X,Y) <=> true.
transitivity @ leq(X,Y), leq(Y,Z) ==> leq(X,Z).
```

   When the above program is loaded, you can call the `leq/2` constraint in a query, e.g.:

```
| ?- leq(X,Y), leq(Y,Z).
leq(X,Y),
leq(X,Z),
leq(Y,Z) ?
```

2. The program below implements a simple finite domain constraint solver.

```
:- module(dom,[dom/2]).
:- use_module(library(chr)).
:- use_module(library(sets), [intersection/3]).

:- chr_constraint dom(?int,+list(int)).
:- chr_type list(T) ---> [] ; [T|list(T)].

dom(X,[]) <=> fail.
dom(X,[Y]) <=> X = Y.
dom(X,L) <=> nonvar(X) | memberchk(X,L).
dom(X,L1), dom(X,L2) <=> intersection(L1,L2,L3), dom(X,L3).
```

When the above program is loaded, you can call the `dom/2` constraint in a query, e.g.:

```
| ?- dom(A,[1,2,3]), dom(A,[3,4,5]).
A = 3
```

Finally, Martin Keser's WebCHR package at `http://chr.informatik.uni-ulm.de/~webchr/` contains more than 40 example programs for SICStus 4, complete with documentation and example queries.

10.7.6 Guidelines

In this subsection we cover several guidelines on how to use CHR to write constraint solvers and how to do so efficiently.

Check guard bindings yourself.
: It is considered bad practice to write guards that bind variables of the head and to rely on the system to detect this at runtime. It is inefficient and obscures the working of the program.

Set semantics.
: The CHR system allows the presence of identical constraints, i.e. multiple constraints with the same functor, arity and arguments. For most constraint solvers, this is not desirable: it affects efficiency and possibly termination. Hence appropriate simpagation rules should be added of the form:

```
constraint \ constraint <=> true.
```

Multi-headed rules.
: Multi-headed rules are executed more efficiently when the constraints share one or more variables.

Mode and type declarations.
: Provide mode and type declarations to get more efficient program execution.

Compile once, run many times.
: Does consulting your CHR program take a long time? Probably it takes the CHR compiler a long time to compile the CHR rules into Prolog code. When you disable optimizations the CHR compiler will be a lot quicker, but you may lose performance.

10.8 Constraint Logic Programming over Booleans—library(clpb)

10.8.1 Introduction

The clp(B) system provided by this library module is an instance of the general Constraint Logic Programming scheme introduced in [Jaffar & Michaylov 87]. It is a solver for constraints over the Boolean domain, i.e. the values 0 and 1. The library module is a direct port from SICStus Prolog 3. It is not supported by SICS in any way.

The Boolean domain is particularly useful for modeling digital circuits, and the constraint solver can be used for verification, design, optimization etc. of such circuits.

To load the solver, enter the query:

```
| ?- use_module(library(clpb)).
```

The solver contains predicates for checking the consistency and entailment of a constraint wrt. previous constraints, and for computing particular solutions to the set of previous constraints.

The underlying representation of Boolean functions is based on Boolean Decision Diagrams [Bryant 86]. This representation is very efficient, and allows many combinatorial problems to be solved with good performance.

Boolean expressions are composed from the following operands: the constants 0 and 1 (`FALSE` and `TRUE`), logical variables, and symbolic constants, and from the following connectives. P and Q are Boolean expressions, X is a logical variable, *Is* is a list of integers or integer ranges, and *Es* is a list of Boolean expressions:

`~ P` True if P is false.

`P * Q` True if P and Q are both true.

`P + Q` True if at least one of P and Q is true.

`P # Q` True if exactly one of P and Q is true.

`X ^ P` True if there exists an X such that P is true. Same as `P[X/0] + P[X/1]`.

`P =:= Q` Same as `~P # Q`.

`P =\= Q` Same as `P # Q`.

`P =< Q` Same as `~P + Q`.

`P >= Q` Same as `P + ~Q`.

`P < Q` Same as `~P * Q`.

`P > Q` Same as `P * ~Q`.

`card(Is, Es)`
True if the number of true expressions in *Es* is a member of the set denoted by *Is*.

Symbolic constants (Prolog atoms) denote parametric values and can be viewed as all-quantified variables whose quantifiers are placed outside the entire expression. They are useful for forcing certain variables of an equation to be treated as input parameters.

10.8.2 Solver Interface

The following predicates are defined:

`sat(+`*Expression*`)`
: *Expression* is a Boolean expression. This checks the consistency of the expression wrt. the accumulated constraints, and, if the check succeeds, *tells* the constraint that the expression be true.

  If a variable X, occurring in the expression, is subsequently unified with some term T, then this is treated as a shorthand for the constraint

```
| ?- sat(X=:=T).
```

`taut(+`*Expression*`, ?`*Truth*`)`
: *Expression* is a Boolean expression. This *asks* whether the expression is now entailed by the accumulated constraints (*Truth*=1), or whether its negation is entailed by the accumulated constraints (*Truth*=0). Otherwise, it fails.

`labeling(+`*Variables*`)`
: *Variables* is a list of variables. The variables are instantiated to a list of 0s and 1s, in a way that satisfies any accumulated constraints. Enumerates all solutions by backtracking, but creates choicepoints only if necessary.

10.8.3 Examples

10.8.3.1 Example 1

```
| ?- sat(X + Y).

sat(X=\=_A*Y#Y)
```

illustrates three facts. First, any accumulated constraints affecting the top-level variables are displayed floundered goals, since the query is not true for all `X` and `Y`. Secondly, accumulated constraints are displayed as `sat(`*V*`=:=`*Expr*`)` or `sat(`*V*`=\=`*Expr*`)` where V is a variable and *Expr* is a "polynomial", i.e. an exclusive or of conjunctions of variables and constants. Thirdly, `_A` had to be introduced as an artificial variable, since `Y` cannot be expressed as a function of `X`. That is, `X + Y` is true iff there exists an `_A` such that `X=\=_A*Y#Y`. Let's check it!

```
| ?- taut(_A ^ (X=\=_A*Y#Y) =:= X + Y, T).

T = 1
```

verifies the above answer. Notice that the formula in this query is a tautology, and so it is entailed by an empty set of constraints.

10.8.3.2 Example 2

```
| ?- taut(A =< C, T).

no
| ?- sat(A =< B), sat(B =< C), taut(A =< C, T).

T = 1,
sat(A=:=_A*_B*C),
sat(B=:=_B*C)

| ?- taut(a, T).

T = 0

| ?- taut(~a, T).

T = 0
```

illustrates the entailment predicate. In the first query, the expression "A implies C" is neither known to be true nor false, so the query fails. In the second query, the system is told that "A implies B" and "B implies C", so "A implies C" is entailed. The expressions in the third and fourth queries are to be read "for each a, a is true" and "for each a, a is false", respectively, and so `T = 0` in both cases since both are unsatisfiable. This illustrates the fact that the implicit universal quantifiers introduced by symbolic constants are placed in front of the entire expression.

10.8.3.3 Example 3

```
| ?- [user].
| adder(X, Y, Sum, Cin, Cout) :-
     sat(Sum =:= card([1,3],[X,Y,Cin])),
     sat(Cout =:= card([2-3],[X,Y,Cin])).
| ^D
% consulted user in module user, 0 msec 424 bytes

| ?- adder(x, y, Sum, cin, Cout).

sat(Sum=:=cin#x#y),
sat(Cout=:=x*cin#x*y#y*cin)

| ?- adder(x, y, Sum, 0, Cout).

sat(Sum=:=x#y),
sat(Cout=:=x*y)

| ?- adder(X, Y, 0, Cin, 1), labeling([X,Y,Cin]).

Cin = 0,
X = 1,
Y = 1 ? ;

Cin = 1,
X = 0,
Y = 1 ? ;

Cin = 1,
X = 1,
Y = 0 ? ;
```

illustrates the use of cardinality constraints and models a one-bit adder circuit. The first query illustrates how representing the input signals by symbolic constants forces the output signals to be displayed as functions of the inputs and not vice versa. The second query computes the simplified functions obtained by setting carry-in to 0. The third query asks for particular input values satisfying sum and carry-out being 0 and 1, respectively.

10.8.3.4 Example 4

The predicate `fault/3` below describes a 1-bit adder consisting of five gates, with at most one faulty gate. If one of the variables `Fi` is equal to 1, then the corresponding gate is faulty, and its output signal is undefined (i.e. the constraint representing the gate is relaxed).

Assuming that we have found some incorrect output from a circuit, we are interesting in finding the faulty gate. Two instances of incorrect output are listed in `fault_ex/2`:

```
fault([F1,F2,F3,F4,F5], [X,Y,Cin], [Sum,Cout]) :-
        sat(
                    card([0-1],[F1,F2,F3,F4,F5]) *
                    (F1 + (U1 =:= X * Cin)) *
                    (F2 + (U2 =:= Y * U3)) *
                    (F3 + (Cout =:= U1 + U2)) *
                    (F4 + (U3 =:= X # Cin)) *
                    (F5 + (Sum =:= Y # U3))
                ).

fault_ex(1, Faults) :- fault(Faults, [1,1,0], [1,0]).
fault_ex(2, Faults) :- fault(Faults, [1,0,1], [0,0]).
```

To find the faulty gates, we run the query

```
| ?- fault_ex(I,L), labeling(L).

I = 1,
L = [0,0,0,1,0] ? ;

I = 2,
L = [1,0,0,0,0] ? ;

I = 2,
L = [0,0,1,0,0] ? ;

no
```

Thus for input data `[1,1,0]`, gate 4 must be faulty. For input data `[1,0,1]`, either gate 1 or gate 3 must be faulty.

To get a symbolic representation of the outputs in terms of the input, we run the query

```
| ?- fault([0,0,0,0,0], [x,y,cin], [Sum,Cout]).

sat(Cout=:=x*cin#x*y#y*cin),
sat(Sum=:=cin#x#y)
```

which shows that the sum and carry out signals indeed compute the intended functions if no gate is faulty.

10.9 Constraint Logic Programming over Finite Domains—`library(clpfd)`

10.9.1 Introduction

The solver described in this chapter is suitable for solving problems modeled as Constraint Satisfaction Problems (CSPs). The components of a CSP are:

variables The CLPFD solver deals with variables that take integer or real numbers as values. Variables known to the solver are called *domain variables*.

domains At any given time, a domain variable has an attached *domain*, a subset of the integers or the reals. Domains can be declared up front. Such declarations are not always mandatory.

constraints
A constraint is a relation over a set of domain variables. If those variables are all ground, the constraint is false or true. The semantics of a constraint can be defined in a number of ways, but fundamentally can be thought of as the set of value tuples for which the constraint is true.

objective function
A CSP can be a satisfiability problem of an optimization problem. In the latter case, an objective function is needed, whose value is the value to minimize or maximize

search procedure
The goal of any CSP is to find an assignment to all domain variables satisfying all constraints and minimizing or maximizing the objective function, if one was given. Some amount of search is almost always necessary to find such an assignment.

The term *finite domains* is a legacy term referring to constraints where all domains are finite sets of integers. Earlier versions of the solver did not support real numbers. Domains could always be finite. The Handbook of Constraint Programming [CPHandbook] gives an excellent overview of Constraint Programming with deep dives into the foundations and many lines of work that have been and are being pursued in the field.

The CLPFD solver can be used via the Prolog API described in this chapter, as well as a back-end to the MiniZinc toolchain [MiniZincHandbook] (see Section 10.55 [lib-zinc], page 923).

10.9.1.1 Referencing this Software

When referring to this implementation of clp(FD) in publications, please use the following reference:

> Carlsson M., Ottosson G., Carlson B. *An Open-Ended Finite Domain Constraint Solver*, Proc. Programming Languages: Implementations, Logics, and Programs, 1997.

10.9.1.2 Acknowledgments

The first version of this solver was written as part of Key Hyckenberg's MSc thesis in 1995, with contributions from Greger Ottosson at the Computing Science Department, Uppsala University. The code was later rewritten by Mats Carlsson with contributions by Nicolas Beldiceanu. Péter Szeredi contributed material for this manual chapter.

The development of this software was supported by the Swedish National Board for Technical and Industrial Development (NUTEK) under the auspices of Advanced Software Technology (ASTEC) Center of Competence at Uppsala University.

We include a collection of examples, among which some have been distributed with the INRIA implementation of clp(FD) [Diaz & Codognet 93].

10.9.2 Glossary

We now introduce some terminology that will be used in this chapter.

assignment
: Given a tuple T of domain variables, an assignment of T is a tuple of the same size as T where each variable has been replaced by an integer or real number in its domain.

Boolean argument
: An integer in 0..1 or an integer variable with domain contained in 0..1.

bounds consistency
: A constraint over a tuple T is bounds-consistent if for all lower and upper bounds of all domains, there is at least one assignment of T in its solution set. Achieving bounds consistency consists in trimming the domains until bounds consistency holds. That is often an NP-complete problem, but it is usually easier to achieve than domain consistency and is a good "second best". Some constraints over integers maintain bounds consistency. All constraints over reals endeavor to maintain bounds consistency.

constraint
: A mathematical relation over a tuple of domain variables. The constraint is true for some assignments of the tuple but may be false for others.

domain consistency
: A constraint over a tuple T is domain-consistent if for all values of all domains, there is at least one assignment of T in its solution set. Achieving domain consistency consists in removing domain values until bounds consistency holds. That is often an NP-complete problem, but is usually desirable, because it achieves the best reduction of the search space. Some constraints over integers maintain domain consistency. Domain consistency for constaints over reals does not make much sense, because their domains contain infinitely many real numbers.

domain store
: The set of all variables and their domains in the model.

domain variable
: A variable that is known to the solver. Attached to it is its domain, a subset of the integers or the reals. Attached to it is also a list of the propagators in which the variable occurs. While the domain contains more than one value, the variable remains an attributed Prolog variable. When and if the domain becomes a singleton, the variable gets bound to that single value. If the domain gets wiped out, then this leads to a Prolog failure, i.e., backtracking.

entailment
: A constraint over a tuple T is entailed if all assignments of T are members of the solution set. The practical effect of entailment is that no more pruning is possible, i.e., the propagator has no more work to do and can be disabled.

extension
: Domain store S is an extension of domain store T if each domain in S is a subset of the corresponding domain in T.

integer argument
: An integer or an integer variable.

integer range expression
: A Prolog term that is used to denote an integer domain. See Section 10.9.16.2 [Syntax of Range Expressions], page 509, *IntegerRange*.

integer variable
: A domain variable whose value varies over the small integers (see Chapter 2 [Glossary], page 7). The lower (upper) bound of its domain does not need to be a small integer; it can be minus (plus) infinity, denoted by the atom `inf` (`sup`). Integer domains do not need to be intervals; they can consist of multiple, disjoint intervals. An integer variable may be unified with another integer variable or with a small integer, equating their values.

model
: Same as CSP.

numeric argument
: An integer or real argument.

objective function
: For an optimization problem, the solver will seek to minimize or maximize the value of an integer variable O (with some variants; see Section 10.9.8 [Enumeration Predicates], page 477). For that to work, the model should contain constraints that constrain O accordingly.

overflow
: If during the computation an integer variable receives a new lower or upper bound that cannot be represented as a small integer, then an overflow condition is issued. This is expressed as silent failure or as a representation error, subject to the `overflow` option of `fd_flag/3`.

partial function
: A function that is not defined for all combinations of input values.

posting
: The act of adding a constraint to the model, i.e., of calling the constraint as a Prolog goal.

propagation

Triggered by the posting of a constraint or the pruning of a domain, propagation is a phase of execution where propagators trigger each other in a "chain reaction" to fixpoint. This fixpoint is a domain store in which no propagator can do any pruning.

propagator

The procedural aspect of a constraint: a coroutine that endeavors to remove such domain values that cannot be part of a satisfying assignment. The coroutine is run when the constraint is posted or is resumed. Resumption is triggered when some domain has been pruned by another propagator or by search. Also, a propagator is responsible for detecting entailment or failure, at the very latest when all domain variables have been assigned. Note that a constraint as described in this chapter does not necessarily correspond to a single propagator; it can be implemented by a combination of propagators; sometimes, it has multiple, alternative implementations depending on option choices or the chosen level of consistency. For a propagator P and domain store S, we sometimes use the notation *P(S)* to denote the domain store that exists after running P.

Please note: The solver performs no global reasoning over propagators whatsoever. All reasoning is done individually by the propagators, which are unaware of each other. For example, the following inconsistency is not detected immediately, because that would require global reasoning:

```
| ?- X #= Y+1, Y #= X+1.
X in inf..sup,
Y in inf..sup
```

pruning The act of removing values from a domain. If the whole domain is wiped out as a result, that leads to backtracking, i.e., to a Prolog failure.

real argument

A real or a real variable.

real range expression

A Prolog term that is used to denote a real domain. See Section 10.9.16.2 [Syntax of Range Expressions], page 509, *RealRange*.

real variable

A domain variable whose value varies over the real numbers. Real domains are always intervals. The lower bound of its domain is a float or the atom `finf`, denoting minus infinity. The upper bound of its domain is a float or the atom `fsup`, denoting plus infinity. An real variable may be unified with another real variable or with a float, equating their values.

reification A constraint C can be reified by a `0..1` variable B, meaning that $B = 1$ if C is true and $B = 0$ if C is false. Procedurally, reification can be though of as a 2-way channel between C and B: if entailment (failure) is detected for C, then B is fixed to 1 (0); if B is fixed to 1, then C is enforced; if B is fixed to 0, then the negation of C is enforced. Syntactically, a constraint is reified whenever it occurs in a propositional formula. Although reification is a general concept, only a few of the solver's constraints support it natively.

satisfying assignment
: Given a constraint over a tuple T of domain variables, an assignment of T for which the constraint is true.

search procedure
: At the end of a successful computation, one expects all domains to become singletons, i.e., all domain variables to become assigned. Usually, domains do not become singletons by propagation alone; it takes some amount of search to find an assignment that satisfies all constraints. That is the job of the search procedure, a procedure that explores the search space, i.e., in principle, all possible assignments of the domain variables. The solver exports predicates for that purpose, but their use is not mandatory, custom search procedures can be formulated using other exported predicates that inspect domains.

solution set
: The solution set of a constraint over a tuple T is the set of its satisfying assignments. Note that if real variables are part of T, the solution set is usually infinite in theory. But the solver cannot represent real numbers exactly; it uses floating-point numbers. Restricting solutions sets to integers and floating-point numbers would lead to loss of solutions, so to prevent that, the solver treats every floating-point number X as a tiny interval of real numbers centered around X.

10.9.3 Desiderata of Propagators

Certain properties of propagators are desirable:

Correct A correct propagator never removes a domain value for which a satisfying assignment exists. This property is mandatory.

Checking A checking propagator accepts all ground assignments that satisfy it and rejects all ground assignments that violate it. This property is also mandatory.

Contracting
: A contracting propagator never adds any value to any domain. This property is also mandatory. In fact, it holds by construction.

Monotone A propagator P is monotone if, for all domain stores S and T, if S is an extension of T, then *P(S)* is an extension of *P(T)*. This property is not mandatory but helps understanding and debugging.

Idempotent
: A propagator P is idempotent if, for all domain stores S, *P(S)* equals *P(P(S))*.

10.9.4 Constraint and Predicate Annotations

This chapter introduces a couple of new annotations, which appear to the right of the name of a constraint or predicate being introduced.

reifiable Denotes that the constraint being introduced is reifiable.

polymorphic

Denotes that the constraint or predicate being introduced can execute in two modes: with integer arguments or with real arguments, but not in mixed mode. By default, constraints and predicates can only execute in integer mode.

10.9.5 Caveats and Limitations

Following are some general statements about the constraints and predicates of this library module.

Aliasing In case of variable aliasing, i.e., if a variable occurs more than once in a constraint that is being posted, or if two variables of a constraint are unified after posting, then any guarantee to maintain a particular level of consistency no longer holds, and idempotency is almost always lost.

Precision A lower bound for the size of nonground real domains can be set. In some applications, if the size of the domain of a real variable becomes smaller than a given bound, the variable should be considered fixed.

Values greater than 0.0 can cause solutions to be missed that otherwise would be found, because most propagators for real constraints do not achieve bounds consistency. If a propagator for constraint *C(X,...)* narrows the domain of X to a size that is smaller than the precision, then X gets fixed to an unspecified value in that domain, for which C is not guaranteed to have a solution.

Termination

All constraints and propagators terminate. However, due to the combinatorial nature of constraint solving, and to the fact that constraint solving is based on filtering domains, which can be huge, pathological cases where termination takes extremely long time are easily constructed. After about 15,000 years on a 64-bit machine, the following query terminates with a representation error, when the lower bound of `X` exceeds the small integer range:

```
| ?- X #> abs(X).
[... ... ...]
! Representation error in user:'t=<u+c'/3
! CLPFD integer overflow
! goal:  't=<u+c'(_245,_247,-1)
```

Anyway, if you find non-pathological cases that take longer than reasonable time to terminate, then please write to `sicstus-support@ri.se`.

Error Checking

Contrary to most library modules, CLPFD constraints and predicates check their arguments to almost the same extent as built-in predicates. If you find a case where reasonable error checking is missing, then please write to `sicstus-support@ri.se`.

Copying Terms

If a term containing domain variables is written, copied, asserted, gathered as a solution to `findall/3` and friends, or raised as an exception, then those domain variables will be replaced by brand new variables in the copy. To

retain the domains and any attached constraints, you can use `copy_term/3` with `clpfd:full_answer` asserted (see Section 4.8.7 [ref-lte-cpt], page 133, and Section 10.9.10 [Answer Constraints], page 487). **API change wrt. release 3.**

Limited Support for Reals

The support for real variables is somewhat limited in this release and is likely to be extended in future releases.

10.9.6 Solver Interface

10.9.6.1 Posting Constraints

A constraint is called in the same way as any other Prolog predicate. When called, the constraint is *posted* to the store. For example:

```
| ?- X in 1..5, Y in 2..8, X+Y #= T.
X in 1..5,
Y in 2..8,
T in 3..13

| ?- X in 1.0..5.0, T in 3.0..13.0, X+Y $= T.
X in 1.0..5.0,
T in 3.0..13.0,
Y in-2.0000000000000013..12.000000000000002
```

Note that the answer constraint shows the domains of nonground query variables, but does not show any constraints that may be attached to them.

Note also that `#=`, `$=`, and similar constraints are term-expanded to internal (non-exported) predicates at compile time when they occur in source code, and prior to execution when they occur in queries. In that process, the role of any variable in those constraints is fixed to being a domain variable. It does not work to unify a domain variable with an expression such as `X+Y`. For example:

```
| ?- X in 1..5, Y in 2..8, T #= U, U =.. [+,X,Y].
! Type error in argument 2 of (=)/2
! expected an integer, but found _250+_252
! goal:  _266=_250+_252

| ?- X in 1..5, Y in 2..8, U =.. [+,X,Y], T #= U.
! Type error in argument 2 of user:scalar_product_reif/6
! expected 'numeric argument', but found _250+_252
! goal:  scalar_product_reif([-1,1],[_250+_252,_290],#=,0,1,[])
```

If such "late term expansion" is required, there is a way to delay it until execution time, by wrapping the constraint in `call/1`:

```
| ?- X in 1..5, Y in 2..8, U =.. [+,X,Y], call(T #= U).
U = X+Y,
X in 1..5,
Y in 2..8,
T in 3..13
```

Normally, after posting a constraint, propagation to fixpoint is performed, which can be an overkill. The following provides a means of posting a set of constraints in one batch, suspending all propagation until the whole set has been posted. Suspending propagation can significantly reduce posting overhead.

`fd_batch(+Goals)` *since release 4.2.1*

where *Goals* should be a list of constraints, or Prolog goals posting such constraints. **Please note**: Every constraint posting must be deterministic and must not be backtracked over. A posting that is backtracked over leads to undefined behavior.

10.9.6.2 Forgetting Constraints

Normally, once a constraint has been posted, it remains active until its entailment has been detected, or it has been backtracked over. In special circumstances, it may be desirable to completely forget any constraints attached to a given variable, as if they never had been posted. The following predicate can be used for that purpose:

`fd_purge(+Var)` *since release 4.6*

Given a domain variable *Var*, all constraints that mention *Var* and the domain information attached to *Var* are erased. *Var* ceases to be a domain variable.

10.9.6.3 Constraint Satisfaction Problems

Constraint satisfaction problems (CSPs) are a major class of problems for which this solver is ideally suited. In a CSP, the goal is to pick values from predefined domains for certain variables so that the given constraints on the variables are all satisfied.

As a simple CSP example, let us consider the Send More Money puzzle. In this problem, the variables are the letters S, E, N, D, M, O, R, and Y. Each letter represents a digit between 0 and 9. The problem is to assign a value to each digit, such that SEND + MORE equals MONEY.

A program that solves the puzzle is given below. The program contains the typical three steps of a clp(FD) program:

1. declare the domains of the variables
2. post the problem constraints
3. look for a feasible solution via backtrack search, or look for an optimal solution via branch-and-bound search

Sometimes, an extra step precedes the search for a solution: the posting of surrogate constraints to break symmetries or to otherwise help prune the search space. No surrogate constraints are used in this example.

The domains of this puzzle are stated via the `domain/3` goal and by requiring that S and M be greater than zero. The two problem constraints of this puzzle are the equation (`sum/8`) and the constraint that all letters take distinct values (`all_different/1`). Finally, the backtrack search is performed by `labeling/2`. Different search strategies can be encoded in the `Type` parameter. In the example query, the default search strategy is used (select the leftmost variable, try values in ascending order).

```
:- use_module(library(clpfd)).

mm([S,E,N,D,M,O,R,Y], Type) :-
     domain([S,E,N,D,M,O,R,Y], 0, 9),      % step 1
     S#>0, M#>0,
     all_different([S,E,N,D,M,O,R,Y]),     % step 2
     sum(S,E,N,D,M,O,R,Y),
     labeling(Type, [S,E,N,D,M,O,R,Y]).    % step 3

sum(S, E, N, D, M, O, R, Y) :-
                  1000*S + 100*E + 10*N + D
     +            1000*M + 100*O + 10*R + E
     #= 10000*M + 1000*O + 100*N + 10*E + Y.

| ?- mm([S,E,N,D,M,O,R,Y], []).
D = 7,
E = 5,
M = 1,
N = 6,
O = 0,
R = 8,
S = 9,
Y = 2
```

10.9.6.4 Reified Constraints

Instead of merely posting a constraint it is often useful to reflect its truth value into a Boolean argument B, so that:

- the constraint is posted if B is set to 1
- the negation of the constraint is posted if B is set to 0
- B is set to 1 if the constraint becomes entailed
- B is set to 0 if the constraint becomes disentailed

This mechanism is known as *reification*. Several frequently used operations can be defined in terms of reified constraints. A reified constraint is written:

```
| ?- Constraint #<=> B.
```

where *Constraint* is reifiable. As an example of a constraint that uses reification, consider `exactly(X,L,N)`, defined to be true if X occurs exactly N times in the list L. It can be defined thus:

```
exactly(_, [], 0).
exactly(X, [Y|L], N) :-
    X #= Y #<=> B,
    N #= M+B,
    exactly(X, L, M).
```

Finally, reified constraints can be used as terms inside arithmetic expression. The value of the term is 1 if the constraint is true, and 0 otherwise. For example:

```
| ?- X #= 10, B #= (X#>=2) + (X#>=4) + (X#>=8).
B = 3,
X = 10
```

10.9.7 Available Constraints

This section describes constraints that can be used with this solver, organized into classes. Unless documented otherwise, constraints are not reifiable and do not guarantee any particular level of consistency.

10.9.7.1 Arithmetic Constraints

Arithmetic Relations

?IExpr `#=` *?IExpr* *reifiable*
?IExpr `#\=` *?IExpr* *reifiable*
?IExpr `#<` *?IExpr* *reifiable*
?IExpr `#=<` *?IExpr* *reifiable*
?IExpr `#>` *?IExpr* *reifiable*
?IExpr `#>=` *?IExpr* *reifiable*
?RExpr `$=` *?RExpr* *reifiable*
?RExpr `$=<` *?RExpr* *reifiable*
?RExpr `$>=` *?RExpr* *reifiable*

defines an arithmetic relation. The syntax for *IExpr* and *RExpr* is defined by a grammar (see Section 10.9.16.3 [Syntax of Integer Expressions], page 510; see Section 10.9.16.4 [Syntax of Real Expressions], page 511). Note that the expressions are not restricted to being linear. Constraints over nonlinear expressions, however, will usually yield less constraint propagation than constraints over linear expressions.

Several examples of arithmetic relations over reals can be found at Section 10.9.15.4 [Equation Solving], page 504.

Arithmetic relations can be reified as e.g.:

```
| ?- X in 1..2, Y in 3..5, X#=<Y #<=> B.
B = 1,
X in 1..2,
Y in 3..5

| ?- X in 1.0..2.0, Y in 3.0..5.0, X$=<Y #<=> B.
B = 1,
X in 1.0..2.0,
Y in 3.0..5.0

| ?- X in 1.0..3.0, X $>= 2.0 #<=> B, indomain(B).
B = 0,
X in 1.0..2.0 ? ;
B = 1,
X in 2.0..3.0 ? ;
no
```

Linear integer relations, except equalities, maintain bounds consistency. All other relations endeavor to maintain bounds consistency.

Partiality and Undefined Values

Some arithmetic functions are partial, i.e., they do not have a defined value for all combinations of arguments. The partial integer functions are:

`X / Y`
`X // Y`
`X div Y`
`X mod Y`
`X rem Y` for `Y #= 0`

`X ^ Y` for `Y #< 0` if `abs(X) #\= 1`. Note that this differs from the MiniZinc semantics. In MiniZinc, `X ^ Y` = `1 div (X ^ -Y)` if `Y < 0`. In SICStus, the CLPFD value is equal to the Prolog value if the latter is defined and integer.

`if_then_else(X,Y,Z)`
for `X` not in `0..1`

The partial real functions are:

`X^Y` for `X $=< 0.0` if `Y` is not integral.

`if_then_else(X,Y,Z)`
for `X` not in `0..1`.

`sqrt(X)`
`log(X)` for `X $=< 0.0`.

`asin(X)`
`acos(X)`
`atanh(X)` for `X` not in `-1.0 .. 1.0`.

`acosh(X)` for `X $=< 1.0`.

`acoth(X)` for `X` in `-1.0 .. 1.0`.

Like MiniZinc, SICStus implements the *relational semantics* of partial functions. Quoting [MiniZincHandbook], "any undefinedness bubbles up to the closest Boolean context and becomes `false` there". Here, a Boolean context is simply an arithmetic relation. A few examples illustrate how this works:

```
| ?- Y in -1 .. 1, 10 div Y #= Z, indomain(Y).
Y = -1, Z = -10 ? ;
Y = 1, Z = 10 ? ;
```

Here, the division by zero silently made the `#=` constraint fail.

```
| ?- Y in 0..1, 10 div Y #= 10 #<=> B, indomain(Y).
Y = 0, B = 0 ? ;
Y = 1, B = 1 ? ;
```

Here, the division by zero again made the `#=` constraint fail, reflected in the answer `B = 0`.

```
| ?- Y in -1 .. 1, Z #= if_then_else(1, 2, 10 div Y), indomain(Y).
Y = -1, Z = 2 ? ;
Y = 1, Z = 2 ? ;
```

Here, the division by zero "bubbled up" through the if-then-else expression, making `#=` fail for `Y = 0`, even though `if_then_else/3` actually did not use its third argument.

```
| ?- X in 1..2, Y in -1 .. 1, X ^ Y #= Z, indomain(X), indomain(Y).
X = 1, Y = -1, Z = 1 ? ;
X = 1, Y = 0, Z = 1 ? ;
X = 1, Y = 1, Z = 1 ? ;
X = 2, Y = 0, Z = 1 ? ;
X = 2, Y = 1, Z = 2 ? ;
```

Here, `2 ^ -1 #= Z` failed, because `2 ^ -1` is undefined.

Other Arithmetic Constraints

The following constraints are among the library constraints that general arithmetic constraints compile to. They express a relation between a sum or a scalar product and a value, using a dedicated algorithm, which avoids creating any temporary variables holding intermediate values. If you are computing a sum or a scalar product, then it can be much more efficient to compute lists of coefficients and variables and post a single sum or scalar product constraint than to post a sequence of elementary constraints.

`sum(+`*`Xs`*`, +`*`IRelOp`*`, ?`*`Value`*`)`
: where *Xs* is a list of integer arguments, *IRelOp* is a relational symbol as above, and *Value* is an integer argument. True if `sum(`*`Xs`*`) `*`IRelOp Value`*. Corresponds roughly to `sumlist/2` in `library(lists)`.

`scalar_product(+Coeffs, +Xs, +IRelOp, ?Value)` *reifiable*
`scalar_product(+Coeffs, +Xs, +IRelOp, ?Value, +Options)` *reifiable*

where *Coeffs* is a list of length *n* of integers, *Xs* is a list of length *n* of integer arguments, *IRelOp* is a relational symbol as above, and *Value* is an integer argument. True if `sum(Coeffs*Xs) IRelOp Value`.

Options is a list that may include the following options:

`among(Least,Most,Range)` *obsolescent*

If given, then *Least* and *Most* should be integers and *Range* should be an *IntegerRange* (see Section 10.9.16.2 [Syntax of Range Expressions], page 509). This option imposes the additional constraint on *Xs* that at least *Least* and at most *Most* elements belong to *Range*.

`consistency(Cons)`

This can be used to control the level of consistency used by the constraint. The value is one of the following:

`domain` The constraint maintains domain consistency. **Please note**: This option is only meaningful if *IRelOp* is `#=`, and requires that all integer arguments have finite bounds.

`bounds`
`value` The constraint tries to maintain bounds consistency (the default). Note that the same algorithm is used also if `Cons = value`.

`scalar_product_reif(+Coeffs, +Xs, +IRelOp, ?Value, ?Reif)` *since release 4.5*
`scalar_product_reif(+Coeffs, +Xs, +IRelOp, ?Value, ?Reif, +Options)`

is the reified version of `scalar_product/[4,5]`, i.e., *Reif* is 1 if `scalar_product/[4,5]` with the same arguments holds; otherwise, *Reif* is 0.

The following constraints constrain a numeric argument to be the minimum (maximum) value of a given list.

`minimum(?Value, +Xs)` *polymorphic*

where *Xs* is a list of numeric arguments, and *Value* is a numeric argument. True if *Value* is the minimum of *Xs*. Corresponds to `min_member/2` in `library(lists)` and to `minimum` in MiniZinc.

`maximum(?Value, +Xs)` *polymorphic*

where *Xs* is a list of numeric arguments, and *Value* is a numeric argument. True if *Value* is the maximum of *Xs*. Corresponds to `max_member/2` in `library(lists)` and to `maximum` in MiniZinc.

The following constraints constrain an integer argument to be the index of the minimum (maximum) value of a given list. They maintain domain consistency.

`minimum_arg(+Xs, ?Index)` *since release 4.6*

where *Xs* is a list of integer arguments, and *Index* is an integer argument. True if *Index* is the index of the minimum value of *Xs*, counting from 1. If that value

occurs more than once, *Index* is the index of the first occurrence. Corresponds to `arg_min` and `minimum_arg` in MiniZinc.

`maximum_arg(+Xs, ?Index)` *since release 4.6*

where *Xs* is a list of integer arguments, and *Index* is an integer argument. True if *Index* is the index of the maximum value of *Xs*, counting from 1. If that value occurs more than once, *Index* is the index of the first occurrence. Corresponds to `arg_max` and `maximum_arg` in MiniZinc.

The following constrain restricts a numeric argument to take the value of either of two other numeric arguments, depending on a Boolean argument. It maintains domain consistency.

`if_then_else(If, Then, Else, Value)` *polymorphic,since release 4.8.0*

True if *If=1* and *Value=Then*, or *If=0* and *Value=Else*. *If* should be an integer argument with domain contained in `0..1`. *Then*, *Else*, and *Value* should be numeric arguments, either both integer or both real. Corresponds to if-then-else expressions in most programming and modeling languages.

10.9.7.2 Membership Constraints

`domain(+Variables, +Range)` *polymorphic,since release 4.10.0*

where *Variables* is a list of variables. True if the variables all are elements of *Range*.

`domain/2` can be used for integer variables as well as for real variables. For integer variables, *Range* should be an *IntegerRange*; For real variables, *Range* should be a *RealRange*. See Section 10.9.16.2 [Syntax of Range Expressions], page 509.

`domain(+Variables, +Min, +Max)` *polymorphic*

where *Variables* is a list of variables. True if the variables all are elements of the range *Min..Max*. `domain/3` can be used for integer variables as well as for real variables. For integer variables, *Min* is an integer or the atom `inf` (minus infinity), and *Max* is an integer or the atom `sup` (plus infinity). For real variables, *Min* is a real or the atom `finf` (minus infinity), and *Max* is a real or the atom `fsup` (plus infinity).

?X `in` *+Range* *reifiable,polymorphic*

where *X* is a domain variable. `in/2` can be used for integer variables as well as for real variables. True if *X* is an element of the range. For integer variables, *Range* should be an *IntegerRange*; For real variables, *Range* should be a *RealRange*. See Section 10.9.16.2 [Syntax of Range Expressions], page 509.

?X `in_set` *+FDSet* *reifiable*

where *X* is an integer variable and *FDSet* is an FD set (see Section 10.9.12.3 [FD Set Operations], page 491). True if *X* is an element of the FD set.

`in/2` and `in_set/2` constraints maintain domain consistency and their reified versions detect domain entailment and disentailment.

10.9.7.3 Propositional Constraints

Propositional combinators can be used to combine reifiable constraints into propositional formulae over such constraints. Such formulae are goal expanded by the system into sequences of reified constraints and arithmetic constraints. For example,

```
X #= 4 #\/ Y #= 6
```

expresses the disjunction of two equality constraints.

The leaves of propositional formulae can be reifiable constraints or Boolean arguments. New reifiable constraints can be defined with indexicals as described in Section 10.9.13 [Defining Indexical Constraints], page 495. The following propositional combinators are available:

`#\ :Q` *reifiable*

True if the constraint Q is false.

`:P #/\ :Q` *reifiable*

True if the constraints P and Q are both true.

`:P #\ :Q` *reifiable*

True if exactly one of the constraints P and Q is true.

`:P #\/ :Q` *reifiable*

True if at least one of the constraints P and Q is true.

`:P #=> :Q` *reifiable*
`:Q #<= :P` *reifiable*

True if the constraint Q is true or the constraint P is false.

`:P #<=> :Q` *reifiable*

True if the constraints P and Q are both true or both false.

Note that the reification scheme introduced in Section 10.9.6.4 [Reified Constraints], page 436, is a special case of a propositional constraint.

10.9.7.4 Arithmetic-Logical Constraints

`smt(:Body)` *since release 4.2,deprecated*

The arithmetic, membership, and propositional constraints described earlier are transformed at compile time to conjunctions of library constraints. Although linear in the size of the source code, the expansion of a propositional formula over reifiable constraints to library goals can have time and memory overheads, and propagates disjunctions very weakly. Temporary variables holding intermediate values may have to be introduced, and the grain size of the constraint solver invocations can be rather small. As an alternative to the default propagation of such constraint formulas, this constraint is a front-end to the `case/[3,4]` propagator, which treats such a formula globally.

Although often convenient, this constraint is deprecated, because it cannot guarantee better performance than a decomposition, nor any particular level of consistency.

Moreover, this constraint is not supported in the scope of `fd_batch/1`.

Body should be a *ConstraintBody* term (see Section 10.9.16.1 [Syntax of Indexicals], page 508).

`count(+Val,+List,+IRelOp,?Count)` *since release 4.0.5*

where *Val* is an integer, *List* is a list of integer arguments, *Count* an integer argument, and *IRelOp* is a relational symbol as in Section 10.9.7.1 [Arithmetic Constraints], page 437. True if *N* is the number of occurrences of *Val* in *List* and *N IRelOp Count*.

Corresponds to `count_*` and `exactly` in MiniZinc.

If you want to count how many times multiple values occur in the same list, the following constraint is a better alternative.

`global_cardinality(+Xs,+Vals)`
`global_cardinality(+Xs,+Vals,+Options)`

where *Xs* = *[X1,...,Xd]* is a list of integer arguments, and *Vals* = *[K1-V1,...,Kn-Vn]* is a list of pairs where keys *Ki* are distinct integers and each *Vi* is a non-negative integer argument. True if every element of *Xs* is equal to some key and for each pair *Ki-Vi*, exactly *Vi* elements of *Xs* are equal to *Ki*.

If either *Xs* or *Vals* is ground, and in many other special cases, then `global_cardinality/[2,3]` maintains domain consistency, but generally, domain or bounds consistency cannot be guaranteed.

Corresponds to `global_cardinality*` and `distribute` in MiniZinc.

Options is a list of zero or one of the following:

`consistency(Cons)`

Which filtering algorithm to use. One of the following:

`domain`
`bounds` A domain-consistency algorithm [Regin 96] is used, roughly linear in the total size of the domains. Note that the same algorithm is used also if *Cons* = `bounds`.

`value` The constraint will use a simple algorithm, which prevents too few or too many of the *Xs* from taking values among the *Vals*.

`cost(Cost,Matrix)`

Cost is constrained to equal a cost computed as a function of *Xs* and *Matrix*, which should be a *d*n* matrix of integers, represented as a list of *d* lists, each of length *n*. The cost of the *i*-th arguments *Xi* is computed as follows. Suppose that the *j*-th pair of *Vals* is the pair *Kj-Vj* where *Kj* = *Xi*. Then the cost of *Xi* is *Matrix[i,j]*. The total cost *Cost* is the total cost of all arguments *Xi*. With this option, a domain-consistency algorithm [Regin 99] is used.

`all_equal(+Arguments)` *reifiable* *since release 4.7*

where *Arguments* is a list of integer arguments. They are constrained to take the same value.

Corresponds to `all_equal` in MiniZinc.

`all_equal_reif(+`*Arguments*`, ?`*Reif*`))` *since release 4.7*

is the reified version of `all_equal/1`, i.e., *Reif* is 1 if `all_equal/1` with the same arguments holds; otherwise, *Reif* is 0.

`all_different(+`*Xs*`)`
`all_different(+`*Xs*`, +`*Options*`)`
`all_distinct(+`*Xs*`)`
`all_distinct(+`*Xs*`, +`*Options*`)`

where *Xs* is a list of integer arguments. Each argument is constrained to take a value that is unique among the arguments. Declaratively, this is equivalent to an inequality constraint for each pair of arguments.

Corresponds to `all_different` in MiniZinc.

Options is a list of zero or more of the following:

L `#=` *R* *obsolescent*

Let *Y1*, ..., *Yj* be a subset of *Xs*. *R* should be an integer. *L* should be an expression of one of the following forms:

```
Y1 + ... + Yj
Y1*Y1 + ... + Yj*Yj
Y1 * ... * Yj
```

The given equation is a side constraint for the constraint to hold. A special bounds-consistency algorithm is used, which considers the main constraint and the side constraints globally. This option is only valid if the domains of *Y1*, ..., *Yj* consist of integers strictly greater than zero.

`consistency(`*Cons*`)`

Which algorithm to use. *Cons* can be one of the following:

`domain` The default for `all_distinct/[1,2]` and `assignment/[2,3]`. A domain-consistency algorithm [Regin 94] is used, roughly linear in the total size of the domains.

`bounds` A bounds-consistency algorithm [Lopez-Ortiz 03] is used, which runs in *O(n* log *n)* time for *n* arguments.

`value` The default for `all_different/[1,2]`. An algorithm achieving exactly the same pruning as a set of pairwise inequality constraints is used, roughly linear in the number of arguments.

`circuit(`*Boolean*`)`

If `true`, then `circuit(`*Xs*`)` must hold for the constraint to be true.

`subcircuit(`*Boolean*`)` *since release 4.6*

If `true`, then `subcircuit(`*Xs*`)` must hold for the constraint to be true.

`cost(`*Cost*`,`*Matrix*`)` *since release 4.9.0*
: *Cost* is constrained to equal a cost computed as a function of *Xs* and *Matrix*, namely *Matrix[1,X1]*+. . .+*Matrix[n,Xn]*. *Matrix* should be an *n***m* matrix of integers, represented as a list of lists.

`all_different_except_0(+`*Arguments*`)` *since release 4.6*
`all_distinct_except_0(+`*Arguments*`)` *since release 4.6*
: where *Arguments* is a list of integer arguments with finite bounds. The arguments are constrained to be all different, except those elements that are assigned the value 0.

  In terms of consistency, `all_different_except_0/1` corresponds to `all_different/1`, and `all_distinct_except_0/1` to `all_distinct/1`.

  Corresponds to `alldifferent_except_0` in MiniZinc.

`nvalue(?`*N*`, +`*Arguments*`)`
: where *Arguments* is a list of integer arguments with finite bounds, and *N* is an integer argument. True if *N* is the number of distinct values taken by *Arguments*. Approximates bounds consistency in *N* and domain consistency in *Arguments*. Can be thought of as a relaxed version of `all_distinct/2`.

  Corresponds to `nvalue` in MiniZinc.

The following is a constraint over two lists of integer arguments, both of length *n*. Each argument is constrained to take a value in *1..n* that is unique in its list. Furthermore, the lists are dual in a sense described below.

`assignment(+`*Xs*`, +`*Ys*`)`
`assignment(+`*Xs*`, +`*Ys*`, +`*Options*`)`
: where *Xs* = *[X1,. . .,Xn]* and *Ys* = *[Y1,. . .,Yn]* are lists of integer arguments. True if all *Xi, Yi* are in *1..n* and *Xi*=*j* iff *Yj*=*i*.

  Corresponds to `inverse` in MiniZinc.

  Options is a list of zero or more of the following, where *Boolean* must be `true` or `false` (`false` is the default):

  `consistency(`*Cons*`)`
  : Same meaning as for `all_different/2`.

  `circuit(`*Boolean*`)`
  : If `true`, then `circuit(`*Xs*`,`*Ys*`)` must hold for the constraint to be true.

  `subcircuit(`*Boolean*`)` *since release 4.6*
  : If `true`, then `subcircuit(`*Xs*`,`*Ys*`)` must hold for the constraint to be true.

  `cost(`*Cost*`,`*Matrix*`)`
  : *Cost* is constrained to equal a cost computed as a function of *Xs* and *Matrix*, namely *Matrix[1,X1]*+. . .+*Matrix[n,Xn]*. *Matrix* should be an *n***n* matrix of integers, represented as a list of lists.

The following is a constraint over a list of length *n* of integer arguments, all of which are constrained to *1..n*.

`symmetric_all_different(+Xs)` *since release 4.6*
`symmetric_all_distinct(+Xs)` *since release 4.6*

True if all elements of *Xs = [X1,...,Xn]* are in *1..n*, they are all different, and for all *i,j* in *1..n*, *Xi=j* iff *Xj=i*.

Corresponds to `symmetric_all_different` in MiniZinc. `symmetric_all_distinct/1` maintains stronger consistency.

The following constraints correspond to `increasing`, `strictly_increasing`, `decreasing`, and `strictly_decreasing` in MiniZinc:

`increasing(+Xs)` *since release 4.10.0*
`increasing(+Xs,+Options)` *since release 4.10.0*

where *Xs* is a list of integer arguments. Requires that *Xs* be in increasing order.

`decreasing(+Xs)` *since release 4.10.0*
`decreasing(+Xs,+Options)` *since release 4.10.0*

where *Xs* is a list of integer arguments. Requires that *Xs* be in decreasing order.

Options is a list of zero or one options, where *Boolean* must be `true` or `false`:

`strict(Boolean)`

If `false` (the default), then duplicates are allowed, otherwise they are not.

The following constraint captures the relation between a list of values, a list of the values in ascending order, and their positions in the original list:

`sorting(+Xs,+Ps,+Ys)`

where *Xs = [X1,. . .,Xn]*, *Ps = [P1,. . .,Pn]*, and *Ys = [Y1,. . .,Yn]* are lists of integer arguments. The constraint holds if the following are true:

- *Ys* is in ascending order.
- *Ps* is a permutation of *1..n*.
- for all *i* in *1..n : Xi = Y(Pi)*

In practice, the underlying algorithm [Mehlhorn 00] is likely to achieve bounds consistency, and is guaranteed to do so if *Ps* is ground or completely free.

Corresponds to `sort` in MiniZinc.

The following constraint is a generalization of `sorting/3`, namely:

- It sorts not variables, but variable tuples.
- The tuples are split into a key prefix and a value suffix. They are sorted wrt. the key part only.
- The sort is stable: if two tuples have identical keys, then their relative order is preserved in the output.

`keysorting(+Xs,+Ys)` *since release 4.3.1*
`keysorting(+Xs,+Ys,+Options)`

where *Xs* and *Ys* are lists of tuples of integer arguments. Both lists should be of the same length *n*, and each tuple, represented by a list, should have the same length *m*. The first *k* elements of a tuple serve as a key, where *k* equals *Keys* as defined below in the options. Let *Xs[i,j]* denote the *j*-th element of the tuple which appears as the *i*-th element of *Xs* (and similarly for *Ys*).

The constraint holds if the following are true:

- *Ps* is a permutation of *1..n*.
- for all *i* in *1..n*, *j* in *1..m : Ys[i,j] = Xs[Ps[i],j]*.
- *[[Ys[i,1],...,Ys[i,k],Ps[i]] | i in 1..n]* is in lex ascending order.

The filtering algorithm is based on [Mehlhorn 00] and endeavors to maintain bounds consistency, but does not guarantee it.

Corresponds to Prolog's `keysort/2`. In particular, the sort is stable by definition. Corresponds to `arg_sort` in MiniZinc.

Options is a list of zero or more of the following:

`keys(Keys)`
where *Keys* should be a positive integer, denoting the length of the key prefix. The default is 1.

`permutation(Ps)`
where *Ps* should be a list of length *n* of integer arguments. Its meaning is described above.

The following constraints express the fact that several vectors of integer arguments are in ascending lexicographic order:

`lex_chain(+Vectors)`
`lex_chain(+Vectors,+Options)`

where *Vectors* is a list of vectors (lists) of integer arguments with finite bounds. The constraint holds if *Vectors* are in ascending lexicographic order.

Corresponds to `*lex2`, `lex_greater*`, `lex_less*` in MiniZinc.

Options is a list of zero or more of the following:

`op(Op)` If *Op* is the atom `#=<` (the default), then the constraints holds if *Vectors* are in non-descending lexicographic order. If *Op* is the atom `#<`, then the constraints holds if *Vectors* are in strictly ascending lexicographic order.

`increasing` *obsolescent*
This option imposes the additional constraint that each vector in *Vectors* be sorted in strictly ascending order.

`among(Least,Most,Values)` *obsolescent*
If given, then *Least* and *Most* should be integers such that *0 <= Least <= Most* and *Values* should be a list of distinct integers. This

option imposes the additional constraint on each vector in *Vectors* that at least *Least* and at most *Most* elements belong to *Values*.

`global(`*Boolean*`)` *since release 4.2.1*
: if `true`, then a more expensive algorithm [Carlsson & Beldiceanu 02], which guarantees domain consistency unless the `increasing/0` or `among/3` options are given, will be used.

In the following constraints, a *literal* is either a term `X` or a term `#\ X`, where `X` is a Boolean argument. They maintain domain consistency:

`bool_and(+`*Lits*`, +`*Lit*`)` *since release 4.3*
: where *Lits* is a list of literals `[L0,...,Lj]` and *Lit* is a literal. True if *Lit* equals the Boolean conjunction of *Lits*. Usually more efficient than the equivalent `L0#/\...#/\Lj #<=> Lit`.

`bool_or(+`*Lits*`, +`*Lit*`)` *since release 4.3*
: where *Lits* is a list of literals `[L0,...,Lj]` and *Lit* is a literal. True if *Lit* equals the Boolean disjunction of *Lits*. Usually more efficient than the equivalent `L0#\/...#\/Lj #<=> Lit`.

`bool_xor(+`*Lits*`, +`*Lit*`)` *since release 4.3*
: where *Lits* is a list of literals `[L0,...,Lj]` and *Lit* is a literal. True if *Lit* equals the Boolean exclusive or of *Lits*. Usually more efficient than the equivalent `L0#\...#\Lj #<=> Lit`.

`bool_channel(+`*Lits*`, ?`*Y*`, +`*Relop*`, +`*Offset*`)` *since release 4.3*
: where *Lits* is a list of literals `[L0,...,Lj]`, *Y* is an integer argument, *IRelOp* is an arithmetic comparison as in Section 10.9.16.3 [Syntax of Integer Expressions], page 510, and *Offset* is an integer. Expresses the constraint *Li #<=> (Y IRelOp i+Offset)* for `i in 0..j`. Usually more efficient than a bunch of reified comparisons between a given argument and a sequence of integers.

10.9.7.5 Extensional Constraints

`element(?`*X*`,+`*List*`,?`*Y*`)` *reifiable,polymorphic*
: where *X* is an integer argument, *Y* is a numeric argument and *List* is a list of numeric arguments. True if the *X*-th element of *List* equals *Y*. *List* and *Y* should be of the same numeric type, i.e., integer or real. Elements are counted from 1.

  Maintains domain consistency in *X*, bounds consistency in *List*, and domain consistency in *Y*. Corresponds to `nth1/3` in `library(lists)` and to `element` in MiniZinc.

`element(+`*List*`,?`*Y*`)` *reifiable,polymorphic,since release 4.7.0*
: where *Y* is a numeric argument and *List* is a list of numeric arguments. True if some element of *List* equals *Y*. *List* and *Y* should be of the same numeric type, i.e., integer or real. Maintains domain consistency in *Y* and bounds consistency in *List*. Corresponds to the built-in `member/2` and to `member` in MiniZinc (but note the different order of arguments).

`relation(?X,+MapList,?Y)` *since release 4.0.5,deprecated*

where X and Y are integer arguments and *MapList* is a list of *integer-IntegerRange* pairs, where the integer keys occur uniquely (see Section 10.9.16.2 [Syntax of Range Expressions], page 509). True if *MapList* contains a pair *X-R* and Y is in the range denoted by R. Maintains domain consistency.

An arbitrary binary constraint can be defined with `relation/3`. `relation/3` is implemented by straightforward transformation to the following, more general constraint, with which arbitrary relations can be defined compactly:

`table(+Tuples,+Extension)` *reifiable*
`table(+Tuples,+Extension,+Options)`

Defines an n-ary constraint by extension. *Extension* should be a list of lists of integers, each of length n. *Tuples* should be a list of lists of integer arguments, each also of length n. The constraint holds if every *Tuple* in *Tuples* occurs in the *Extension*. The constraint maintains domain consistency, even if it is used reified.

Corresponds to `table` in MiniZinc.

For convenience, *Extension* may contain *IntegerRange* (see Section 10.9.16.2 [Syntax of Range Expressions], page 509) expressions in addition to integers.

Options is a list that may contain the following obsolescent options:

`order(Order)` *obsolescent,since release 4.1*

Determines the variable order used internally. The following values are valid:

`leftmost` The order is the one given in the arguments (the default).

`id3` Each tuple, and the columns of the extension, is permuted according to the heuristic that more discriminating columns should precede less discriminating ones.

`method(Method)` *obsolescent,since release 4.1*

Controls the choice of internal data structure and algorithm. The following values are valid:

`default` *since release 4.4*

SICStus choice handles propagation as it sees fit (the default).

`noaux` SICStus handles propagation with the `case/[3,4]` constraint, see below, converting the extension to a DAG.

`aux` SICStus handles propagation with the `case/[3,4]` constraint, see below. Before converting the extension to a DAG, an auxiliary, first variable is introduced, denoting extension row number. The role of this variable is to make the DAG as wide as the number of rows of the extension.

`table/[2,3]` can be implemented in terms of the following, more general constraint, which allows a compact representation of arbitrary relations:

`case(+`*Template*`, +`*Tuples*`, +`*Dag*`)`
`case(+`*Template*`, +`*Tuples*`, +`*Dag*`, +`*Options*`)`

This constraint encodes an n-ary constraint, defined by extension and/or linear inequalities. It uses a DAG-shaped data structure where nodes correspond to variables and every arc is labeled by an admissible interval for the node above it and optionally by linear inequalities. The variable order is fixed: every path from the root node to a leaf node should visit every variable exactly once, in the order in which they occur lexically in *Template*. The constraint is true for a single ground tuple if there is a path from the root node to a leaf node such that (a) each tuple element is contained in the corresponding *Min..Max* interval on the path, and (b) any encountered linear inequalities along the path are true.

The `case` constraint is true for a set of ground tuples if it is true for each tuple of the set. The details are given below.

Template is a nonground Prolog term, each variable of which should occur exactly once. Its variables are merely place-holders; they should not occur outside the constraint nor inside *Tuples*.

Tuples is a list of terms of the same shape as *Template*. They should not share any variables with *Template*.

Dag is a list of *nodes* of the form `node(`*ID*`,`*X*`,`*Children*`)`, where X is a template variable, and *ID* should be an integer, uniquely identifying each node. The first node in the list is the *root node*.

Nodes are either *internal nodes* or *leaf nodes*. For an internal node, *Children* is a list of terms `(`*Min*`..`*Max*`)-`*ID2* or `(`*Min*`..`*Max*`)-`*SideConstraints*`-`*ID2*, where *ID2* is the ID of a child node, *Min* is an integer or the atom `inf` (minus infinity), and *Max* is an integer or the atom `sup` (plus infinity). For a leaf node, *Children* is a list of terms `(`*Min*`..`*Max*`)` or `(`*Min*`..`*Max*`)-`*SideConstraints*.

SideConstraints is a list of side constraints of the form `scalar_product(`*Coeffs*`, `*Xs*`, #=<, `*Bound*`)`, where *Coeffs* is a list of length k of integers, *Xs* is a list of length k of template variables, and *Bound* is an integer.

Variables in *Tuples* for which their template variable counterparts are constrained by side constraints, must have bounded domains. In the absence of side constraint, the constraint maintains domain consistency.

The use of side constraint is deprecated, because the level of consistency is no better than the alternative, namely to use separate, reified arithmetic constraints and possibly auxiliary variables.

Options is a list of zero or one of the following:

`scalar_product(`*Coeffs*`, `*Xs*`, #=<, `*Bound*`)` *since release 4.2*`,`*deprecated*

A side constraint located at the root of the DAG.

For example, recall that `element(`*X*`,`*L*`,`*Y*`)` wakes up when the domain of X or the lower or upper bound of Y has changed, performs full pruning of X, but only prunes the bounds of Y. The following two constraints:

```
element(X, [1,1,1,1,2,2,2,2], Y),
element(X, [10,10,20,20,10,10,30,30], Z)
```

can be replaced by the following single constraint, which is equivalent declaratively, but which maintains domain consistency:

```
elts(X, Y, Z) :-
    case(f(A,B,C), [f(X,Y,Z)],
         [node(0, A,[(1..2)-1,(3..4)-2,(5..6)-3,(7..8)-4]),
          node(1, B,[(1..1)-5]),
          node(2, B,[(1..1)-6]),
          node(3, B,[(2..2)-5]),
          node(4, B,[(2..2)-7]),
          node(5, C,[(10..10)]),
          node(6, C,[(20..20)]),
          node(7, C,[(30..30)])]).
```

The DAG of the previous example has the following shape:

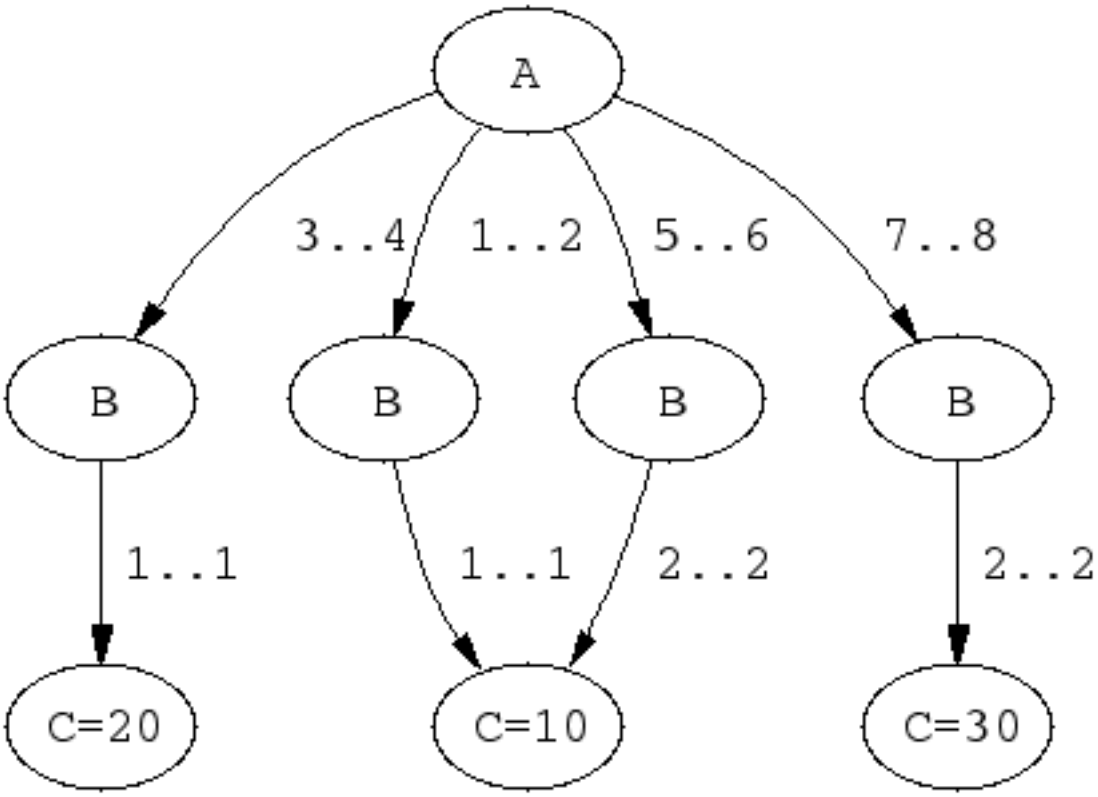

DAG corresponding to `elts/3`.

A couple of sample queries:

```
| ?- elts(X, Y, Z).
X in 1..8,
Y in 1..2,
Z in {10}\/{20}\/{30}

| ?- elts(X, Y, Z), Z #>= 15.
X in(3..4)\/(7..8),
Y in 1..2,
Z in {20}\/{30}

| ?- elts(X, Y, Z), Y = 1.
Y = 1,
X in 1..4,
Z in {10}\/{20}
```

As an example with side constraints, consider assigning tasks to machines with given unavailability periods. In this case, one can use a *calendar* constraint [CHIP 03, Beldiceanu, Carlsson & Rampon 05] to link the real origins of the tasks (taking the unavailability periods into account) with virtual origins of the tasks (not taking the unavailability periods into account). One can then state machine resource constraints using the virtual origins, and temporal constraints between the tasks using the real origins.

Assume, for example, three machines with unavailability periods given by the following table:

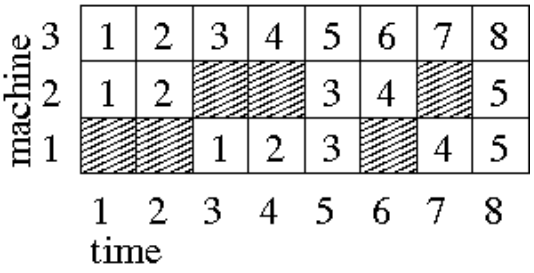

Unavailability periods for three machines.

Machine `1` is not available during (real) time periods `1-2` and `6-6`, machine `2` is not available during (real) time periods `3-4` and `7-7`, and machine `3` is always available.

The following can then be used to express a calendar constraint for a given task scheduled on machine *`M`* `in 1..3`, with virtual origin *`V`* `in 1..8`, and real origin *`R`* `in 1..8`:

```
calendar(M, V, R) :-
        M in 1..3,
        V in 1..8,
        R in 1..8,
        smt((M#=1 #/\ V in 1..3 #/\ R#=V+2) #\/
            (M#=1 #/\ V in 4..5 #/\ R#=V+3) #\/
            (M#=2 #/\ V in 1..2 #/\ R#=V) #\/
            (M#=2 #/\ V in 3..4 #/\ R#=V+2) #\/
            (M#=2 #/\ V in 5..5 #/\ R#=V+3) #\/
            (M#=3               #/\ R#=V)).
```

or equivalently as:

```
calendar(M, V, R) :-
    case(f(A,B,C),
         [f(M,V,R)],
         [node(0, A, [(1..1)-1, (2..2)-2, (3..3)-3]),
          node(1, B, [(1..3)-[scalar_product([1,-1],[B,C],#=<,-2),
                              scalar_product([1,-1],[C,B],#=<, 2)]-4,
                      (4..5)-[scalar_product([1,-1],[B,C],#=<,-3),
                              scalar_product([1,-1],[C,B],#=<, 3)]-4]),
          node(2, B, [(1..2)-[scalar_product([1,-1],[B,C],#=<, 0),
                              scalar_product([1,-1],[C,B],#=<, 0)]-4,
                      (3..4)-[scalar_product([1,-1],[B,C],#=<,-2),
                              scalar_product([1,-1],[C,B],#=<, 2)]-4,
                      (5..5)-[scalar_product([1,-1],[B,C],#=<,-3),
                              scalar_product([1,-1],[C,B],#=<, 3)]-4]),
          node(3, B, [(1..8)-[scalar_product([1,-1],[B,C],#=<, 0),
                              scalar_product([1,-1],[C,B],#=<, 0)]-4]),
          node(4, C, [(1..8)])]).
```

Note that equality must be modeled as the conjunction of inequalities, as only constraints of the form `scalar_product(+Coeffs, +Xs, #=<, +Bound)` are allowed as side constraints.

The DAG of the calendar constraint has the following shape:

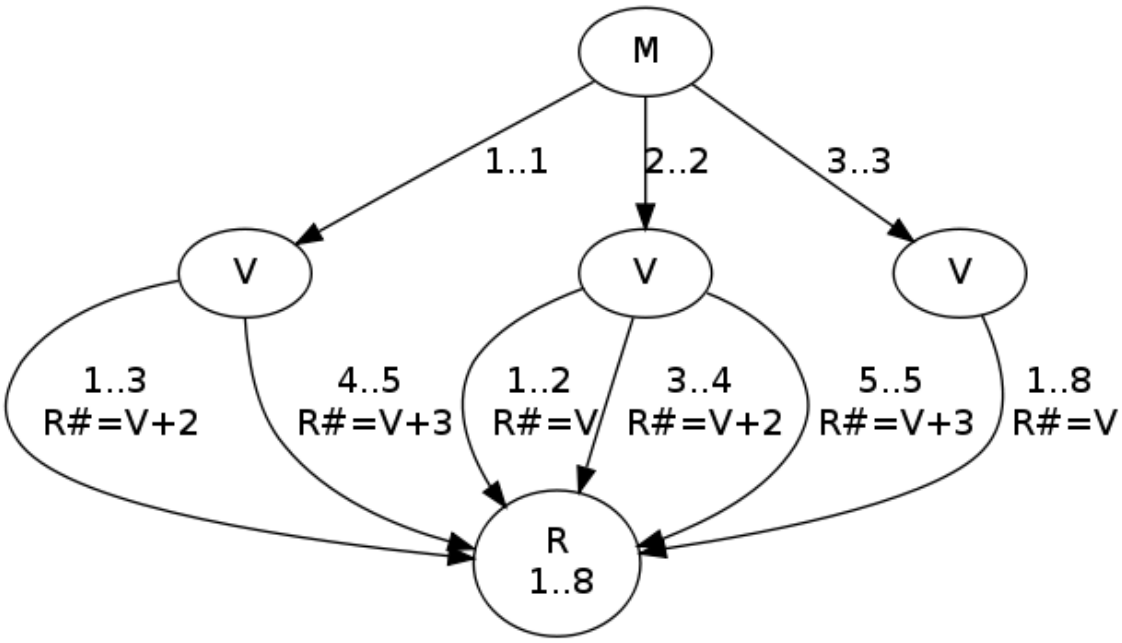

DAG corresponding to `calendar/3`.

A couple of sample queries:

```
| ?- M in 1..3, V in 1..8, R in 1..8,
     calendar(M, V, R).
M in 1..3,
V in 1..8,
R in 1..8

| ?- M in 1..3, V in 1..8, R in 1..8,
     calendar(M, V, R), M #= 1.
M = 1,
V in 1..5,
R in 1..8

| ?- M in 1..3, V in 1..8, R in 1..8,
     calendar(M, V, R), M #= 2, V #> 4.
M = 2,
V = 5,
R = 8
```

10.9.7.6 Graph Constraints

The following constraints can be thought of as constraining n nodes in a graph to form a Hamiltonian (sub-)circuit. The nodes are numbered from 1 to n. A full circuit visits each node exactly once and returns to the origin. A subcircuit visits a subset of the nodes exactly once and returns to the origin.

`circuit(+Succ)`
`circuit(+Succ, +Pred)`
: where *Succ* is a list of length *n* of integer arguments. The value of the *i*-th element of *Succ* (*Pred*) is the successor (predecessor) of node *i* in the graph. True if the nodes form exactly one Hamiltonian circuit.

  Corresponds to `circuit` in MiniZinc.

`subcircuit(+Succ)` *since release 4.6*
`subcircuit(+Succ, +Pred)` *since release 4.6*
: where *Succ* is a list of length *n* of integer arguments. If the value of the *i*-th element of *Succ* (*Pred*) is *i*, then that corresponds to a node not in the graph. Otherwise, the value is the successor (predecessor) of node *i* in the graph. True if the nodes that are included form at most one Hamiltonian subcircuit.

  Corresponds to `subcircuit` in MiniZinc.

The following constraint defines a flow in a network made up of nodes and arcs.

`network_flow(+Nodes, +Arcs)` *since release 4.10.0*
`network_flow(+Nodes, +Arcs, +Options)` *since release 4.10.0*
: *Nodes* should be a list of terms `node(Id,Balance)`. *Arcs* should be a list of terms `arc(From,To,Weight,Flow)`. *Id* can be any term, but the ids of *Nodes* should be all distinct. *From* and *To* identify the two nodes that the arc connects, and should occur as ids. They are looked up with `==/2`. *Flow* should be an integer argument with finite, non-negative bounds, the flow going through an arc. *Weight* should be a non-negative integer, the unit cost of the flow through an arc. *Balance* should be a non-negative integer, the difference between output and input flow for a node. *Options* should be a list of zero or one of the following:

  `cost(Cost)`
  : An integer argument, the overall cost of the flow.

  Corresponds to `network_flow` and `network_flow_cost` in MiniZinc. The following figure:

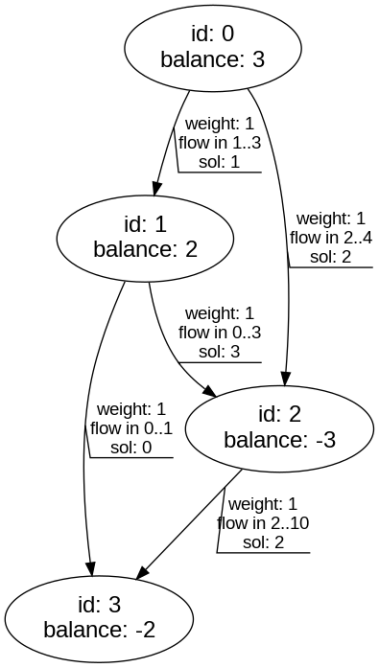

An example of `network_flow/3`.

depicts the query:

```
| ?- F0 in 1..3,
     F1 in 2..4,
     F2 in 0..3,
     F3 in 0..1,
     F4 in 2..10,
     network_flow([node(0,3), node(1,2), node(2,-3), node(3,-2)],
                  [arc(0,1,1,F0), arc(0,2,1,F1), arc(1,2,1,F2),
                   arc(1,3,1,F3), arc(2,3,1,F4)],
                  [cost(Cost)]
     ).
```

The query has a unique solution, with cost 8. The arcs of the figure have been annotated with the value of the flow, e.g., '`sol: 1`' stands for a flow equal to 1 in the solution.

10.9.7.7 Scheduling Constraints

The following constraint can be thought of as constraining n tasks so that the total resource consumption does not exceed a given limit at any time. **API change wrt. release 3:**

`cumulative(+`*`Tasks`*`)`
`cumulative(+`*`Tasks`*`,+`*`Options`*`)`

A task is represented by a term `task(`*`Oi`*`,`*`Di`*`,`*`Ei`*`,`*`Hi`*`,`*`Ti`*`)` where *Oi* is the start time, *Di* the non-negative duration, *Ei* the end time, *Hi* the non-negative resource consumption, and *Ti* the task identifier. All fields are integer arguments with bounded domains.

Let n be the number of tasks and L the global resource limit (by default 1, but see below), and:

Hij = *Hi*, if *Oi* <= *j* < *Oi*+*Di*
Hij = 0 otherwise

The constraint holds if:

1. For every task *i*, *Oi*+*Di*=*Ei*, and
2. For all instants *j*, *H1j*+. . .+*Hnj* <= *L*.

Corresponds to `cumulative` in MiniZinc. If all durations are 1, then it corresponds to `bin_packing` in MiniZinc.

Options is a list of zero or more of the following, where *Boolean* must be `true` or `false` (`false` is the default).

`limit(L)` See above.

`precedences(Ps)`
Ps encodes a set of precedence constraints to apply to the tasks. *Ps* should be a list of terms of the form:

```
Ti-Tj #= Dij
```

where *Ti* and *Tj* should be task identifiers, and *Dij* should be an integer argument, denoting:

Oi-*Oj* = *Dij*

`global(Boolean)`
if `true`, then a more expensive algorithm will be used in order to achieve tighter pruning of the bounds of the parameters.

This constraint is due to Aggoun and Beldiceanu [Aggoun & Beldiceanu 93].

The following constraint models a set of machines and a set of tasks that should be assigned to the machines. It is duee to Beldiceanu and Carlsson [Beldiceanu and Carlsson 02].

The machines have a resource limit and the tasks each have a resource usage that can be either positive, negative, or zero. The constraint is enforced over each point in time for a machine where there is at least one task assigned. The limit for a machine is either the maximum amount available at any given time (`bound(upper)`), or else the least amount to be used (`bound(lower)`):

`cumulatives(+Tasks,+Machines)`
`cumulatives(+Tasks,+Machines,+Options)`
A task is represented by a term `task(O,D,E,H,M)` where *O* is the start time, *D* the non-negative duration, *E* the end time, *H* the resource consumption (if positive) or production (if negative), and *M* a machine identifier. All fields are integer arguments with bounded domains.

A machine is represented by a term `machine(M,L)` where *M* is the identifier, an integer; and *L* is the resource bound of the machine, which must be an integer argument with bounded domains.

Options is a list of zero or more of the following, where *Boolean* must be `true` or `false` (`false` is the default):

`bound(lower)`
`bound(upper)`
: If `lower` (the default), then each resource limit is treated as a lower bound. If `upper`, then each resource limit is treated as an upper bound.

`generalization(`*Boolean*`)`
: If `true`, then extra reasoning based on assumptions on machine assignment will be done to infer more.

`task_intervals(`*Boolean*`)`
: If `true`, then extra global reasoning will be performed in an attempt to infer more.

The following constraint is a generalization of `cumulative/[1,2]` in the following sense:

- The new constraint deals with the consumption of multiple resources simultaneously, not just a single resource. For the constraint to succeed, none of the resources can exceed its limit.
- Resources can be of two kinds:

  cumulative
  : This is the kind of resource that `cumulative/[1,2]` deals with: at no point in time can the total resource use exceed the limit.

  colored
  : For this kind of resource, each task specifies not a resource use, but a color, encoded as an integer. At no point in time can the total number of distinct colors in use exceed the limit. The color code 0 is treated specially: it denotes that the task does not have any color.

On the other hand, the new constraint has the limitation that all fields and parameters except start and end times must be given as integers:

`multi_cumulative(+`*Tasks*`,+`*Capacities*`)` *since release 4.3.1*
`multi_cumulative(+`*Tasks*`,+`*Capacities*`,+`*Options*`)` *since release 4.3.1*
: A task is represented by a term `task(`*Oi*`,`*Di*`,`*Ei*`,`*Hsi*`,`*Ti*`)` where *Oi* is the start time, *Di* the non-negative duration, *Ei* the end time, *Hsi* the list of non-negative resource uses or colors, and *Ti* the task identifier. The start and end times should be integer arguments with bounded domains. The other fields should be integers.

  The capacities should be a list of terms of the following form, where *Limit* should be a non-negative integer. *Capacities* and all the *Hsi* should be of the same length:

  `cumulative(`*Limit*`)`
  : denotes a cumulative resource.

  `colored(`*Limit*`)`
  : denotes a colored resource.

Options is a list of zero or more of the following:

`greedy(`*Flag*`)`
: If given, then *Flag* is an integer argument in `0..1`. If *Flag* equals 1, either initially or by binding *Flag* during search, then the constraint switches behavior into greedy assignment mode. The greedy assignment will either succeed and assign all start and end times to values that satisfy the constraint, or merely fail. *Flag* is never bound by the constraint; its sole function is to control the behavior of the constraint.

`precedences(`*Ps*`)`
: *Ps* encodes a set of precedence constraints to apply to the tasks. *Ps* should be a list of pairs `Ti-Tj` where *Ti* and *Tj* should be task identifiers, denoting that task *Ti* must complete before task *Tj* can start.

This constraint is due to [Letort, Beldiceanu & Carlsson 14].

10.9.7.8 Placement Constraints

`disjoint1(+`*Lines*`)` *obsolescent*
`disjoint1(+`*Lines*`,+`*Options*`)`
: constrains a set of lines to be non-overlapping. This constraint is best replaced by `diffn/[1,2]` in new code.

Lines is a list of terms *F(Sj,Dj)* or *F(Sj,Dj,Tj)*, *Sj* and *Dj* are integer arguments with finite bounds denoting the origin and length of line *j* respectively, *F* is any functor, and the optional *Tj* is an atomic term denoting the type of the line. *Tj* defaults to 0 (zero).

Options is a list of zero or more of the following, where *Boolean* must be `true` or `false` (`false` is the default):

`global(`*Boolean*`)`
: if `true`, then a redundant algorithm using global reasoning is used to achieve more complete pruning.

`wrap(`*Min*`,`*Max*`)`
: If used, then the space in which the lines are placed should be thought of as a circle where positions *Min* and *Max* coincide, where *Min* and *Max* should be integers. That is, the space wraps around. Furthermore, this option forces the domains of the origin arguments to be inside *[Min,Max-1]*.

`margin(`*T1*`,`*T2*`,`*D*`)`
: This option imposes a minimal distance *D* between the end point of any line of type *T1* and the origin of any line of type *T2*. *D* should be a positive integer or `sup`. If `sup` is used, then all lines of type *T2* must be placed before any line of type *T1*.

  This option interacts with the `wrap/2` option in the sense that distances are counted with possible wrap-around, and the distance between any end point and origin is always finite.

`disjoint2(+`*Rectangles*`)` *obsolescent*
`disjoint2(+`*Rectangles*`,+`*Options*`)`

constrains a set of rectangles to be non-overlapping. This constraint is best replaced by `diffn/[1,2]` in new code.

Rectangles is a list of terms *F(Xj,Lj,Yj,Hj)* or *F(Xj,Lj,Yj,Hj,Tj)*, *Xj* and *Lj* are integer arguments with finite bounds denoting the origin and size of rectangle *j* in the X dimension, *Yj* and *Hj* are the values for the Y dimension, *F* is any functor, and the optional *Tj* is an atomic term denoting the type of the rectangle. *Tj* defaults to 0 (zero).

Options is a list of zero or more of the following, where *Boolean* must be `true` or `false` (`false` is the default):

`global(`*Boolean*`)`
Disabled.

`wrap(`*Min1*`,`*Max1*`,`*Min2*`,`*Max2*`)`
Min1 and *Max1* should be either integers or the atoms `inf` and `sup` respectively. If they are integers, then the space in which the rectangles are placed should be thought of as a cylinder wrapping around the X dimension where positions *Min1* and *Max1* coincide. Furthermore, this option forces the domains of the *Xj* arguments to be inside *[Min1,Max1-1]*.

Min2 and *Max2* should be either integers or the atoms `inf` and `sup` respectively. If they are integers, then the space in which the rectangles are placed should be thought of as a cylinder wrapping around the Y dimension where positions *Min2* and *Max2* coincide. Furthermore, this option forces the domains of the *Yj* arguments to be inside *[Min2,Max2-1]*.

If all four are integers, then the space is a toroid wrapping around both dimensions.

`margin(`*T1*`,`*T2*`,`*D1*`,`*D2*`)`
This option imposes minimal distances *D1* in the X dimension and *D2* in the Y dimension between the end point of any rectangle of type *T1* and the origin of any rectangle of type *T2*. *D1* and *D2* should be positive integers or `sup`. If `sup` is used, then all rectangles of type *T2* must be placed before any rectangle of type *T1* in the relevant dimension.

This option interacts with the `wrap/4` option in the sense that distances are counted with possible wrap-around, and the distance between any end point and origin is always finite.

`synchronization(`*Boolean*`)`
Disabled.

`diffn(+`*Boxes*`)` *since release 4.6*
`diffn(+`*Boxes*`,+`*Options*`)`

constrains a set of multidimensional boxes to be non-overlapping.

A box is represented by a term *[Facet,Facet,...]*. A facet is a term of the form *Origin-Length*, where the integer arguments *Origin* and *Length* are the coordinate and length of the box in the given dimension. All boxes should have the same dimensionality (length of the box term).

Options is a list of zero or one of the following, where *Boolean* must be `true` or `false`:

`strict(`*Boolean*`)`

If `false` (the default), then the constraint is true iff, for all pairs of boxes *i, j*, there exists a dimension with respective facets *Oi-Li* and *Oj-Lj* and their overlap is zero, i.e.:

Oi+*Li* <= *Oj or*
Oj+*Lj* <= *Oi or*
Li = 0 *or*
Lj = 0

If `true`, then the constraint is true iff, for all pairs of boxes *i, j*, there exists a dimension with respective facets *Oi-Li* and *Oj-Lj* and one precedes the other, i.e.:

Oi+*Li* <= *Oj or*
Oj+*Lj* <= *Oi*

Corresponds to `diffn*` and `disjunctive*` in MiniZinc.

`bin_packing(+`*Items*`,+`*Bins*`)` *since release 4.4*

constrains the placement of items of given size in bins of given capacity, so that the total load of any bin matches its capacity.

Items is a list of terms of the form `item(`*Bin*`,`*Size*`)` where *Bin* is an integer argument denoting the bin where the item should be placed, and *Size* is an integer >= 0 denoting its size.

Bins is a list of terms of the form `bin(`*ID*`,`*Cap*`)` where *ID* is an integer identifying the bin, and *Cap* is an integer argument denoting is its capacity. The *ID* values should be all different.

The constraint holds if every *Bin* equals one of the *ID* values, and for every bin `bin(`*ID*`,`*Cap*`)`, the total size of the items assigned to it equals *Cap*.

Corresponds to `bin_packing*` in MiniZinc.

`geost(+`*Objects*`,+`*Shapes*`)` *since release 4.1*
`geost(+`*Objects*`,+`*Shapes*`,+`*Options*`)` *since release 4.1*
`geost(+`*Objects*`,+`*Shapes*`,+`*Options*`,+`*Rules*`)` *since release 4.1*

constrains the location in space of non-overlapping multi-dimensional *Objects*, each of which taking a shape among a set of *Shapes*.

Each shape is defined as a finite set of *shifted boxes*, where each shifted box is described by a box in a *k*-dimensional space at the given offset with the given sizes. A shifted box is described by a ground term `sbox(`*Sid*`,`*Offset*`,`*Size*`)` where *Sid*, an integer, is the shape id; *Offset*, a list of *k* integers, denotes the offset of the shifted box from the origin of the object; and *Size*, a list of *k* integers greater than zero, denotes the size of the shifted box. Then, a *shape*

is a collection of shifted boxes all sharing the same shape id. The shifted boxes associated with a given shape must not overlap. *Shapes* is thus the list of such `sbox/3` terms.

Each object is described by a term `object(`*`Oid`*`,`*`Sid`*`,`*`Origin`* where *Oid*, an integer, is the unique object id; *Sid*, an integer argument, is the shape id; and *Origin*, a list of integer arguments, is the origin coordinate of the object. If *Sid* is nonground, then the object is said to be *polymorphic*. The possible values for *Sid* are the shape ids that occur in *Shapes*. *Objects* is thus the list of such `object/3` terms.

If given, then *Options* is a list of zero or more of the following, where *Boolean* must be `true` or `false` (`false` is the default):

`lex(`*`ListOfOid`*`)`
: where *ListOfOid* should be a list of distinct object ids, denotes that the origin vectors of the objects according to *ListOfOid* should be in ascending lexicographic order. Multiple `lex/1` options can be given, but should mention disjoint sets of objects.

`cumulative(`*`Boolean`*`)`
: If `true`, then redundant reasoning methods are enabled, based on projecting the objects onto each dimension.

`disjunctive(`*`Boolean`*`)`
: If `true`, then cliques of objects are detected that clash in one dimension and so must be separated in the other dimension. This method only applies in the 2D case.

`longest_hole(`*`Value`*`,`*`Maxbacks`*`)`
: This method only applies in the 2D case and in the absence of polymorphic objects. *Value* can be `all`, `true` or `false`. If `true`, then the filtering algorithm computes and uses information about holes that can be tolerated without necessarily failing the constraint. If `all`,then more precise information is computed. If `false`, then no such information is computed. *Maxbacks* should be an integer `>= -1` and gives a bound on the effort spent tightening the longest hole information. Experiments suggest that 1000 may be a reasonable compromise value.

`parconflict(`*`Boolean`*`)`
: If `true`, then redundant reasoning methods are enabled, based on computing the number of items that can be put in parallel in the different dimensions.

`visavis_init(`*`Boolean`*`)`
: If `true`, then a redundant method is enabled that statically detects placements that would cause too large holes. This method can be quite effective.

`visavis_floating(`*`Boolean`*`)` *`obsolescent`*
: Disabled, because it has not been shown to pay off experimentally except in rare cases.

`visavis(`*Boolean*`)` *obsolescent*
: Disabled, because it has not been shown to pay off experimentally.

`corners(`*Boolean*`)` *obsolescent*
: Disabled, because it has not been shown to pay off experimentally.

`task_intervals(`*Boolean*`)` *obsolescent*
: Disabled, because it has not been shown to pay off experimentally.

`dynamic_programming(`*Boolean*`)`
: If `true`, then a redundant reasoning method is enabled that solves a 2D knapsack problem for every two adjacent columns of the projection of the objects onto each dimension. This method has pseudo-polynomial complexity but can be quite powerful.

`polymorphism(`*Boolean*`)` *obsolescent*
: Disabled, because it has not been shown to pay off experimentally.

`pallet_loading(`*Boolean*`)`
: If `true`, and if all objects consist of a single shifted box of the same shape, modulo rotations, then a redundant method is enabled that recognizes necessary conditions for this special case.

`overlap(`*Boolean*`)`
: If `true`, then the constraint that objects be non-overlapping is lifted. This option is useful mainly in conjunction with the *Rules* argument, in case the placement of objects should be restricted by the *Rules* only.

`volume(`*Total*`)`
: If given, then *Total* is constrained to be the total volume of *Objects*.

`bounding_box(`*Lower*`,`*Upper*`)`
: *Lower=[L1,...,Lk]* and *Upper=[U1,...,Uk]* should be lists of integer arguments. The following conditions are imposed:

  - For every point *P = [P1,...,Pk]* occupied by an object, *L1 <= P1 < U1, ..., Lk <= Pk < Uk*.
  - For every *j* in *1..k*, there exists a point *P = [P1,...,Pj,...,Pk]* occupied by an object such that *Pj=Lj*.
  - For every *j* in *1..k*, there exists a point *P = [P1,...,Pj,...,Pk]* occupied by an object such that *Pj=Uj-1*.

`fixall(`*Flag*`,`*Patterns*`)`
: If given, then *Flag* is an integer argument in `0..1`. If *Flag* equals 1, then either initially or by binding *Flag* during search, the constraint switches behavior into greedy assignment mode. The greedy assignment will either succeed and assign all shape ids and origin coordinates to values that satisfy the constraint, or merely fail. *Flag* is never bound by the constraint; its sole function is to control the behavior of the constraint.

  Greedy assignment is done one object at a time, in the order of *Objects*. The assignment per object is controlled by *Patterns*,

which should be a list of one or more pattern terms of the form `object(_,SidSpec,OriginSpec)`, where *SidSpec* is a term `min(I)` or `max(I)`, *OriginSpec* is a list of k such terms, and I is a unique integer between 1 and $k+1$.

The meaning of the pattern is as follows. The argument in the position of `min(1)` or `max(1)` is fixed first; the argument in the position of `min(2)` or `max(2)` is fixed second; and so on. `min(I)` means trying values in ascending order; `max(I)` means descending order.

If *Patterns* contains m pattern, then object 1 is fixed according to pattern 1, . . ., object m is fixed according to pattern m, object $m+1$ is fixed according to pattern 1, and so on. For example, suppose that the following option is given:

```
fixall(F, [object(_,min(1),[min(3),max(2)]),
           object(_,max(1),[min(2),max(3)])])
```

Then, if the program binds `F` to 1, then the constraint enters greedy assignment mode and endeavors to fix all objects as follows.

- For object 1, 3, . . ., (a) the shape is fixed to the smallest possible value, (b) the Y coordinate is fixed to the largest possible value, (c) the X coordinate is fixed to the smallest possible value.
- For object 2, 4, . . ., (a) the shape is fixed to the largest possible value, (b) the X coordinate is fixed to the smallest possible value, (c) the Y coordinate is fixed to the largest possible value.

If given, then *Rules* is a list of zero or more terms of the form shown below, and impose extra constraints on the placement of the objects. For the time being, the details are described in [Carlsson, Beldiceanu & Martin 08]. **Please note:** the rules require that all shapes of a polymorphic objects consist of the same number of shifted boxes. For example, `Shapes = [sbox(1,[0,0],[3,1]),sbox(1,[0,1],[2,4]),sbox(2,[0,0],[3,1])]` will not work.

sentence	::= *macro* `|` *fol*	
macro	::= *head* `--->` *body*	
head	::= *term*	{ to be substituted by a *body* }
body	::= *term*	{ to substitute for a *head* }
fol	::= `#\` *fol*	{ negation }
	`|` *fol* `#/\` *fol*	{ conjunction }
	`|` *fol* `#\/` *fol*	{ disjunction }
	`|` *fol* `#=>` *fol*	{ implication }
	`|` *fol* `#<=>` *fol*	{ equivalence }
	`|` `exists(`*var*`,`*collection*`,`*fol*`)`	{ existential quantification }

	`| forall(`*var*`,`*collection*`,`*fol*`)`	{ universal quantification }
	|	{ cardinality }
	`card(`*var*`,`*collection*`,`*integer*`,`*integer*`,`*fol*`)`	
	`| true`	
	`| false`	
	| *expr relop expr*	{ rational arithmetic }
	| *head*	{ macro application }
expr	::= *expr* `+` *expr*	
	`| -` *expr*	
	| *expr* `-` *expr*	
	`| min(`*expr*`,`*expr*`)`	
	`| max(`*expr*`,`*expr*`)`	
	| *expr* `*` *groundexpr*	
	| *groundexpr* `*` *expr*	
	| *expr* `/` *groundexpr*	
	| *attref*	
	| *integer*	
	`| fold(`*var*`,`*collection*`,`*fop*`,`*expr*`,`*expr*`)`	
	| *variable*	{ quantified variable }
	| *head*	{ macro application }
groundexpr	::= *expr*	{ where *expr* is ground }
attref	::= *entity* `^` *attr*	
attr	::= *term*	{ attribute name }
	| *variable*	{ quantified variable }
relop	::= `#< | #= | #> | #\= | #=< | #>=`	
fop	::= `+ | min | max`	
collection	::= *list*	
	`| objects(`*list*`)`	{ list of oids }
	`| sboxes(`*list*`)`	{ list of sids }

Corresponds to `geost*` in MiniZinc.

The following example shows `geost/2` modeling three non-overlapping objects. The first object has four possible shapes, and the other two have two possible shapes each.

```
| ?- domain([X1,X2,X3,Y1,Y2,Y3], 1, 4),
     S1 in 1..4,
     S2 in 5..6,
     S3 in 7..8,
     geost([object(1,S1,[X1,Y1]),
            object(2,S2,[X2,Y2]),
            object(3,S3,[X3,Y3])],
            [sbox(1,[0,0],[2,1]),
            sbox(1,[0,1],[1,2]),
            sbox(1,[1,2],[3,1]),
            sbox(2,[0,0],[3,1]),
            sbox(2,[0,1],[1,3]),
            sbox(2,[2,1],[1,1]),
            sbox(3,[0,0],[2,1]),
            sbox(3,[1,1],[1,2]),
            sbox(3,[-2,2],[3,1]),
            sbox(4,[0,0],[3,1]),
            sbox(4,[0,1],[1,1]),
            sbox(4,[2,1],[1,3]),
            sbox(5,[0,0],[2,1]),
            sbox(5,[1,1],[1,1]),
            sbox(5,[0,2],[2,1]),
            sbox(6,[0,0],[3,1]),
            sbox(6,[0,1],[1,1]),
            sbox(6,[2,1],[1,1]),
            sbox(7,[0,0],[3,2]),
            sbox(8,[0,0],[2,3])]).
```

The shapes are illustrated in the following picture:

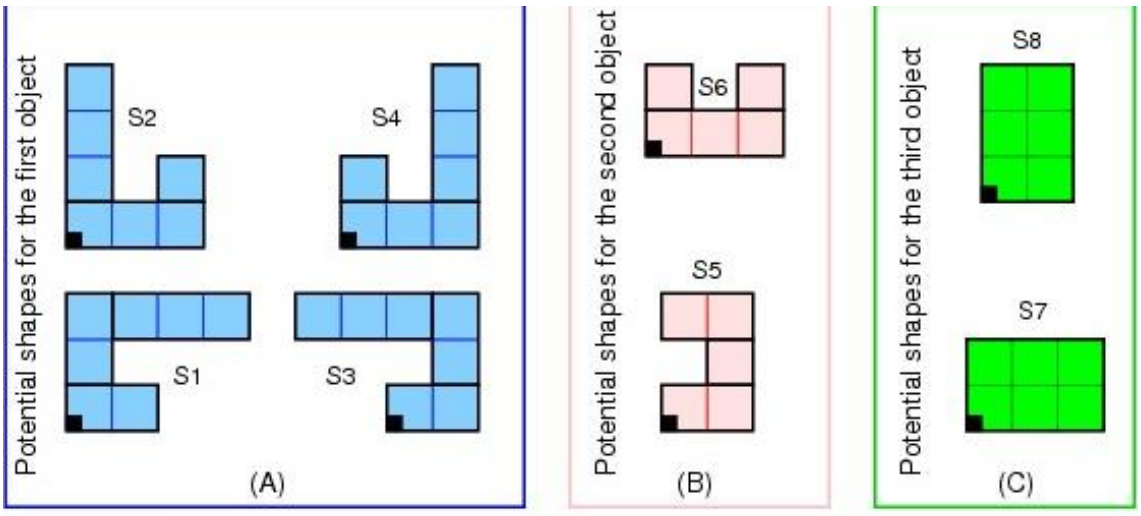

`geost/2`: three objects and eight shapes.

A ground solution is shown in the following picture:

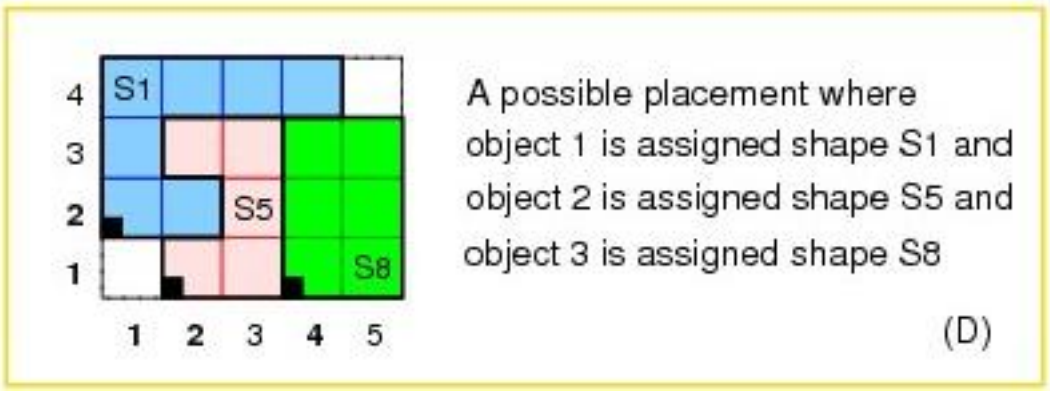

`geost/2`: a ground solution.

The following example shows how to encode in *Rules* "objects with oid 1, 2 and 3 must all be at least 2 units apart from objects with oid 4, 5 and 6".

```
[ (origin(O1,S1,D) ---> O1^x(D)+S1^t(D)),

  (end(O1,S1,D) ---> O1^x(D)+S1^t(D)+S1^l(D)),

  (tooclose(O1,O2,S1,S2,D) --->
      end(O1,S1,D)+2 #> origin(O2,S2,D) #/\
      end(O2,S2,D)+2 #> origin(O1,S1,D)),

  (apart(O1,O2) --->
      forall(S1,sboxes([O1^sid]),
          forall(S2,sboxes([O2^sid]),
              #\ tooclose(O1,O2,S1,S2,1) #\/
              #\ tooclose(O1,O2,S1,S2,2)))),

  (forall(O1,objects([1,2,3]),
      forall(O2,objects([4,5,6]), apart(O1,O2))))].
```

The following example shows how to encode in *Rules* "objects 3 and 7 model rooms that must be adjacent and have a common border at least 1 unit long".

```
[ (origin(O1,S1,D) ---> O1^x(D)+S1^t(D)),

  (end(O1,S1,D) ---> O1^x(D)+S1^t(D)+S1^l(D)),

  (overlap(O1,S1,O2,S2,D) --->
      end(O1,S1,D) #> origin(O2,S2,D) #/\
      end(O2,S2,D) #> origin(O1,S1,D)),

  (abut(O1,O2) --->
      forall(S1,sboxes([O1^sid]),
          forall(S2,sboxes([O2^sid]),
              ((origin(O1,S1,1) #= end(O2,S2,1) #\/
                origin(O2,S2,1) #= end(O1,S1,1)) #/\
               overlap(O1,S1,O2,S2,2)) #\/
              ((origin(O1,S1,2) #= end(O2,S2,2) #\/
                origin(O2,S2,2) #= end(O1,S1,2)) #/\
               overlap(O1,S1,O2,S2,1))))),

  (forall(O1,objects([3]),
      forall(O2,objects([7]), abut(O1,O2)))).
```

10.9.7.9 Sequence Constraints

The following constraint provides a general way of defining any constraint involving sequences whose *checker*, i.e., a procedure that classifies ground instances as solutions or non-solutions, can be expressed by a finite automaton, deterministic or nondeterministic, extended with counter operations on its arcs. The point is that it is very much easier to come up with such a checker than to come up with a filtering algorithm for the constraint of interest. In the absence of counters, it maintains domain consistency.

Corresponds to `regular*` in MiniZinc, but see also `regular/2` below.

`automaton(`*Signature*`,` *SourcesSinks*`,` *Arcs*`)` *since release 4.1*
`automaton(`*Sequence*`,` *Template*`,` *Signature*`,` *SourcesSinks*`,` *Arcs*`,` *Counters*`,` *Initial*`,` *Final*`)`
`automaton(`*Sequence*`,` *Template*`,` *Signature*`,` *SourcesSinks*`,` *Arcs*`,` *Counters*`,` *Initial*`,` *Final*`,` *Options*`)` *since release 4.1*

The arguments are described below in terms of their abstract syntax:

Sequence The sequence of terms of interest; abstract grammar category *sequence*.

Template A template for an item of the sequence; abstract grammar category *template*. Only relevant if some state transition involving counter arithmetic mentions a variable occurring in *Template*, in which case the corresponding term in a sequence element will be accessed.

Signature The *signature* of *Sequence*; abstract grammar category *signature*. The automaton is not driven by *Sequence* itself, but by *Signature*, which ranges over some alphabet, implicitly defined by the values

used by *Arcs*. In addition to `automaton/[8,9]`, you must call a constraint that maps *Sequence* to *Signature*.

SourcesSinks
: The source and sink nodes of the automaton; abstract grammar category *sourcessinks*.

Arcs
: The arcs (transitions) of the automaton; abstract grammar category *arcs*. Any transition not mentioned is assumed to go to an implicit failure node. An arc optionally contains expressions for updated counter values; by default, the counters remain unchanged. Conditional updates can be specified. Those expressions and conditions cannot contain any variable that is not a counter or mentioned in *Template*. If you need, e.g., a global parameter, pass it as an extra counter.

Counters
: A list of *c* variables, local to the constraint; abstract grammar category *counters*.

Initial
: A list of *c* initial values, usually instantiated; abstract grammar category *initial*.

Final
: A list of *c* final values, usually uninstantiated; abstract grammar category *final*.

Options
: Abstract grammar category *options*; a list of zero or more of the following terms. All but the last option are implemented by adding auxiliary counters to the automaton including the necessary updates in the arcs:

  `valueprec(`*`First`*`,`*`Later`*`,`*`N`*`)` *since release 4.1.3*
  : *N* is unified with *n*, computed such that: if the value *Later* occurs in the *Signature*, then *First* occurs *n* times before the first occurrence of *Later*, otherwise *n=0*.

  `anystretchocc(`*`N`*`)` *since release 4.1.3*
  : *N* is unified with the number of (nonempty) stretches of any single value in the *Signature*.

  `stretchocc(`*`ValPat`*`,`*`N`*`)` *since release 4.1.3*
  : *N* is unified with the number of stretches of values matching *ValPat* (abstract grammar category *valpat*) in the *Signature*.

  `stretchoccmod(`*`ValPat`*`,`*`Mod`*`,`*`N`*`)` *since release 4.1.3*
  : *N* is unified with the number (modulo *Mod*) of stretches of values matching *ValPat* (abstract grammar category *valpat*) the *Signature*.

  `stretchmaxlen(`*`ValPat`*`,`*`N`*`)` *since release 4.1.3*
  : *N* is unified with *n*, computed such that: if values matching *ValPat* (abstract grammar category *valpat*) occur the *Signature*, then *n* is the length of the longest such stretch, otherwise *n=0*.

`stretchminlen(`*ValPat*`,`*N*`)` *since release 4.1.3*

N is unified with *n*, computed such that: if values matching *ValPat* (abstract grammar category *valpat*) occur the *Signature*, then *n* is the length of the shortest such stretch, otherwise *n* is a large integer.

`wordocc(`*WordPat*`,`*N*`)` *since release 4.1.3*

N is unified with the number of words matching *WordPat* (abstract grammar category *wordpat*) in the *Signature*.

`wordoccmod(`*WordPat*`,`*Mod*`,`*N*`)` *since release 4.1.3*

N is unified with the number (modulo *Mod*) of words matching *WordPat* (abstract grammar category *wordpat*) in the *Signature*.

`wordprefix(`*WordPat*`,`*ZO*`)` *since release 4.1.3*

If the prefix of the *Signature* matches *WordPat* (abstract grammar category *wordpat*), then *ZO* is unified with 1, otherwise with 0.

`wordsuffix(`*WordPat*`,`*ZO*`)` *since release 4.1.3*

If the suffix of the *Signature* matches *WordPat* (abstract grammar category *wordpat*), then *ZO* is unified with 1, otherwise with 0.

`state(`*Map*`,`*StateSequence*`)` *since release 4.1*

For a signature of length *k*, the constraint is implemented by decomposition into *k* smaller constraints mapping an old state to a new state. The states are represented as integer variables. *StateSequence* forms the list of these *k+1* integer variables, starting with the initial state and ending with the final state. *Map* gives the interpretation of their values: it is a list of pairs *Node-Value* such that if the nth state variable *Sn* equals *Value*, then the automaton is in state *Node* having read *n* symbols.

`counterseq(`*CounterSequence*`)` *since release 4.2.1*

Similarly to the list of states, *CounterSequence* forms the list of the *k+1* instances of *Counters*, beginning with *Initial* and ending with *Final*.

Abstract syntax:

sequence	::= *list of template*	{all of which of the same shape}
template	::= *term*	{most general shape of the *sequence*}
		{its variables should be local to the constraint}

signature	::= *list of variable*	
sourcessinks	::= *list of nodespec*	
nodespec	::= `source(`*node*`)`	{an initial state}
	| `sink(`*node*`)`	{an accept state}
node	::= *term*	
arcs	::= *list of arc*	
arc	::= `arc(`*node*`,`*integer*`,`*node*`)`	{from node, integer, to node}
	| `arc(`*node*`,`*integer*`,`*node*`,`*exprs*`)`	{*exprs* correspond to new counter values}
	| `arc(`*node*`,`*integer*`,`*node*`,`*conditional*`)`	
conditional	::= *(cond -> exprs)*	
	| *(conditional ; conditional)*	
exprs	::= *list of IExpr*	{of length *c*}
		{*IExpr* as defined in Section 10.9.16.3 [Syntax of Integer Expressions], page 510,}
		{over *counters*, *template* and constants}
		{variables occurring in *counters* correspond to old counter values}
		{variables occurring in *template* refer to the current element of *sequence*}
cond	::= *constraint*	{over *counters*, *template* and constants}
		{must be reifiable or `true`}
counters	::= *list of variable*	{should be local to the constraint}
initial	::= *list of intarg*	{of length *c*}
final	::= *list of intarg*	{of length *c*}
option	::= `state(`*list of term*`,`*list of intarg*`)`	
	| `valueprec(`*integer*`,`*integer*`,`*intarg*`)`	
	| `anystretchocc(`*intarg*`)`	
	| `stretchocc(`*valpat*`,`*intarg*`)`	
	| `stretchoccmod(`*valpat*`,`*intarg*`,`*integer*`)`	
	| `stretchmaxlen(`*valpat*`,`*intarg*`)`	
	| `stretchminlen(`*valpat*`,`*intarg*`)`	
	| `wordocc(`*wordpat*`,`*intarg*`)`	
	| `wordoccmod(`*wordpat*`,`*intarg*`,`*integer*`)`	
	| `wordprefix(`*wordpat*`,`*intarg*`)`	
	| `wordsuffix(`*wordpat*`,`*intarg*`)`	
valpat	::= *integer*	
	| *list of integer*	{alternatives}

	| *valpat*/*valpat*	{alternatives}
wordpat	::= *list of valpat*	
intarg	::= *integer argument*	

If no counters are used, then the arguments *Counters*, *Initial* and *Final* should be `[]`. The arguments *Template* and *Sequence* are only relevant if some *IExpr* mentions a variable in *Template*, in which case the corresponding position in *Sequence* will be used at that point.

The constraint holds for a ground instance *Sequence* if:

- *Signature* is the signature corresponding to *Sequence*.
- The finite automaton encoded by *SourcesSinks* and *Arcs* stops in an accept state.
- Any counter arithmetic on the transitions map their *Initial* values to the *Final* values.
- Any extra constraint imposed by *Options* are true.

Here is an example. Suppose that you want to define the predicate `inflexion(`*N*`,`*L*`,`*Opt*`)` which should hold if *L* is a list of integer arguments, and *N* is the number of times that the sequence order switches between strictly increasing and strictly decreasing. For example, the sequence `[1,1,4,8,8,2,7,1]` switches order three times.

Such a constraint is conveniently expressed by a finite automaton over the alphabet `[<,=,>]` denoting the order between consecutive list elements. A counter is incremented when the order switches, and is mapped to the first argument of the constraint. The automaton could look as follows:

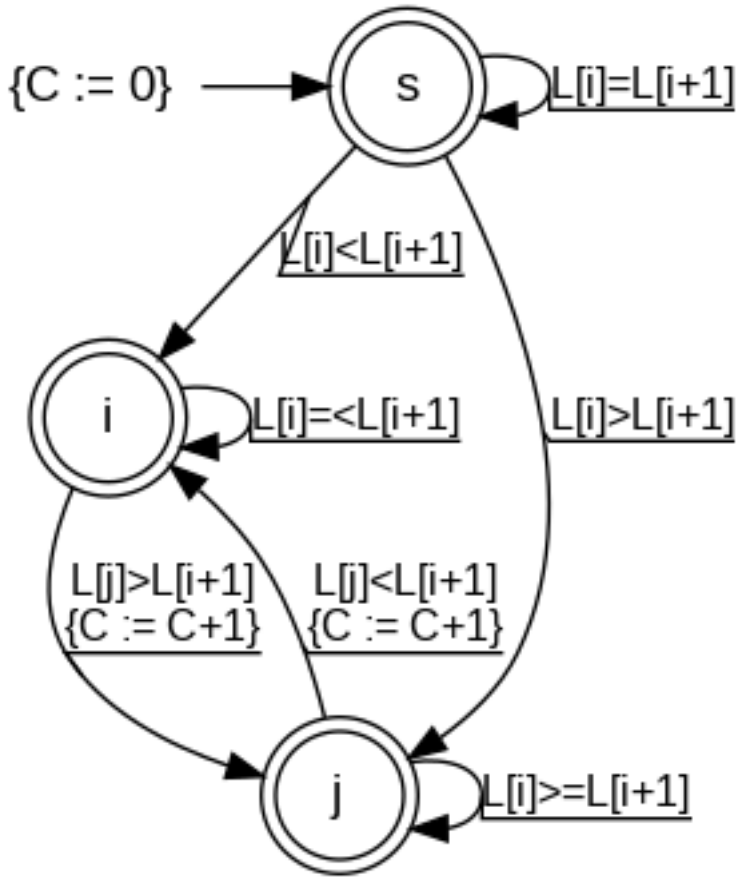

Automaton for `inflexion/3`.

The following piece of code encodes this using `automaton/9`. The auxiliary predicate `inflexion_signature/2` maps the sequence to a signature where the consecutive element order is encoded over the alphabet `[0,1,2]`. We use one counter with initial value 0 and final value N (an argument of `inflexion/3`). Two transitions increment the counter. All states are accept states.

```
inflexion(N, Vars, Opt) :-
        inflexion_signature(Vars, Sign),
        automaton(Sign, _, Sign,
                  [source(s),sink(i),sink(j),sink(s)],
                  [arc(s,1,s      ),
                   arc(s,2,i      ),
                   arc(s,0,j      ),
                   arc(i,1,i      ),
                   arc(i,2,i      ),
                   arc(i,0,j,[C+1]),
                   arc(j,1,j      ),
                   arc(j,0,j      ),
                   arc(j,2,i,[C+1])],
                  [C],[0],[N],Opt).

inflexion_signature([], []).
inflexion_signature([_], []) :- !.
inflexion_signature([X,Y|Ys], [S|Ss]) :-
        S in 0..2,
        X #> Y #<=> S #= 0,
        X #= Y #<=> S #= 1,
        X #< Y #<=> S #= 2,
        inflexion_signature([Y|Ys], Ss).
```

Some queries:

```
/* count the #inflections of a ground string */
| ?- inflexion(N, [1,1,4,8,8,2,7,1], []).
N = 3 ? RET
yes
```

```
/* find strings with two inflections */
| ?- length(L,4), domain(L,0,1),
     inflexion(2,L,[]), labeling([],L).
L = [0,1,0,1] ? ;
L = [1,0,1,0] ? ;
no
```

```
/* find strings that are strictly increasing, strictly de-
creasing or all equal */
| ?- length(L,4), domain(L,0,3),
     inflexion(I,L,[anystretchocc(1)]), labeling([],L).
I = 0,
L = [0,0,0,0] ? ;
I = 0,
L = [0,1,2,3] ? ;
I = 0,
L = [1,1,1,1] ? ;
I = 0,
L = [2,2,2,2] ? ;
I = 0,
L = [3,2,1,0] ? ;
I = 0,
L = [3,3,3,3] ? ;
no
/* find strings that contain an increase followed by a de-
crease */
| ?- length(L,4), domain(L,0,1),
     inflexion(I,L,[wordocc([2,0],1)]), labeling([],L).
I = 1,
L = [0,0,1,0] ? ;
I = 1,
L = [0,1,0,0] ? ;
I = 2,
L = [0,1,0,1] ? ;
I = 2,
L = [1,0,1,0] ? ;
no
```

This constraint uses techniques from [Beldiceanu, Carlsson & Petit 04] and [Beldiceanu, Carlsson, Flener & Pearson 10].

Following is an interface to `automaton/3`, which instead of taking a finite automaton argument takes a regular expression argument. Regular expressions are more concise and declarative, whereas finite automata are more procedural. Corresponds to `regular` in MiniZinc.

`regular(`*Signature*`,` *RegularExpression*`)` *since release 4.7.0*

where *Signature* should be a list of integer arguments, and *RegularExpression* should be a ground Prolog term as described below. The constraint holds if *Signature* forms a sequence of values that is recognized by the regular expression. Maintains domain consistency.

A regular expression has one of the following forms, where all subterms stand for regular expressions. The expression *L(R)* denotes the language (set of sequences) that regular expression R recognizes.

`I` recognizes the sequence `[I]`, where I is an integer.

`*(R)` recognizes $L(R)$ repeated zero or more times.

`+(R)` recognizes $L(R)$ repeated one or more times.

`?(R)` recognizes $L(R)$ repeated zero or one times. In other words, it recognizes $L(R)$ as well as the empty sequence.

`[R1,R2,...]`
recognizes the concatenation of *L(R1)*, *L(R2)*, ... In particular, *[]* recognizes the empty sequence.

`{R1,R2,...}`
recognizes the union of *L(R1)*, *L(R2)*, ... In particular, *{}* does not recognize anything, i.e., *L({})* is the empty set.

`R1 + R2` recognizes the concatenation of *L(R1)* and *L(R2)*. Same as *[R1,R2]*.

`R1 \/ R2` recognizes the union of *L(R1)* and *L(R2)*. Same as *{R1,R2}*.

`R1 /\ R2` recognizes the intersection of *L(R1)* and *L(R2)*.

`R1 \ R2` recognizes the set difference of *L(R1)* and *L(R2)*.

For example, suppose that we want to recognize sequences that consist of a stretch of 1s and 2s, followed by a stretch of 0s, followed by a stretch of 1s and 2s:

```
| ?- length(L, 4), regular(L, [+({1,2}), +(0), +({1,2})]),
     labeling([], L).
L = [1,0,0,1] ? ;
L = [1,0,0,2] ? ;
L = [1,0,1,1] ? ;
L = [1,0,1,2] ? ;
L = [1,0,2,1] ? ;
L = [1,0,2,2] ? ;
L = [1,1,0,1] ? ;
L = [1,1,0,2] ? ;
L = [1,2,0,1] ? ;
L = [1,2,0,2] ? ;
L = [2,0,0,1] ? ;
L = [2,0,0,2] ? ;
L = [2,0,1,1] ? ;
L = [2,0,1,2] ? ;
L = [2,0,2,1] ? ;
L = [2,0,2,2] ? ;
L = [2,1,0,1] ? ;
L = [2,1,0,2] ? ;
L = [2,2,0,1] ? ;
L = [2,2,0,2] ? ;
```

The following constraints are useful for removing value symmetries.

`value_precede_chain(+Values,+Vars)` *since release 4.5*
`value_precede_chain(+Values,+Vars,+Options)` *since release 4.5*
holds if for all adjacent pairs *v*,*w* in *Values*, either *w* does not occur in *Vars*, or *v* occurs earlier than *w* in *Vars*.

`seq_precede_chain(+Vars)` *since release 4.6*
`seq_precede_chain(+Vars,+Options)` *since release 4.6*
The same as the above, for *Values* = `[1,2,...]`.

Values should be a list of integers, and *Vars* should be a list of integer arguments, with no restriction on their domains.

Correspond to `value_precede_chain` and `seq_precede_chain` in MiniZinc.

Options is a list that may include the following option:

`global(Boolean)`
If `false` (the default), then the constraint is implemented by decomposition to `automaton/3`. If `true`, then a custom propagator is used. Both methods maintain domain consistency, but their relative performance may vary from case to case.

10.9.7.10 User-Defined Constraints

User-defined constraints can be added using two APIs. On a higher level, constraints over integers and reals can be defined using the global constraint programming interface; see Section 10.9.12 [Defining Global Constraints], page 487. Such constraints can be implemented by specialized, stateful algorithms and use the full power of Prolog. They cannot be reified.

On a lower level, constraints over integers can be defined as indexical constraints; see Section 10.9.13 [Defining Indexical Constraints], page 495. Such constraints are encoded in a language that uses stateless set expressions for pruning and entailment checking. Indexical constraints are reifiable.

10.9.8 Enumeration Predicates

`indomain(?X)` *polymorphic*
where *X* is a numeric argument with finite bounds. Assigns via backtracking a feasible value to *X*. For integer arguments, the values are assigned in increasing order.

`labeling(:Options, +Variables)` *polymorphic*
where *Variables* is a list of numeric arguments with finite bounds and all of the same numeric type, i.e., integer or real. *Options* is a list of search options. True if an assignment of the arguments can be found, which satisfies the posted constraints.

`first_bound(+BB0, -BB)`
`later_bound(+BB0, -BB)`
Provides an auxiliary service for the `value(Enum)` option (see below).

`minimize(`*:Goal*`,`*?X*`)`
`minimize(`*:Goal*`,`*?X*`,`*+Options*`)` *since release 4.3*
`maximize(`*:Goal*`,`*?X*`)`
`maximize(`*:Goal*`,`*?X*`,`*+Options*`)` *since release 4.3*

Uses a restart algorithm to find an assignment that minimizes (maximizes) the integer variable *X*. *Goal* should be a Prolog goal that constrains *X* to become assigned, and could be a `labeling/2` goal. The algorithm calls *Goal* repeatedly with a progressively tighter upper (lower) bound on *X* until a proof of optimality is obtained.

Whether to enumerate every solution that improves the objective function, or only the optimal one after optimality has been proved, is controlled by *Options*. If given, then it whould be a list containing a single atomic value, one of:

`best` *since release 4.3*

Return the optimal solution after proving its optimality. This is the default.

`all` *since release 4.3*

Enumerate all improving solutions, on backtracking seek the next improving solution. Merely fail after proving optimality.

The *Options* argument of `labeling/2` controls the order in which variables are selected for assignment (variable choice heuristic), the way in which choices are made for the selected variable (value choice heuristic), whether the problem is a satisfaction one or an optimization one, and whether all solutions or only the optimal one should be returned. The options are divided into 11 groups. At most one option may be selected per group, and each group has a default choice.

Option Group 1—Variable Choice

The following mutually exclusive options control the order in which the next variable is selected for assignment. In all cases, ties are broken by selecting the leftmost variable.

`leftmost`
`input_order`

The leftmost variable is selected. This is the default.

`min`
`smallest` The variable with the smallest lower bound is selected.

`max`
`largest` The variable with the greatest upper bound is selected.

`ff`
`first_fail`

The first-fail principle is used: the variable with the smallest domain is selected.

`anti_first_fail` *since release 4.3*

The variable with the largest domain is selected.

`occurrence` *since release 4.3*

The variable that has the most constraints suspended on it is selected. **Please note**: the mapping from constraints to propagators is subject to change from release to release, and after entailment, it is undefined whether a propagator is counted. Consequently, the behavior of `occurrence` may change from release to release.

`ffc`
`most_constrained`

The most constrained heuristic is used: a variable with the smallest domain is selected, breaking ties by selecting the variable that has the most propagators suspended on it. **Please note**: the same caveat applies as for `occurrence`.

`max_regret` *since release 4.3*

The variable with the largest difference between its first two domain elements is selected. Not supported for real variables.

`impact` *since release 4.7.0*

The variable that has been involved in the most failures is selected. Not supported for real variables.

`dom_w_deg` *since release 4.7.0*

The variable is selected that maximizes the quantity failure count divided by domain size. Not supported for real variables.

`variable(`*Sel*`)`

Sel is a predicate to select the next variable. Given *Vars*, the variables that remain to label, it will be called as *Sel(Vars,Selected,Rest)*.

Sel is expected to succeed determinately, unifying *Selected* and *Rest* with the selected variable and the remaining list, respectively.

Sel should be a callable term, optionally with a module prefix, and the arguments *Vars*, *Selected*, *Rest* will be appended to it. For example, if *Sel* is `mod:sel(Param)`, then it will be called as `mod:sel(Param,Vars,Selected,Rest)`.

Option Group 2—Value Choice

The following mutually exclusive options control the way in which choices are made for the selected variable *X*. For real variables, the default is an undefined order that could change from release to release and only the *value/1* option is supported.

`step` Makes a binary choice between *X* `#=` *B* and *X* `#\=` *B*, where *B* is the lower or upper bound of *X*. This is the default for integer variables. Not supported for real variables.

`enum` Makes an n-ary choice for *X* corresponding to the values in its domain. Not supported for real variables.

`bisect` Makes a binary choice between *X* `#=<` *M* and *X* `#>` *M*, where *M* is the middle of the domain of *X*, i.e., the mean of `min(X)` and `max(X)` rounded down to the nearest integer. This strategy is also known as domain splitting. Not supported for real variables.

`interval` *since release 4.10.0*

Makes a binary choice between `X #=< M` and `X #> M`, where M is:

- the max of the first interval, if the domain of X consists of multiple intervals
- as for `bisect` otherwise.

Not supported for real variables.

`value(Enum)`

Enum is a predicate that should prune the domain of X, possibly but not necessarily to a singleton. It will be called as *Enum(X,Rest,BB0,BB)* where *Rest* is the list of variables that need labeling except X, and *BB0* and *BB* are parameters described below.

Enum is expected to succeed nondeterminately, pruning the domain of X, and to backtrack one or more times, providing alternative prunings. To ensure that branch-and-bound search works correctly, it must call the auxiliary predicate `first_bound(BB0,BB)` in its first solution. Similarly, it must call the auxiliary predicate `later_bound(BB0,BB)` in any alternative solution.

Enum should be a callable term, optionally with a module prefix, and the arguments *X,Rest,BB0,BB* will be appended to it. For example, if *Enum* is `mod:enum(Param)`, then it will be called as `mod:enum(Param,X,Rest,BB0,BB)`.

Option Group 3—Value Order

The following mutually exclusive options control the order in which the choices are made for the selected variable X. They have no effect if combined with `value/1`.

`up` The domain is explored in ascending order. This is the default. Useful with `enum`, `step`, `bisect`, and with integer and real variables.

`down` The domain is explored in descending order. Useful with `enum`, `step`, `bisect`, and with integer and real variables.

`median` *since release 4.3*

Makes a binary choice between `X #= M` and `X #\= M`, where M is the median of the domain of X. If the domain has an even number of elements, then the smaller middle value is used. Useful with the `step` option. Not supported for real variables.

`middle` *since release 4.3*

Makes a binary choice between `X #= M` and `X #\= M`, where M is the middle of the domain of X, i.e., the mean of `min(X)` and `max(X)` rounded down to the nearest integer. Useful with the `step` option. Not supported for real variables.

`random` *since release 4.10.0*

Makes an n-ary choice (with `enum`) or a binary choice (the default) between `X #= R` and `X #\= R`, where R is a random member of the domain of X. Useful with `enum`, `step`, `bisect`, and with integer and real variables. The random number generator seed can be set and obtained with `fd_setrand/1` and `fd_getrand/1`.

WARNING: With `enum`, a temporary list representation of the domain of each integer variable will be created.

Option Group 4—Branch Order

The following mutually exclusive options control the order in which the alternatives are explored for binary and n-ary choices. They have no effect if combined with `value/1`.

`in` *since release 4.10.0*

The alternatives are explored in the order described for Groups 2 and 3. This is the default.

`out` *since release 4.10.0*

The alternatives are explored in the reverse order of that described for Groups 2 and 3.

Option Group 5—Precision

When exploring alternatives for real variables, the number of float values contained in the domain is typically huge. It is usually a good idea to explore only a sample of them. The granularity of the sample is problem specific. If it it too coarse, solutions can be missed. If it is too fine, spurious, closely clustered solutions may be reported due to accumulated rounding errors that prevent those spurious solutions from being ruled out. The following parameter controls the granularity:

`precision(`*P*`)` *since release 4.10.0*

When exploring the alternatives for X, if its domain has been narrowed to $A..B$ and $A+P >= B$, then only one candidate domain element will be tried. Otherwise, the domain will be split and explored recursively. P should be a non-negative float. The default is 0.0, but the value of the `precision` FD flag overrides P if it is greater than P.

See Section 10.9.5 [CLPFD Caveats], page 433, for limitations.

Option Group 6—Objective

The following options tell the solver whether the given problem is a satisfaction problem or an optimization problem. In a satisfaction problem, we wish to find values for the domain variables, all solutions being equally good. In an optimization problem, we wish to find values that minimize or maximize some objective function reflected in an integer variable. It is useful to combine the optimization options with the `time_out/2`, `best`, and `all` options (see later). If these options occur more than once, then the last occurrence overrides previous ones.

`satisfy` *since release 4.3*

We have a satisfication problem. Its solutions are enumerated by backtracking. This is the default.

`minimize(`*X*`)`
`maximize(`*X*`)`

We have an optimization problem, seeking an assignment where the value of the numeric argument X is minimal (maximal). The labeling should fix X for all assignments of *Variables*. **Please note**: If X is a real variable, it is best to include it in *Variables*, because propagation does not always fix real variables.

`lex_minimize(`*Xs*`)` *since release 4.10.0*
`lex_maximize(`*Xs*`)` *since release 4.10.0*

Similar to `minimize` and `maximize`, but the objective is not a single numeric argument, but a vector of integer arguments to minimize or maximize lexicographically. **Please note:** real arguments are not supported yet.

`pareto_minimize(`*Xs*`)` *since release 4.10.0*
`pareto_maximize(`*Xs*`)` *since release 4.10.0*

Similar to `lex_minimize` and `lex_maximize`, but here we are looking not for a single, optimal solution, but for a set of solutions such that no solution is dominated by another solution. Suppose that *Xs* is assigned to *As* resp. *Bs* in solutions 1 resp. 2. For `pareto_minimize`, solution 1 is dominated by solution 2 iff *As[i]* `>=` *Bs[i]* for every position *i*. For `pareto_maximize`, solution 1 is dominated by solution 2 iff *As[i]* `=<` *Bs[i]* for every position *i*. The non-dominated solutions are enumerated by backtracking.

Option Group 7—Optimization Incrementality

The following options are only meaningful for optimization problems. They tell the solver whether to enumerate every solution that improves the objective function, or only the optimal one after optimality has been proved:

`best` *since release 4.3*

Return the optimal solution after proving its optimality. This is the default.

`all` *since release 4.3*

Enumerate all improving solutions, on backtracking seek the next improving solution. Merely fail after proving optimality. This option is not very useful for `pareto_minimize` and `pareto_maximize`, because an improving solution may later become dominated during search.

Option Group 8—Optimization Strategy

The following options too are only meaningful for optimization problems. They tell the solver what search scheme to use, but have no effect on the semantics or on the meaning of other options:

`bab` *since release 4.3*

Use a branch-and-bound scheme, which incrementally tightens the bound on the objective as more and more solutions are found. This is the default, and is usually the more efficient scheme.

`restart` *since release 4.3*

Use a scheme that restarts the search with a tighter bound on the objective each time a solution is found.

Option Group 9—Restart

Depth-first search suffers from the problem that wrong decisions made at the top of the search tree can take an exponential amount of search to undo. One common way to mitigate this problem is to restart the search from scratch, thus having a chance to make better

decisions. Of course, this only makes sense if the decisions have a chance to be different, e.g., using the `random` option. The following options are meaningful for satisfaction as well as optimization problems. Restarts occur when a backtrack cutoff limit is reached after the latest (re)start. The default is no cutoff limit:

`restart_constant(`*`Scale`*`)` *since release 4.10.0*
: The cutoff limit is fixed to *Scale*.

`restart_linear(`*`Scale`*`)` *since release 4.10.0*
: The cutoff limit is fixed to *Scale*k* after the *k*-th (re)start. *Scale* should be an integer.

`restart_geometric(`*`Base, Scale`*`)` *since release 4.10.0*
: The cutoff limit is fixed to *Scale*(Base^k)* after the *k*-th (re)start. *Scale* should be an integer and *Base* should be a float.

`restart_luby(`*`Scale`*`)` *since release 4.10.0*
: The cutoff limit is fixed to *Scale*L[k]* after the *k*-th (re)start, where *L[k]* is the *k*-th number in the Luby sequence. The Luby sequence looks like:

```
1 1 2 1 1 2 4 1 1 2 1 1 2 4 8, ...
```

e.g., it repeats two copies of the sequence ending in *2^i* before adding the number *2^(i+1)*. *Scale* should be an integer.

Option Group 10—Large Neighborhood Search

Restarting search can be made more effective by using a fragment of the latest found solution as a warm start each time. With the following options, upon restart, for each variable to label, it is fixed to the previous solution with a given probability. **Please note**: this strategy makes the search procedure unable to exhaust the search space, so the search effectively goes on forever, or until the execution time limit has been exceeded. This strategy is meningful mainly for optimization problems with the `all` option:

`relax_and_reconstruct(`*`Xs, P`*`)` *since release 4.10.0*
`relax_and_reconstruct(`*`Xs, P, Ys`*`)` *since release 4.10.0*
: Upon restart, for each variable to label, it is fixed to the previous solution with probability *P/100*. If *Ys* is given, then use that as an initial solution until the first solution has been found.

Option Group 11—Time-Out

Finally, a limit on the execution time can be imposed:

`time_out(`*`Time,Flag`*`)`
: See Section 10.48 [lib-timeout], page 908. *Time* should be an integer number of milliseconds. The default is no time limit. If the search space is exhausted within this time limit and no solution is found, then the search merely fails, as usual. Otherwise, *Flag* is bound to a value reflecting the outcome:

  `optimality` *since release 4.4*
  : If `best` was selected in an optimization problem, then the search space was exhausted, having found the optimal solution. The vari-

ables are bound to the corresponding values. If `best` was not selected, this flag value is not used.

`success` *since release 4.4*

If `best` was selected in an optimization problem, then the search timed out before the search space was exhausted, having found at least one solution. If `best` was not selected, then a solution was simply found before the time limit. In any case, the variables are bound to the values corresponding to the latest solution found.

`time_out` *since release 4.4*

If `best` was selected in an optimization problem, then the search timed out before any solution was found. If `best` was not selected, then the search timed out while searching for the next solution. The variables are left unbound.

For example, to enumerate solutions using a static variable ordering, use:

```
| ?- constraints(Variables),
     labeling([], Variables).
     %same as [leftmost,step,up,satisfy]
```

To minimize a cost function using branch-and-bound search, computing the best solution only, with a dynamic variable ordering using the first-fail principle, and domain splitting exploring the upper part of domains first, use:

```
| ?- constraints(Variables, Cost),
     labeling([ff,bisect,down,minimize(Cost)], Variables).
```

To give a time budget and collect the solutions of a satisfiability problem up to the time limit, use:

```
| ?- constraints(Variables),
     findall(Variables, label-
ing([time_out(Budget,success)|Options]), Solutions).
```

where `Flag=success` will hold if all solutions were found, and `Flag=time_out` will hold if the time expired.

Note that, when used for optimization, `labeling/2` has a limitation compared to `minimize/[2,3]` and `maximize/[2,3]`: the variable and value choice heuristics specified by `labeling/2` must apply to the whole set of variables, with no provision for different heuristics for different subsets. As of release 4.3, this limitation has been lifted by the following predicate:

`solve(:Options, :Searches)` *since release 4.3,polymorphic*

where *Options* is a list of options of the same shape as taken by `labeling/2`, and *Searches* is a list of `labeling/2` and `indomain/1` goals, or a single such goal. The domain variables of *Searches* must all have finite bounds. True if the conjunction of *Searches* is true.

The main purpose of this predicate is for optimization, allowing to use different heuristics in the different *Searches*. For satisfiability problems, a simple sequence of `labeling/2` and `indomain/1` goals does the trick.

The treatment of the *Options*, as well as the suboption lists given in the `labeling/2` goals of *Searches*, is a bit special. Some options are global for the whole search, and are ignored if they occur in the suboption lists. Others are local to the given `labeling/2` goal, but provides a default value for the whole search if it occurs in *Options*. The following table defines the role of each option as `global` or `local`:

`all`	`global`
`anti_first_fail`	`local`
`bab`	`global`
`best`	`global`
`bisect`	`local`
`dom_w_deg`	`local`
`down`	`local`
`enum`	`local`
`ffc`	`local`
`ff`	`local`
`first_fail`	`local`
`impact`	`local`
`in`	`local`
`input_order`	`local`
`interval`	`local`
`largest`	`local`
`leftmost`	`local`
`lex_maximize/1`	`global`
`lex_minimize/1`	`global`
`max_regret`	`local`
`maximize/1`	`global`
`max`	`local`
`median`	`local`
`middle`	`local`
`minimize/1`	`global`
`min`	`local`
`most_constrained`	`local`
`occurrence`	`local`
`out`	`local`
`pareto_maximize/1`	`global`
`pareto_minimize/1`	`global`
`precision`	`local`
`random`	`local`
`relax_and_reconstruct/2`	`global`
`relax_and_reconstruct/3`	`global`
`restart`	`global`
`restart_constant/1`	`global`

```
restart_geometric/2             global
restart_linear/1                global
restart_luby/1                  global
satisfy                         global
smallest                        local
step                            local
time_out/2                      global
up                              local
value/1                         local
variable/1                      local
```

For example, suppose that you want to minimize a cost function using branch-and-bound search, enumerating every improving solution, using left-to-right search on some variables followed by first-fail domain splitting search on some other variables. This can be expressed as:

```
| ?- constraints([X1,X2,X3,Y1,Y2,Y3], Cost),
     solve([minimize(Cost),all],
           [labeling([leftmost],[X1,X2,X3]),
            labeling([ff,bisect],[Y1,Y2,Y3])]).
```

10.9.9 Statistics Predicates

The following predicates can be used to access execution statistics.

`fd_statistics`
`fd_statistics(`*?Key*`, `*?Value*`)`

This allows a program to access execution statistics specific to this solver. General statistics about CPU time and memory consumption etc. is available from the built-in predicate `statistics/2`.

Without arguments, displays on the standard error stream a summary of the following statistics, and zeroes all counters. With arguments, for each of the possible keys *Key*, *Value* is unified with the current value of a counter, which is simultaneously zeroed. The following counters are maintained:

`propagations` *since release 4.10.0*

The number of times a constraint was resumed.

`entailments`

The number of times a (dis)entailment was detected by a constraint.

`prunings` The number of times a domain was pruned.

`backtracks`

The number of times the search has backtracked to an alternative branch.

`restarts` *since release 4.10.0*

The number of times the search has restarted from scratch.

`solutions` *since release 4.10.0*
: The number of times the search has found an intermediate (for optimization problems) or final (for satisfaction problems) solution.

`optimalities` *since release 4.10.0*
: The number of times the search has proven optimality (for optimization problems) or found all solutions (for satisfaction problems).

`propagators` *since release 4.10.0*
: The number of propagators created.

`variables` *since release 4.10.0*
: The number of domain variables created.

10.9.10 Answer Constraints

By default, the answer constraint only shows the projection of the store onto the variables that occur in the query, but not any constraints that may be attached to these variables, nor any domains or constraints attached to other variables. This is a conscious decision, as no efficient algorithm for projecting answer constraints onto the query variables is known for this constraint system.

It is possible, however, to get a complete answer constraint including all variables that took part in the computation and their domains and attached constraints. This is done by asserting a clause for the following predicate:

`clpfd:full_answer` *hook,volatile*
: If false (the default), then the answer constraint, as well as constraints projected by `copy_term/3`, `clpfd:project_attributes/2`, `clpfd:attribute_goal/2` and their callers, only contain the domains of the query variables. If true, then those constraints contain the domains and any attached constraints of all variables. Initially defined as a dynamic, volatile predicate with no clauses.

10.9.11 Debugging

Code using `library(clpfd)` can be debugged with the usual debugger, but it does not capture all relevant aspects of constraint execution: the propagation cascade and domain changes are not visible. To capture such aspects, a separate, dedicated debugger is available; see Section 10.14 [lib-fdbg], page 547.

The `v` command (*print variable bindings*) of the usual debugger can be handy. It will endeavor to print the variable bindings of the clause containing the current goal, as well as any goals that are blocked on a variable found among those bindings. In particular, it will show the current domains of such variables. See Section 5.5 [Debug Commands], page 241.

10.9.12 Defining Global Constraints

10.9.12.1 The Global Constraint Programming Interface

This section describes a programming interface by means of which new constraints can be written. The interface consists of a set of predicates provided by this library module. Con-

straints defined in this way can take arbitrary arguments and may use any constraint solving algorithm, provided it makes sense; see Section 10.9.3 [CLPFD Desiderata], page 432. Reification cannot be expressed in this interface; instead, reification may be achieved by explicitly passing a Boolean argument to the constraint in question. Integer as well as real variables can be handled.

Global constraints have state, which may be updated each time the constraint is resumed. The state information may be used, e.g., in incremental constraint solving.

The following two predicates are the principal entrypoints for defining and posting new global constraints:

`clpfd:dispatch_global(+`*Constraint*`, +`*State0*`, -`*State*`, -`*Actions*`)` *hook*

Tells the solver how to solve constraints of the form *Constraint*. Defined as a multifile predicate.

When defining a new constraint, a clause of this predicate must be added. Its body defines a propagator which should always succeed determinately. When a global constraint is resumed, the propagator will be executed and should perform the relevant pruning.

> **Please note**: the constraint is identified by its principal functor; there is no way to have two constraints with the same name in different modules. It is good practice to include a cut in every clause of `clpfd:dispatch_global/4`.
>
> **Please note**: During propagation, if the domain of a variable becomes reduced to a single value, then the variable will eventually be bound to that value, but it is undefined exactly when that happens. Therefore, clauses of `clpfd:dispatch_global/4` should not use `nonvar/1` or `number/1` to check if a variable is fixed. Use, e.g., `fd_min/1` and `fd_max/1` instead.

The propagator receives in *State0* a term representing the current state and should unify *State* with a term representing the new state. That way, the propagator can be stateful if it wishes to.

The propagator should treat all domain variables as read-only: it must not prune any domains, bind any domain variables, wake up any suspended goals, or post any new constraints. Instead, *Actions* should be unified with a list of requests to the solver. The list of requests is executed as if in the scope of `fd_batch/1` so that any newly posted constraints are injected into the ongoing propagation, and not propagated recursively. Each request should be of one of the following forms:

`exit` The constraint has become entailed, and ceases to exist.

`fail` The constraint has become disentailed, causing a backtrack.

X `=` *V* Binds X to V. X to V should be of the same type.

X `in` *R* Constrains X to be a member of the *IntegerRange* or *RealRange* R, depending on the type of X (see Section 10.9.16.2 [Syntax of Range Expressions], page 509).

`X in_set S`
: Constrains X to be a member of the FD set S (see Section 10.9.12.3 [FD Set Operations], page 491). X must be an integer variable.

`call(Goal)`
: The solver calls the goal or constraint *Goal*, which should be module prefixed unless it is a built-in predicate or an exported predicate of the `clpfd` module.

`fd_global(:Constraint, +State, +Susp)`
`fd_global(:Constraint, +State, +Susp, +Options)`
: where *Constraint* is a constraint goal, *State* is its initial state, and *Susp* is a term encoding how the constraint should wake up in response to domain changes. This predicate posts the constraint.

Susp is a list of *F(Var)* terms where *Var* is a variable to suspend on and F is a functor encoding when to wake up:

`dom(X)` wake up when the domain of X has changed

`min(X)` wake up when the lower bound of X has changed

`max(X)` wake up when the upper bound of X has changed

`minmax(X)`
: wake up when the lower or upper bound of X has changed

`val(X)` wake up when X has been fixed

Options is a list of zero or more of the following:

`source(Term)`
: By default, the symbolic form computed by `copy_term/3`, and shown in the answer constraint if `clpfd:full_answer` holds, equals *Constraint*, module name expanded. With this option, the symbolic form will instead be *Term*. In particular, if *Term* equals `true`, then the constraint will not appear in the *Body* argument of `copy_term/3`. This can be useful if you are posting some redundant (implied) constraint.

`idempotent(Boolean)`
: If `true` (the default), then the propagator is assumed to be idempotent. That is, in the scope of `clpfd:dispatch_global/4`, the solver will not check for the resumption conditions for the given constraint, while performing its *Actions*. If `false`, then an action may well cause the solver to resume the constraint that produced the action.

  If a variable occurs more than once in a global constraint that is being posted, or due to a variable-variable unification, then the solver will no longer trust the propagator to be idempotent.

For an example of usage, see Section 10.9.12.4 [Global Constraint Example], page 493.

The following predicate controls operational aspects of the constraint solver:

`fd_setrand(+`*Seed*`)` *since release 4.10.0*

Sets the random number generator seed. *Seed* should be a 32-bit integer.

`fd_getrand(-`*Seed*`)` *since release 4.10.0*

Gets the random number generator seed.

`fd_flag(+`*FlagName*`, ?`*OldValue*`, ?`*NewValue*`)`

OldValue is the value of the FD flag *FlagName*, and the new value of *FlagName* is set to *NewValue*. The possible FD flag names and values are:

`overflow` Determines the behavior on integer overflow conditions. Possible values:

`error` Raises a representation error (the default).

`fail` Silently fails.

`debug` Controls the visibility of constraint propagation. Possible values are `on` and `off` (the default). For internal use by `library(fdbg)`.

`precision` *since release 4.10.0*

The value should be a float not smaller than 0.0 (the default). Defines a lower bound for the size of nonground real domains. In some applications, if the size of the domain of a real variable becomes smaller than a given bound, the variable should be considered fixed. The `precision` flag provides that functionality, fixing the variable to a value in its domain as soon as the size drops below the threshold.

See Section 10.9.5 [CLPFD Caveats], page 433, for limitations.

10.9.12.2 Reflection Predicates

The propagator needs access to information about the current domains of variables. This is provided by the following predicates, all of which which are constant time operations.

`fd_var(?`*X*`)` *polymorphic*

`fd_var(?`*X*`, -`*Type*`)` *polymorphic,since release 4.10.0*

Checks that *X* is currently an unbound variable that is known to the CLPFD solver. *Type* is unified with its type, `integer` or `real`.

`fd_min(?`*X*`, ?`*Min*`)` *polymorphic*

where *X* is a numeric argument. *Min* is unified with the lower bound of the current domain of *X*, i.e., a number, the atom `inf` denoting integer minus infinity, or the atom `finf` denoting real minus infinity.

`fd_max(?`*X*`, ?`*Max*`)` *polymorphic*

where *X* is a numeric argument. *Max* is unified with the upper bound of the current domain of *X*, i.e., a number, the atom `sup` denoting integer plus infinity, or the atom `fsup` denoting real plus infinity.

`fd_size(?`*X*`, ?`*Size*`)` *polymorphic*

where *X* is a numeric argument. For integer arguments, *Size* is unified with the size of the current domain of *X*, if the domain is bounded, the atom `sup`

otherwise. For real arguments, *Size* is unified with the upper bound minus the lower bound if they are finite, the atom `fsup` otherwise.

`fd_set(?X, ?Set)`
: where X is an integer argument. *Set* is unified with an FD set denoting the internal representation of the current domain of X; see below.

`fd_dom(?X, ?Range)` *polymorphic*
: where X is a numeric argument. *Range* is unified with a term denoting the current domain of X. For integer arguments, that term is an *IntegerRange*; for real arguments, it is a *RealRange*. See Section 10.9.16.2 [Syntax of Range Expressions], page 509.

`fd_degree(?X, ?Degree)` *polymorphic*
: where X is a numeric argument. *Degree* is unified with the number of constraints that are attached to X.

> **Please note**: the degree is computed in terms of propagators, not constraints, and may include some propagators that have been detected as entailed.

`fd_failures(?X, ?Failures)` *since release 4.7.0*
: where X is a numeric argument. *Failures* is unified with the number of times that X has been involved in a failure, as far as the solver can detect it. This number affects the variable selection methods `impact` and `dom_w_deg`. Not supported for real variables. **Please note**: the number is not reset on backtracking, and so it is a counter for the whole search.

`fd_set_failures(?X, +Failures)` *since release 4.7.0*
: where X is a numeric argument. The failure count of X is set to *Failures*, which should be a non-negative small integer. This can be useful for repeated searches or similar circumstances. Not supported for real variables.

The following predicates can be used for computing the set of variables that are (transitively) connected via constraints to some given variable(s).

`fd_neighbors(+Var, -Neighbors)` *polymorphic*
: Given a numeric argument *Var*, *Neighbors* is the set of other domain variables that occur with *Var* in some constraint.

`fd_closure(+Vars, -Closure)` *polymorphic*
: Given a list *Vars* of numeric arguments, *Closure* is the set of variables (including *Vars*) that can be transitively reached via constraints. Thus, `fd_closure/2` is the transitive closure of `fd_neighbors/2`.

10.9.12.3 FD Set Operations

The domains of variables are internally represented compactly as *FD set* terms. The details of this representation are subject to change and should not be relied on. Therefore, a number of operations on FD sets are provided, as such terms play an important role in the interface. **Under no circumstances should you try to construct FD sets with other operations such as unification.** The following operations are the primitive ones:

`is_fdset(+Set)`
: *Set* is a valid FD set.

`empty_fdset(?Set)`
: *Set* is the empty FD set.

`fdset_parts(?Set, ?Min, ?Max, ?Rest)`
: *Set* is an FD set, which is a union of the non-empty interval *[Min,Max]* and the FD set *Rest*, and all elements of *Rest* are greater than *Max*+1. *Min* and *Max* are both integers or the atoms `inf` and `sup`, denoting minus and plus infinity, respectively. Either *Set* or all the other arguments must be ground.

The following operations can all be defined in terms of the primitive ones, but in most cases, a more efficient implementation is used:

`empty_interval(+Min, +Max)`
: *[Min,Max]* is an empty interval.

`fdset_interval(?Set, ?Min, ?Max)`
: *Set* is an FD set, which is the non-empty interval *[Min,Max]*.

`fdset_singleton(?Set, ?Elt)`
: *Set* is an FD set containing *Elt* only. At least one of the arguments must be ground.

`fdset_min(+Set, -Min)`
: *Min* is the lower bound of *Set*.

`fdset_max(+Set, -Min)`
: *Max* is the upper bound of *Set*. This operation is linear in the number of intervals of *Set*.

`fdset_size(+Set, -Size)`
: *Size* is the cardinality of *Set*, represented as `sup` if *Set* is infinite. This operation is linear in the number of intervals of *Set*.

`list_to_fdset(+List, -Set)`
: *Set* is the FD set containing the elements of *List*. Slightly more efficient if *List* is ordered.

`fdset_to_list(+Set, -List)`
: *List* is an ordered list of the elements of *Set*, which must be finite.

`range_to_fdset(+Range, -Set)`
: *Set* is the FD set containing the elements of the *IntegerRange* (see Section 10.9.16.2 [Syntax of Range Expressions], page 509) *Range*.

`fdset_to_range(+Set, -Range)`
: *Range* is a constant interval, a singleton constant set, or a union of such, denoting the same set as *Set*.

`fdset_add_element(+Set1, +Elt -Set2)`
: *Set2* is *Set1* with *Elt* inserted in it.

`fdset_del_element(+Set1, +Elt, -Set2)`
: *Set2* is like *Set1* but with *Elt* removed.

`fdset_disjoint(+Set1, +Set2)`
: The two FD sets have no elements in common.

`fdset_intersect(+Set1, +Set2)`
: The two FD sets have at least one element in common.

`fdset_intersection(+Set1, +Set2, -Intersection)`
: *Intersection* is the intersection between *Set1* and *Set2*.

`fdset_intersection(+Sets, -Intersection)`
: *Intersection* is the intersection of all the sets in *Sets*.

`fdset_member(?Elt, +Set)`
: is true when *Elt* is a member of *Set*. If *Elt* is unbound, then *Set* must be finite.

`fdset_eq(+Set1, +Set2)`
: is true when the two arguments represent the same set, i.e., they are identical.

`fdset_subset(+Set1, +Set2)`
: Every element of *Set1* appears in *Set2*.

`fdset_subtract(+Set1, +Set2, -Difference)`
: *Difference* contains all and only the elements of *Set1* that are not also in *Set2*.

`fdset_union(+Set1, +Set2, -Union)`
: *Union* is the union of *Set1* and *Set2*.

`fdset_union(+Sets, -Union)`
: *Union* is the union of all the sets in *Sets*.

`fdset_complement(+Set, -Complement)`
: *Complement* is the complement of *Set* wrt. `inf..sup`.

10.9.12.4 Global Constraint Example

The following example defines a new global constraint `exactly(X,L,N)`, which is true if X occurs exactly N times in the list L of integer variables. N must be an integer when the constraint is posted. A version without this restriction and defined in terms of reified equalities was presented earlier; see Section 10.9.6.4 [Reified Constraints], page 436.

This example illustrates the use of state information. The state has two components: the list of variables that could still be X, and the number of variables still required to be X.

The constraint is defined to wake up on any domain change.

```
                                                                % exactly.pl
/*
An implementation of exactly(I, X[1]...X[m], N):

Necessary condition: 0 <= N <= m.
Rewrite rules:

[1] |= X[i]=I  ↦ exactly(I, X[1]...X[i-1],X[i+1]...X[m], N-1):
[2] |= X[i]!=I ↦ exactly(I, X[1]...X[i-1],X[i+1]...X[m], N):
[3] |= N=0     ↦ X[1]!=I ... X[m]!=I
[4] |= N=m     ↦ X[1]=I  ... X[m]=I
*/
:- use_module(library(clpfd)).

% the entrypoint
exactly(I, Xs, N) :-
        dom_suspensions(Xs, Susp),
        fd_global(exactly(I,Xs,N), state(Xs,N), Susp).

dom_suspensions([], []).
dom_suspensions([X|Xs], [dom(X)|Susp]) :-
        dom_suspensions(Xs, Susp).

% the propagator
:- multifile clpfd:dispatch_global/4.
clpfd:dispatch_global(exactly(I,_,_), state(Xs0,N0), state(Xs,N), Actions) :-
        exactly_solver(I, Xs0, Xs, N0, N, Actions).

exactly_solver(I, Xs0, Xs, N0, N, Actions) :-
        ex_filter(Xs0, Xs, N0, N, I),
        length(Xs, M),
        (   N=:=0 -> Actions = [exit|Ps], ex_neq(Xs, I, Ps)
        ;   N=:=M -> Actions = [exit|Ps], ex_eq(Xs, I, Ps)
        ;   N>0, N<M -> Actions = []
        ;   Actions = [fail]
        ).
```

```
                                                                % exactly.pl
% rules [1,2]: filter the X's, decrementing N
ex_filter([], [], N, N, _).
ex_filter([X|Xs], Ys, L, N, I) :- X==I, !,
        M is L-1,
        ex_filter(Xs, Ys, M, N, I).
ex_filter([X|Xs], Ys0, L, N, I) :-
        fd_set(X, Set),
        fdset_member(I, Set), !,
        Ys0 = [X|Ys],
        ex_filter(Xs, Ys, L, N, I).
ex_filter([_|Xs], Ys, L, N, I) :-
        ex_filter(Xs, Ys, L, N, I).

% rule [3]: all must be neq I
ex_neq(Xs, I, Ps) :-
        fdset_singleton(Set0, I),
        fdset_complement(Set0, Set),
        eq_all(Xs, Set, Ps).

% rule [4]: all must be eq I
ex_eq(Xs, I, Ps) :-
        fdset_singleton(Set, I),
        eq_all(Xs, Set, Ps).

eq_all([], _, []).
eq_all([X|Xs], Set, [X in_set Set|Ps]) :-
        eq_all(Xs, Set, Ps).

end_of_file.

% sample queries:

| ?- exactly(5,[A,B,C],1), A=5.
A = 5,
B in(inf..4)\/(6..sup), C in(inf..4)\/(6..sup)

| ?- exactly(5,[A,B,C],1), A in 1..2, B in 3..4.
C = 5,
A in 1..2,
B in 3..4
```

10.9.13 Defining Indexical Constraints

Indexicals are a simple means of defining a constraint over a fixed number of integer arguments. The key idea is to associate each argument with a *domain expression* term that mentions the other arguments. Whenever the constraint wakes up, that term is evaluated

in the context of the current store, and the the resulting set of integers is intersected with the argument's current domain.

It is usually not necessary to resort to this level of programming—most commonly used constraints are available in a library and/or via macro-expansion. However, indexicals give the programmer some degree of choice of the consistency level. Indexicals also support reification—in addition to indexicals for pruning, indexicals for entailment checking can be formulated.

10.9.13.1 Indexicals

An indexical has the syntax `X in R`, where R is a set of integers valued *domain expression* (see below). See Section 10.9.16.1 [Syntax of Indexicals], page 508, for a grammar defining indexicals and domain expressions.

Indexicals can play one of two roles: *propagating indexicals* are used for constraint solving, and *checking indexicals* are used for entailment checking.

Let S be the constraint store, *X in R* a propagating indexical, and *D(E,S)* the domain of expression E in S. When it fires, the indexical prunes the domain of X by intersecting its domain with *D(R,S)*. When a checking indexical fires, it checks if *D(X,S)* is contained in *D(R,S)*, in which case the constraint corresponding to the indexical is detected as entailed.

The domain expression R of a propagating indexical should be contracting, i.e., as the constraint store S gets narrower and narrower, *D(R,S)* should get smaller and smaller; otherwise, the propagator would not be contracting. Dually, the domain expression R of a checking indexicals should be expanding, i.e., as the constraint store S gets narrower and narrower, *D(R,S)* should get larger and larger; otherwise, the entailment check would not work. The solver analyzes each domain expressions, and if it does not fulfill the contracting or expanding property, its evaluation is suspended until enough variables have been fixed to make the property hold.

10.9.13.2 Domain Expressions

A domain expression has one of the following forms, where *Ri* denote domain expressions, *Ti* denote integer valued *term expressions*, S denotes the current store, *S(Ri)* denotes the integer set value of *Ri* in S, *S(Ti)* denotes the integer value of *Ti* in S, X denotes a variable, and I denotes an integer.

`dom(X)` evaluates to *D(X,S)*

`{T1,...,Tn}`
: evaluates to {*S(T1)*,. . .,*S(Tn)*}. Any *Ti* containing a variable that is not "quantified" by `unionof/3` will cause the indexical to suspend until this variable has been assigned.

`T1..T2` evaluates to the interval between *S(T1)* and *S(T2)*.

`R1/\R2` evaluates to the intersection of *S(R1)* and *S(R2)*

`R1\/R2` evaluates to the union of *S(R1)* and *S(R2)*

`\R2` evaluates to the complement of *S(R2)*

`R1+R2`
`R1+T2` evaluates to *S(R2)* or *S(T2)* added pointwise to *S(R1)*

`-R2` evaluates to *S(R2)* negated pointwise

`R1-R2`
`R1-T2`
`T1-R2` evaluates to *S(R2)* or *S(T2)* subtracted pointwise from *S(R1)* or *S(T1)*

`R1 mod R2`
`R1 mod T2` evaluates to the pointwise floored modulo of *S(R1)* and *S(R2)* or *S(T2)*

`R1 rem R2`
`R1 rem T2` evaluates to the pointwise truncated remainder of *S(R1)* and *S(R2)* or *S(T2)*

`R1 ? R2` evaluates to *S(R2)* if *S(R1)* is a non-empty set; otherwise, evaluates to the empty set. This expression is commonly used in the context `(R1 ? (inf..sup) \/ R3)`, which evaluates to *S(R3)* if *S(R1)* is an empty set; otherwise, evaluates to `inf..sup`. As an optimization, *R3* is not evaluated while the value of *R1* is a non-empty set.

`unionof(X,R1,R2)`
evaluates to the union of *S(E1),...,S(EN)*, where each *EI* has been formed by substituting *K* for *X* in *R2*, where *K* is the *I*-th element of *S(R1)*. See Section 10.9.15.2 [N Queens], page 502, for an example of usage.

> **Please note**: if *S(R1)* is infinite, then the evaluation of the indexical will be abandoned, and the indexical will simply suspend.

`switch(T,MapList)`
evaluates to *S(E)* if *S(T1)* equals *K* and *MapList* contains a pair `K-E`. Otherwise, evaluates to the empty set. If *T* contains a variable that is not "quantified" by `unionof/3`, then the indexical will suspend until this variable has been assigned.

10.9.13.3 Term Expressions

A term expression has one of the following forms, where *T1* and *T2* denote term expressions, *X* denotes a variable, *I* denotes an integer, and *S* denotes the current store.

`min(X)` evaluates to the minimum of *D(X,S)*

`max(X)` evaluates to the maximum of *D(X,S)*

`card(X)` evaluates to the size of *D(X,S)*

`X` evaluates to the integer value of *X*. The indexical will suspend until *X* is assigned.

`I` an integer

`inf` minus infinity

`sup` plus infinity

`-T1` evaluates to *S(T1)* negated

`T1+T2` evaluates to the sum of *S(T1)* and *S(T2)*

`T1-T2` evaluates to the difference of *S(T1)* and *S(T2)*

`T1*T2` evaluates to the product of *S(T1)* and *S(T2)*, where *S(T2)* must not be negative

`T1/>T2` evaluates to the floored quotient of *S(T1)* and *S(T2)*, where *S(T2)* must be positive

`T1/<T2` evaluates to the ceilinged quotient of *S(T1)* and *S(T2)*, where *S(T2)* must be positive

T1 `mod` *T2* evaluates to the floored remainder of *S(T1)* and *S(T2)*

T1 `rem` *T2* evaluates to the truncated remainder of *S(T1)* and *S(T2)*

10.9.13.4 Indexical Constraints

The following example defines the constraint $X+Y=T$ with three indexicals. Each indexical is a rule responsible for removing values detected as incompatible from one particular constraint argument. Indexicals are *not* Prolog goals; thus, the example does not express a conjunction, but the constaint itself can be called as a Prolog predicate. An indexical may wipe out a variable's domain, in which case backtracking is triggered, as usual.

```
plus(X,Y,T) +:
        X in min(T) - max(Y) .. max(T) - min(Y),
        Y in min(T) - max(X) .. max(T) - min(X),
        T in min(X) + min(Y) .. max(X) + max(Y).
```

The above definition contains a single clause composed of three propagating indexicals. The first indexical wakes up whenever the bounds of T or Y are updated, and removes from the domain of X any values that are not compatible with the new bounds of T and Y. Note that in the event of "holes" in the domains of T or Y, the domain of X may still contain some values that are incompatible with $X+Y=T$. Like most built-in arithmetic constraints, the above definition maintains bounds consistency, which is significantly cheaper to maintain than domain consistency, and suffices in most cases. The constraint could for example be used as follows:

```
| ?- X in 1..5, Y in 2..8, plus(X,Y,T).
X in 1..5,
Y in 2..8,
T in 3..13
```

Thus, when an indexical constraint is called, the '`+:`' clause is activated.

The definition of an indexical has to specify the variables involved and the domain expressions with which their domains should be intersected when the propagator is run. Therefore the indexical constraint with *n* arguments usually consists of *n* indexicals, each specifying a left hand side variable and a right hand side expression that evaluates to a set of integers, which is a function of the expression and of the constraint store. For example, the third indexical in the above indexical predicate evaluates to the set *3..13* for T if *D(X,S) = 1..5* and *D(Y,S) = 2..8*. As the domain of some variables gets smaller, the indexical may further narrow the domain of other variables.

There can be several alternative definitions for the same constraint with different strengths in propagation. For example, the definition of `plusd` below encodes the same `X+Y=T` constraint as the `plus` predicate above, but maintaining domain consistency:

```
plusd(X,Y,T) +:
        X in dom(T) - dom(Y),
        Y in dom(T) - dom(X),
        T in dom(X) + dom(Y).

| ?- X in {1}\/{3}, Y in {10}\/{20}, plusd(X, Y, T).
X in{1}\/{3},
Y in{10}\/{20},
T in{11}\/{13}\/{21}\/{23}
```

This costs more in terms of execution time, but gives more precise results. For singleton domains, `plus` and `plusd` behave in the same way.

If the program only uses a constraint in non-reified contexts, then it suffices for the definition to contain a single clause for solving the constraint. If a constraint is reified or occurs in a propositional formula, then the definition must contain four clauses for solving and checking entailment of the constraint and its negation. The role of each clause is reflected in the "neck" operator. The following table summarizes the different forms of indexical clauses corresponding to a constraint C. In all cases, *Head* should be a compound term with all arguments being distinct variables:

Head `+:` *Indexicals*`.`
: The body consists of propagating indexicals for solving C. The body can in fact be of a more general form—see Section 10.9.13.5 [Compiled Indexicals], page 500.

Head `-:` *Indexicals*`.`
: The body consists of propagating indexicals for solving the negation of C.

Head `+?` *Indexical*`.`
: The body consists of a single checking indexical for testing entailment of C.

Head `-?` *Indexical*`.`
: The body consists of a single checking indexical for testing disentailment (entailment of the negation) of C.

When a constraint is reified as in *Constraint* `#<=>` *B*, the solver spawns two coroutines corresponding to detecting entailment and disentailment. Then, eventually, one of the following cases occur after some amount of search and/or propagation:

1. The '`+?`' indexical detects entailment. The two checking indexicals are disabled and B is bound to 1.
2. The '`-?`' indexical detects disentailment. The two checking indexicals are disabled and B is bound to 0.

3. B gets bound to 1 by search and/or propagation. The two checking indexicals are disabled and the '`+:`' indexicals are enabled.
4. B gets bound to 0 by search and/or propagation. The two checking indexicals are disabled and the '`-:`' indexicals are enabled.

The life cycle of a propagating indexical `X in R` of constraint C can be described as follows:

- It is suspended until it is provably contracting, and then it is evaluated.
- It is re-evaluated whenever one of the following conditions occurs:
  1. The domain of a variable Y that occurs as `dom(Y)` or `card(Y)` in R has been updated.
  2. The lower bound of a variable Y that occurs as `min(Y)` in R has been updated.
  3. The upper bound of a variable Y that occurs as `max(Y)` in R has been updated.
- Upon evaluation, X is pruned; three cases exist:
  1. The domain of X was wiped out: backtracking,
  2. The domain of X was not wiped out and R is now a ground expression, i.e., its value cannot contract any more: the constraint is considered entailed (disentailed) for '`+:`' ('`-:`') indexicals; all active indexicals of constraint C are disabled.
  3. Otherwise, all active indexicals of constraint C remain active.

The life cycle of a checking indexical `X in R` of constraint C reified to variable B can be described as follows:

- It is suspended until it is provably expanding, and then it is evaluated.
- It is re-evaluated whenever one of the following conditions occurs:
  1. The domain of a variable Y that occurs as `dom(Y)` or `card(Y)` in R has been updated.
  2. The lower bound of a variable Y that occurs as `min(Y)` in R has been updated.
  3. The upper bound of a variable Y that occurs as `max(Y)` in R has been updated.
- Upon evaluation, the domain of X is compared with the value of R; two cases exist:
  1. The domain of X is included in the value of R: the constraint is considered entailed (disentailed) and B is bound to 1 (0) for '`+:`' ('`-:`') indexicals; all active indexicals of constraint C are disabled.
  2. Otherwise, all active indexicals of constraint C remain active.

10.9.13.5 Compiled Indexicals

The arithmetic, membership, and propositional constraints described earlier are transformed at compile time to conjunctions of library constraints. Although linear in the size of the source code, the expansion of a constraint to library goals can have time and memory overheads. Temporary variables holding intermediate values may have to be introduced, and the grain size of the constraint solver invocations can be rather small. Therefore, an automatic translation by compilation to indexicals is also provided for a selected set of constraints. The syntax for this construction is:

Head `+:` *ConstraintBody* *since release 4.1.3*

Head should be a compound term with all arguments being distinct variables. *ConstraintBody* should be a constraint amenable to compilation to indexicals, and should not contain any variable not mentioned in *Head*. This clause defines the constraint *Head* to hold iff *ConstraintBody* is true.

Roughly, a constraint amenable to such compilation is of one of the following forms, or is a propositional combination of such forms. See Section 10.9.16.1 [Syntax of Indexicals], page 508, for the exact definition:

- *var* `in` *IntegerRange*
- `element(`*var*`,`*CList*`,`*var*`)`
- `table([`*VList*`],`*CTable*`)`
- *LinIntExpr IRelOp LinIntExpr*
- *var* { `X` stands for `X#=1` }

10.9.14 Coexisting with Attributes and Blocked Goals

Domain variables may have attributes from other modules, as well as blocked goals, attached to them. As usual, they are woken up if those variables are fixed by propagation. The CLPFD propagation phase runs to fixpoint before waking anything up. At fixpoint, any attribute handlers and blocked goals for variables that were fixed by propagation are executed before search continues.

See also the `verify_attributes/3` hook at Section 10.3 [lib-atts], page 397.

Please note: `fd_purge(X)` (see Section 10.9.6.2 [Forgetting Constraints], page 435) does not affect attributes of other modules, or blocked goals.

Please note: the garbage collector will preserve all variables with attached attributes or blocked goals, even if they are not otherwise reachable.

10.9.15 Example Programs

This section contains a few example programs. The first two programs are included in a benchmark suite that comes with the distribution. The benchmark suite is run by typing:

```
| ?- compile(library('clpfd/examples/bench')).
| ?- make.
```

10.9.15.1 Send More Money

Let us return briefly to the Send More Money problem (see Section 10.9.6.3 [Constraint Satisfaction Problems], page 435). Its `sum/8` predicate will expand to a `scalar_product/4` constraint. An indexical version is defined simply by changing the neck symbol of `sum/8` from '`:-`' to '`+:`', thus turning it into an indexical constraint:

```
sum(S, E, N, D, M, O, R, Y) +:
                  1000*S + 100*E + 10*N + D
     +            1000*M + 100*O + 10*R + E
     #= 10000*M + 1000*O + 100*N + 10*E + Y.
```

10.9.15.2 N Queens

The problem is to place N queens on an NxN chess board so that no queen is threatened by another queen.

The variables of this problem are the N queens. Each queen has a designated row. The problem is to select a column for it.

The main constraint of this problem is that no queen threaten another queen. This is encoded by the `no_threat/3` constraint and holds between all pairs `(X,Y)` of queens. It could be defined as:

```
no_threat(X, Y, I) :-
        X   #\= Y,
        X+I #\= Y,
        X-I #\= Y.
```

However, this formulation introduces new temporary integer variables and creates twelve fine-grained indexicals. Worse, the disequalities only maintain bounds consistency, and so may miss some opportunities for pruning elements in the middle of domains.

A better idea is to formulate `no_threat/3` as an indexical predicate with two indexicals, as shown in the program below. This constraint will not fire until one of the queens has been assigned (the corresponding indexical does not become monotone until then). Hence, the constraint is still not as strong as it could be.

For example, if the domain of one queen is `2..3`, then it will threaten any queen placed in column 2 or 3 on an adjacent row, no matter which of the two open positions is chosen for the first queen. The commented out formulation of the constraint captures this reasoning, and illustrates the use of the `unionof/3` operator. This stronger version of the constraint indeed gives less backtracking, but is computationally more expensive and does not pay off in terms of execution time, except possibly for very large chess boards.

It is clear that `no_threat/3` cannot detect any incompatible values for a queen with domain of size greater than three. This observation is exploited in the third version of the constraint.

The first-fail principle is appropriate in the enumeration part of this problem.

```
:- use_module(library(clpfd)).

queens(N, L, LabelingType) :-
     length(L, N),
     domain(L, 1, N),
     constrain_all(L),
     labeling(LabelingType, L).

constrain_all([]).
constrain_all([X|Xs]) :-
     constrain_between(X, Xs, 1),
     constrain_all(Xs).

constrain_between(_X, [], _N).
constrain_between(X, [Y|Ys], N) :-
     no_threat(X, Y, N),
     N1 is N+1,
     constrain_between(X, Ys, N1).


% version 1: weak but efficient
no_threat(X, Y, I) +:
     X in \({Y} \/ {Y+I} \/ {Y-I}),
     Y in \({X} \/ {X+I} \/ {X-I}).

/*
% version 2: strong but very inefficient version
no_threat(X, Y, I) +:
    X in unionof(B,dom(Y),\({B} \/ {B+I} \/ {B-I})),
    Y in unionof(B,dom(X),\({B} \/ {B+I} \/ {B-I})).

% version 3: strong but somewhat inefficient version
no_threat(X, Y, I) +:
    X in (4..card(Y)) ? (inf..sup) \/
          unionof(B,dom(Y),\({B} \/ {B+I} \/ {B-I})),
    Y in (4..card(X)) ? (inf..sup) \/
          unionof(B,dom(X),\({B} \/ {B+I} \/ {B-I})).
*/

| ?- queens(8, L, [ff]).
L = [1,5,8,6,3,7,2,4]
```

10.9.15.3 Cumulative Scheduling

This example is a very small scheduling problem. We consider seven tasks where each task has a fixed duration and a fixed amount of used resource:

Task	*Duration*	*Resource*
`t1`	16	2
`t2`	6	9
`t3`	13	3
`t4`	7	7
`t5`	5	10
`t6`	18	1
`t7`	4	11

The goal is to find a schedule that minimizes the completion time for the schedule while not exceeding the capacity 13 of the resource. The resource constraint is succinctly captured by a `cumulative/2` constraint. Branch-and-bound search is used to find the minimal completion time.

This example was adapted from [Beldiceanu & Contejean 94].

```
:- use_module(library(clpfd)).

schedule(Ss, End) :-
        Ss = [S1,S2,S3,S4,S5,S6,S7],
        Es = [E1,E2,E3,E4,E5,E6,E7],
        Tasks = [task(S1,16,E1, 2,0),
                 task(S2, 6,E2, 9,0),
                 task(S3,13,E3, 3,0),
                 task(S4, 7,E4, 7,0),
                 task(S5, 5,E5,10,0),
                 task(S6,18,E6, 1,0),
                 task(S7, 4,E7,11,0)],
        domain(Ss, 1, 30),
        domain(Es, 1, 50),
        domain([End], 1, 50),
        maximum(End, Es),
        cumulative(Tasks, [limit(13)]),
        append(Ss, [End], Vars),
        labeling([minimize(End)], Vars).

| ?- schedule(Ss, End).
Ss = [1,17,10,10,5,5,1],
End = 23
```

10.9.15.4 Equation Solving

The following small examples show how you can use this package for solving equations over reals.

This example shows how propagation alone can prune the bounds of variables:

```
| ?- X in 1.0 .. 3.0, Y^2.0 $= X.
X in 1.0..3.0,
Y in-1.7320508075688776..1.7320508075688779 ?
```

This example solves a small equation system over two variables and illustrates the use of the `precision` parameter and the fact that it's sometimes not possible to avoid spurious solutions that arise due to accumulated rounding errors.

```
| ?- X in 0.0..1.0, X^3.0 + Y^3.0 $= 2.0*X*Y, X^2.0+Y^2.0 $= 1.0,
     labeling([precision(1.5E-15)], [X,Y]).
X = 0.39105200381556626,
Y = -0.9203685839444056 ? ;
X = 0.4497874598272418,
Y = 0.8931356229499292 ? ;
X = 0.4497874598272409,
Y = 0.893135622949929 ? ;
X = 0.44978745982724133,
Y = 0.893135622949929 ? ;
X = 0.893135622949929,
Y = 0.44978745982724083 ? ;
no
```

This example encodes the problem of finding the complex square root of -1.

```
| ?- R in -1.0..1.0, I in -1.0..1.0, -R*I $= R*I, I*I-1.0 $= R*R,
     labeling([precision(0.1)], [R,I]).
R = 0.0,
I = -1.0 ? ;
R = 0.0,
I = 1.0 ? ;
no
```

This example solves a small equation system over two variables that involves a trigonometric function:

```
| ?- domain([X,Y], 1.0, 2.0), tan(X) $= Y, X^2.0 + Y^2.0 $= 5.0,
     labeling([precision(1.0E-15)], [X,Y]).
X = 1.0966681287054714,
Y = 1.9486710896099533 ? ;
no
```

This example solves how to explore the set of solution to a high-degree equation:

```
| ?- X in 0.8..1.0, 0.0 $= 35.0*X^256.0 -14.0*X^17.0 + X,
     labeling([precision(5.0E-16)], [X]).
X = 0.8479436608273154 ? ;
X = 0.995842494200498 ? ;
no
```

10.9.15.5 Mortgage Calculator

This small example, adapted from Section 10.10.5 [CLPQR Projection], page 526, illustrates the use of arithmetic relations over reals. It defines a simple mortgage calculator as a relation over:

- `T`, a parameter, is the number of interest periods (e.g., years)
- `P` is the initial balance
- `I` is the interest ratio, e.g., 0.10 means 10%
- `B` is the balance at the end of the period
- `MP` is the withdrawal amount for each interest period

```
mortgage(1, P, Interest, B, MP) :- !,
        B + MP $= P * (1.0 + Interest).
mortgage(T, P, Interest, B, MP) :-
        P1 + MP $= P * (1.0 + Interest),
        T1 is T - 1,
        mortgage(T1, P1, Interest, B, MP).

| ?- % if I deposit 1000.0 at 10% interest,
     % what is the balance if I withdraw 250.0 per year four times?
     mortgage(4, 1000.0, 0.10, B, 250.0), indomain(B).
B = 303.8500000000002

| ?- % if I deposit 1000.0 at 10% interest,
     % how much should I redraw to empty the account in four years?
     mortgage(4, 1000.0, 0.10, 0.0, MP), MP $>= 0.0, indomain(MP).
MP = 315.47080370609797

| ?- % At 10% interest, how much should I deposit
     % if I want the balance to be 2000.0 in four years?
     mortgage(4, P, 0.10, 2000.0, 0.0), indomain(P).
P = 1366.026910730141
```

10.9.15.6 Rack Configuration

This example is a product configuration problem. There are two types of alveoles and 17 boards of four types. We want to plug in all boards using at most 5 alveoles at minimal cost.

alveole type	power	slots	cost	board type	power	quantity
1	0.0	0	0	1	19.5	10
2	150.0	8	150	2	39.5	4
3	200.0	16	200	3	49.5	2
				4	74.5	1

```
:- use_module(library(lists), [append/2, transpose/2]).
:- use_module(library(clpfd)).

config(Alveoles, Boardss, Cost) :-
        problem(Alveoles, Boardss, Cost, Variables),
        labeling([minimize(Cost)], Variables).

problem(Alveoles, Boardss, Cost, Variables) :-
        length(Alveoles, 5),
        (   foreach(Alveole,Alveoles),
            foreach(Boards,Boardss),
            foreach(ACost,ACosts)
        do  alveole_constraints(Alveole, Boards, ACost)
        ),
        append(Boardss, BoardsFlat),
        domain(BoardsFlat, 0, 10),
        transpose(Boardss, [BoardT1, BoardT2, BoardT3, BoardT4]),
        sum(BoardT1, #=, 10),
        sum(BoardT2, #=, 4),
        sum(BoardT3, #=, 2),
        sum(BoardT4, #=, 1),
        sum(ACosts, #=, Cost),
        decreasing(Alveoles),
        append(Alveoles, BoardsFlat, Variables).

alveole_constraints(AType, [N1,N2,N3,N4], ACost) :-
        element(AType, [0.0, 150.0, 200.0], APower),
        element(AType, [0, 8, 16], ASlots),
        element(AType, [0, 150, 200], ACost),
        sum([N1,N2,N3,N4], #=<, ASlots),
        19.5 * float(N1) +
        39.5 * float(N2) +
        49.5 * float(N3) +
        74.5 * float(N4) $=< APower.

| ?- config(As, Cs, Cost).
As = [3,3,2,1,1],
Cs = [[0,3,0,1],[3,1,2,0],[7,0,0,0],[0,0,0,0],[0,0,0,0]],
Cost = 550
```

The optimal solution with cost 550 uses two type 3 alveoles, one type 2 alveole, and two type 1 (unused) alveoles. The first alveole contains three type 2 boards and one type 4 board, and so on.

10.9.16 Syntax Summary

10.9.16.1 Syntax of Indexicals

FixTerm	::= *IntConstant*	
	| *var*	{ suspend until assigned }
Term	::= `min(var)`	{ min. of domain of X }
	| `max(var)`	{ max. of domain of X }
	| `card(var)`	{ size of domain of X }
	| *FixTerm*	
	| `-` *FixTerm*	
	| *Term* `+` *FixTerm*	
	| *Term* `-` *FixTerm*	
	| *Term* `*` *FixTerm*	
	| *Term* `/>` *FixTerm*	{ ceilinged division }
	| *Term* `/<` *FixTerm*	{ floored division }
	| *Term* `mod` *FixTerm*	{ floored remainder }
	| *Term* `rem` *FixTerm*	{ truncated remainder }
TermSet	::= `{`*FixTerm*`,...,`*FixTerm*`}`	
Range	::= *TermSet*	
	| `dom(var)`	{ domain of X }
	| *Term* `..` *Term*	{ interval }
	| *Range* `/\` *Range*	{ intersection }
	| *Range* `\/` *Range*	{ union }
	| `\` *Range*	{ complement }
	| `-` *Range*	{ pointwise negation }
	| *Range* `+` *Range*	{ pointwise addition }
	| *Range* `-` *Range*	{ pointwise subtraction }
	| *Range* `mod` *Range*	{ pointwise modulo }
	| *Range* `rem` *Range*	{ pointwise remainder }
	| *Range* `+` *FixTerm*	{ pointwise addition }
	| *Range* `-` *FixTerm*	{ pointwise subtraction }
	| *FixTerm* `-` *Range*	{ pointwise subtraction }
	| *Range* `mod` *FixTerm*	{ pointwise floored remainder }
	| *Range* `rem` *FixTerm*	{ pointwise truncated remainder }
	| *Range* `?` *Range*	
	| `unionof(`*var*`,`*Range*`,`*Range*`)`	
	| `switch(`*FixTerm*`,`*MapList*`)`	
MapList	::= `[]`	
	| `[`*integer*`-`*IntegerRange*`|`*MapList*`]`	
CTable	::= `[]`	
	| `[`*CRow*`|`*CTable*`]`	
CRow	::= `[]`	
	| `[`*integer*`|`*CRow*`]`	
	| `[`*IntegerRange*`|`*CRow*`]`	
CList	::= `[]`	

```
                  | [integer|CList]
VList             ::= []
                  | [var|VList]
Indexical         ::= var in Range
Indexicals        ::= Indexical
                  | Indexical , Indexicals
ConstraintBody    ::= var { X stands for X#=1 }
                  | true
                  | false
                  | 1
                  | 0
                  | var in IntegerRange
                  | element(var,CList,var)
                  | table([VList],CTable)
                  | LinIntExpr IRelOp LinIntExpr
                  | #\ ConstraintBody
                  | ConstraintBody #/\ ConstraintBody
                  | ConstraintBody #\/ ConstraintBody
                  | ConstraintBody #=> ConstraintBody
                  | ConstraintBody #\ ConstraintBody
                  | ConstraintBody #<=> ConstraintBody
IxConstraintBody  ::= Indexicals
                  | ConstraintBody
Head              ::= term                          { a compound term with
                                                      unique variable args }
TellPos           ::= Head +: IxConstraintBody
TellNeg           ::= Head -: Indexicals
AskPos            ::= Head +? Indexical
AskNeg            ::= Head -? Indexical
ConstraintDef     ::= TellPos
                  | TellNeg
                  | AskPos
                  | AskNeg
```

10.9.16.2 Syntax of Range Expressions

```
IntegerRange      ::= {integer,...,integer}
                  | IntConstant .. IntConstant
                  | IntegerRange /\ IntegerRange
                  | IntegerRange \/ IntegerRange
                  | \ IntegerRange
IntConstant       ::= integer
                  | inf                             { minus infinity }
                  | sup                             { plus infinity }
RealRange         ::= RealConstant .. RealConstant
RealConstant      ::= float
                  | finf                            { minus infinity }
```

`| fsup`	{ plus infinity }

10.9.16.3 Syntax of Integer Expressions

Please note: that the Prolog arithmetic operators `/` and `//` do not mean the same thing.

LinIntExpr	::= *integer*	
	| *var*	
	| *integer* `*` *var*	
	| *integer* `*` *integer*	
	| `-` *LinIntExpr*	
	| *LinIntExpr* `+` *LinIntExpr*	
	| *LinIntExpr* `-` *LinIntExpr*	
	| *ConstraintBody*	{ if true then 1 else 0 }
IExpr	::= *LinIntExpr*	
	| `-` *IExpr*	
	| *IExpr* `+` *IExpr*	
	| *IExpr* `-` *IExpr*	
	| *IExpr* `*` *IExpr*	
	| *IExpr* `^` *IExpr*	*since release 4.9.0*
	| *IExpr* `/\` *IExpr*	*since release 4.9.0*
	| *IExpr* `\/` *IExpr*	*since release 4.9.0*
	| *IExpr* `\` *IExpr*	*since release 4.9.0*
	| *IExpr* `/` *IExpr*	{ truncated division }
	| *IExpr* `//` *IExpr*	{ truncated division } *since release 4.3*
	| *IExpr* `div` *IExpr*	{ floored division } *since release 4.3*
	| *IExpr* `rem` *IExpr*	{ truncated remainder }
	| *IExpr* `mod` *IExpr*	{ floored remainder }
	| `min(`*IExpr*`,`*IExpr*`)`	
	| `max(`*IExpr*`,`*IExpr*`)`	
	| `abs(`*IExpr*`)`	
	| `sign(`*RExpr*`)`	{ -1, 0, or 1 }
	| `integer(`*RExpr*`)`	{ requires integral *RExpr* }
	| `round(`*RExpr*`)`	{ to nearest integer }
	| `truncate(`*RExpr*`)`	{ truncate fractional part }
	| `floor(`*RExpr*`)`	
	| `ceiling(`*RExpr*`)`	
	| `\(`*IExpr*`)`	*since release 4.9.0*
	| `xor(`*IExpr*`,`*IExpr*`)`	*since release 4.9.0*
	| `if_then_else(`*IExpr*`,`*IExpr*`,`*IExpr*`)`	*since release 4.8.0*
IRelOp	::= `#=` | `#\=` | `#<` | `#=<` | `#>` | `#>=`	

10.9.16.4 Syntax of Real Expressions

RExpr ::= *var*
| `-` *RExpr*
| *RExpr* `+` *RExpr*
| *RExpr* `-` *RExpr*
| *RExpr* `*` *RExpr*
| *RExpr* `^` *RExpr*
| *RExpr* `/` *RExpr*
| `min(`*RExpr*`,`*RExpr*`)`
| `max(`*RExpr*`,`*RExpr*`)`
| `abs(`*RExpr*`)`
| `sqrt(`*RExpr*`)`
| `exp(`*RExpr*`)`
| `log(`*RExpr*`)`
| `float(`*IExpr*`)`
| `if_then_else(`*IExpr*`,`*RExpr*`,`*RExpr*`)`
| `sin(`*RExpr*`)`
| `cos(`*RExpr*`)`
| `tan(`*RExpr*`)`
| `cot(`*RExpr*`)`
| `asin(`*RExpr*`)`
| `acos(`*RExpr*`)`
| `atan(`*RExpr*`)`
| `acot(`*RExpr*`)`
| `sinh(`*RExpr*`)`
| `cosh(`*RExpr*`)`
| `tanh(`*RExpr*`)`
| `coth(`*RExpr*`)`
| `asinh(`*RExpr*`)`
| `acosh(`*RExpr*`)`
| `atanh(`*RExpr*`)`
| `acoth(`*RExpr*`)`

RRelOp ::= `$=` | `$=<` | `$>=`

10.9.16.5 Operator Declarations

```
:- op(1200, xfx, [+:,-:,+?,-?]).
:- op(760, yfx, #<=>).
:- op(750, xfy, #=>).
:- op(750, yfx, #<=).
:- op(740, yfx, #\/).
:- op(730, yfx, #\).
:- op(720, yfx, #/\).
:- op(710, fy, #\).
:- op(700, xfx, [in,in_set]).
:- op(700, xfx, [#=,#\=,#<,#=<,#>,#>=]).
:- op(700, xfx, [$=,$=<,$>=]).
:- op(550, xfx, ..).
:- op(500, fy, \).
:- op(490, yfx, ?).
:- op(400, yfx, [/>,/<]).
```

10.10 Constraint Logic Programming over Rationals or Reals—`library([clpq,clpr])`

10.10.1 Introduction

The clp(Q,R) system described in this chapter is an instance of the general Constraint Logic Programming scheme introduced by [Jaffar & Michaylov 87]. It is a third-party product, bundled with SICStus Prolog as two library packages. It is not supported by RISE in any way.

The implementation is at least as complete as other existing clp(R) implementations: It solves linear equations over rational or real valued variables, covers the lazy treatment of nonlinear equations, features a decision algorithm for linear inequalities that detects implied equations, removes redundancies, performs projections (quantifier elimination), allows for linear dis-equations, and provides for linear optimization.

10.10.1.1 Referencing this Software

When referring to this implementation of clp(Q,R) in publications, you should use the following reference:

> Holzbaur C., *OFAI clp(q,r) Manual*, Edition 1.3.3, Austrian Research Institute for Artificial Intelligence, Vienna, TR-95-09, 1995.

10.10.1.2 Acknowledgments

The development of this software was supported by the Austrian *Fonds zur Foerderung der Wissenschaftlichen Forschung* under grant P9426-PHY. Financial support for the Austrian Research Institute for Artificial Intelligence is provided by the Austrian Federal Ministry for Science and Research.

We include a collection of examples that has been distributed with the Monash University version of clp(R) [Heintze et al. 87], and its inclusion into this distribution was kindly permitted by Roland Yap.

10.10.2 Solver Interface

Until rational numbers become first class citizens in SICStus Prolog, rational arithmetics has to be emulated. Because of the emulation it is too expensive to support arithmetics with automatic coercion between all sorts of numbers, like you find it in CommonLisp, for example.

You must choose whether you want to operate in the field of Q (Rationals) or R (Reals):

```
| ?- use_module(library(clpq)).
```

or

```
| ?- use_module(library(clpr)).
```

You can also load both modules, but the exported predicates listed below will name clash (see Section 4.11.12 [ref-mod-ncl], page 172). You can avoid the interactive resolu-

tion dialog if the importation is skipped, e.g. via: `use_module(library(clpq),[]),use_module(library(clpr),[])`.

10.10.2.1 Notational Conventions

Throughout this chapter, the prompts `clp(q) ?-` and `clp(r) ?-` are used to differentiate between clp(Q) and clp(R) in exemplary interactions.

In general there are many ways to express the same linear relationship. This degree of freedom is manifest in the fact that the printed manual and an actual interaction with the current version of clp(Q,R) may show syntactically different answer constraints, despite the fact the same semantic relationship is being expressed. There are means to control the presentation; see Section 10.10.5.1 [CLPQR Variable Ordering], page 527. The approximative nature of floating point numbers may also produce numerical differences between the text in this manual and the actual results of clp(R), for a given edition of the software.

10.10.2.2 Solver Predicates

The solver interface for both Q and R consists of the following predicates, which are exported from `module(linear)`.

`{+`*`Constraint`*`}`

Constraint is a term accepted by the grammar below. The corresponding constraint is added to the current constraint store and checked for satisfiability. Use the module prefix to distinguish the solvers if both clp(Q) and clp(R) were loaded.

```
| ?- clpr:{Ar+Br=10}, Ar=Br, clpq:{Aq+Bq=10}, Aq=Bq.

Aq = 5,
Ar = 5.0,
Bq = 5,
Br = 5.0
```

Although clp(Q) and clp(R) are independent modules, you are asking for trouble if you (accidentally) share variables between them:

```
| ?- clpr:{A+B=10}, clpq:{A=B}.
! Type error in argument 2 of clpq:=/2
! a rational number expected, but 5.0 found
! goal:  _118=5.0
```

This is because both solvers eventually compute values for the variables and Reals are incompatible with Rationals.

Here is the constraint grammar:

Constraint	::= *C*	
	| *C* , *C*	{ conjunction }
C	::= *Expr* =:= *Expr*	{ equation }
	| *Expr* = *Expr*	{ equation }
	| *Expr* < *Expr*	{ strict inequation }
	| *Expr* > *Expr*	{ strict inequation }
	| *Expr* =< *Expr*	{ nonstrict inequation }

	| *Expr* >= *Expr*	{ nonstrict inequation }
	| *Expr* =\= *Expr*	{ disequation }
Expr	::= *variable*	{ Prolog variable }
	| *number*	{ floating point or integer }
	| + *Expr*	{ unary plus }
	| - *Expr*	{ unary minus }
	| *Expr* + *Expr*	{ addition }
	| *Expr* - *Expr*	{ subtraction }
	| *Expr* * *Expr*	{ multiplication }
	| *Expr* / *Expr*	{ division }
	| abs(*Expr*)	{ absolute value }
	| sin(*Expr*)	{ trigonometric sine }
	| cos(*Expr*)	{ trigonometric cosine }
	| tan(*Expr*)	{ trigonometric tangent }
	| pow(*Expr*,*Expr*)	{ raise to the power }
	| exp(*Expr*,*Expr*)	{ raise to the power }
	| min(*Expr*,*Expr*)	{ minimum of the two arguments }
	| max(*Expr*,*Expr*)	{ maximum of the two arguments }
	| #(*Const*)	{ symbolic numerical constants }

Conjunctive constraints {*C*,*C*} have been made part of the syntax to control the granularity of constraint submission, which will be exploited by future versions of this software. Symbolic numerical constants are provided for compatibility only; see Section 10.10.7 [CLPQR Monash Examples], page 533.

`entailed(+`*Constraint*`)`

Succeeds iff the linear *Constraint* is entailed by the current constraint store. This predicate does not change the state of the constraint store.

```
clp(q) ?- {A =< 4}, entailed(A=\=5).

{A=<4}

clp(q) ?- {A =< 4}, entailed(A=\=3).

no
```

`inf(+`*Expr*`, -`*Inf*`)`
`inf(+`*Expr*`, -`*Inf*`, +`*Vector*`, -`*Vertex*`)`

Computes the infimum of the linear expression *Expr* and unifies it with *Inf*. If given, then *Vector* should be a list of variables relevant to *Expr*, and *Vertex* will be unified a list of the same length as *Vector* containing the values for *Vector*, such that the infimum is produced when assigned. Failure indicates unboundedness.

`sup(+`*Expr*`, -`*Sup*`)`
`sup(+`*Expr*`, -`*Sup*`, +`*Vector*`, -`*Vertex*`)`
Computes the supremum of the linear expression *Expr* and unifies it with *Sup*. If given, then *Vector* should be a list of variables relevant to *Expr*, and *Vertex* will be unified a list of the same length as *Vector* containing the values for *Vector*, such that the supremum is produced when assigned. Failure indicates unboundedness.

```
clp(q) ?- { 2*X+Y =< 16, X+2*Y =< 11,
            X+3*Y =< 15, Z = 30*X+50*Y
          }, sup(Z, Sup, [X,Y], Vertex).

Sup = 310,
Vertex = [7,2],
{Z=30*X+50*Y},
{X+1/2*Y=<8},
{X+3*Y=<15},
{X+2*Y=<11}
```

`minimize(+`*Expr*`)`
Computes the infimum of the linear expression *Expr* and equates it with the expression, i.e. as if defined as:

```
minimize(Expr) :- inf(Expr, Expr).
```

`maximize(+`*Expr*`)`
Computes the supremum of the linear expression *Expr* and equates it with the expression.

```
clp(q) ?- { 2*X+Y =< 16, X+2*Y =< 11,
            X+3*Y =< 15, Z = 30*X+50*Y
          }, maximize(Z).

X = 7,
Y = 2,
Z = 310
```

`bb_inf(+`*Ints*`, +`*Expr*`, -`*Inf*`)`
Computes the infimum of the linear expression *Expr* under the additional constraint that all of variables in the list *Ints* assume integral values at the infimum. This allows for the solution of mixed integer linear optimization problems; see Section 10.10.8 [CLPQR MIP], page 534.

```
clp(q) ?- {X >= Y+Z, Y > 1, Z > 1}, bb_inf([Y,Z],X,Inf).

Inf = 4,
{Y>1},
{Z>1},
{X-Y-Z>=0}
```

`bb_inf(+`*Ints*`, +`*Expr*`, -`*Inf*`, -`*Vertex*`, +`*Eps*`)`
Computes the infimum of the linear expression *Expr* under the additional constraint that all of variables in the list *Ints* assume integral values at the infimum.

Eps is a positive number between 0 and 0.5 that specifies how close a number X must be to the next integer to be considered integral: `abs(round(X)-X) < Eps`. The predicate `bb_inf/3` uses `Eps = 0.001`. With clp(Q), `Eps = 0` makes sense. *Vertex* is a list of the same length as *Ints* and contains the (integral) values for *Ints*, such that the infimum is produced when assigned. Note that this will only generate one particular solution, which is different from the situation with `minimize/1`, where the general solution is exhibited.

`bb_inf/5` works properly for non-strict inequalities only! Disequations (`=\=`) and higher dimensional strict inequalities (`>`,`<`) are beyond its scope. Strict bounds on the decision variables are honored however:

```
clp(q) ?- {X >= Y+Z, Y > 1, Z > 1}, bb_inf([Y,Z],X,Inf,Vertex,0).

Inf = 4,
Vertex = [2,2],
{Y>1},
{Z>1},
{X-Y-Z>=0}
```

The limitation(s) can be addressed by:

- transforming the original problem statement so that only non-strict inequalities remain; for example, `{X + Y > 0}` becomes `{X + Y >= 1}` for integral `X` and `Y`;
- contemplating the use of clp(FD).

`ordering(+Spec)`

Provides a means to control one aspect of the presentation of the answer constraints; see Section 10.10.5.1 [CLPQR Variable Ordering], page 527.

`dump(+Target, -NewVars, -CodedAnswer)`

Reflects the constraints on the target variables into a term, where *Target* and *NewVars* are lists of variables of equal length and *CodedAnswer* is the term representation of the projection of constraints onto the target variables where the target variables are replaced by the corresponding variables from *NewVars* (see Section 10.10.5.2 [CLPQR Turning Answers into Terms], page 528).

```
clp(q) ?- {A+B =< 10, A>=4},
          dump([A,B],Vs,Cs),
          dump([B],Bp,Cb).

Cb = [_A=<6],
Bp = [_A],
Cs = [_B>=4,_C+_B=<10],
Vs = [_C,_B],
{A>=4},
{A+B=<10}
```

The current version of `dump/3` is incomplete with respect to nonlinear constraints. It only reports nonlinear constraints that are connected to the target variables. The following example has no solution. From the top level's report

we have a chance to deduce this fact, but `dump/3` currently has no means to collect global constraints ...

```
q(X) :-
        {X>=10},
        {sin(Z)>3}.

clp(r) ?- q(X), dump([X],V,C).

C = [_A>=10.0],
V = [_A],
clpr:{3.0-sin(_B)<0.0},
{X>=10.0}
```

`projecting_assert/1(:Clause)`

If you use the database, then the clauses you assert might have constraints associated with their variables. Use this predicate instead of `assert/1` in order to ensure that only the relevant and projected constraints get stored in the database. It will transform the clause into one with plain variables and extra body goals that set up the relevant constraint when called.

10.10.2.3 Unification

Equality constraints are added to the store implicitly each time variables that have been mentioned in explicit constraints are bound—either to another such variable or to a number.

```
clp(r) ?- {2*A+3*B=C/2}, C=10.0, A=B.

A = 1.0,
B = 1.0,
C = 10.0
```

Is equivalent modulo rounding errors to

```
clp(r) ?- {2*A+3*B=C/2, C=10, A=B}.

A = 1.0,
B = 0.9999999999999999,
C = 10.0
```

The shortcut bypassing the use of `{}/1` is allowed and makes sense because the interpretation of this equality in Prolog and clp(R) coincides. In general, equations involving interpreted functors, `+/2` in this case, must be fed to the solver explicitly:

```
clp(r) ?- X=3.0+1.0, X=4.0.

no
```

Moreover, variables known by clp(R) may be bound directly to floats only. Likewise, variables known by clp(Q) may be bound directly to rational numbers only; see Section 10.10.9.1 [CLPQR Fragments and Bits], page 536. Failing to do so is rewarded with an exception:

```
clp(q) ?- {2*A+3*B=C/2}, C=10.0, A=B.
! Type error in argument 2 of = /2
! 'a rational number' expected, but 10.0 found
! goal:  _254=10.0
```

This is because `10.0` is not a rational constant. To make clp(Q) happy you have to say:

```
clp(q) ?- {2*A+3*B=C/2}, C=rat(10,1), A=B.

A = 1,
B = 1,
C = 10
```

If you use `{}/1`, then you do not have to worry about such details.

10.10.2.4 Feedback and Bindings

What was covered so far was how the user populates the constraint store. The other direction of the information flow consists of the success and failure of the above predicates and the binding of variables to numerical values. Example:

```
clp(r) ?- {A-B+C=10, C=5+5}.

{A = B},
C = 10.0
```

The linear constraints imply `C=10.0` and the solver consequently exports this binding to the Prolog world. The fact that `A=B` is deduced and represented by the solver but not exported as a binding. More about answer presentation in Section 10.10.5 [CLPQR Projection], page 526.

10.10.3 Linearity and Nonlinear Residues

The clp(Q,R) system is restricted to deal with linear constraints because the decision algorithms for general nonlinear constraints are prohibitively expensive to run. If you need this functionality badly, then you should look into symbolic algebra packages. Although the clp(Q,R) system cannot solve nonlinear constraints, it will collect them faithfully in the hope that through the addition of further (linear) constraints they might get simple enough to solve eventually. If an answer contains nonlinear constraints, then you have to be aware of the fact that success is qualified modulo the existence of a solution to the system of residual (nonlinear) constraints:

```
clp(r) ?- {sin(X) = cos(X)}.

clpr:{sin(X)-cos(X)=0.0}
```

There are indeed infinitely many solutions to this constraint (`X = 0.785398 + n*Pi`), but clp(Q,R) has no direct means to find and represent them.

The systems goes through some lengths to recognize linear expressions as such. The method is based on a normal form for multivariate polynomials. In addition, some simple isolation axioms, that can be used in equality constraints, have been added. The current major limitation of the method is that full polynomial division has not been implemented. Examples:

This is an example where the isolation axioms are sufficient to determine the value of X.

```
clp(r) ?- {sin(cos(X)) = 1/2}.

X = 1.0197267436954502
```

If we change the equation into an inequation, then clp(Q,R) gives up:

```
clp(r) ?- {sin(cos(X)) < 1/2}.

clpr:{sin(cos(X))-0.5<0.0}
```

The following is easy again:

```
clp(r) ?- {sin(X+2+2)/sin(4+X) = Y}.

Y = 1.0
```

And so is this:

```
clp(r) ?- {(X+Y)*(Y+X)/X = Y*Y/X+99}.

{Y=49.5-0.5*X}
```

An ancient symbol manipulation benchmark consists in rising the expression `X+Y+Z+1` to the 15th power:

```
clp(q) ?- {exp(X+Y+Z+1,15)=0}.
clpq:{Z^15+Z^14*15+Z^13*105+Z^12*455+Z^11*1365+Z^10*3003+...
       ... polynomial continues for a few pages ...
       =0}
```

Computing its roots is another story.

10.10.3.1 How Nonlinear Residues Are Made to Disappear

Binding variables that appear in nonlinear residues will reduce the complexity of the nonlinear expressions and eventually results in linear expressions:

```
clp(q) ?- {exp(X+Y+1,2) = 3*X*X+Y*Y}.

clpq:{Y*2-X^2*2+Y*X*2+X*2+1=0}
```

Equating X and Y collapses the expression completely and even determines the values of the two variables:

```
clp(q) ?- {exp(X+Y+1,2) = 3*X*X+Y*Y}, X=Y.

X = -1/4,
Y = -1/4
```

10.10.3.2 Isolation Axioms

These axioms are used to rewrite equations such that the variable to be solved for is moved to the left hand side and the result of the evaluation of the right hand side can be assigned to the variable. This allows, for example, to use the exponentiation operator for the computation of roots and logarithms; see below.

`A = B * C` Residuates unless B or C is ground or A and B or C are ground.

`A = B / C` Residuates unless C is ground or A and B are ground.

`X = min(Y,Z)`
: Residuates unless Y and Z are ground.

`X = max(Y,Z)`
: Residuates unless Y and Z are ground.

`X = abs(Y)`
: Residuates unless Y is ground.

`X = pow(Y,Z)`, `X = exp(Y,Z)`
: Residuates unless any pair of two of the three variables is ground. Example:

```
clp(r) ?- { 12=pow(2,X) }.

X = 3.5849625007211565

clp(r) ?- { 12=pow(X,3.585) }.

X = 1.9999854993443926

clp(r) ?- { X=pow(2,3.585) }.

X = 12.000311914286545
```

`X = sin(Y)`
: Residuates unless X or Y is ground. Example:

```
clp(r) ?- { 1/2 = sin(X) }.

X = 0.5235987755982989
```

`X = cos(Y)`
: Residuates unless X or Y is ground.

`X = tan(Y)`
: Residuates unless X or Y is ground.

10.10.4 Numerical Precision and Rationals

The fact that you can switch between clp(R) and clp(Q) should solve most of your numerical problems regarding precision. Within clp(Q), floating point constants will be coerced into rational numbers automatically. Transcendental functions will be approximated with rationals. The precision of the approximation is limited by the floating point precision. These two provisions allow you to switch between clp(R) and clp(Q) without having to change your programs.

What is to be kept in mind however is the fact that it may take quite big rationals to accommodate the required precision. High levels of precision are for example required if your linear program is ill-conditioned, i.e. in a full rank system the determinant of the coefficient matrix is close to zero. Another situation that may call for elevated levels of precision is when a linear optimization problem requires exceedingly many pivot steps before the optimum is reached.

If your application approximates irrational numbers, then you may be out of space particularly soon. The following program implements N steps of Newton's approximation for the square root function at point 2.

```
                                        % library('clpqr/examples/root')
root(N, R) :-
  root(N, 1, R).

root(0, S, R) :- !, S=R.
root(N, S, R) :-
  N1 is N-1,
  { S1 = S/2 + 1/S },
  root(N1, S1, R).
```

It is known that this approximation converges quadratically, which means that the number of correct digits in the decimal expansion roughly doubles with each iteration. Therefore the numerator and denominator of the rational approximation have to grow likewise:

```
clp(q) ?- [library('clpqr/examples/root')].
clp(q) ?- root(3,R),print_decimal(R,70).
1.4142156862 7450980392 1568627450 9803921568 6274509803 9215686274
5098039215

R = 577/408

clp(q) ?- root(4,R),print_decimal(R,70).
1.4142135623 7468991062 6295578890 1349101165 5962211574 4044584905
0192000543

R = 665857/470832

clp(q) ?- root(5,R),print_decimal(R,70).
1.4142135623 7309504880 1689623502 5302436149 8192577619 7428498289
4986231958

R = 886731088897/627013566048

clp(q) ?- root(6,R),print_decimal(R,70).
1.4142135623 7309504880 1688724209 6980785696 7187537723 4001561013
1331132652

R = 1572584048032918633353217/1111984844349868137938112

clp(q) ?- root(7,R),print_decimal(R,70).
1.4142135623 7309504880 1688724209 6980785696 7187537694 8073176679
7379907324

R = 4946041176255201878775086487573351061418968498177 /
    3497379255757941172020851852070562919437964212608
```

Iterating for 8 steps produces no further change in the first 70 decimal digits of `sqrt(2)`. After 15 steps the approximating rational number has a numerator and a denominator with 12543 digits each, and the next step runs out of memory.

Another irrational number that is easily computed is e. The following program implements an alternating series for `1/e`, where the absolute value of last term is an upper bound on the error.

```
                                        % library('clpqr/examples/root')
e(N, E) :-
  { Err =:= exp(10,-(N+2)), Half =:= 1/2 },
  inv_e_series(Half, Half, 3, Err, Inv_E),
  { E =:= 1/Inv_E }.

inv_e_series(Term, S0, _, Err, Sum) :-
  { abs(Term) =< Err }, !,
  S0 = Sum.
inv_e_series(Term, S0, N, Err, Sum) :-
  N1 is N+1,
  { Term1 =:= -Term/N, S1 =:= Term1+S0 },
  inv_e_series(Term1, S1, N1, Err, Sum).
```

The computation of the rational number E that approximates e up to at least 1000 digits in its decimal expansion requires the evaluation of 450 terms of the series, i.e. 450 calls of `inv_e_series/5`.

```
clp(q) ?- e(1000,E).

E = 71490562289327602136668095920728423342907442213926109558455654943708750229467761730471738895197792271346693089326102132000338192013187418783398542092268880422016784031919969949419385240322370058538327415441916287470521364021769419638255435659005891615857234023097417605004829991929283045372355639145644588174733401360176995397370653727413328361474090277156115991306991783382028560844031049668999996519286376346564189690270766990828887424813923048079484725489080844360397606199771786024695620205344042765860581379353829045120832212989806997810797122687316087204673187975303454931304921674748091963488469164217828500869856686806404251920381554902863298351349469211627292865440876581064873866786120098602898879913009887737209736006593482775112065921347052879314380590355479286821310821643660070166987619610669483714073689625394679946271374858249110795976398595034606994740186040425117101588480000000000
```

```
clp(q) ?- e(1000, E), print_decimal(E, 1000).
2.
7182818284 5904523536 0287471352 6624977572 4709369995 9574966967
6277240766 3035354759 4571382178 5251664274 2746639193 2003059921
8174135966 2904357290 0334295260 5956307381 3232862794 3490763233
8298807531 9525101901 1573834187 9307021540 8914993488 4167509244
7614606680 8226480016 8477411853 7423454424 3710753907 7744992069
5517027618 3860626133 1384583000 7520449338 2656029760 6737113200
7093287091 2744374704 7230696977 2093101416 9283681902 5515108657
4637721112 5238978442 5056953696 7707854499 6996794686 4454905987
9316368892 3009879312 7736178215 4249992295 7635148220 8269895193
6680331825 2886939849 6465105820 9392398294 8879332036 2509443117
3012381970 6841614039 7019837679 3206832823 7646480429 5311802328
7825098194 5581530175 6717361332 0698112509 9618188159 3041690351
5988885193 4580727386 6738589422 8792284998 9208680582 5749279610
4841984443 6346324496 8487560233 6248270419 7862320900 2160990235
3043699418 4914631409 3431738143 6405462531 5209618369 0888707016
7683964243 7814059271 4563549061 3031072085 1038375051 0115747704
1718986106 8739696552 1267154688 9570350354
```

10.10.5 Projection and Redundancy Elimination

Once a derivation succeeds, the Prolog system presents the bindings for the variables in the query. In a CLP system, the set of answer constraints is presented in analogy. A complication in the CLP context are variables and associated constraints that were not mentioned in the query. A motivating example is the familiar `mortgage` relation:

```
                                              % library('clpqr/examples/mg')
mg(P,T,I,B,MP):-
  {
     T = 1,
     B + MP = P * (1 + I)
  }.
mg(P,T,I,B,MP):-
  {
     T > 1,
     P1 = P * (1 + I) - MP,
     T1 = T - 1
  },
  mg(P1, T1, I, B, MP).
```

A sample query yields:

```
clp(r) ?- [library('clpqr/examples/mg')].
clp(r) ?- mg(P,12,0.01,B,Mp).

{B=1.1268250301319698*P-12.682503013196973*Mp}
```

Without projection of the answer constraints onto the query variables we would observe the following interaction:

```
clp(r) ?- mg(P,12,0.01,B,Mp).

{B=12.682503013196973*_A-11.682503013196971*P},
{Mp= -(_A)+1.01*P},
{_B=2.01*_A-1.01*P},
{_C=3.0301*_A-2.0301*P},
{_D=4.060401000000001*_A-3.0604009999999997*P},
{_E=5.101005010000001*_A-4.10100501*P},
{_F=6.152015060100001*_A-5.152015060099999*P},
{_G=7.213535210701001*_A-6.213535210700999*P},
{_H=8.285670562808011*_A-7.285670562808009*P},
{_I=9.368527268436091*_A-8.36852726843609*P},
{_J=10.462212541120453*_A-9.46221254112045*P},
{_K=11.566834666531657*_A-10.566834666531655*P}
```

The variables $_A \ldots _K$ are not part of the query, they originate from the mortgage program proper. Although the latter answer is equivalent to the former in terms of linear algebra, most users would prefer the former.

10.10.5.1 Variable Ordering

In general, there are many ways to express the same linear relationship between variables. clp(Q,R) does not care to distinguish between them, but the user might. The predicate `ordering(+Spec)` gives you some control over the variable ordering. Suppose that instead of B, you want Mp to be the defined variable:

```
clp(r) ?- mg(P,12,0.01,B,Mp).

{B=1.1268250301319698*P-12.682503013196973*Mp}
```

This is achieved with:

```
clp(r) ?- mg(P,12,0.01,B,Mp), ordering([Mp]).

{Mp= -0.0788487886783417*B+0.08884878867834171*P}
```

One could go one step further and require P to appear before (to the left of) B in an addition:

```
clp(r) ?- mg(P,12,0.01,B,Mp), ordering([Mp,P]).

{Mp=0.08884878867834171*P-0.0788487886783417*B}
```

Spec in `ordering(+Spec)` is either a list of variables with the intended ordering, or of the form `A<B`. The latter form means that A goes to the left of B. In fact, `ordering([A,B,C,D])` is shorthand for:

```
ordering(A < B), ordering(A < C), ordering(A < D),
ordering(B < C), ordering(B < D),
ordering(C < D)
```

The ordering specification only affects the final presentation of the constraints. For all other operations of clp(Q,R), the ordering is immaterial. Note that `ordering/1` acts like a constraint: you can put it anywhere in the computation, and you can submit multiple specifications.

```
clp(r) ?- ordering(B < Mp), mg(P,12,0.01,B,Mp).

{B= -12.682503013196973*Mp+1.1268250301319698*P}

clp(r) ?- ordering(B < Mp), mg(P,12,0.01,B,Mp), ordering(P < Mp).

{P=0.8874492252651537*B+11.255077473484631*Mp}
```

10.10.5.2 Turning Answers into Terms

In meta-programming applications one needs to get a grip on the results computed by the clp(Q,R) solver. You can use the predicate `dump/3` for that purpose:

```
clp(r) ?- {2*A+B+C=10,C-
D=E,A<10}, dump([A,B,C,D,E],[a,b,c,d,e],Constraints).

Constraints = [e<10.0,a=10.0-c-d-2.0*e,b=c+d],
{C=10.0-2.0*A-B},
{E=10.0-2.0*A-B-D},
{A<10.0}
```

10.10.5.3 Projecting Inequalities

As soon as linear inequations are involved, projection gets more demanding complexity wise. The current clp(Q,R) version uses a Fourier-Motzkin algorithm for the projection of linear inequalities. The choice of a suitable algorithm is somewhat dependent on the number of variables to be eliminated, the total number of variables, and other factors. It is quite easy to produce problems of moderate size where the elimination step takes some time. For example, when the dimension of the projection is 1, you might be better off computing the supremum and the infimum of the remaining variable instead of eliminating `n-1` variables via implicit projection.

In order to make answers as concise as possible, redundant constraints are removed by the system as well. In the following set of inequalities, half of them are redundant.

```
                                        % library('clpqr/examples/eliminat')
example(2, [X0,X1,X2,X3,X4]) :-
  {
       +87*X0  +52*X1  +27*X2  -54*X3  +56*X4 =<  -93,
       +33*X0  -10*X1  +61*X2  -28*X3  -29*X4 =<   63,
       -68*X0   +8*X1  +35*X2  +68*X3  +35*X4 =<  -85,
       +90*X0  +60*X1  -76*X2  -53*X3  +24*X4 =<  -68,
       -95*X0  -10*X1  +64*X2  +76*X3  -24*X4 =<   33,
       +43*X0  -22*X1  +67*X2  -68*X3  -92*X4 =<  -97,
       +39*X0   +7*X1  +62*X2  +54*X3  -26*X4 =<  -27,
       +48*X0  -13*X1   +7*X2  -61*X3  -59*X4 =<   -2,
       +49*X0  -23*X1  -31*X2  -76*X3  +27*X4 =<    3,
       -50*X0  +58*X1   -1*X2  +57*X3  +20*X4 =<    6,
       -13*X0  -63*X1  +81*X2   -3*X3  +70*X4 =<   64,
       +20*X0  +67*X1  -23*X2  -41*X3  -66*X4 =<   52,
       -81*X0  -44*X1  +19*X2  -22*X3  -73*X4 =<  -17,
       -43*X0   -9*X1  +14*X2  +27*X3  +40*X4 =<   39,
       +16*X0  +83*X1  +89*X2  +25*X3  +55*X4 =<   36,
        +2*X0  +40*X1  +65*X2  +59*X3  -32*X4 =<   13,
       -65*X0  -11*X1  +10*X2  -13*X3  +91*X4 =<   49,
       +93*X0  -73*X1  +91*X2   -1*X3  +23*X4 =<  -87
  }.
```

Consequently, the answer consists of the system of nine non-redundant inequalities only:

```
clp(q) ?- [library('clpqr/examples/eliminat')].
clp(q) ?- example(2, [X0,X1,X2,X3,X4]).

{X0-2/17*X1-35/68*X2-X3-35/68*X4>=5/4},
{X0-73/93*X1+91/93*X2-1/93*X3+23/93*X4=<-29/31},
{X0-29/25*X1+1/50*X2-57/50*X3-2/5*X4>=-3/25},
{X0+7/39*X1+62/39*X2+18/13*X3-2/3*X4=<-9/13},
{X0+2/19*X1-64/95*X2-4/5*X3+24/95*X4>=-33/95},
{X0+2/3*X1-38/45*X2-53/90*X3+4/15*X4=<-34/45},
{X0-23/49*X1-31/49*X2-76/49*X3+27/49*X4=<3/49},
{X0+44/81*X1-19/81*X2+22/81*X3+73/81*X4>=17/81},
{X0+9/43*X1-14/43*X2-27/43*X3-40/43*X4>=-39/43}
```

The projection (the shadow) of this polyhedral set into the `X0,X1` space can be computed via the implicit elimination of non-query variables:

```
clp(q) ?- example(2, [X0,X1|_]).

{X0+2619277/17854273*X1>=-851123/17854273},
{X0+6429953/16575801*X1=<-12749681/16575801},
{X0+19130/1213083*X1>=795400/404361},
{X0-1251619/3956679*X1>=21101146/3956679},
{X0+601502/4257189*X1>=220850/473021}
```

Projection is quite a powerful concept that leads to surprisingly terse executable specifications of nontrivial problems like the computation of the convex hull from a set of points in an n-dimensional space: Given the program

```
                                % library('clpqr/examples/elimination')
conv_hull(Points, Xs) :-
  lin_comb(Points, Lambdas, Zero, Xs),
  zero(Zero),
  polytope(Lambdas).

polytope(Xs) :-
  positive_sum(Xs, 1).

  positive_sum([], Z) :- {Z=0}.
  positive_sum([X|Xs], SumX) :-
    { X >= 0, SumX = X+Sum },
    positive_sum(Xs, Sum).

zero([]).
zero([Z|Zs]) :- {Z=0}, zero(Zs).

lin_comb([],        [],     S1, S1).
lin_comb([Ps|Rest], [K|Ks], S1, S3) :-
  lin_comb_r(Ps, K, S1, S2),
  lin_comb(Rest, Ks, S2, S3).

  lin_comb_r([],     _, [],     []).
  lin_comb_r([P|Ps], K, [S|Ss], [Kps|Ss1]) :-
    { Kps = K*P+S },
    lin_comb_r(Ps, K, Ss, Ss1).
```

we can post the following query:

```
clp(q) ?- conv_hull([ [1,1], [2,0], [3,0], [1,2], [2,2] ], [X,Y]).

{Y=<2},
{X+1/2*Y=<3},
{X>=1},
{Y>=0},
{X+Y>=2}
```

This answer is easily verified graphically:

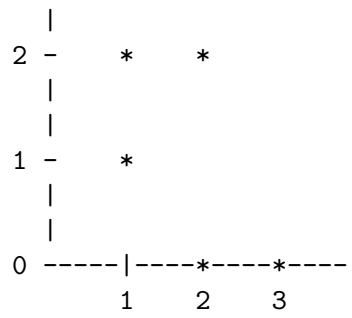

The convex hull program directly corresponds to the mathematical definition of the convex hull. What does the trick in operational terms is the implicit elimination of the *Lambdas* from the program formulation. Please note that this program does not limit the number of points or the dimension of the space they are from. Please note further that quantifier elimination is a computationally expensive operation and therefore this program is only useful as a benchmark for the projector and not so for the intended purpose.

10.10.6 Why Disequations

A beautiful example of disequations at work is due to [Colmerauer 90]. It addresses the task of tiling a rectangle with squares of all-different, a priori unknown sizes. Here is a translation of the original `Prolog-III` program to clp(Q,R):

```
                                        % library('clpqr/examples/squares')
filled_rectangle(A, C) :-
  { A >= 1 },
  distinct_squares(C),
  filled_zone([-1,A,1], _, C, []).

distinct_squares([]).
distinct_squares([B|C]) :-
  { B > 0 },
  outof(C, B),
  distinct_squares(C).

outof([],     _).
outof([B1|C], B) :-
  { B =\= B1 },       % *** note disequation ***
  outof(C, B).

filled_zone([V|L], [W|L], C0, C0) :-
  { V=W,V >= 0 }.
filled_zone([V|L], L3, [B|C], C2) :-
  { V < 0 },
  placed_square(B, L, L1),
  filled_zone(L1, L2, C, C1),
  { Vb=V+B },
  filled_zone([Vb,B|L2], L3, C1, C2).

placed_square(B, [H,H0,H1|L], L1) :-
  { B > H, H0=0, H2=H+H1 },
  placed_square(B, [H2|L], L1).
placed_square(B, [B,V|L], [X|L]) :-
  { X=V-B }.
placed_square(B, [H|L], [X,Y|L]) :-
  { B < H, X= -B, Y=H-B }.
```

There are no tilings with less than nine squares except the trivial one where the rectangle equals the only square. There are eight solutions for nine squares. Six further solutions are rotations of the first two.

```
clp(q) ?- [library('clpqr/examples/squares')].
clp(q) ?- filled_rectangle(A, Squares).

A = 1,
Squares = [1] ? ;

A = 33/32,
Squares = [15/32,9/16,1/4,7/32,1/8,7/16,1/32,5/16,9/32] ? ;

A = 69/61,
Squares = [33/61,36/61,28/61,5/61,2/61,9/61,25/61,7/61,16/61] ? RET
```

Depending on your hardware, the above query may take a few minutes. Supplying the knowledge about the minimal number of squares beforehand cuts the computation time by a factor of roughly four:

```
clp(q) ?- length(Squares, 9), filled_rectangle(A, Squares).

A = 33/32,
Squares = [15/32,9/16,1/4,7/32,1/8,7/16,1/32,5/16,9/32] ? ;

A = 69/61,
Squares = [33/61,36/61,28/61,5/61,2/61,9/61,25/61,7/61,16/61] ? RET
```

10.10.7 Monash Examples

This collection of examples has been distributed with the Monash University Version of clp(R) [Heintze et al. 87], and its inclusion into this distribution was kindly permitted by Roland Yap.

Assuming you are using clp(R):

```
clp(r) ?- [library('clpqr/examples/monash/rkf45')].

clp(r) ?- go.
Point    0.00000 :    0.75000    0.00000
Point    0.50000 :    0.61969    0.47793
Point    1.00000 :    0.29417    0.81233
Point    1.50000 :   -0.10556    0.95809
Point    2.00000 :   -0.49076    0.93977
Point    2.50000 :   -0.81440    0.79929
Point    3.00000 :   -1.05440    0.57522

Iteration finished
------------------
 439  derivative evaluations
```

10.10.8 A Mixed Integer Linear Optimization Example

The predicates `bb_inf/[3,5]` implement a simple Branch and Bound search algorithm for Mixed Integer Linear (MIP) Optimization examples. Serious MIP is not trivial. The implementation `library('clpqr/bb.pl')` is to be understood as a starting point for more ambitious users who need control over branching, or who want to add cutting planes, for example.

Anyway, here is a small problem from miplib, a collection of MIP models, housed at Rice University:

```
NAME:          flugpl
ROWS:          18
COLUMNS:       18
INTEGER:       11
NONZERO:       46
BEST SOLN:     1201500 (opt)
LP SOLN:       1167185.73
SOURCE:        Harvey M. Wagner
               John W. Gregory (Cray Research)
               E. Andrew Boyd (Rice University)
APPLICATION:   airline model
COMMENTS:      no integer variables are binary
```

```
                                          % library('clpqr/examples/mip')
example(flugpl, Obj, Vs, Ints, []) :-
  Vs = [ Anm1,Anm2,Anm3,Anm4,Anm5,Anm6,
         Stm1,Stm2,Stm3,Stm4,Stm5,Stm6,
         UE1,UE2,UE3,UE4,UE5,UE6],
  Ints = [Stm6, Stm5, Stm4, Stm3, Stm2,
          Anm6, Anm5, Anm4, Anm3, Anm2, Anm1],

  Obj =    2700*Stm1 + 1500*Anm1 + 30*UE1
         + 2700*Stm2 + 1500*Anm2 + 30*UE2
         + 2700*Stm3 + 1500*Anm3 + 30*UE3
         + 2700*Stm4 + 1500*Anm4 + 30*UE4
         + 2700*Stm5 + 1500*Anm5 + 30*UE5
         + 2700*Stm6 + 1500*Anm6 + 30*UE6,

  allpos(Vs),
  {  Stm1 = 60, 0.9*Stm1 +1*Anm1 -1*Stm2 = 0,
     0.9*Stm2 +1*Anm2 -1*Stm3 = 0, 0.9*Stm3 +1*Anm3 -1*Stm4 = 0,
     0.9*Stm4 +1*Anm4 -1*Stm5 = 0, 0.9*Stm5 +1*Anm5 -1*Stm6 = 0,
     150*Stm1 -100*Anm1 +1*UE1 >= 8000,
     150*Stm2 -100*Anm2 +1*UE2 >= 9000,
     150*Stm3 -100*Anm3 +1*UE3 >= 8000,
     150*Stm4 -100*Anm4 +1*UE4 >= 10000,
     150*Stm5 -100*Anm5 +1*UE5 >= 9000,
     150*Stm6 -100*Anm6 +1*UE6 >= 12000,
     -20*Stm1 +1*UE1 =< 0, -20*Stm2 +1*UE2 =< 0, -20*Stm3 +1*UE3 =< 0,
     -20*Stm4 +1*UE4 =< 0, -20*Stm5 +1*UE5 =< 0, -20*Stm6 +1*UE6 =< 0,
     Anm1 =< 18, 57 =< Stm2, Stm2 =< 75, Anm2 =< 18,
     57 =< Stm3, Stm3 =< 75, Anm3 =< 18, 57 =< Stm4,
     Stm4 =< 75, Anm4 =< 18, 57 =< Stm5, Stm5 =< 75,
     Anm5 =< 18, 57 =< Stm6, Stm6 =< 75, Anm6 =< 18
   }.

  allpos([]).
  allpos([X|Xs]) :- {X >= 0}, allpos(Xs).
```

We can first check whether the relaxed problem has indeed the quoted infimum:

```
clp(r) ?- example(flugpl, Obj, _, _, _), inf(Obj, Inf).

Inf = 1167185.7255923203
```

Computing the infimum under the additional constraints that `Stm6`, `Stm5`, `Stm4`, `Stm3`, `Stm2`, `Anm6`, `Anm5`, `Anm4`, `Anm3`, `Anm2`, `Anm1` assume integer values at the infimum is computationally harder, but the query does not change much:

```
clp(r) ?- example(flugpl, Obj, _, Ints, _),
          bb_inf(Ints, Obj, Inf, Vertex, 0.001).

Inf = 1201500.0000000005,
Vertex = [75.0,70.0,70.0,60.0,60.0,0.0,12.0,7.0,16.0,6.0,6.0]
```

10.10.9 Implementation Architecture

The system consists roughly of the following components:

- A polynomial normal form expression simplification mechanism.
- A solver for linear equations [Holzbaur 92a].
- A simplex algorithm to decide linear inequalities [Holzbaur 94].

10.10.9.1 Fragments and Bits

Rationals. The internal data structure for rational numbers is `rat(Num,Den)`. *Den* is always positive, i.e. the sign of the rational number is the sign of *Num*. Further, *Num* and *Den* are relative prime. Note that integer *N* looks like `rat(N,1)` in this representation. You can control printing of terms with `user:portray/1`.

Partial Evaluation, Compilation. Once one has a working solver, it is obvious and attractive to run the constraints in a clause definition at read time or compile time and proceed with the answer constraints in place of the original constraints. This gets you constant folding and in fact the full algebraic power of the solver applied to the avoidance of computations at run time. The mechanism to realize this idea is to use `dump/3` for the expansion of `{}/1`, via the goal and term expansion hook predicates.

Asserting with Constraints. If you use the database, then the clauses you assert might have constraints associated with their variables. You should use `projecting_assert/1` instead of `assert/1` in order to ensure that only the relevant and projected constraints get stored in the database.

```
| ?- {A+B=<33}, projecting_assert(test(A,B)).

{A+B=<33}

| ?- listing(test).
test(A, B) :-
        {A+B=<rat(33,1)}

| ?- test(A,B).

{A+B=<33}
```

10.10.9.2 Bugs

- The fuzzy comparison of floats is the source for all sorts of weirdness. If a result in R surprises you, then try to run the program in Q before you send me a bug report.

- The projector for floundered nonlinear relations keeps too many variables. Its output is rather unreadable.
- Disequations are not projected properly.
- This list is probably incomplete.

10.11 I/O on Lists of Character Codes—`library(codesio)`

This package defines I/O predicates that read from, or write to, a code list. There are also predicates to open a stream referring to a code list. The stream may be used with general Stream I/O predicates.

Exported predicates:

`format_to_codes(+`*Format*`, :`*Arguments*`, -`*Codes*`)`
`format_to_codes(+`*Format*`, :`*Arguments*`, ?`*S0*`, ?`*S*`)`
: Prints *Arguments* into a code list using `format/3`. *Codes* is unified with the list, alternatively *S0* and *S* are unified with the list and its end, respectively.

`write_to_codes(+`*Term*`, -`*Codes*`)`
`write_to_codes(+`*Term*`, ?`*S0*`, ?`*S*`)`
: A specialized `format_to_codes/[3,4]`. Writes *Term* into a code list using `write/2`. *Codes* is unified with the list. Alternatively, *S0* and *S* are unified with the list and its end, respectively.

`write_term_to_codes(+`*Term*`, -`*Codes*`, +`*Options*`)`
`write_term_to_codes(+`*Term*`, ?`*S0*`, ?`*S*`, +`*Options*`)`
: A specialized `format_to_codes/[3,4]`. Writes *Term* into a code list using `write_term/3` and *Options*. *Codes* is unified with the list. Alternatively, *S0* and *S* are unified with the list and its end, respectively.

`read_from_codes(+`*Codes*`, -`*Term*`)`
: Reads *Term* from *Codes* using `read/2`. The *Codes* must, as usual, be terminated by a *full stop*, i.e. a '`.`', possibly followed by *layout-text*.

`read_term_from_codes(+`*Codes*`, -`*Term*`, +`*Options*`)`
: Reads *Term* from *Codes* using `read_term/3` and *Options*. The *Codes* must, as usual, be terminated by a *full stop*, i.e. a '`.`', possibly followed by *layout-text*.

`open_codes_stream(+`*Codes*`, -`*Stream*`)`
: *Stream* is opened as an input stream to an existing code list. The stream may be read with the Stream I/O predicates and must be closed using `close/1`. The list is copied to an internal buffer when the stream is opened and must therefore be a ground code list at that point.

`with_output_to_codes(:`*Goal*`, -`*Codes*`)`
`with_output_to_codes(:`*Goal*`, ?`*S0*`, ?`*S*`)`
`with_output_to_codes(:`*Goal*`, -`*Stream*`, ?`*S0*`, ?`*S*`)`
: *Goal* is called with the `current_output` stream set to a new stream. This stream writes to an internal buffer, which is, after the successful execution of *Goal*, converted to a list of character codes. *Codes* is unified with the list, alternatively *S0* and *S* are unified with the list and its end, respectively. `with_output_to_codes/4` also passes the stream in the *Stream* argument. It can be used only by *Goal* for writing.

10.12 I/O on Comma-Separated Values (CSV) Files and Strings—`library(csv)`

This library module provides some utilities for Comma-Separated Values (CSV) files and strings. In this context, a file is a sequence of *records*, and a record is a sequence of *fields*. In a CSV file, fields are separated by commas, and each record is terminated by `RET`.

This module does not report any syntax errors. In the event of prematurely terminated input file, the current field and record will be terminated silently.

Then a CSV record is read, it will yield a list of fields of the following form:

`integer(`*`Number`*`,`*`Codes`*`)`
: Stands for the integer *Number*, where `number_codes(`*`Number`*`,`*`Codes`*`)` holds, and *Codes* is the list of character codes actually read.

`float(`*`Number`*`,`*`Codes`*`)`
: Stands for the float *Number*, where `number_codes(`*`Number`*`,`*`Codes`*`)` holds, and *Codes* is the list of character codes actually read.

`string(`*`Codes`*`)`
: Stands for the text string (list of character codes) *Codes*, and `number_codes(`*`Number`*`,`*`Codes`*`)` does not hold.

When a CSV records is written, the *Codes* argument of the above terms is used, but the following fields are also allowed:

`integer(`*`Number`*`)`
: Stands for the integer *Number*.

`float(`*`Number`*`)`
: Stands for the float *Number*.

`atom(`*`Atom`*`)`
: Stands for the atom *Atom*.

Adapted to the conventions of this manual, RFC 4180 specifies the following. Where this module relaxes the requirements, that is explicitly mentioned:

1. Each record is located on a separate line, delimited by a line break. For example:

   ```
   aaa,bbb,ccc RET
   zzz,yyy,xxx RET
   ```

2. The last record in the file may or may not have an ending line break. For example:

   ```
   aaa,bbb,ccc RET
   zzz,yyy,xxx
   ```

3. There may be an optional header line appearing as the first line of the file with the same format as normal record lines. This header will contain names corresponding to the fields in the file and should contain the same number of fields as the records in the rest of the file. For example:

```
field_name,field_name,field_name RET
aaa,bbb,ccc RET
zzz,yyy,xxx RET
```

This module does not attempt to detect a header line nor treat it in any special way.

4. Within the header and each record, there may be one or more fields, separated by commas. Each record should contain the same number of fields throughout the file. Spaces are considered part of a field and should not be ignored. The last field in the record must not be followed by a comma, so if the record ends with a comma, the last field is treated as empty. For example, the following is treated as four fields:

   ```
   aaa,bbb,ccc,
   ```

   This module does not require or check that each record contains the same number of fields.

5. Each field may or may not be enclosed in double quotes. If fields contain line breaks (`RET`), double quotes or commas, then they should be enclosed in double quotes, otherwise the double quotes may be omitted. For example:

   ```
   "aaa","bbb","ccc" RET
   "aaa","b RET
   bb","ccc" RET
   zzz,yyy,xxx
   ```

   If an unenclosed field is immediately followed by a `"`, (or vice versa), then this module treats that as a new enclosed (or unenclosed) field to be read and appended to the field read so far.

6. If double quotes are used to enclose fields, then a double quote appearing inside a field must be escaped by preceding it with another double quote. For example:

   ```
   "aaa","b""bb","ccc"
   ```

Exported predicates:

`read_record(-`*Record*`)`
`read_record(+`*Stream*`, -`*Record*`)`
: Reads a single record from the stream *Stream*, which defaults to the current input stream, and unifies it with *Record*. On end of file, *Record* is unified with `end_of_file`.

`read_records(-`*Records*`)`
`read_records(+`*Stream*`, -`*Records*`)`
: Reads records from the stream *Stream*, which defaults to the current input stream, up to the end of the stream, and unifies them with *Records*.

`read_record_from_codes(-`*Record*`, +`*Codes*`)`
`read_record_from_codes(-`*Record*`, +`*Codes*`, -`*Suffix*`)`
: Reads a record from the code list *Codes*. In the arity 2 variant, there must be no trailing character codes after the record. In the arity 3 variant, any trailing character codes are unified with *Suffix*, which can be used for reading subsequent records.

`write_record(+`*Record*`)`
`write_record(+`*Stream*`, +`*Record*`)`
: Writes a single record to the stream *Stream*, which defaults to the current output stream.

`write_records(+`*Records*`)`
`write_records(+`*Stream*`, +`*Records*`)`
: Writes records to the stream *Stream*, which defaults to the current output stream.

`write_record_to_codes(+`*Record*`, -`*Codes*`)`
: Writes a single record to the code list *Codes*, without the terminating `RET`.

10.13 COM Client—`library(comclient)`

This library provides rudimentary access to COM automation objects. As an example it is possible to manipulate Microsoft Office applications and Internet Explorer. It is not possible, at present, to build COM objects using this library.

Feedback is very welcome. Please contact SICStus support (`sicstus-support@ri.se`) if you have suggestions for how this library could be improved.

10.13.1 Preliminaries

In most contexts both atoms and code lists are treated as strings. With the wide character support available in release 3.8 and later, is should now be possible to pass UNICODE atoms and strings successfully to the COM interface.

10.13.2 Terminology

ProgID A human readable name for an object class, typically as an atom, e.g. `'Excel.Application'`.

CLSID (Class Identifier)
A globally unique identifier of a class, typically as an atom, e.g. `'{00024500-0000-0000-C000-000000000046}'`.

Where it makes sense a *ProgID* can be used instead of the corresponding *CLSID*.

IID (Interface Identifier)
A globally unique identifier of an interface. Currently only the `'IDispatch'` interface is used so you do not have to care about this.

IName (Interface Name)
The human readable name of an interface, e.g. `'IDispatch'`.

Where it makes sense an *IName* can be used instead of the corresponding *IID*.

Object A COM-object (or rather a pointer to an interface).

ComValue A value that can be passed from COM to SICStus Prolog. Currently numeric types, booleans (treated as 1 for `true`, 0 for `false`), strings, and COM objects.

ComInArg
A value that can be passed as an input argument to COM, currently one of:

atom Passed as a string (BSTR)

numeric Passed as the corresponding number

list A code list is treated as a string.

COM object
A compound term referring to a COM object.

compound Other compound terms are presently illegal but will be used to extend the permitted types.

SimpleCallSpec
Denotes a single method and its arguments. As an example, to call the method named `foo` with the arguments `42` and the string `"bar"` the *Simple-*

CallSpec would be the compound term `foo(42,'bar')` or, as an alternative, `foo(42,"bar")`.

The arguments of the compound term are treated as follows:

ComInArg
: See above

variable
: The argument is assumed to be output. The variable is bound to the resulting value when the method returns.

mutable
: The argument is assumed to be input/output. The value of the mutable is passed to the method and when the method returns the mutable is updated with the corresponding return value.

CallSpec
: Either a SimpleCallSpec or a list of CallSpecs. If it is a list then all but the last SimpleCallSpec are assumed to denote method calls that return a COM-object. So for instance the VB statement `app.workbooks.add` can be expressed either as:

```
comclient_invoke_method_proc(App, [workbooks, add])
```

or as

```
comclient_invoke_method_fun(App, workbooks, WorkBooks),
comclient_invoke_method_proc(WorkBooks, add),
comclient_release(WorkBooks)
```

10.13.3 Predicate Reference

`comclient_garbage_collect`
: Release Objects that are no longer reachable from SICStus Prolog. To achieve this the predicate `comclient_garbage_collect/0` performs an atom garbage collection, i.e. `garbage_collect_atoms/0`, so it should be used sparingly.

`comclient_is_object(+`*`Object`*`)`
: Succeeds if *Object* "looks like" an object. It does not check that the object is (still) reachable from SICStus Prolog, see `comclient_valid_object/1`. Currently an object looks like `'$comclient_object'(`*`stuff`*`)` where *stuff* is some prolog term. Do not rely on this representation!

`comclient_valid_object(+`*`Object`*`)`
: Succeeds if *Object* is an object that is still available to SICStus Prolog.

`comclient_equal(+`*`Object1`*`, +`*`Object2`*`)`
: Succeeds if *Object1* and *Object2* are the same object. (It succeeds if their `'IUnknown'` interfaces are identical)

`comclient_clsid_from_progid(+`*`ProgID`*`, -`*`CLSID`*`).`
: Obtain the *CLSID* corresponding to a particular *ProgID*. Uses the Win32 routine `CLSIDFromProgID`. You rarely need this since you can use the ProgID directly in most cases.

`comclient_progid_from_clsid(+`*`CLSID`*`, -`*`ProgID`*`).`
: Obtain the *ProgID* corresponding to a particular *CLSID*. Uses the Win32 routine `ProgIDFromCLSID`. Rarely needed. The *ProgID* returned will typically have the version suffix appended.

Example, to determine what version of `Excel.Application` is installed:

```
| ?- comclient_clsid_from_progid('Excel.Application, CLSID),
     comclient_progid_from_clsid(CLSID, ProgID).
CLSID = '{00024500-0000-0000-C000-000000000046}',
ProgID = 'Excel.Application.8'
```

`comclient_iid_from_name(+IName, -IID)`
: Look in the registry for the *IID* corresponding to a particular Interface. Currently of little use.

```
| ?- comclient_iid_from_name('IDispatch', IID).
IID = '{00020400-0000-0000-C000-000000000046}'
```

`comclient_name_from_iid(+IID, -IName)`
: Look in the registry for the name corresponding to a particular *IID*. Currently of little use.

`comclient_create_instance(+ID, -Object)`
: Create an instance of the Class identified by the CLSID or ProgID *ID*.

```
comclient_create_instance('Excel.Application', App)
```

Corresponds to `CoCreateInstance`.

`comclient_get_active_object(+ID, -Object)`
: Retrieves a running object of the Class identified by the CLSID or ProgID *ID*.

```
comclient_get_active_object('Excel.Application', App)
```

An exception is thrown if there is no suitable running object. Corresponds to `GetActiveObject`.

`comclient_invoke_method_fun(+Object, +CallSpec, -ComValue)`
: Call a method that returns a value. Also use this to get the value of properties.

`comclient_invoke_method_proc(+Object, +CallSpec)`
: Call a method that does not return a value.

`comclient_invoke_put(+Object, +CallSpec, +ComInArg)`
: Set the property denoted by *CallSpec* to *ComValue*. Example: `comclient_invoke_put(App, visible, 1)`

`comclient_release(+Object)`
: Release the object and free the data structures used by SICStus Prolog to keep track of this object. After releasing an object the term denoting the object can no longer be used to access the object (any attempt to do so will raise an exception).

> **Please note**: The same COM-object can be represented by different prolog terms. A COM object is not released from SICStus Prolog until all such representations have been released, either explicitly by calling `comclient_release/1` or by calling `comclient_garbage_collect/0`.
>
> You cannot use *Obj1* `==` *Obj2* to determine whether two COM-objects are identical. Instead use `comclient_equal/2`.

`comclient_is_exception(+`*`ExceptionTerm`*`)`

Succeeds if *ExceptionTerm* is an exception raised by the comclient module.

```
catch(<some code>,
      Exception,
      ( comclient_is_exception(E) ->
         handle_com_related_errors(E)
      ; otherwise -> % Pass other exceptions upwards
         throw(E)
      ))
```

`comclient_exception_code(+`*`ExceptionTerm`*`, -`*`ErrorCode`*`)`
`comclient_exception_culprit(+`*`ExceptionTerm`*`, -`*`Culprit`*`)`
`comclient_exception_description(+`*`ExceptionTerm`*`, -`*`Description`*`)`

Access the various parts of a comclient exception. The *ErrorCode* is the `HRESULT` causing the exception. *Culprit* is a term corresponding to the call that gave an exception. *Description*, if available, is either a term `'EXCEPINFO'(...)` corresponding to an `EXCEPINFO` structure or `'ARGERR'(MethodName, ArgNumber)`.

The `EXCEPINFO` has six arguments corresponding to, and in the same order as, the arguments of the `EXCEPINFO` struct.

10.13.4 Examples

The following example launches *Microsoft Excel*, adds a new worksheet, fill in some fields and finally clears the worksheet and quits *Excel*

```
:- use_module(library(comclient)).
:- use_module(library(lists)).

test :-
   test('Excel.Application').

test(ProgID) :-
   comclient_create_instance(ProgID, App),
   %% Visuall Basic: app.visible = 1
   comclient_invoke_put(App, visible, 1),
   %% VB: app.workbooks.add
   comclient_invoke_method_proc(App, [workbooks, add]),
   %% VB: with app.activesheet
   comclient_invoke_method_fun(App, activesheet, ActiveSheet),

   Rows = [1,2,3,4,5,6,7,8,9,10,11,12,13,14,15],
   Cols = Rows,
   %% VB: .cells i,j . value = i+j/100
   (
     member(I, Rows),
     member(J, Cols),
     ValIJ is I+J/100,

     comclient_invoke_put(ActiveSheet, [cells(I,J),value], ValIJ),
     fail
   ; true
   ),
   (
     member(I, Rows),
     member(J, Cols),
     %% retrieve cell values
     comclient_invoke_method_fun(ActiveSheet, [cells(I,J), value],CellValue),
     format(user_error, '~nCell(~w,~w) = ~w', [I,J,CellValue]),
     fail
   ; true
   ),

   Range = 'A1:O15',
   format(user_error, '~Npress return to clear range (~w)', [Range]),
   flush_output(user_error),
   get_code(_),

   %% VB: .range A1:O15 .Clear
   comclient_invoke_method_proc(ActiveSheet, [range(Range),clear]),

   %% Avoid Excel query "do you want to save..."
   %%  VB: app.activeworkbook.saved = 1
   comclient_invoke_put(App, [activeworkbook,saved], 1),

   format(user_error, '~Npress return to quit \'~w\'', [ProgID]),
   flush_output(user_error),
   get_code(_),
```

10.14 Finite Domain Constraint Debugger—`library(fdbg)`

10.14.1 Introduction

FDBG is a CLP(FD) debugger for SICStus Prolog. Its main purpose is to enable the CLP programmer to trace the changes of domains of variables. See [Hanak et al. 04].

FDBG defines the following prefix operator:

```
:- op(400, fy, #).
```

The presence of FDBG affects the translation and execution, but not the semantics, of subsequently loaded arithmetic constraints.

10.14.2 Concepts

In this section, several concepts and terms are defined. These terms will later be heavily used in the documentation; therefore, it is important that you understand them well.

10.14.2.1 Events

An FDBG event can (currently) belong to one of the two following major classes:

constraint event
: A constraint is woken.

labeling event
: Three events belong to this class, namely:
  - the labeling of an FD variable is started
  - an FD variable gets constrained
  - the labeling of an FD variable fails, i.e. all elements of its domain have been tried and caused failure

These events are intercepted by the FDBG core. When any of them occurs, the appropriate visualizer (see Section 10.14.2.3 [FDBG Visualizers], page 548) gets called with a representation of the event (a Prolog term) as extra arguments.

10.14.2.2 Labeling Levels

In this subsection we give three definitions regarding the labeling procedure.

labeling session
: This term denotes the whole labeling procedure that starts with the call of `labeling/2` or an equivalent predicate and finishes by exiting this predicate. Normally, there is at most one labeling session per run.

labeling attempt
: One choicepoint of a labeling session. Exactly one variable is associated with a labeling attempt, although this is not necessarily true vice versa. For example in `enum` mode labeling, a single labeling attempt tries every possible value, but in `step` mode labeling, several binary choicepoints are created.

labeling step
: The event of somehow constraining the domain of a variable. This usually means either setting the variable to a specific value or limiting it with a lower or an upper bound.

As you can see there is a hierarchical relation among these definitions: a labeling session consists of several labeling attempts, which, in turn, might consist of several labeling steps.

A *labeling event*, on the other hand, can either be a labeling step, or the start of a labeling attempt, or the failure of the same. See Section 10.14.2.1 [FDBG Events], page 547.

10.14.2.3 Visualizers

A visualizer is a Prolog predicate reacting to FDBG events (see Section 10.14.2.1 [FDBG Events], page 547). It is called directly by the FDBG core when any FDBG event occurs. It is called *visualizer*, because usually it should present the events to the user, but in general it can do any kind of processing, like checking invariants, etc.

For all major event classes, a different visualizer type is used. The set of visualizers you would like to use for a session is specified in the option list of `fdbg_on/1` (see Section 10.14.3.1 [FDBG Options], page 550), when FDBG is switched on.

A specific visualizer can have several arguments, some are supplied by the FDBG core, the rest (if any) should be specified when FDBG is switched on. Note that the obligatory arguments will be appended to the *end* of the user defined argument list.

The set of built-in visualizers installed by default (see Section 10.14.3.1 [FDBG Options], page 550) is the following:

- for constraint awakenings: `fdbg_show`
- for labeling events: `fdbg_label_show`

For details on built-in visualizers, see Section 10.14.3.3 [FDBG Built-In Visualizers], page 552.

10.14.2.4 Names of Terms

FDBG provides a service to assign names to Prolog terms for later reference. A name is an atom and it is usually associated with a compound term containing constraint variables, or with a single variable. In the former case, each variable appearing in the compound term is also assigned a name automatically by FDBG. This auto-assigned name is derived from the name of the term; see Section 10.14.2.6 [FDBG Name Auto-Generation], page 549.

Perhaps the most useful utilization of names is *annotation*, another service of FDBG. Here, each variable appearing in a Prolog term is replaced with a compound term describing it (i.e. containing its name, the variable itself, and some data regarding its domain). During annotation, unnamed constraint variables are also given a unique "anonymous" name automatically, these names begin with a '`fdvar`' prefix. See Section 10.14.4.2 [FDBG Writing Visualizers], page 559.

The names will be used by the built-in visualizers when referring to constraint variables, and they can also be used to retrieve the terms assigned to them in user defined visualizers. See Section 10.14.2.3 [FDBG Visualizers], page 548.

10.14.2.5 Selectors

A *selector* is a Prolog term denoting a (path to a) subterm of a given term T. Let *subterm(T,S)* denote the subterm of T wrt. a selector S, and let N denote an integer. A selector then takes one of the following forms:

S	*subterm(T,S)*
`[]`	T
`[...,`*N*`]`	Nth argument of the compound term *subterm(T,*`[...]`*)*
`[...,#`*N*`]`	Nth element of the list *subterm(T,*`[...]`*)*

10.14.2.6 Name Auto-Generation

There are two cases when a name is automatically generated.

1. When a name is assigned to a compound term by the user, each variable appearing in it is assigned a so called *derived* name, which is created by appending a variant of the selector of the variable to the original name. For example, the call:

   ```
   fdbg_assign_name(bar(A, [B, C], foobar(D, E)), foo)
   ```

   will create the following name/term entries:

Name	*Term/Variable*	*Selector*
`foo`	`bar(A, [B, C], foobar(D, E))`	`[]`
`foo_1`	`A`	`[1]`
`foo_2_1`	`B`	`[2,#1]`
`foo_2_2`	`C`	`[2,#2]`
`foo_3_1`	`D`	`[3,1]`
`foo_3_2`	`E`	`[3,2]`

   See Section 10.14.3.2 [FDBG Naming Terms], page 551.

2. If, during the annotation of a term (see Section 10.14.3.5 [FDBG Annotation], page 554) an unnamed constraint variable is found, then it is assigned a unique "anonymous" name. This name consists of the prefix '`fdvar`', an underscore character, and an integer. The integer is automatically incremented when necessary.

10.14.2.7 Legend

The *legend* is a list of variables and their domains, usually appearing after a description of the current constraint. This is necessary because the usual visual representation of a constraint contains only the *names* of the variables in it (see Section 10.14.3.5 [FDBG Annotation], page 554), and does not show anything about their domain. The legend links these names to the corresponding domains. The legend also shows the changes of the domains made by the constraint. Finally, the legend may contain some conclusions regarding the behavior of the constraint, like failure or side effects.

The format of the legend is somewhat customizable by defining a hook function; see Section 10.14.4.1 [FDBG Customizing Output], page 558. The default format of the legend is the following:

```
list_2 = 0..3
list_3 = 0..3
list_4 = 0..3
fdvar_2 = 0..3 -> 1..3
```

Here, we see four variables, with initial domains 0..3, but the domain of the (previously unnamed) variable `fdvar_2` is narrowed by the constraint (not shown here) to 1..3.

A legend is automatically printed by the built-in visualizer `fdbg_show`, but it can be easily printed from user defined visualizers too.

10.14.2.8 The `fdbg_output` Stream

The `fdbg_output` is a stream alias created when FDBG is switched on and removed when it is switched off. All built-in visualizers write to this stream, and the user defined visualizers should do the same.

10.14.3 Basics

Here, we describe the set of FDBG services and commands necessary to do a simple debugging session. No major modification of your CLP(FD) program is necessary to use FDBG this way. Debugging more complicated programs, on the other hand, might also require user written extensions to FDBG, since the wallpaper trace produced by the built-in visualizer `fdbg_show` could be too detailed and therefore hard to analyze. See Section 10.14.4 [FDBG Advanced Usage], page 558.

10.14.3.1 FDBG Options

FDBG is switched on and off with the predicates:

`fdbg_on`
`fdbg_on(`*`:Options`*`)`
: Turns on FDBG by putting advice points on several predicates of the CLP(FD) module. *Options* is a list of options; see Section 10.14.3.1 [FDBG Options], page 550. The empty list is the default value.

  `fdbg_on/[0,1]` can be called safely several times consecutively; only the first call will have an effect.

`fdbg_off`
: Turns the debugger off by removing the previously installed advice points.

`fdbg_on/1` accepts the following options:

`file(`*`Filename`*`, `*`Mode`*`)`
: Tells FDBG to attach the stream alias `fdbg_output` to the file called *Filename* opened in mode *Mode*. *Mode* can either be `write` or `append`. The file specified is opened on a call to `fdbg_on/1` and is closed on a call to `fdbg_off/0`.

`socket(Host, Port)`
: Tells FDBG to attach the stream alias `fdbg_output` to the socket connected to *Host* on port *Port*. The specified socket is created on a call to `fdbg_on/1` and is closed on a call to `fdbg_off/0`.

`stream(Stream)`
: Tells FDBG to attach the stream alias `fdbg_output` to the stream *Stream*. The specified stream remains open after calling `fdbg_off/0`.

  If none of the above three options is used, then the stream alias `fdbg_output` is attached to the current output stream.

`constraint_hook(Goal)`
: Tells FDBG to extend *Goal* with two (additional) arguments and call it on the exit port of the constraint dispatcher.

`no_constraint_hook`
: Tells FDBG not to use any constraint hook.

  If none of the above two options is used, then the default is `constraint_hook(fdbg:fdbg_show)`.

`labeling_hook(Goal)`
: Tells FDBG to extend *Goal* with three (additional) arguments and call it on any of the three labeling events.

`no_labeling_hook`
: Tells FDBG not to use any labeling hook.

  If none of the above two options is used, then the default is `labeling_hook(fdbg:fdbg_label_show)`.

For both `constraint_hook` and `labeling_hook`, *Goal* should be a visualizer, either built-in (see Section 10.14.3.3 [FDBG Built-In Visualizers], page 552) or user defined. More of these two options may appear in the option list, in which case they will be called in their order of occurrence.

See Section 10.14.4.2 [FDBG Writing Visualizers], page 559, for more details on these two options.

10.14.3.2 Naming Terms

Naming is a procedure of associating names with terms and variables; see Section 10.14.2.4 [FDBG Names of Terms], page 548. Three predicates are provided to assign and retrieve names, these are the following:

`fdbg_assign_name(+Term, ?Name)`
: Assigns the atom *Name* to *Term*, and a derived name to each variable appearing in *Term*. If *Name* is a variable, then use a default (generated) name, and return it in *Name*. See Section 10.14.2.6 [FDBG Name Auto-Generation], page 549.

`fdbg_current_name(?Term, ?Name)`
: Retrieves *Term* associated with *Name*, or enumerates all term-name pairs.

`fdbg_get_name(+Term, -Name)`
: Returns the name associated to *Term* in *Name*, if it exists. Otherwise, silently fails.

10.14.3.3 Built-In Visualizers

The default visualizers are generic predicates to display FDBG events (see Section 10.14.2.1 [FDBG Events], page 547) in a well readable form. These visualizers naturally do not exploit any problem specific information—to have more "fancy" output, you have to write your own visualizers; see Section 10.14.4.2 [FDBG Writing Visualizers], page 559. To use these visualizers, pass them in the appropriate argument to `fdbg_on/1`; see Section 10.14.3.1 [FDBG Options], page 550, or call them directly from user defined visualizers.

`fdbg_show(+Constraint, +Actions)`
: This visualizer produces a trace output of all woken constraints, in which a line showing the constraint is followed by a legend (see Section 10.14.2.7 [FDBG Legend], page 549) of all the variables appearing in it, and finally an empty line to separate events from each other. The usual output will look like this:

```
<fdvar_1>#=0
    fdvar_1 = inf..sup -> {0}
    Constraint exited.
```

Here, we can see an arithmetical constraint being woken. It narrows '`fdvar_1`' to a domain consisting of the singleton value 0, and since this is the narrowest domain possible, the constraint does not have anything more to do: it exits.

Note that when you pass `fdbg_show` as an option, you should omit the two arguments, like in:

```
fdbg_on([..., constraint_hook(fdbg_show), ...]).
```

`fdbg_label_show(+Event, +LabelID, +Variable)`
: This visualizer produces a wallpaper trace output of all labeling events. It is best used together with `fdbg_show/2`. Each labeling event produces a single line of output, some of them are followed by an empty line, some others are always followed by another labeling action and therefore the empty line is omitted. Here is a sample output of `fdbg_label_show/3`:

```
Labeling [9, <list_1>]: starting in range 0..3.
Labeling [9, <list_1>]: step: <list_1> = 0
```

What we see here is the following:

- The prefix '`Labeling`' identifies the event.
- The number in the brackets (9) is a unique identification number belonging to a labeling attempt. Only *one* labeling step with this number can be in effect at a time. This number in fact is the invocation number of the predicate doing the labeling for that variable.
- The name in the brackets (`<list_1>`) identifies the variable currently being labeled. Note that several identification numbers might belong to the same variable, depending on the mode of labeling.

- The text after the colon specifies the actual labeling event. This string can be:
  - "starting in range *Range*." meaning the starting of a labeling attempt in range *Range*
  - "*Mode*: *Narrowing*." meaning a labeling step in mode *Mode*. *Narrowing* is the actual narrowing done in the labeling step. *Mode* is one of the following:

    `step` meaning `step` mode labeling

    `indomain_up` meaning `enum` mode labeling or a direct call to `indomain/1`

    `indomain_down` meaning `enum,down` mode labeling

    `bisect` meaning `bisect` mode labeling

    `interval` meaning `interval` mode labeling
  - "failed." meaning the labeling attempt failed.

Note that when you pass `fdbg_label_show/3` as an option, you should omit the three arguments, like in

```
fdbg_on([..., labeling_hook(fdbg_label_show), ...]).
```

10.14.3.4 New Debugger Commands

The Prolog debugger is extended by FDBG. The *&* debugger is modified, and two new commands are added:

&
& N This debugger command is extended so that the annotated form of domain variables is also printed when listing the variables with blocked goals.

A
A Selector
Annotates and prints the current goal and a legend of the variables appearing in it. If a selector is specified, then the subterm specified by it is assumed to be an action list, and is taken into account when displaying the legend. For example:

```
23  2 Exit: clpfd:dispatch_global_fast(no_threat(2,_1001,1),0,0,
            [exit,_1001 in_set[[3|3]]]) ? A [2,4]

clpfd:dispatch_global_fast(no_threat(2,<board_2>,1),0,0,
                           [exit,<board_2> in_set[[3|3]]])
    board_2 = 1..4 -> {3}
    Constraint exited.
```

W Name=Selector
Assigns the atom *Name* to the variable specified by the *Selector*. For example:

```
7      15 Call: bar(4, [_101,_102,_103]) ? W foo=[2,#2]
```

This would assign the name `foo` to `_102`, being the second element of the second argument of the current goal.

10.14.3.5 Annotating Programs

In order to use FDBG efficiently, you have to make some changes to your CLP(FD) program. Fortunately the calls you have to add are not numerous, and when FDBG is turned off they do not decrease efficiency significantly or modify the behavior of your program. On the other hand, they are necessary to make FDBG output easier to understand.

Assign names to the more important and more frequently occurring variables by inserting `fdbg_assign_name/2` calls at the beginning of your program. It is advisable to assign names to variables in larger batches (i.e. as lists or compound terms) with a single call.

Use predefined labeling predicates if possible. If you define your own labeling predicates and you want to use them even in the debugging session, then you should follow these guidelines:

1. Add a call to `clpfd:fdbg_start_labeling(+`*`Var`*`)` at the beginning of the predicate doing a labeling attempt, and pass the currently labeled variable as an argument to the call.
2. Call `clpfd:fdbg_labeling_step(+`*`Var`*`, +`*`Step`*`)` before each labeling step. *Step* should be a compound term describing the labeling step, this will be
   a. printed "as is" by the built-in visualizer as the mode of the labeling step (see Section 10.14.3.3 [FDBG Built-In Visualizers], page 552)—you can use `portray/1` to determine how it should be printed;
   b. passed as `step(`*`Step`*`)` to the user defined labeling visualizers in their *Event* argument; see Section 10.14.4.2 [FDBG Writing Visualizers], page 559.

This way FDBG can inform you about the labeling events created by your labeling predicates exactly like it would do in the case of internal labeling. If you ignore these rules, then FDBG will not be able to distinguish labeling events from other FDBG events any more.

10.14.3.6 An Example Session

The problem of magic sequences is a well known constraint problem. A magic sequence is a list, where the i-th item of the list is equal to the number of occurrences of the number i in the list, starting from zero. For example, the following is a magic sequence:

```
[1,2,1,0]
```

The CLP(FD) solution can be found in `library('clpfd/examples/magicseq')`, which provides a couple of different solutions, one of which uses the `global_cardinality/2` constraint. We'll use this solution to demonstrate a simple session with FDBG.

First, the debugger is imported into the user module:

```
| ?- use_module(library(fdbg)).
% loading /home/matsc/sicstus3/Utils/x86-linux-glibc2.2/lib/sicstus-
3.9.1/library/fdbg.po...
% module fdbg imported into user

[...]

% loaded /home/matsc/sicstus3/Utils/x86-linux-glibc2.2/lib/sicstus-
3.9.1/library/fdbg.po in module fdbg, 220 msec 453936 bytes

| ?- use_module(library(clpfd)).
[...]
```

Then, the magic sequence solver is loaded:

```
| ?- [library('clpfd/examples/magicseq')].
% consulting /home/matsc/sicstus3/Utils/x86-linux-
glibc2.2/lib/sicstus-3.9.1/library/clpfd/examples/magicseq.pl...
%  module magic imported into user
%  module clpfd imported into magic
% consulted /home/matsc/sicstus3/Utils/x86-linux-glibc2.2/lib/sicstus-
3.9.1/library/clpfd/examples/magicseq.pl in mod-
ule magic, 30 msec 9440 bytes
```

Now we turn on the debugger, telling it to save the trace in `fdbg.log`.

```
| ?- fdbg_on([file('fdbg.log',write)]).
% The clp(fd) debugger is switched on
```

To produce a well readable trace output, a name has to be assigned to the list representing the magic sequence. To avoid any modifications to the source code, the name is assigned by a separate call before calling the magic sequence finder predicate:

```
| ?- length(L,4), fdbg_assign_name(L,list), magic_demo(4,L).
L = [1,2,1,0] ? ;
L = [2,0,2,0] ? ;

no
```

Please note: the call to `length/2` is necessary; otherwise, `L` would be a single variable instead of a list of four variables when the name is assigned.

Finally we turn the debugger off:

```
| ?- fdbg_off.
% The clp(fd) debugger is switched off
```

The output of the sample run can be found in `fdbg.log`. Here, we show selected parts of the trace. In each block, the woken constraint appears on the first line, followed by the corresponding legend.

In the first selected block, `scalar_product/4` removes infeasible domain values from `list_4`, adjusting its upper bound. The legend shows the domains before and after pruning. Note also that the constraint is rewritten to a more readable form:

```
<list_2>+2*<list_3>+3*<list_4>#=<list_1>+<list_2>+<list_3>+<list_4>
    list_1 = 0..3
    list_2 = 0..3
    list_3 = 0..3
    list_4 = 0..3 -> 0..1
```

The following block shows the initial labeling events, trying the value 0 for `list_1`:

```
Labeling [9, <list_1>]: starting in range 0..3.
Labeling [9, <list_1>]: indomain_up: <list_1> = 0
```

This soon leads to a dead end:

```
<list_1>=0
    list_1 = 0..3 -> {0}
    Constraint exited.

<list_2>+2*<list_3>+3*<list_4>#=<list_2>+<list_3>+<list_4>
    list_2 = 0..3
    list_3 = 0..3 -> {0}
    list_4 = 0..1 -> {0}
    Constraint exited.

<list_2>+<list_3>+<list_4>#=4
    list_2 = 0..3
    list_3 = {0}
    list_4 = {0}
    Constraint failed.
```

We backtrack on `list_1`, trying instead the value 1. This leads to the following propagation steps and to the first solution. In these propagation steps, the constraint exits, which means that it holds no matter what value any remaining variable takes (like `list_2` in the second step):

```
Labeling [9, <list_1>]: indomain_up: <list_1> = 1

<list_1>=1
    list_1 = 0..3 -> {1}
    Constraint exited.

<list_2>+2*<list_3>+3*<list_4>#=1+<list_2>+<list_3>+<list_4>
    list_2 = 0..3
    list_3 = 0..3 -> {1}
    list_4 = 0..1 -> {0}
    Constraint exited.

1+<list_2>+<list_3>+<list_4>#=4
    list_2 = 0..3 -> {2}
    list_3 = {1}
    list_4 = {0}
    Constraint exited.

global_cardinality([1,<list_2>,<list_3>,<list_4>],[0-1,1-<list_2>,2-<list_3>,3-<list_4
    list_2 = {2}
    list_3 = {1}
    list_4 = {0}
    Constraint exited.
```

Then, we backtrack again on `list_1`, which leads to the second solution after a chain of propagation steps:

```
Labeling [9, <list_1>]: indomain_up: <list_1> = 2

[...]

global_cardinality([2,<list_2>,<list_3>,<list_4>],[0-2,1-<list_2>,2-<list_3>,3-<list_4
    list_2 = {0}
    list_3 = {2}
    list_4 = {0}
    Constraint exited.
```

Then we backtrack on `list_1` yet another time, but no more solutions are found:

```
Labeling [9, <list_1>]: indomain_up: <list_1> = 3

[...]

<list_2>+2*<list_3>+3*<list_4>#=3+<list_2>+<list_3>+<list_4>
    list_2 = {0}
    list_3 = {1}
    list_4 = {0}
    Constraint failed.

Labeling [9, <list_1>]: failed.
```

10.14.4 Advanced Usage

Sometimes the output of the built-in visualizer is inadequate. There might be cases when only minor changes are necessary to produce a more readable output; in other cases, the trace output should be completely reorganized. FDBG provides two ways of changing the appearance of the output by defining hook predicates. In this section, these predicates will be described in detail.

10.14.4.1 Customizing Output

The printing of variable names is customized by defining the following hook predicate.

`fdbg:fdvar_portray(`*Name*`, `*Var*`, `*FDSet*`)` *hook*

This hook predicate is called whenever an annotated constraint variable (see Section 10.14.3.5 [FDBG Annotation], page 554) is printed. *Name* is the assigned name of the variable *Var*, whose domain *will be FDSet* as soon as the narrowings of the current constraint take effect. The *current* domain is not passed to the hook, but it can be easily determined with a call to `fd_set/2`. (Although these two sets may be the same if the constraint did not narrow it.)

If `fdbg:fdvar_portray/3` is undefined or fails, then the default representation is printed, which is *Name* between angle brackets.

The printing of legend lines is customized by defining the following hook predicate.

`fdbg:legend_portray(`*Name*`, `*Var*`, `*FDSet*`)` *hook*

This hook is called for each line of the legend by the built-in legend printer. The arguments are the same as in the case of `fdbg:fdvar_portray/3`. Note that a prefix of four spaces and a closing newline character is always printed by FDBG.

If `fdbg:fdvar_portray/3` is undefined or fails, then the default representation is printed, which is

```
Name = RangeNow [ -> RangeAfter ]
```

The arrow and *RangeAfter* are only printed if the constraint narrowed the domain of *Var*.

The following example will print a list of all possible values instead of the range for each variable in the legend:

```
:- multifile fdbg:legend_portray/3.
fdbg:legend_portray(Name, Var, Set) :-
        fd_set(Var, Set0),
        fdset_to_list(Set0, L0),
        fdset_to_list(Set, L),
        (   L0 == L
        ->  format('~p = ~p', [Name, L])
        ;   format('~p = ~p -> ~p', [Name, L0, L])
        ).
```

10.14.4.2 Writing Visualizers

For more complicated problems you might want to change the output more drastically. In this case you have to write and use your own visualizers, which could naturally be problem specific, not like `fdbg_show/2` and `fdbg_label_show/3`. As we described earlier, currently there are two types of visualizers:

constraint visualizer

> *MyGlobalVisualizer*`([+`*Arg1*`, +`*Arg2*`, ...] +`*Constraint*`, +`*Actions*`)`
>
> This visualizer is passed in the `constraint_hook` option. It must take at least two arguments, the last two of which being:
>
> *Constraint*
> : the constraint that was handled by the dispatcher
>
> *Actions*
> : the action list returned by the dispatcher
>
> Other arguments can be used for any purpose, for example to select the verbosity level of the visualizer. This way you do not have to modify your code if you would like to see less or more information. Note however, that the two obligatory arguments must appear at the *end* of the argument list.
>
> When passing as an option to `fdbg_on/1`, only the optional arguments have to be specified; the two mandatory arguments should be omitted. See Section 10.14.4.6 [FDBG Debugging Global Constraints], page 566, for an example.

labeling visualizer

> *MyLabelingVisualizer*`([+`*Arg1*`, +`*Arg2*`, ...] +`*Event*`, +`*ID*`, +`*Var*`)`
>
> This visualizer is passed in the `labeling_hook` option. It must have at least three arguments, the last three of which being:
>
> *Event*
> : a term representing the labeling event, can be one of the following:
>
> start
> : labeling has just started for a variable
>
> fail
> : labeling has just failed for a variable

step(*Step*) variable has been constrained in a labeling step described by the compound term *Step*, which is either created by `library(clpfd)`'s labeling predicates (in this case, simply print it—FDBG will know how to handle it) or by you; see Section 10.14.3.5 [FDBG Annotation], page 554.

ID identifies the labeling session, i.e. binds step and fail events to the corresponding start event

Var the variable being the subject of labeling

The failure of a visualizer is ignored and multiple choices are cut by FDBG. Exceptions, on the other hand, are not caught.

FDBG provides several predicates to ease the work of the visualizer writers. These predicates are the following:

`fdbg_annotate(+`*Term0*`, -`*Term*`, -`*Variables*`)`
`fdbg_annotate(+`*Term0*`, +`*Actions*`, -`*Term*`, -`*Variables*`)`
Replaces each constraint variable in *Term0* by a compound term describing it and returns the result in *Term*. Also, collects these compound terms into the list *Variables*. These compound terms have the following form:

`fdvar(`*Name*`, `*Var*`, `*FDSet*`)`

Name is the name of the variable (auto-generated, if necessary; see Section 10.14.2.6 [FDBG Name Auto-Generation], page 549)

Var is the variable itself

FDSet is the domain of the variable *after* narrowing with *Actions*, if specified; otherwise, it is the *current* domain of the variable

`fdbg_legend(+`*Vars*`)`
Prints a legend of *Vars*, which is a list of `fdvar/3` compound terms returned by `fdbg_annotate/[3,4]`.

`fdbg_legend(+`*Vars*`, +`*Actions*`)`
Prints a legend of *Vars* followed by some conclusions regarding the constraint (exiting, failing, etc.) based on *Actions*.

10.14.4.3 Writing Legend Printers

When you write your own visualizers, you might not be satisfied with the default format of the legend. Therefore you might want to write your own legend printer, replacing `fdbg_legend/[1,2]`. This should be quite straightforward based on the variable list returned by `fdbg_annotate/[3,4]`. Processing the rest of the action list and writing conclusions about the constraint behavior is not that easy though. To help your work, FDBG provides a predicate to transform the raw action list to a more readable form:

`fdbg_transform_actions(+`*Actions*`, +`*Vars*`, -`*TransformedActions*`)`
This will do the following transformations to *Actions*, returning the result in *TransformedActions*:

1. remove all actions concerning variables in *Vars* (the list returned by `fdbg_annotate/[3,4]`);
2. remove multiple `exit` and/or `fail` commands;
3. remove all ground actions, translating those that will cause failure into `fail(`*`Action`*`)`;
4. substitute all other narrowings with an `fdvar/3` compound term per variable.

The transformed action list may contain the following terms:

`exit` the constraint exits

`fail` the constraint fails due to a `fail` action

`fail(`*`Action`*`)`
: the constraint fails because of *Action*

`call(`*`Goal`*`)`
: *Actions* originally contained this action. FDBG cannot do anything with that but to inform the user about it.

`fdvar(`*`Name, Var, FDSet`*`)`
: *Actions* also narrowed some variables that did not appear in the *Vars* list, this is one of them. The meaning of the arguments is the usual, described in Section 10.14.4.2 [FDBG Writing Visualizers], page 559. This should normally not happen.

`AnythingElse`
: *Actions* contained unrecognized actions too, these are copied unmodified. This should not happen!

10.14.4.4 Showing Selected Constraints (simple version)

Sometimes the programmer is not interested in every constraint, only some selected ones. Such a filter can be easily implemented with a user-defined visualizer. Suppose that you are interested in the constraints `all_different/[1,2]` and `all_distinct/[1,2]` only:

```
%% spec_filter(+Constraint, +Actions):  Call fdbg_show for all constraints
%%   for which interesting_event(Constraint) succeeds.
%%
%%   Use this filter by giving the constraint_hook(spec_filter) option to
%%   fdbg_on.
spec_filter(Constraint, Actions) :-
        interesting_event(Constraint),
        fdbg_show(Constraint, Actions).

interesting_event(all_different(_)).
interesting_event(all_different(_,_)).
interesting_event(all_distinct(_)).
interesting_event(all_distinct(_,_)).
```

Here is a session using the visualizer. Note that the initialization part (`domain/3` events), are filtered out, leaving only the `all_distinct/[1,2]` constraints:

```
| ?- [library('clpfd/examples/suudoku')].
[...]
| ?- fdbg_on([constraint_hook(spec_filter)]).
% The clp(fd) debugger is switched on
% advice
| ?- suudoku([], 1, domain).
all_distinct([1,<fdvar_1>,<fdvar_2>,8,<fdvar_3>,
               4,<fdvar_4>,<fdvar_5>,<fdvar_6>],[consistency(domain)])
    fdvar_1 = 1..9 -> (2..3)\/(5..7)\/{9}
    fdvar_2 = 1..9 -> (2..3)\/(5..7)\/{9}
    fdvar_3 = 1..9 -> (2..3)\/(5..7)\/{9}
    fdvar_4 = 1..9 -> (2..3)\/(5..7)\/{9}
    fdvar_5 = 1..9 -> (2..3)\/(5..7)\/{9}
    fdvar_6 = 1..9 -> (2..3)\/(5..7)\/{9}

[...]

all_distinct([7,6,2,5,8,4,1,3,9],[consistency(domain)])
    Constraint exited.
1 5 6 8 9 4 3 2 7
9 2 8 7 3 1 4 5 6
4 7 3 2 6 5 9 1 8
3 6 2 4 1 7 8 9 5
7 8 9 3 5 2 6 4 1
5 1 4 9 8 6 2 7 3
8 3 1 5 4 9 7 6 2
6 9 7 1 2 3 5 8 4
2 4 5 6 7 8 1 3 9
yes
% advice
| ?- fdbg_off.
% The clp(fd) debugger is switched off
```

Note that failure of `spec_filter/2` does not cause any unwanted output.

10.14.4.5 Showing Selected Constraints (advanced version)

Suppose that you want to give the constraints that you are interested in as an argument to the visualizer, instead of defining them in a table. The following visualizer implements this.

```
%% filter_events(+CtrSpecs, +Constraint, +Actions):  This predicate will
%%   only show constraint events if they match an element in the list CtrSpecs,
%%   or if CtrSpecs is wrapped in -/1, all the non-matching events will
%%   be shown.
%%   CtrSpecs can contain the following types of elements:
%%     ctr_name             - matches all constraints of the given name
%%     ctr_name/arity       - matches constraints with the given name and arity
%%     ctr_name(...args...) - matches constraints unifyable with the given term
%%
%%   For the selected events fdbg_show(Constraint, Actions) is called.
%%   This visualizer can be specified when turning fdbg on, e.g.:
%%     fdbg_on([constraint_hook(filter_events([count/4]))]), or
%%     fdbg_on([constraint_hook(filter_events(-[in_set]))]).
filter_events(CtrSpecs, Constraint, Actions) :-
        filter_events(CtrSpecs, fdbg_show, Constraint, Actions).

%% filter_events(+CtrSpecs, +Visualizer, +Constraint, +Actions):  Same as
%%   the above predicate, but the extra argument Visualizer specifies the
%%   predicate to be called for the selected events (in the same form as
%%   in the constraint_hook option, i.e. without the last two arguments). E.g.
%%     fdbg_on([constraint_hook(filter_events([count/4],my_show))]).
filter_events(-CtrSpecs, Visualizer, Constraint, Actions) :- !,
        \+ show_constraint(CtrSpecs, Constraint),
        call(Visualizer, Constraint, Actions).
filter_events(CtrSpecs, Visualizer, Constraint, Actions) :-
        show_constraint(CtrSpecs, Constraint),
        call(Visualizer, Constraint, Actions).

show_constraint([C|_], Constraint) :-
        matches(C, Constraint), !.
show_constraint([_|Cs], Constraint) :-
        show_constraint(Cs, Constraint).

matches(Name/Arity, Constraint) :- !,
        functor(Constraint, Name, Arity).
matches(Name, Constraint) :-
        atom(Name), !,
        functor(Constraint, Name, _).
matches(C, Constraint) :-
        C = Constraint.
```

Here is a session using the visualizer, filtering out everything but `all_distinct/2` constraints:

```
| ?- [library('clpfd/examples/suudoku')].
[...]
| ?- fdbg_on([constraint_hook(filter_events([all_distinct/2]))]).
% The clp(fd) debugger is switched on
% advice
| ?- suudoku([], 1, domain).
all_distinct([1,<fdvar_1>,<fdvar_2>,8,<fdvar_3>,
               4,<fdvar_4>,<fdvar_5>,<fdvar_6>],[consistency(domain)])
    fdvar_1 = 1..9 -> (2..3)\/(5..7)\/{9}
    fdvar_2 = 1..9 -> (2..3)\/(5..7)\/{9}
    fdvar_3 = 1..9 -> (2..3)\/(5..7)\/{9}
    fdvar_4 = 1..9 -> (2..3)\/(5..7)\/{9}
    fdvar_5 = 1..9 -> (2..3)\/(5..7)\/{9}
    fdvar_6 = 1..9 -> (2..3)\/(5..7)\/{9}

[...]

all_distinct([7,6,2,5,8,4,1,3,9],[consistency(domain)])
    Constraint exited.
1 5 6 8 9 4 3 2 7
9 2 8 7 3 1 4 5 6
4 7 3 2 6 5 9 1 8
3 6 2 4 1 7 8 9 5
7 8 9 3 5 2 6 4 1
5 1 4 9 8 6 2 7 3
8 3 1 5 4 9 7 6 2
6 9 7 1 2 3 5 8 4
2 4 5 6 7 8 1 3 9
yes
% advice
| ?- fdbg_off.
% The clp(fd) debugger is switched off
```

In the next session, all constraints named `all_distinct` are ignored, irrespective of arity. Also, we explicitly specified the visualizer to be called for the events that are kept (here, we have written the default, `fdbg_show`, so the actual behavior is not changed).

```
| ?- [library('clpfd/examples/suudoku')].
[...]
| ?- fdbg_on([constraint_hook(filter_events(-
[all_distinct],fdbg_show))]).
% The clp(fd) debugger is switched on
% advice
| ?- suudoku([], 1, domain).
domain([1,<fdvar_1>,<fdvar_2>,8,<fdvar_3>, ...,
        <fdvar_50>,<fdvar_51>,9],1,9)
    fdvar_1 = inf..sup -> 1..9
    fdvar_2 = inf..sup -> 1..9
    ...
    fdvar_50 = inf..sup -> 1..9
    fdvar_51 = inf..sup -> 1..9
    Constraint exited.

[...]
1 5 6 8 9 4 3 2 7
9 2 8 7 3 1 4 5 6
4 7 3 2 6 5 9 1 8
3 6 2 4 1 7 8 9 5
7 8 9 3 5 2 6 4 1
5 1 4 9 8 6 2 7 3
8 3 1 5 4 9 7 6 2
6 9 7 1 2 3 5 8 4
2 4 5 6 7 8 1 3 9
yes
% advice
| ?- fdbg_off.
% The clp(fd) debugger is switched off
```

In the last session, we specify a list of constraints to ignore, using a pattern to select the appropriate constraints. Since all constraints in the example match one of the items in the given list, no events are printed.

```
| ?- [library('clpfd/examples/suudoku')].
[...]
| ?- fdbg_on([constraint_hook(filter_events(-
[domain(_,1,9),all_distinct]))]).
% The clp(fd) debugger is switched on
% advice
| ?- suudoku([], 1, domain).
1 5 6 8 9 4 3 2 7
9 2 8 7 3 1 4 5 6
4 7 3 2 6 5 9 1 8
3 6 2 4 1 7 8 9 5
7 8 9 3 5 2 6 4 1
5 1 4 9 8 6 2 7 3
8 3 1 5 4 9 7 6 2
6 9 7 1 2 3 5 8 4
2 4 5 6 7 8 1 3 9
yes
% advice
| ?- fdbg_off.
% The clp(fd) debugger is switched off
```

10.14.4.6 Debugging Global Constraints

Missing pruning and excessive pruning are the two major classes of bugs in the implementation of global constraints. Since CLP(FD) is an incomplete constraint solver, missing pruning is mainly an efficiency concern (but *ground* instances for which the constraint does not hold should be rejected). Excessive pruning, however, means that some valid combinations of values are pruned away, leading to missing solutions. The following exported predicate helps spotting excessive pruning in user-defined global constraints:

`fdbg_guard(:Goal, +Constraint, +Actions)`

A constraint visualizer that does no output, but notifies the user by calling *Goal* if a solution is lost through domain narrowings. Naturally you have to inform `fdbg_guard/3` about the solution in question—stating which variables should have which values. To use `fdbg_guard/3`, first:

1. Set it up as a visualizer by calling:

   ```
   fdbg_on([..., constraint_hook(fdbg_guard(Goal)), ...])
   ```

   As usual, the two other arguments will be supplied by the FDBG core when calling `fdbg_guard/3`.
2. At the beginning of your program, form a pair of lists `Xs-Vs` where *Xs* is the list of variables and *Vs* is the list of values in question. This pair should then be assigned the name `fdbg_guard` using:

   ```
   | ?- fdbg_assign_name(Xs-Vs, fdbg_guard).
   ```

When these steps have been taken, `fdbg_guard/3` will watch the domain changes of *Xs* done by each constraint *C*. Whenever *Vs* is in the domains of *Xs* at entry to *C*, but not at exit from *C*, *Goal* is called with three more arguments:

Variable List
: a list of `Variable-Value` terms for which *Value* was removed from the domain of *Variable*

Constraint
: the constraint that was handled by the dispatcher

Actions
: the action list returned by the dispatcher

We will now show an example using `fdbg_guard/3`. First, we will need a few extra lines of code:

```
%% print_and_trace(MissValues, Constraint, Actions):  To be used as a Goal for
%%   fdbg_guard to call when the given solution was removed from the domains
%%   of the variables.
%%
%%   MissValues is a list of Var-Value pairs, where Value is the value that
%%   should appear in the domain of Var, but has been removed.  Constraint is
%%   the current constraint and Actions is the list of actions returned by it.
%%
%%   This predicate prints MissValues in a textual form, then shows the current
%%   (culprit) constraint (as done by fdbg_show/2), then turns on the Prolog
%%   tracer.
print_and_trace(MissValues, Constraint, Actions) :-
        print(fdbg_output, '\nFDBG Guard:\n'),
        display_missing_values(MissValues),
        print(fdbg_output, '\nCulprit constraint:\n\n'),
        fdbg_show(Constraint, Actions),
        trace.

display_missing_values([]).
display_missing_values([Var-Val|MissVals]) :-
        fdbg_annotate(Var,AVar,_),
        format(fdbg_output, '  ~d was removed from ~p~n', [Val,AVar]),
        display_missing_values(MissVals).
```

Suppose that we have written the following N Queens program, using a global constraint `no_threat/3` with a bug in it:

```
:- use_module(library(fdbg)).
:- use_module(library(clpfd)).

queens(L, N) :-
        length(L, N),
        domain(L, 1, N),
        constrain_all(L),
        labeling([enum], L).

constrain_all([]).
constrain_all([X|Xs]):-
        constrain_between(X,Xs,1),
        constrain_all(Xs).

constrain_between(_X,[],_N).
constrain_between(X,[Y|Ys],N) :-
        no_threat(X,Y,N),
        N1 is N+1,
        constrain_between(X,Ys,N1).

no_threat(X,Y,I) :-
        fd_global(no_threat(X,Y,I), 0, [val(X),val(Y)]).

:- multifile clpfd:dispatch_global/4.
clpfd:dispatch_global(no_threat(X,Y,I), S, S, Actions) :-
        ground(X), !,
        remove_threat(Y, X, I, NewYSet),
        Actions = [exit, Y in_set NewYSet].
clpfd:dispatch_global(no_threat(X,Y,I), S, S, Actions) :-
        ground(Y), !,
        remove_threat(X, Y, I, NewXSet),
        Actions = [exit, X in_set NewXSet].
clpfd:dispatch_global(no_threat(_,_,_), S, S, []).

remove_threat(X, V, I, Set) :-
        Vp is V+I+1,   % Bug introduced here
%       Vp is V+I,     % Good code
        Vn is V-I,
        fd_set(X, Set0),
        list_to_fdset([Vn, V, Vp], VSet),
        fdset_subtract(Set0, VSet, Set).

missing(L, Tuple) :-
     length(Tuple, N),
     length(L, N),
     domain(L, 1, N),
     lex_chain([[2,4,1,3],L]),
     fdbg_assign_name(L-Tuple, fdbg_guard),
     fdbg_assign_name(L, board),
     fdbg_on([constraint_hook(fdbg_guard(print_and_trace))]),
     queens(L, N).
```

We will now use `print_and_trace/3` as an argument to the `fdbg_guard` visualizer to handle the case when a solution has been removed by a constraint. The bug shown above causes three invalid solutions to be found instead of the two correct solutions `[2,4,1,3]` and `[3,1,4,2]`. The constraint:

```
lex_chain([[2,4,1,3],L]),
```

constraints the search to solutions lexicographically greater than or equal to the first correct solution, and FDBG is told to watch for its disappearance. At some point, the buggy constraint removes it, and `fdbg_guard/3` calls the given predicate. This prints the cause of waking (the value that should not have been removed by the constraint), prints the constraint itself, then switches the Prolog debugger to trace mode. At this point, we type '`A`' (see Section 10.14.3.4 [FDBG Debugger Commands], page 553) to print the annotated form of the goal containing the culprit constraint. Finally, we type '`A [2,4]`' to print the same information, but taking into account the action list, which is the 4th argument of the 2nd argument of the module prefixed goal. For clarity, the labeling events were not turned off in the session below.

This example shows how FDBG can be used to narrow down what causes invalid pruning.

```
| ?- missing(L, [2,4,1,3]).
% The clp(fd) debugger is switched on
Labeling [8, <board_1>]: starting in range 2..4.
Labeling [8, <board_1>]: indomain_up: <board_1> = 2


FDBG Guard:
  4 was removed from <board_2>

Culprit constraint:

user:no_threat(2,<board_2>,1)
    board_2 = 1..4 -> {3}
    Constraint exited.

% The debugger will first creep -- showing everything (trace)
       11      2 Exit:
       clpfd:dispatch_global_fast(no_threat(2,_1511,1),0,0,
       [exit,_1511 in_set[[3|3]]],
       global('$mutable'(0,0),no_threat(2,_1511,1),'$mutable'(11,596),
       _10779,user:no_threat(2,_1511,1))) ? A

clpfd:dispatch_global_fast(no_threat(2,<board_2>,1),0,0,
        [exit,<board_2> in_set[[3|3]]],global($mutable(0,0),no_threat(2,<board_2>,1),
        $mutable(11,596),<fdvar_1>,user:no_threat(2,<board_2>,1)))
    board_2 = 1..4
    fdvar_1 = inf..sup

       11      2 Exit:
       clpfd:dispatch_global_fast(no_threat(2,_1511,1),0,0,
       [exit,_1511 in_set[[3|3]]],
       global('$mutable'(0,0),no_threat(2,_1511,1),'$mutable'(11,596),
       _23859,user:no_threat(2,_1511,1))) ? A [2,4]

clpfd:dispatch_global_fast(no_threat(2,<board_2>,1),0,0,
        [exit,<board_2> in_set[[3|3]]],global($mutable(0,0),no_threat(2,<board_2>,1),
        $mutable(11,596),<fdvar_1>,user:no_threat(2,<board_2>,1)))
    board_2 = 1..4 -> {3}
    fdvar_1 = inf..sup
    Constraint exited.

       11      2 Exit:
       clpfd:dispatch_global_fast(no_threat(2,_1511,1),0,0,
       [exit,_1511
       in_set[[3|3]]],global('$mutable'(0,0),no_threat(2,_1511,1),'$mutable'(11,596),
       _23859,user:no_threat(2,_1511,1))) ? a
% Execution aborted
% advice,source_info
| ?- fdbg_off.
% The clp(fd) debugger is switched off
```

10.15 Accessing Files And Directories—`library(file_systems)`

This module provides operations on files and directories, such as renaming, deleting, opening, checking permissions, accessing members of.

The following principles have been observed:

- An absolute distinction is drawn between files and directories. The set of operations one can usefully perform on a directory is different from the set one can perform on a file: for example, having write permission to a directory allows the user to create new files in it, not to rewrite the entire directory! If any routine in this package tells you that a "file" exists, you can be sure that it means a file and not a directory (and vice versa for "directory" exists).
- The directory scanning routines do not actually open the files they find. Thus finer discriminations, such as that between source and object code, are not made.
- All paths are expanded as if by `absolute_file_name/3`.
- Every predicate acts like a genuine logical relation insofar as it possibly can.
- If anything goes wrong, the predicates raise an error exception. Any time that a predicate fails quietly, it should mean "this question is meaningful, but the answer is no".
- The directory scanning routines insist that the directory argument name a searchable directory.
- On Unix-like systems, symbolic links are followed by default and symbolic links that can not be followed are treated as non-existing. This means `file_exists/1` will fail if passed such a "broken" link and that neither `file_members_of_directory/1` nor `directory_members_of_directory/1` et al. will return such a link.

  On Windows, symbolic links (and other reparse points) are *not* followed when enumerating directory contents with `file_members_of_directory/1` nor `directory_members_of_directory/1` et al. and are not returned for these predicates.

  The behavior for symbolic links (and reparse points) may change on all platforms in the future to ensure a well defined and consistent behavior on all platforms.

  To see *all* members of a directory you can use `absolute_file_name/3` with a `glob('*')` option.

The "property" routines use the same simplistic access control model as that used by the `absolute_file_name/3` `access/1`-option. See Section 11.3.3 [mpg-ref-absolute_file_name], page 965, for details.

Exported predicates:

`rename_file(+`*`OldName`*`, +`*`NewName`*`)`

> *OldName* must identify an existing file, which will be renamed to *NewName*. The details of just when this can be done are operating-system dependent. Typically it is only possible to rename within the same file system.

`rename_directory(+`*OldName*`, +`*NewName*`)`
: *OldName* must identify an existing directory, which will be renamed to *NewName*. The details of just when this can be done are operating-system dependent. Typically it is only possible to rename empty directories within the same file system.

`delete_file(+`*OldName*`)`
: *OldName* must identify an existing file, which will be deleted.

`delete_directory(+`*Directory*`)`
`delete_directory(+`*Directory*`, +`*Options*`)`
: *Directory* must identify an existing directory, which will be deleted, if empty. *Options* should be a list of at most one term of the form:

  `if_nonempty(`*Value*`)`
  : Defines what to do if the directory is nonempty. One of:

`ignore`	The predicate simply succeeds, deleting nothing.
`fail`	The predicate simply fails, deleting nothing.
`error`	The predicate raises a permissison error.
`delete`	The predicate recursively deletes the directory and its contents.

`directory_exists(+`*Directory*`)`
`directory_exists(+`*Directory*`, +`*Mode*`)`
: is true when *Directory* is an existing directory that is accessible according to *Mode*. *Mode* defaults to `exist`.

  This is more or less equivalent to `absolute_file_name(`*File*`, _, [file_type(directory),access([exist|`*Mode*`]),file_errors(fail)])`.

`make_directory(+`*Directory*`)`
: *Directory* is expanded, as if by `absolute_file_name/3`, and the resulting directory is created.

`file_exists(+`*File*`)`
`file_exists(+`*File*`, +`*Mode*`)`
: is true when *File* is an existing file that is accessible according to *Mode*. *Mode* defaults to `exist`.

  This is more or less equivalent to `absolute_file_name(`*File*`, _, [access([exist|`*Mode*`]),file_errors(fail)])`.

`file_must_exist(+`*File*`)`
`file_must_exist(+`*File*`, +`*Mode*`)`
: is like `file_exists(`*File*`[, `*Mode*`])` except that if the file is *not* accessible it reports an error.

  This is more or less equivalent to `absolute_file_name(`*File*`, _, [access([exist|`*Mode*`]),file_errors(error)])`.

`directory_must_exist(+`*File*`)`
`directory_must_exist(+`*File*`, +`*Mode*`)`
: is like `file_must_exists(`*File*`[, `*Mode*`])`, but for directories.

This is more or less equivalent to `absolute_file_name(`*`File`*`, _, [file_type(directory),access([exists|`*`Mode`*`]),file_errors(error)])`.

`close_all_streams`
: closes all the streams (other than the standard streams) which are currently open. The time to call this is after an `abort/0`. Note that `current_stream/3` does not notice the standard streams.

`directory_member_of_directory(?`*`BaseName`*`, ?`*`FullName`*`)`
: is true when *BaseName* is the name of a subdirectory of the current directory (other than '.' or '..') and *FullName* is its absolute name.

  This uses `absolute_file_name/3` with the `glob/1` option.

`directory_member_of_directory(+`*`Directory`*`, ?`*`BaseName`*`, ?`*`FullName`*`)`
: is true when *Directory* is a name (not necessarily the absolute name) of a directory, *BaseName* is the name of a subdirectory of that directory (other than '.' or '..') and *FullName* is its absolute name.

  This uses `absolute_file_name/3` with the `glob/1` option.

`directory_member_of_directory(+`*`Directory`*`, +`*`Pattern`*`, ?`*`BaseName`*`, ?`*`FullName`*`)`
: is true when *Directory* is a name (not necessarily the absolute name) of a directory, *BaseName* is the name of a directory of that directory (other than '.' or '..') which matches the given *Pattern*, and *FullName* is the absolute name of the subdirectory.

  This uses `absolute_file_name/3` with a `glob(`*`Pattern`*`)` option.

`directory_members_of_directory(-`*`Set`*`)`
: is true when *Set* is a set of *BaseName-FullName* pairs being the relative and absolute names of subdirectories of the current directory.

  This uses `absolute_file_name/3` with the `glob/1` option.

`directory_members_of_directory(+`*`Directory`*`, -`*`Set`*`)`
: is true when *Set* is a set of *BaseName-FullName* pairs being the relative and absolute names of subdirectories of the given *Directory*. *Directory* need not be absolute; the *FullNames* will be regardless.

  This uses `absolute_file_name/3` with the `glob/1` option.

`directory_members_of_directory(+`*`Directory`*`, +`*`Pattern`*`, -`*`Set`*`)`
: is true when *Set* is a set of *BaseName-FullName* pairs being the relative and absolute names of subdirectories of the given *Directory*, such that each *BaseName* matches the given Pattern.

  This uses `absolute_file_name/3` with a `glob(`*`Pattern`*`)` option.

`file_member_of_directory(?`*`BaseName`*`, ?`*`FullName`*`)`
: is true when *BaseName* is the name of a file in the current directory and *FullName* is its absolute name.

  This uses `absolute_file_name/3` with the `glob/1` option.

`file_member_of_directory(+`*`Directory`*`, ?`*`BaseName`*`, ?`*`FullName`*`)`
: is true when *Directory* is a name (not necessarily the absolute name) of a directory, *BaseName* is the name of a file in that directory, and *FullName* is its absolute name.

This uses `absolute_file_name/3` with the `glob/1` option.

`file_member_of_directory(+`*`Directory`*`, +`*`Pattern`*`, ?`*`BaseName`*`, ?`*`FullName`*`)`
is true when *Directory* is a name (not necessarily the absolute name) of a directory, *BaseName* is the name of a file in that directory which matches the given *Pattern*, and *FullName* is its absolute name.

This uses `absolute_file_name/3` with a `glob(`*`Pattern`*`)` option.

`file_members_of_directory(-`*`Set`*`)`
is true when *Set* is a set of *BaseName-FullName* pairs being the relative and absolute names of the files in the current directory.

This uses `absolute_file_name/3` with the `glob/1` option.

`file_members_of_directory(+`*`Directory`*`, -`*`Set`*`)`
is true when *Set* is a set of *BaseName-FullName* pairs being the relative and absolute names of the files in the given *Directory*. *Directory* need not be absolute; the *FullNames* will be regardless.

This uses `absolute_file_name/3` with the `glob/1` option.

`file_members_of_directory(+`*`Directory`*`, +`*`Pattern`*`, -`*`Set`*`)`
is true when *Set* is a set of *BaseName-FullName* pairs being the relative and absolute names of subdirectories of the given *Directory*, such that each *BaseName* matches the given *Pattern*.

This uses `absolute_file_name/3` with a `glob(`*`Pattern`*`)` option.

`directory_property(+`*`Directory`*`, ?`*`Property`*`)`
is true when *Directory* is a name of a directory, and *Property* is a boolean property which that directory possesses, e.g.

```
directory_property(., searchable).
```

The current set of file and directory properties include:

`readable`
`writable`
`executable`
`searchable`
: Tries to determine whether the process has permission to read, write, execute (only for files) or search (only for directories) the file.

`size_in_bytes`
: The size, in bytes, of the file. Not available for directories.

`create_timestamp`
`modify_timestamp`
`access_timestamp`
: The time of creation, last modification or last access expressed as a timestamp. A *timestamp* is an integer expressing the time interval, in seconds, since the "Epoch". The *Epoch* is the time zero hours, zero minutes, zero seconds, on January 1, 1970 Coordinated Universal Time (UTC).

The timestamp is what should be used when comparing information between files since it is independent of locale issues like time zone and daylight savings time etc.

`create_localtime`
`modify_localtime`
`access_localtime`
: The same as the corresponding `..._timestamp` values passed through `system:datime/2`, i.e. expressed as local time and split up in the components year, month, day, hour, minute, seconds.

`set_user_id`
`set_group_id`
`save_text`
: True if the set-uid, set-group-id, save-text bits, respectively, are set for the file. Always false on Windows.

`who_can_read`
`who_can_write`
`who_can_execute`
`who_can_search`
: A list containing the subset of `[user,group,other]` for the process classes that can, respectively, read, write, execute (only for files) or search (only for directories.

`owner_user_id`
`owner_group_id`
: The id of the owner and group of the file. The id is an integer on UNIX and an atom (expressed as a string security identifier) on Windows.

`owner_user_name`
`owner_group_group`
: The atom containing the name of the files owner and group respectively. On Windows a name like `'DOMAIN\NAME'` will be used.

  If for some reason the name cannot be found it will fall back to using the same value as `owner_user_id` and `owner_group_id`.

Other properties may be added in the future. You can backtrack through the available properties by calling `file_property/3` or `directory_property/3` with an uninstantiated *Property* argument.

`directory_property(+Directory, ?Property, ?Value)`
: is true when *Directory* is a name of a directory, *Property* is a property of directories, and *Value* is *Directory*'s *Property Value*. See `directory_property/2`, above, for a list of properties.

`file_property(+File, ?Property)`
: is true when *File* is a name of a file, and *Property* is a boolean property which that file possesses, e.g.

```
file_property('foo.txt', readable).
```

See `directory_property/2`, above, for a list of properties.

`file_property(+File, ?Property, ?Value)`
: is true when *File* is a name of a file, *Property* is a property of files, and *Value* is *File*'s *Property Value*. See `directory_property/2`, above, for a list of properties.

`current_directory(-Directory)`
`current_directory(-Directory, +NewDirectory)`
: *Directory* is unified with the current working directory and the working directory is set to *NewDirectory*.

10.16 The Gauge Profiling Tool—`library(gauge)`

The Gauge library package is a graphical interface to the SICStus built-in predicates `profile_data/1` and `profile_reset/0`. See Section 9.2 [Execution Profiling], page 359, for more information about execution profiling. The interface is based on Tcl/Tk (see Section 10.46 [lib-tcltk], page 809).

The SICStus IDE (see Section 3.11 [SPIDER], page 32) can also show profiling information. This makes the Gauge library largely obsolescent.

`view` *since release 4.2*

Creates a graphical user interface for viewing the profile data accumulated so far. When the display first comes up it is blank except for the control panel. A screen shot is shown below.

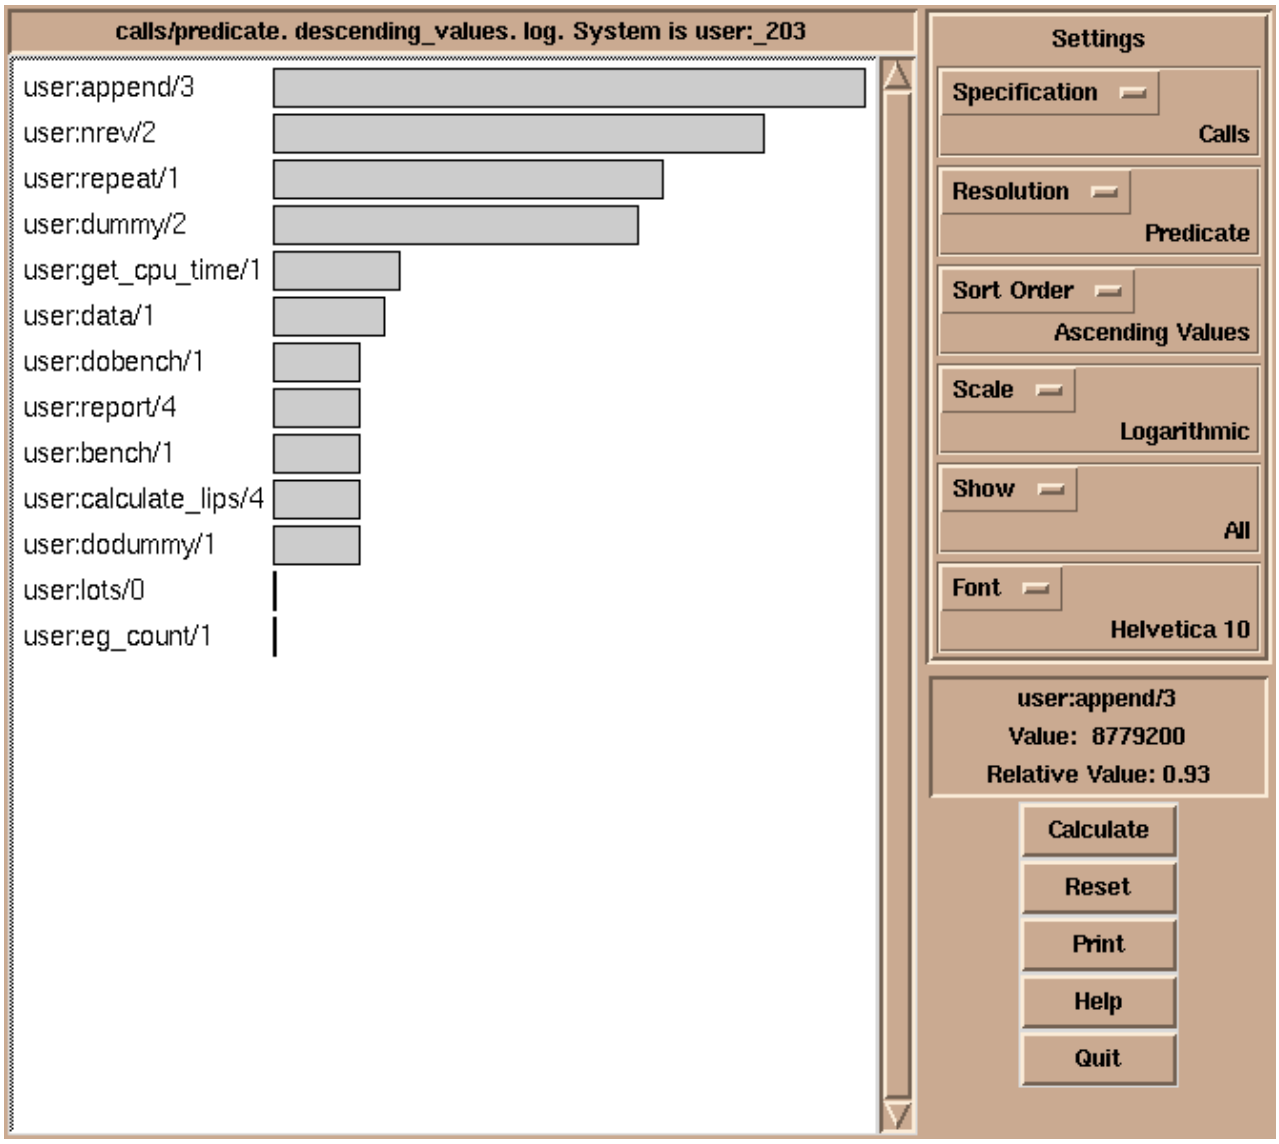

Gauge graphical user interface

The menus and buttons on the control panel are used as follows:

Specification
: Selects what statistics to display. One of:

  Calls
  : The number of times a predicate was called.

  Instructions
  : The number of abstract instructions executed, plus two times the number of choice point accesses.

  Choicepoints
  : Number of choicepoints accessed (saved or restored).

Sort Order
: Selects the sort order of the histogram. One of:

Alphabetic Sort the bars in alphabetic order.

Descending values
Sort the bars by descending values.

Ascending values
Sort the bars by ascending values.

Top 40 Show just the 40 highest values in descending order.

Scale Controls the scaling of the bars. One of:

Linear Display values with a linear scale.

Logarithmic
Display values with a logarithmic scale.

Show Controls whether to show bars with zero counts. One of:

All Show all values in the histogram.

No zero values
Show only non-zero values.

Font The font used in the histogram chart.

Calculate Calculates the values according to the current settings. The values are displayed in a histogram.

Reset The execution counters of the selected predicates and clauses are reset.

Print A choice of printing the histogram on a Postscript printer, or to a file.

Help Shows a help text.

Quit Quits Gauge and closes its windows.

By clicking on the bars of the histogram, the figures are displayed in the *Value Info* window.

10.17 Heap Operations—`library(heaps)`

A heap is a labeled binary tree where the key of each node is less than or equal to the keys of its sons. The point of a heap is that we can keep on adding new elements to the heap and we can keep on taking out the minimum element. If there are N elements total, the total time is *O(N lg N)*. If you know all the elements in advance, you are better off doing a merge-sort, but this file is for when you want to do say a best-first search, and have no idea when you start how many elements there will be, let alone what they are.

A heap is represented as a triple `heap(N,Free,Tree)` where N is the number of elements in the tree, *Free* is a list of integers which specifies unused positions in the tree, and *Tree* is a tree made of:

`heap` terms for empty subtrees and

`heap(`*Key*`,`*Datum*`,`*Lson*`,`*Rson*`)`
terms for the rest

The nodes of the tree are notionally numbered like this:

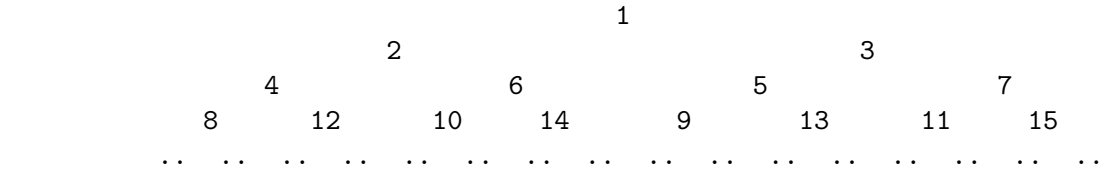

The idea is that if the maximum number of elements that have been in the heap so far is M, and the tree currently has K elements, the tree is some subtreee of the tree of this form having exactly M elements, and the *Free* list is a list of *M-K* integers saying which of the positions in the M-element tree are currently unoccupied. This free list is needed to ensure that the cost of passing N elements through the heap is *O(N lg M)* instead of *O(N lg N)*. For M say 100 and N say 10^4 this means a factor of two. The cost of the free list is slight. The storage cost of a heap in a copying Prolog is *2K+3M* words. Exported predicates:

`add_to_heap(+`*OldHeap*`, +`*Key*`, +`*Datum*`, -`*NewHeap*`)`
`add_to_heap/4 (heaps)`
inserts the new *Key-Datum* pair into the heap. The insertion is not stable, that is, if you insert several pairs with the same *Key* it is not defined which of them will come out first, and it is possible for any of them to come out first depending on the history of the heap.

`delete_from_heap(+`*OldHeap*`, +`*Key*`, -`*Datum*`, -`*NewHeap*`)`
`delete_from_heap/4 (heaps)`
deletes a single *Key-Datum* pair from the *OldHeap* producing a *NewHeap*. This is useful if you want to e.g. change the priority of Datum.

`get_from_heap(+`*OldHeap*`, -`*Key*`, -`*Datum*`, -`*NewHeap*`)`
`get_from_heap/4 (heaps)`
returns the *Key-Datum* pair in *OldHeap* with the smallest *Key*, and also a *NewHeap* which is the *OldHeap* with that pair deleted.

`heap_size(+Heap, -Size)`
`heap_size/2 (heaps)`
: reports the number of elements currently in the heap.

`heap_to_list(+Heap, -List)`
`heap_to_list/2 (heaps)`
: returns the current set of *Key-Datum* pairs in the *Heap* as a *List*, sorted into ascending order of *Keys*.

`list_to_heap(+List, -Heap)`
`list_to_heap/2 (heaps)`
: takes a proper list of *Key-Datum* pairs (such as `keysort/2` could be used to sort) and forms them into a heap.

`empty_heap(?Heap)`
`empty_heap/1 (heaps)`
: is true when *Heap* represents an empty heap. There is only one way it can be true.

`is_heap(+Heap)`
`is_heap/1 (heaps)`
: is true when *Heap* is a well formed heap. For this to be true, the size must be right and the tree must satisfy the heap condition.

`min_of_heap(+Heap, -Key, -Datum)`
`min_of_heap/3 (heaps)`
: returns the *Key-Datum* pair at the top of the heap (which is of course the pair with the smallest *Key*), but does not remove it from the heap. It fails if the heap is empty.

`min_of_heap(+Heap, -Key1, -Datum1, -Key2, -Datum2)`
`min_of_heap/5 (heaps)`
: returns the smallest (*Key1*) and second smallest (*Key2*) pairs in the heap, without deleting them. It fails if the heap does not have at least two elements.

`portray_heap(+Heap)`
`portray_heap/1 (heaps)`
: writes a heap to the current output stream in a pretty format so that you can easily see what it is. Note that a heap written out this way can *not* be read back in. The point of this predicate is that you can add a clause

```
portray(X) :- is_heap(X), !, portray_heap(X).
```

10.18 Declaring determinacy attributes—`library(is_directives)`

This library module gives access to the information declared by `is/2` directives. The `is/2` declarations can be used for declaring arbitrary predicate attributes, but the main application is for declaring determinacy information, and this is what is described here.

10.18.1 Introduction

Determinacy, i.e. whether a call to a predicate can produce more than one solution on backtracking, is an important property for understanding the predicate and the code that uses it. For this reason it is desirable to describe the behavior in the documentation that accompanies a predicate.

The determinacy properties of a predicate can also be used by various tools, and for this reason it is possible to declare the determinacy of a predicate in a way that can be automatically processed by such tools. One example is the determinacy analyzer in the SPIDER IDE (see Section 3.11 [SPIDER], page 32), which uses the declared determinacy of a called predicate to improve the precision of the analysis of the caller in the common case that the caller does not have any determinacy declaration of its own.

The SICStus libraries contain determinacy declarations for most exported predicates. These can serve as useful examples.

Determinacy declarations are *hints*, i.e. they are meant to convey the *expected* behavior. Due to the dynamic nature of Prolog, almost any call can fail, throw an exception, or succeed more than once for reasons not directly related to the called predicate. Examples where these things can happen are timeouts (`library(timeout)`) and functionality that can cause goals to run when a variable is bound, e.g. `freeze/2`. For this reason, anything that uses determinacy declarations must be prepared to handle any run-time behavior, not just the behavior specified by the declarations.

10.18.2 Available Determinacy Annotations

The following determinacy attributes are available:

`det` A call will always succeed exactly once. I.e. the number of solutions is expected to be one. This is probably the most common behavior.

`semidet` A call will fail, or succeed exactly once. I.e. the number of solutions is expected to be zero or one. This can be used for for describing tests, e.g. `X>Y`.

`multi` A call will succeed more than once. I.e. the number of solutions is expected to be one or more. This is uncommon, but could be used to describe the builtin `repeat/0`.

`nondet` A call may fail or succeed any number of times. I.e. the number of solutions is expected to be zero or more. This is the most general determinacy information and is what must be assumed unless no other information is available.

`failing` A call will fail. I.e. the number of solutions is expected to be zero. This is uncommon, but could be used to describe the builtin `false/0`.

`throwing` A call is expected to throw an exception. This is similar to `failing` in that the number of solutions is expected to be zero but differs in situations where failure is treated specially, like if-then-else. This is uncommon, but could be used to describe the builtin `throw/1` and some of the error reporting predicates in `library(types)`.

10.18.3 Syntax of Determinacy Declarations

Determinacy is declared using directives that use `is/2`. Note that in this usage, `is/2` has nothing to do with the arithmetic predicate of the same name.

The format of a determinacy directive is:

```
:- SPEC is ANNOTATION.
```

where *ANNOTATION* is one of the atoms used for determinacy annotation. The *SPEC* describes the predicate and can be either a predicate specification (like those used by the `abolish/1` predicate) or a skeletal goal (like those used by the `meta_predicate/1` directive).

Example:

```
% foo/2 is expected to always succeed, once, for any argument.
:- foo/2 is det.

foo(X, Y) :-
        Y = hello(X).

% bar/2, when called with a non-variable first argument,
% is expected to succeed at most once.
:- bar(+, ?) is semidet.

% bar/2, when called with a variable first argument,
% is expected to succeed any number of times.
:- bar(-, ?) is nondet.

bar('a', lowercase).
bar('A', uppercase).
...
bar('z', lowercase).
bar('Z', uppercase).
```

The *SPEC* tells which predicate is being annotated and, if it is a skeletal goal, it can restrict the declaration to only apply for the specified instantiation of the arguments. It can have one of the following forms:

Module`:`*Name*`/`*Arity*
Name`/`*Arity*
: *Module* and *Name* should be atoms, *Arity* should be a non-negative integer. This predicate specification denotes the predicate *Name* with arity *Arity* in module *Module*, where *Module* defaults to the source module.

Module`:`*Name*`(ARG1, ARG2, ..., ARGN)`
Name`(ARG1, ARG2, ..., ARGN)`
: This skeletal goal denotes the predicate *Name* with arity *N* in the module *Module*, where *Module* defaults to the source module. The argument positions is typically used to indicate an instantiation pattern.

10.18.3.1 Specifying Instantiation Patterns

Many predicates have different determinacy depending on how their arguments are instantiated. This can be indicated using the skeleton goal form of specification, with each argument of the skeleton goal being one of the following:

`+`
: Indicates that the argument is instantiated, i.e. it is not a variable when the predicate is called.

`-`
: Indicates that the argument is uninstantiated, i.e. it is a variable when the predicate is called.

`?`
`*`
: Indicates that the argument can be anything, i.e. the declared determinism is not affected by the instantiation of this argument

if the argument is a compound term with one argument (like `+ hello`, or `- Bar`), only the functor is used when interpreting the argument. This makes it possible to use variables as descriptive names for the arguments, e.g.

```
:- parent_of(+Parent, -Child) is nondet.
```

Not only variables can be used as descriptions in this way, any term is accepted.

When declaring determinism, the skeleton argument only specifies whether an argument is a variable or not. This is different from whether the argument should be considered input or output (`var(X)` has only an input argument, but will often be called with a variable as input argument).

10.18.3.2 Declaring Meta Predicate Determinacy

The declarations above is sufficient for most predicates. However, they do not suffice for predicates whose determinism depends on an argument goal, like `lists:maplist/2`.

For such predicates, i.e. meta predicates that take a single closure (goal) argument, it is possible to specify different determinacy for each of the possible determinacies of the closure argument, as in the following example:

```
% The last argument of dolist/3 is a closure with two
% suppressed arguments that will be supplied using call/3.
:- meta_predicate dolist(*, *, 2).

% This is the expected mode, a determinate producer. In this
% case dolist/3 will also succeed exactly once.
:- dolist(+, -, det) is det.

% If the closure can fail, then dolist/2 can also fail.
:- dolist(+, -, semidet) is semidet.

% If the closure succeeds more than once, then so will dolist/2.
:- dolist(+, -, multi) is multi.

% If the closure always fails (a strange usage, indeed) then dolist/3
% can nevertheless succeed, when the input is an empty list.
:- dolist(+, -, failing) is semidet.

% In general, dolist/3 will be nondeterminate if the closure is
% nondeterminate.
% This declaration may seem redundant, but it may not be for some tools.
:- dolist(+, -, nondet) is nondet.

% dolist/3 calls the argument closure, which expects two extra
% arguments, on each pair of corresponding list elements
dolist([], [], _G_2).          % The closure is ignored here
dolist([X|Xs], [Y|Ys], G_2) :-
        call(G_2, X, Y),
        dolist(Xs, Ys, G_2).

:- square/2 is det. % always expected to succeed (once)
square(X, XX) :-
        XX is X*X.

%  Example use:
%  | ?- square_list([1,2,3], Squares).
%  Squares = [1,4,9] ?
%
% It can be inferred that this is expected to succeed exactly once.
square_list(Numbers, Squares) :-
        % Calls square(X,Y) on each X in Numbers and Y in Squares.
        % Since square/2 is 'det', the call do dolist/3 will
        % be considered 'det' as well.
        dolist(Numbers, Squares, square).
```

10.18.4 Using Determinacy Declarations

Since determinacy declarations by necessity are only *hints*, it is often better to focus on the expected behavior rather than the exact behavior when declaring determinism for a predicate.

Also, only very simple instantiation patterns can be specified, so it may be useful to pretend they indicate more than they actually do.

As an example, consider how to declare the determinacy of the builtin `length(List, Length)`:

1. It will succeed at most once if the second argument is instantiated (It will succeed once if the first argument can be unified with a list of the specified length, otherwise it will fail), regardless of the instantiation of the first argument. This corresponds to the attribute `semidet`.
2. It will succeed exactly once if the first argument is a proper list and the second argument is a variable. This corresponds to the attribute `det`.
3. It will succeed more than once if the first argument is a partial list (i.e. is a variable or has a variable tail). This corresponds to the attribute `multi`.
4. Finally, it will throw an exception for some invalid inputs, but this is not specified with determinacy declarations (`... is throwing` is only meant for predicates expected to *always* throw an exception).

However, it is not possible to specify "proper list", "partial list" and non-list as instantiation patterns. On the other hand, it would be unfortunate to not be able to say anything about the determinacy of `length/2`.

In such cases it may make sense to pretend that '`+`', the non-variable argument instantiation, means "a properly/fully instantiated input", i.e. a "proper list" in the case of `length/2`. Similarly, it may make sense to pretend that '`?`', any instantiation, means "a partially instantiated input", i.e. a "partial list" in the case of `length/2`.

So, for the builtin `length/2` it would make sense to specify the following determinacy declarations:

```
:- length(*, +) is semidet.     % this is precise
:- length(+, -) is det.         % pretend '+' means proper list
:- length(?, -) is multi.       % pretend '?' means partial list
```

It is up to the documentation accompanying the predicate, and any tools that use these declarations, to handle this appropriately.

10.18.5 Accessing Determinacy Declarations at Runtime

The determinacy declarations are saved when code is compiled or consulted and can be accessed when the code has been loaded. This could be used by documentation generators, smart debuggers, and many other purposes, not all of which documented. New uses may

be added without notice, so you should ignore any recorded `is/2` directive that you do not understand.

The loaded `is/2` directives can be accessed using the following, non-determinate, predicate:

```
current_is_directive(Skel, M, Annotation, Spec, Directive, Context).
```

Skel This is a compound term with the same name as the predicate and one anonymous variable in each argument position.

M This is the module of the predicate specification. Typically the same as the source module.

Annotation
This is the second argument of the `is/2` directive.

Spec This is the first argument of the `is/2` directive, with module prefixes peeled off.

Directive This is the entire `is/2` directive (without the surrounding `:- ...`).

Context this is the source module.

Consider the following code:

```
:- module(example, [p1/3]).

:- p1/3 is det.
:- user:bar(+, +) is semidet.
```

This corresponds to the following two clauses of `current_is_directive/6`:

```
current_is_directive(p1(_,_,_),
                     example,
                     det,
                     p1/3,
                     (p1/3 is det),
                     example).
current_is_directive(bar(_,_),
                     user,
                     semidet,
                     bar(+,+),
                     (user:bar(+,+) is semidet),
                     example).
```

Exported predicates:

`current_is_directive(`*Skel*`, `*M*`, `*Annotation*`, `*Spec*`, `*Directive*`, `*Context*`).`
Low-level access to the information recorded by `is/2` directives. See the library documentation for details.

`current_is_directive(:`*`MSkel`*`, `*`Annotation`*`, `*`Spec`*`).`
Like `current_is_directive(`*`Skel`*`, `*`M`*`, `*`Annotation`*`, `*`Spec`*`, _, _)` where *M* and *Skel* are the parts of the meta argument *MSkel*.

10.19 Jasper Interface—`library(jasper)`

10.19.1 Jasper Overview

Jasper is a bi-directional interface between Java and SICStus. The Java side of the interface consists of a Java package (`se.sics.jasper`) containing classes representing the SICStus runtime system (`SICStus`, `SPTerm`, etc). The Prolog part is designed as a library module (`library(jasper)`).

Please note: If only uni-directional communicaton from Java to Prolog is needed, then the newer `library('jsonrpc/jsonrpc_server')` (see Section 10.21 [lib-jsonrpc], page 623) is probably an easier way to expose a Prolog program to a client written in some other programming language, such as Java. One advantage is that it uses a standardized, text-based, protocol for communication, which makes it easier to integrate with arbitrary client languages (not just Java), test, and troubleshoot. Like the Jasper library the JSON-RPC library gives the client access to the full power of Prolog, including backtracking and constrained variables.

The library module `library(jasper)` (see Section 10.19.8 [The Jasper Library], page 604) provides functionality for controlling the loading and unloading the JVM (Java Virtual Machine), method call functionality (`jasper_call/4`), and predicates for managing object references.

Jasper can be used in two modes, depending on which system acts as *Parent Application*. If Java is the parent application, then the SICStus runtime kernel will be loaded into the JVM using the `System.loadLibrary()` method (this is done indirectly when instantiating a `SICStus` object). In this mode, SICStus is loaded as a runtime system (see Section 6.7.1 [Runtime Systems], page 323).

As of release 3.9, it is possible to use Jasper in multi threaded mode. This means that several Java threads can call SICStus runtime via a server thread. The communication between the client threads and the server thread is hidden from the programmer, and the API is based on Java `Interfaces`, which are implemented both by the multi thread capable classes and the pre-3.9 classes, which are restricted to single threaded mode. The decision whether to run in single thread mode or in multi threaded mode can thus be left until runtime.

If SICStus is the parent application, then Java will be loaded as a foreign resource using the query `use_module(library(jasper))`. The Java engine is initialized using `jasper_initialize/[1,2]`.

- Some of the information in this chapter is a recapitulation of the information in Chapter 6 [Mixing C and Prolog], page 293. The intention is that this chapter should be possible to read fairly independently.

- Before proceeding, please read Section "Jasper Notes" in *SICStus Prolog Release Notes*. It contains important information about requirements, availability, installation tips, limitations, and how to access other (online) Jasper/Java resources.

10.19.2 Getting Started

See Section "Getting Started" in *SICStus Prolog Release Notes* for a detailed description of how to get started using the interface. It addresses issues such as finding SICStus from within Java and vice versa, setting the classpath correctly, etc. If you have trouble in getting started with Jasper, then read that chapter before contacting SICStus Support.

10.19.3 Calling Prolog from Java

Calling Prolog from Java is done by using the Java package `se.sics.jasper`. This package contains a set of Java classes, which can be used to create and manipulate terms, ask queries and request one or more solutions. The functionality provided by this set of classes is basically the same as the functionality provided by the C-Prolog interface (see Chapter 6 [Mixing C and Prolog], page 293).

It is possible to debug the Prolog code using the Prolog debugger, either from the command line or from the SICStus Prolog IDE (SPIDER), see Section 6.9.3 [Examples of Debugging Runtime Systems], page 348.

The usage is easiest described by some examples.

10.19.3.1 Single Threaded Example

The following is a Java version of the `train` example. See Section 6.8.1 [Train Example], page 335, for information about how the `train.sav` file is created.

This code demonstrates the use of Jasper in single threaded mode. In this mode only one thread can access the SICStus runtime via a `SICStus` object.

```
                                                                    // Simple.java
import se.sics.jasper.SICStus;
import se.sics.jasper.Query;
import java.util.HashMap;

public class Simple
{
    public static void main(String argv[]) {

        SICStus sp;
        Query query;
        HashMap WayMap = new HashMap();

        try {
            sp = new SICStus(argv,null);

            sp.restore("train.sav");

            query = sp.openPrologQuery("connected('Örebro', 'Stockholm',
                                       Way, Way).",
                                   WayMap);

            try {
                while (query.nextSolution()) {
                    System.out.println(WayMap);
                }
            } finally {
                query.close();
            }
        }
        catch ( Exception e ) {
            e.printStackTrace();
        }
    }
}
```

It is assumed that the reader has read the section on Section 10.19.2 [Getting Started], page 590, which describes how to get the basics up and running.

This is how the example works:

1. Before any predicates can be called, the SICStus runtime system must be initialized. This is done by instantiating the `SICStus` class. Each SICStus object correspond to one independent copy of the SICStus runtime system (a rather heavy-weight entity).

   In this example, we have specified `null` as the second argument to `SICStus`. This instructs SICStus to search for `sprt.sav` using its own internal methods.

2. Queries are made through method `query`. The arguments to this method are a string

specifying a Prolog goal, and a `Map`, which will contain a mapping of variable names to bindings. This method is for finding a single solution. Note that the string is read by the Prolog reader, so it must conform to the syntax rules for Prolog, including the terminating period. There are two more methods for making queries: `queryCutFail`, for side effects only, and `openQuery` to produce several solutions through backtracking.

3. The next step is to load the Prolog code. This is done by the method `restore`. Corresponds to `SP_restore()` in the C-interface. See Section 6.7.4.2 [Loading Prolog Code], page 335. Note that this method must be called before any other SICStus method is called. See the HTML Jasper documentation for details.
4. The `openQuery` method returns a reference to a query, an object implementing the `Query` interface. To obtain solutions, the method `nextSolution` is called with no arguments. `nextSolution` returns `true` as long as there are more solutions, and the example above will print the value of the Map `WayMap` until there are no more solutions. Note that the query must be closed, even if `nextSolution` has indicated that there are no more solutions.

10.19.3.2 Multi Threaded Example

Following is a Java version of the `train` example.

This is a multi threaded version of the `train` example. In this mode several threads can access the SICStus runtime via a `Prolog interface`. The static method `Jasper.newProlog()` returns an object that implements a `Prolog interface`. A thread can make queries by calling the query-methods of the Prolog object. The calls will be sent to a separate server thread that does the actual call to SICStus runtime.

```
                                                        // MultiSimple.java
import se.sics.jasper.Jasper;
import se.sics.jasper.Query;
import se.sics.jasper.Prolog;
import java.util.HashMap;

public class MultiSimple
{
    class Client extends Thread
    {
        Prolog jp;
        String qs;

        Client(Prolog p,String queryString)
        {
            jp = p;
            qs = queryString;
        }
        public void run()
        {
            HashMap WayMap = new HashMap();
            try {
                synchronized(jp) {
                    Query query = jp.openPrologQuery(qs, WayMap);
                    try {
                        while (query.nextSolution()) {
                            System.out.println(WayMap);
                        }
                    } finally {
                        query.close();
                    }
                }
            } catch ( Exception e ) {
                e.printStackTrace();
            }
        }
    }
```

```
    {
        try {
            Prolog jp = Jasper.newProlog(argv,null,"train.sav");

            Client c1 =
                new Client(jp,"connected('Örebro', 'Hallsberg',
                           Way1, Way1).");
            c1.start();
            // The prolog variable names are different from above
            // so we can tell which query gives what solution.
            Client c2 =
                new Client(jp,"connected('Stockholm', 'Hallsberg',
                           Way2, Way2).");
            c2.start();
        }
        catch ( Exception e ) {
            e.printStackTrace();
        }
    }

    public static void main(String argv[])
    {
        new MultiSimple(argv);
    }
}
```

1. The `Prolog` object `jp` is the interface to SICStus. It implements the methods of `interface Prolog`, making it possible to write quite similar code for single threaded and multi threaded usage of Jasper. The static method `Jasper.newProlog()` returns such an object.

2. In this example, the Prolog code is loaded by the server thread just after creating the SICStus object (which is invisible to the user). The third argument to the method `Jasper.newProlog` is the .sav file to restore. Two threads are then started, which will make different queries with the `connected` predicate.

3. `openPrologQuery` is not recommended in multi threaded mode, but if you must use it from more than one Java thread, then you should enclose the call to `openPrologQuery` and the closing of the query in a single synchronized block, synchronizing on the Prolog object. See Section 10.19.6 [SPTerm and Memory], page 601, for details on one of the reasons why this is necessary.

10.19.3.3 Another Multi Threaded Example (Prolog Top Level)

This is another multi threaded version of the `train` example (see Section 6.8.1 [Train Example], page 335).

In this example, Prolog is the top level and Java is invoked via `library(jasper)`.

```
                                                        // MultiSimple2.java
import se.sics.jasper.Jasper;
import se.sics.jasper.Query;
import se.sics.jasper.Prolog;
import se.sics.jasper.SICStus;
import java.util.ArrayList;
import java.util.HashMap;
import java.util.ListIterator;

public class MultiSimple2
{
    class Client extends Thread
    {
        Prolog jp;
        SICStus sp;
        String qs;

        Client(Prolog p, SICStus s, String queryString)
        {
            jp = p;
            sp = s;
            qs = queryString;
        }
        public void run()
        {
            HashMap WayMap = new HashMap();
            try {
                synchronized(jp) {
                    Query query = jp.openPrologQuery(qs, WayMap);
                    try {
                        while (query.nextSolution()) {
                            System.out.println(WayMap);
                        }
                    } finally {
                        query.close();
                    }
                }
            } catch ( Exception e ) {
                e.printStackTrace();
            }
        }
    }
```

```
class Watcher extends Thread
{
    SICStus mySp;
    ArrayList threadList = new ArrayList(2);

    public boolean add(Client cl)
    {
        return threadList.add((Object)cl);
    }
    boolean at_least_one_is_alive(ArrayList tl)
    {
        ListIterator li = tl.listIterator();
        boolean f = false;
        while (li.hasNext()) {
            boolean alive = ((Client)(li.next())).isAlive();
            f = f || alive;
        }
        return f;
    }
    public void run()
    {
        while (at_least_one_is_alive(threadList)) {
            try {
                this.sleep(1000);
            } catch (InterruptedException ie) {
                System.err.println("Watcher interrupted.");
            }
        }
        mySp.stopServer();
    }
    Watcher(SICStus sp)
    {
        mySp = sp;
    }
}
```

```
    public void CallBack()
    {
        try {
            SICStus sp = SICStus.getCaller(); // get the SICStus object
            sp.load("train.ql");
            Prolog jp = sp.newProlog(); // Create a new Prolog Interface
            Client c1 =
                new Client(jp, sp,
                           "connected('Örebro', 'Hallsberg', Way1, Way1).");
            c1.start();
            // The prolog variable names in the Map are different from above so
            // we can tell which query gives what solution.
            Client c2 =
                new Client(jp, sp,
                           "connected('Stockholm', 'Hallsberg', Way2, Way2).");
            c2.start();
            Watcher w = new Watcher(sp);
            w.add(c1);
            w.add(c2);
            w.start();
            sp.startServer();   // And finally start the server. This
                                //  method call does not return until
                                //  some other thread calls sp.stopServer().
        }
        catch ( Exception e ) {
            e.printStackTrace();
        }
    }

}
```

```
                                                        % multisimple2.pl
:- use_module(library(jasper)).
main:-
        jasper_initialize(JVM),
        jasper_new_object(JVM,
                          'MultiSimple2',
                          init,
                          init,
                          Obj),
        jasper_call(JVM,
                    method('', 'CallBack', [instance]),
                    'CallBack'(+object('')),
                    'CallBack'(Obj)).
```

1. This example is similar to the previous multi threaded example See Section 10.19.3.2

[Multi Threaded Example], page 592, but in this case Prolog is the top level.

2. Since a SICStus object already exists when the java method `CallBack` is called, we cannot use `Jasper.newProlog` to obtain a `Prolog` interface. Instead we can use the `SICStus` method `getCaller` to get a handle on the `SICStus` object.

3. In this example we cannot use the `restore` method to load the Prolog saved state, since it unloads all foreign resources. This includes `library(jasper)` from which the call to Java was made. Instead the method `SICStus.load` can be used to load a compiled Prolog file. See the HTML Jasper documentation for details on this method. See Section 4.3.2 [ref-lod-lod], page 84, for how to create a '`.ql`' file.

4. The rest of the example is similar to the previous multi threaded example with the addition of a watcher class, which is used to monitor the client threads. This is necessary if the method `startServer` is to return. See the HTML Jasper documentation on the methods `SICStus.startServer` and `SICStus.stopServer`.

10.19.4 Jasper Package Class Reference

Detailed documentation of the classes in the `jasper` package can be found in the HTML documentation installed with SICStus and also on the SICStus documentation page (`https://sicstus.sics.se/documentation.html`).

> **Please note**: None of the `se.sics.jasper` methods are thread safe, unless explicitly mentioned, they can only be called from the thread that created the SICStus object. (This is different from how `se.sics.jasper` worked in release 3.8.)

As of release 3.9, Jasper supports multi threaded mode. Several Java threads can access SICStus runtime through a server thread that does the actual calls.

The API is defined by three `interfaces`: `Prolog`, `Query` and `Term`. The methods of these `interfaces` are implemented by inner classes of the `Jasper` server. Instances of these inner classes are returned by methods of the class `Jasper` and can then be used from multiple threads by the Java programmer.

In multi threaded mode the Java programmer obtains an object implementing the `interface Prolog`. That interface has methods similar to the methods of the `SICStus` class described below. `Interface Query` and `interface Term` have the same relations to `class SPQuery` and `class SPTerm`, respectively. In addition the `SICStus` class, the `SPQuery` class and the `SPTerm` class all implement the above interfaces. The methods of the interfaces are preferred over the old methods.

See the HTML documentation for details on the methods of the `interfaces`.

See Section "Jasper Notes" in *SICStus Prolog Release Notes* for limitations in multi threaded Jasper.

`boolean query (String module, String name, SPTerm args[])` [Method on `SICStus`]

Call *name* with *args* (a vector of `SPTerm` objects). Like `once(Module:Name(Args...))`.

Returns `true` if the call succeeded, `false` if the call failed, i.e. there were no solutions.

Introduced in release 3.8.5.

`boolean query (String goal, Map varMap)` [Method on `SICStus`]

Call a goal specified as a string.

`goal` The textual representation of the goal to execute, with terminating period.

`varMap` A map from variable names to SPTerm objects. Used both for passing variable bindings into the goal and to obtain the bindings produced by the goal. May be null.

On success, the values of variables with names that do not start with underscore ('_') will be added to the map.

Returns `true` if the call succeeded, `false` if the call failed, i.e. there were no solutions.

```
HashMap varMap = new HashMap();

varMap.put("File", new SPTerm(sp, "datafile.txt"));

if (sp.query("see(File),do_something(Result),seen.", varMap)) {
   System.out.println("Result==" +
                      ((SPTerm)varMap.get("Result")).toString());
} else {
   System.out.println("Failed);
}
```

Introduced in release 3.8.5.

`boolean query (SPPredicate pred, SPTerm args[])` [Method on `SICStus`]

Obsolescent version of `SICStus::query()` above.

`boolean queryCutFail (String module, String name, SPTerm args[])` [Method on `SICStus`]

Call *name* with *args* for side effect only.

As `SICStus.query()` it only finds the first solution, and then it cuts away all other solutions and fails.

It corresponds roughly to the following Prolog code:

```
( \+ call(Module:Name(Args...)) -> fail; true )
```

Introduced in release 3.8.5.

`boolean queryCutFail (String goal, Map varMap)` [Method on `SICStus`]
Call a goal specified as a string, for side effect only. The map is only used for passing variable bindings *into* the goal. See `query` for details

Introduced in release 3.8.5.

`boolean queryCutFail (SPPredicate pred, SPTerm args[])` [Method on `SICStus`]
Obsolescent version of `queryCutFail` above.

`SPQuery openQuery (String module, String name, SPTerm args[])` [Method on `SICStus`]
Sets up a query (an object of class `SPQuery`), which can later be asked to produce solutions. You must *close* an opened query when no more solutions are required; see below.

It corresponds roughly to the following Prolog code:

```
( true     % just calling openQuery does not call the predicate

; % failing (nextSolution) will backtrack for more solutions
  call(Module:Name(Args...))
)
```

Introduced in release 3.8.5.

`boolean openQuery (String goal, Map varMap)` [Method on `SICStus`]
Sets up a query specified as a string. See `openQuery` and `query` for details.

Introduced in release 3.8.5.

`SPQuery openQuery (SPPredicate pred, SPTerm args[])` [Method on `SICStus`]
Obsolescent version of `openQuery` above.

The following methods are used to obtain solutions from an opened query and to tell the SICStus runtime system that no more answers are required.

`boolean nextSolution ()` [Method on `SPQuery`]
Obtain the next solution. Returns `true` on success and `false` if there were no more solutions. When you are no longer interested in any more solutions, you should call `SPQuery.close` or `SPQuery.cut` to *close* the query.

Returns `true` if a new solution was produced, `false` if there were no more solutions. This corresponds roughly to `fail/0`. See Section 10.19.6 [SPTerm and Memory], page 601, for additional details.

`close ()` [Method on `SPQuery`]

Cut and fail away any previous solution to the query. After closing a query object, you should not use it anymore. This corresponds roughly to `!, fail`. See Section 10.19.6 [SPTerm and Memory], page 601, for additional details.

`cut ()` [Method on `SPQuery`]

Cut, but do not fail away, any previous solution. After closing a query object with `cut`, you should not use it anymore. This corresponds roughly to `!`. See Section 10.19.6 [SPTerm and Memory], page 601, for additional details.

10.19.5 Java Exception Handling

Exceptions are handled seamlessly between Java and Prolog. This means that exceptions can be thrown in Prolog and caught in Java and the other way around. For example, if a predicate called from Java throws an exception with `throw/1` and the predicate itself does not catch the exception, then the Java method that performed the query, `queryCutFail()` for example, will throw an exception (of class `SPException`) containing the exception term. Symmetrically, a Java exception thrown (and not caught) in a method called from Prolog will cause the corresponding predicate (`simple/2` in the example above) to throw an exception consisting of the exception object (in the internal Prolog representation of a Java object). See Section 10.19.8.5 [Handling Java Exceptions], page 615, for examples of catching Java exceptions in Prolog.

10.19.6 SPTerm and Memory

Java and Prolog have quite different memory management policies. In Java, memory is reclaimed when the garbage collector can determine that no code will ever use the object occupying the memory. In Prolog, the garbage collector additionally reclaims memory upon failure (such as the failure implied in the use of `SPQuery.close()` and `SPQuery::nextSolution()`). This mismatch in the notion of memory lifetime can occasionally cause problems.

10.19.6.1 Lifetime of SPTerms and Prolog Memory

There are three separate memory areas involved when manipulating Prolog terms from Java using `SPTerm` objects. These areas have largely independent life times.

1. The `SPTerm` object itself.
2. Creating `SPTerm` object also tells Prolog to allocate an SP_term_ref. SP_term_refs have a life-time that is independent of the lifetime of the corresponding SPTerm object.
3. Any Prolog terms allocated on the global stack. An `SPTerm` refer to a Prolog term indirectly via a SP_term_ref.

A SP_term_ref *ref* (created as a side effect of creating a `SPTerm` object) will be reclaimed if either:

- Java returns to Prolog. This may never happen, especially if Java is the top-level application.

- Assume there exists a still open query q that was opened before the SP_term_ref *ref* was created. The SP_term_ref *ref* will be reclaimed if the query q is closed (using `q.close()` or `q.cut()`) or if `q.nextSolution()` is called.

An `SPTerm` object will be invalidated (and eventually reclaimed by the garbage collector) if the corresponding SP_term_ref is reclaimed as above. If passed an invalidated SP_term_ref, then most methods will throw an `IllegalTermException` exception.

A Prolog term (allocated on the global stack) will be deallocated when:

- Assume there exists a still open query q that was opened before the term was created. The memory of the term will be reclaimed if the query q is closed using `q.close()` or if `q.nextSolution()` is called. The memory is not reclaimed if the query is closed with `q.cut()`.

  Please note: it is possible to get a `SPTerm` object and its SP_term_ref to refer to deallocated Prolog terms, in effect creating "dangling" pointers in cases where the `SPTerm` would ordinarily still be valid. This will be detected and invalidate the `SPTerm`:

```
{
  SPTerm old = new SPTerm(sp);
  SPQuery q;

  q = sp.openQuery(....);
  ...
  old.consFunctor(...);  // allocate a Prolog term newer than q
  ...
  q.nextSolution(); // or q.close()
  // error:
  // The SP_term_ref in q refers to an invalid part of the global stack
  // the SPTerm old will be invalidated by q.nextSolution()
}
```

10.19.6.2 Preventing SPTerm Memory Leaks

Some uses of `SPTerm` will leak memory on the Prolog side. This happens if a new `SPTerm` object is allocate, but Java neither returns to Prolog nor backtracks (using the method `close`, `cut` or `nextSolution`) into a query opened before the allocation of the `SPTerm` object.

As of release 3.8.5, it is possible to explicitly delete a `SPTerm` object using the `SPTerm.delete()` method. The `delete()` method invalidates the SPTerm object and makes the associated SP_term_ref available for reuse.

Another way to ensure that all SP_term_refs are deallocated is to open a dummy query only for this purpose. The following code demonstrates this:

```
// Always synchronize over creation and closing of SPQuery objects
synchronized (sp) {
    // Create a dummy query that invokes true/0
    SPQuery context = sp.openQuery("user","true",new SPTerm[]{});
    // All SP_term_refs created after this point will be reclaimed by
    // Prolog when doing context.close() (or context.cut())

    try {           // ensure context is always closed
        SPTerm tmp = new SPTerm(sp); // created after context
        int i = 0;

        while (i++ < 5) {
            // reused instead of doing tmp = new SPTerm(sp,"...");
            tmp.putString("Iteration #" + i + "\n");
            // e.g. user:write('Iteration #1\n')
            sp.queryCutFail("user", "write", new SPTerm[]{tmp});
        }
    }
    finally {
        // This will invalidate tmp and make Prolog
        // reclaim the corresponding SP_term_ref
        context.close(); // or context.cut() to retain variable bindings.
    }
}
```

10.19.7 Java Threads

None of the pre-3.9 methods in `se.sics.jasper` are thread safe. They can only be called from the thread that created the SICStus object. (This is different from how `se.sics.jasper` used to work in release 3.8.)

As of 3.9 there are two ways to set up for calls to SICStus from multiple threads.

One way is to use the static method `newProlog` in the class `Jasper`:

`Prolog newProlog (String argv[], String bootPath)` [Method on `Jasper`]
Creates a `Prolog` interface object. Starts a server thread, which will serve that `Prolog`. The server thread takes care of all interaction with the Prolog runtime, making sure that all calls to the Prolog runtime will be done from one and the same thread.

See the HTML documentation on the `interface Prolog` for details on what methods are available for a client thread.

Another way is to create a SICStus object and use the following methods:

`Prolog newProlog ()` [Method on `SICStus`]
: Returns the `Prolog` interface for this SICStus object. Creates a server and a client (`Prolog`) interface for this SICStus object. The server may be started by calling `startServer()`

`startServer ()` [Method on `SICStus`]
: Start serving requests from a Prolog client. This method does not return until another thread calls `stopServer()`. Before calling this method you should call `newProlog()` and hand the result over to another Thread.

`stopServer ()` [Method on `SICStus`]
: Stops the server. Calling this method causes the Thread running in the `startServer()` method to return.

As with the first method, the `interface Prolog` defines the methods available for the client threads.

10.19.8 The Jasper Library

The Jasper library module is the Prolog interface to the Java VM. It corresponds to the `se.sics.jasper` package in Java. It is loaded by executing the query:

```
| ?- use_module(library(jasper)).
```

The Jasper library fully supports multiple SICStus runtimes in a process.

Jasper cannot be used when the SICStus runtime is statically linked to the executable, such as when using `spld --static`.

The following functionality is provided:

- Initializing the Java VM using the *JNI Invocation API* (`jasper_initialize/[1,2]`, `jasper_deinitialize/1`).
- Creating and deleting Java objects directly from Prolog (`jasper_new_object/5`).
- Method calls (`jasper_call/4`).
- Global and local (object) reference management (`jasper_create_global_ref/3`, `jasper_delete_global_ref/2`, `jasper_delete_local_ref/2`). Global references are used to prevent the JVM from garbage collecting a Java object referenced from Prolog.
- There is also a subdirectory containing example programs (`library('jasper/examples')`).

10.19.8.1 Jasper Method Call Example

We begin with a small example.

```
                                                        // Simple.java
import se.sics.jasper.*;

public class Simple {
  private String instanceDatum = "this is instance data";

  static int simpleMethod(int value) {
    return value*42;
  }

  public String getInstanceData(String arg) {
    return instanceDatum + arg;
  }
}
```

Compile `Simple.java` (UNIX):

```
% javac -deprecation \
  -classpath <installdir>/lib/sicstus-
4.10.2/bin/jasper.jar Simple.java
```

Under Windows this may look like (the command should go on a single line):

```
C:\> c:\jdk1.2.2\bin\javac -deprecation
 -classpath "D:\Program Files\SICStus Prolog VC16
4.10.2\bin\jasper.jar" Simple.java
```

The option '`-deprecation`' is always a good idea, it makes `javac` warn if your code use deprecated methods.

```
                                                        % simple.pl
:- use_module(library(jasper)).
main :-
   %% Replace '/my/java/dir' below with the path containing
   %% 'Simple.class', e.g. to look in the current directory use
   %% classpath(['.']).
   %% You can also use the CLASSPATH environment variable and call
   %% jasper_initialize(JVM)
   %% Under Windows it may look like classpath(['C:/MyTest'])
   jasper_initialize([classpath(['/my/java/dir'])],JVM),

   format('Calling a static method...~n',[]),
   jasper_call(JVM,
               method('Simple','simpleMethod',[static]), % Which method
               simple_method(+integer,[-integer]), % Types of arguments
               simple_method(42,X)), % The arguments.
   format('simpleMethod(~w) = ~w~n',[42,X]),

   format('Creating an object...~n',[]),
   jasper_new_object(JVM, 'Simple', init, init, Object),

   format('Calling an instance method on ~w...~n',[Object]),
   jasper_call(JVM,
               method('Simple','getInstanceData',[instance]),
               %% first arg is the instance to call
               get_instance_data(+object('Simple'), +string,[-string]),
               get_instance_data(Object, 'foobar', X1)),
   format('getInstanceData(~w) = ~w~n',['foobar',X1]).
```

Then, run SICStus:

```
% echo "[simple],main." | sicstus
SICStus 4.10.2 ...
Licensed to SICS
% consulting /home1/jojo/simple.pl...
[...]
% consulted /home1/jojo/simple.pl in module user, 100 msec 26644 bytes
Calling a static method...
simpleMethod(42) = 1764
Creating an object...
Calling and instance method on $java_object(135057576)...
getInstanceData(foobar) = this is instance datafoobar
```

This example performed three things.

- The static method `simpleMethod` was called with argument '42', and returned the square of '42', '1764'.

- An object of class `Simple` was created.
- The method `getInstanceData` was executed on the object just created. The method took an atom as an argument and appended the atom to a string stored as a field in the object, yielding "this is instance datafoobar".

10.19.8.2 Jasper Library Predicates

`jasper_initialize(-`*`JVM`*`)`
`jasper_initialize(+`*`Options`*`, -`*`JVM`*`)`

Loads and initializes the Java VM. *JVM* is a reference to the Java VM. *Options* is a list of options. The options can be of the following types:

`classpath(<classpath>)`

If `<classpath>` is an atom, then it will be added (unmodified) to the Java VM's classpath. If `<classpath>` is a list, then each element will be expanded using `absolute_file_name/2` and concatenated using the Java VM's path separator. Example:

```
classpath([library('jasper/examples'),'$HOME/joe'])
```

In addition to the classpaths specified here, Jasper will automatically add `jasper.jar` to the classpath together with the contents of the `CLASSPATH` environment variable.

`if_exists(`*`option`*`)`

This option determines what happens if a JVM has already been initialized, either through a previous call to `jasper_initialize` or because Prolog have been called from Java. If a JVM already exists, then the other options are ignored.

`ok` The default. Argument *JVM* is bound to the existing JVM.

`fail` The call to `jasper_initialize/2` fails.

`error` The call to `jasper_initialize/2` throws an exception (`java_exception(`*`some text`*`)`).

`if_not_exists(`*`option`*`)`

This option determines what happens if a JVM has not already been initialized.

`ok` The default. The remaining options are used to initialize the JVM.

`fail` The call to `jasper_initialize/2` fails.

`error` The call to `jasper_initialize/2` throws an exception (`java_exception(`*`some text`*`)`).

As an example, to access the currently running JVM and to give an error if there is no running JVM use `jasper_initialize([if_exists(ok),if_not_exists(error)], JVM)`.

Option The option is an atom that will be passed directly to the Java VM as an option. This enables the user to send additional options to the Java VM. Example:

```
jasper_initialize(['-Dkenny.is.dead=42'],JVM),
```

In addition to the options specified by the user, Jasper adds a couple of options on its own in order for Java to find the Jasper classes and the Jasper native library.

There is currently no support for creating multiple JVMs (few JDKs, if any, supports this).

`jasper_deinitialize(+`*JVM*`)`

De-initialize Java. Do Not call this, current versions of the JVM does not support deinitialization.

`jasper_call(+`*JVM*`,+`*Method*`,+`*TypeInfo*`,+`*Args*`)`

Calls a Java static or instance method.

JVM A reference to the Java VM, as obtained by `jasper_initialize/[1,2]`.

Method

A term of the form `method(`*ClassName*`,` *MethodName*`,` *Flags*`)` that identifies the method to call.

ClassName

This is the *Fully Qualified Classname* of the class (for example, `java/lang/String`) of the object or where to look for the static method. Note that you need to surround the atom with single quotes since it contains `/` characters. The class is ignored when calling instance methods but should still be an atom, e.g. `''`.

Name This is the name of the method, as an atom.

Flags This is the singleton list `[instance]` for instance methods and `[static]` for static methods.

TypeInfo Information about the argument types and the argument conversion that should be applied. See Section 10.19.8.3 [Conversion between Prolog Arguments and Java Types], page 610, for more information on specifying argument types.

Note that for an instance method the first argument must be an object reference (specified with `+object(`*Class*`)`). In this case the class is ignored but should still be an atom, e.g. `''`.

Args A term with one position for each argument to the method. For an instance method the first argument is the instance.

`jasper_new_object(+`*JVM*`,+`*ClassName*`,+`*TypeInfo*`,+`*Args*`,-`*Object*`)`

Creates a new Java object.

See `jasper_call/4` above for an explanation of the arguments *JVM*, *ClassName*, *TypeInfo* and *Args*.

ClassName
: An an atom containing the *fully qualified classname*

TypeInfo
: *TypeInfo* has the same format as for a static void method.

Args
: A term with one position for each argument to the constructor.

Object
: This argument is bound to a (local) reference to the created object. See Section 10.19.8.4 [Global vs. Local References], page 614.

As an example, the following code creates a `java/lang/Integer` object initialized from a string of digits. It then calls the instance method `doubleValue` to obtain the floating point representation of the Integer.

```
| ?- Chars = "4711",
     %% get existing JVM
     jasper_initialize([if_not_exists(error)], JVM),
     jasper_new_object(JVM, 'java/lang/Integer',
                       init(+chars), init(Chars), S),
     jasper_call(JVM,
                 method('java/lang/Integer', double-
Value, [instance]),
                 to_double(+object('java/lang/Integer'), [-
double]),
                 to_double(S,X)).

S = '$java_object'(135875344),
X = 4711.0,  % note that this is now a floating point number
JVM = '$jvm'(1076414148),
Chars = [52,55,49,49]  % a.k.a. "4711"
```

`jasper_create_global_ref(+JVM,+Ref,-GlobalRef)`
: Creates a global reference (*GlobalRef*) for a (non-null) Java object (*Ref*). See Section 10.19.8.4 [Global vs. Local References], page 614.

`jasper_delete_global_ref(+JVM,+GlobalRef)`
: Destroys a global reference. See Section 10.19.8.4 [Global vs. Local References], page 614.

`jasper_create_local_ref(+JVM,+Ref,-LocalRef)`
: Creates a local reference (*LocalRef*) for a (non-null) Java object (*Ref*). See Section 10.19.8.4 [Global vs. Local References], page 614. Rarely needed.

`jasper_delete_local_ref(+JVM,+GlobalRef)`
: Destroys a local reference. See Section 10.19.8.4 [Global vs. Local References], page 614.

`jasper_is_jvm(+JVM)`
: Succeeds if *JVM* is a reference to a Java Virtual Machine.

`jasper_is_object(+`*Object*`)`
`jasper_is_object(+`*JVM*`,+`*Object*`)`
: Succeeds if *Object* is a reference to a Java object. The representation of Java object *will* change so use `jasper_is_object/1` to recognize objects instead of relying on the internal representation. Currently the *JVM* argument is ignored. If, and when, multiple JVMs becomes a possibility `jasper_is_object/2` will verify that *Object* is an object in a particular JVM.

`jasper_is_same_object(+`*JVM*`,+`*Object1*`,+`*Object2*`)`
: Succeeds if *Object1* and *Object2* refers to the same Java object (or both are null object references). The same object may be represented by two different terms in Prolog so `==/2` can *not* be used to reliably detect if two object references refer to the same object.

`jasper_is_instance_of(+`*JVM*`,+`*Object*`,+`*ClassName*`)`
: Succeeds if *Object* is an instance of class *ClassName*; fails otherwise. *ClassName* is a fully qualified classname; see `jasper_call/4`.

`jasper_object_class_name(+`*JVM*`,+`*Object*`,-`*ClassName*`)`
: Returns the fully qualified name of the class of `+`*Object* as an atom.

`jasper_null(+`*JVM*`,-`*NullRef*`)`
: Create a null object reference.

`jasper_is_null(+`*JVM*`,+`*Ref*`)`
: Succeeds if *Ref* is a null object reference, fails otherwise, e.g. if *Ref* is not an object reference.

10.19.8.3 Conversion between Prolog Arguments and Java Types

The following table lists the possible values of arguments of the argument type specification to `jasper_call/4` and `jasper_new_object/5` (see Section 10.19.8.2 [Jasper Library Predicates], page 607). The value specifies which conversion between corresponding Prolog argument and Java type will take place.

There is currently no mechanism for specifying Java arrays in this way.

In the following the package prefix (`java/lang` or `se/sics/jasper`) has been left out for brevity.

For several of the numerical types there is the possibility that the target type cannot accurately represent the source type, e.g. when converting from a Prolog integer to a Java byte. The behavior in such cases is unspecified.

`Prolog: +integer`
`Java: int`
: The argument should be a number. It is converted to a Java `int`, a 32 bit signed integer.

`Prolog: +byte`
`Java: byte`
: The argument should be a number. It is converted to a Java `byte`.

`Prolog: +short`
`Java: short`

The argument should be a number. It is converted to a Java `short`, a 16 bit signed integer.

`Prolog: +long`
`Java: long`

The argument should be a number. It is converted to a Java `long`, a 64-bit signed integer.

In releases prior to 3.9.1, the value was truncated to 32 bits when passed between Java and Prolog. This is no longer the case.

`Prolog: +float`
`Java: float`

The argument should be a number. It is converted to a Java `float`.

`Prolog: +double`
`Java: double`

The argument should be a number. It is converted to a Java `double`.

`Prolog: +term`
`Java: SPTerm`

The argument can be any term. It is passed to Java as an object of the class `SPTerm`.

`Prolog: +object(`*`Class`*`)`
`Java:` *`Class`*

The argument should be the Prolog representation of a Java object of class *Class*. Unless it is the first argument in a non-static method (in which case is it treated as the object on which the method should be invoked), it is passed to the Java method as an object of class `Class`.

`Prolog: +atom` *`obsolescent`*
`Java: SPCanonicalAtom`

The argument should be an atom. The Java method will be passed an object of class `SPCanonicalAtom`. Often `+string`, see below, is more useful.

`Prolog: +boolean`
`Java: boolean`

The argument should be an atom in {`true`,`false`}. The Java method will receive a `boolean`.

`Prolog: +chars`
`Java: String`

The argument should be a code list. The Java method will receive an object of class `String`.

`Prolog: +codes`
`Java: String`

`+codes` is an alias for `+chars`.

`Prolog: +string`
`Java: String`

The argument should be an atom. The Java method will receive an object of class `String`.

`Note.` When using `+chars`, `+codes` or `+string` the automatic type conversion mechanism will also create a type signature of the form java/lang/String. If you want to call a method that accepts a String object as a parameter, but has different signature, then the method lookup will fail. A workaround is to explicitly create a String object and then call the method. For example:

```
:- use_module(library(jasper)).

main :-
    jasper_initialize([],JVM),
    jasper_new_object(JVM,
                      'java/lang/String',
                      init(+chars),
                      init("hamburger"),
                      H),
    Str = "urge",
    jasper_new_object(JVM,
                      'java/lang/String',
                      init(+chars),
                      init(Str),
                      S),
    jasper_call(JVM,
                method('', contains, [instance]),
                contains(+object(''),
                         +object('java/lang/CharSequence'),
                         [-boolean]),
                contains(H, S, B)),
    format('Contains? ~a~n', [B]).
```

`Prolog: -atom` *obsolescent*
`Java: SPTerm`

The Java method will receive an object of class `SPTerm`, which should be set to an atom (e.g. using `SPTerm.putString`). The argument will be bound to the value of the atom when the method returns. Often `-term`, see below, is more useful.

`Prolog: -chars`
`Java: StringBuffer`

The Java method will receive an (empty) object of type `StringBuffer`, which can be modified. The argument will be bound to a code list of the `StringBuffer` object.

`Prolog: -codes`
`Java: StringBuffer`

`-codes` is an alias for `-chars`.

`Prolog: -string`
`Java: StringBuffer`
: The Java method will receive an object of type `StringBuffer`, which can be modified. The argument will be bound to an atom converted from the `StringBuffer` object.

`Prolog: -term`
`Java: SPTerm`
: The Java method will receive an object of class `SPTerm`, which can be set to a term (e.g. using `SPTerm.consFunctor`). The argument will be bound to the term when the method returns.

`Prolog: [-integer]`
`Java: int` *`M`*`()`
: The Java method should return an `int`. The value will be converted to a Prolog integer.

`Prolog: [-byte]`
`Java: byte` *`M`*`()`
: The Java method should return a `byte`. The value will be converted to a Prolog integer.

`Prolog: [-short]`
`Java: short` *`M`*`()`
: The Java method should return a `short`. The value will be converted to a Prolog integer.

`Prolog: [-long]`
`Java: long` *`M`*`()`
: The Java method should return a `long`, a 64 bit signed integer. The value will be converted to a Prolog integer.

`Prolog: [-float]`
`Java: float` *`M`*`()`
: The Java method should return a `float`. The value will be converted to a Prolog float.

`Prolog: [-double]`
`Java: double` *`M`*`()`
: The Java method should return a `double`. The value will be converted to a Prolog float.

`Prolog: [-term]`
`Java: SPTerm` *`M`*`()`
: The Java method should return an object of class `SPTerm`, which will be converted to a Prolog term.

`Prolog: [-object(`*`Class`*`)]`
`Java: SPTerm` *`M`*`()`
: The Java method should return an object of class *Class*, which will be converted to the internal Prolog representation of the Java object.

`Prolog: [-atom]` *obsolescent*
`Java: SPTerm` *M*`()`
: The Java method should return an object of class `SPCanonicalAtom`, which will be converted to a Prolog atom. Often `[-term]`, see above, is more useful.

`Prolog: [-boolean]`
`Java: boolean` *M*`()`
: The Java should return a `boolean`. The value will be converted to a Prolog atom in {`true`,`false`}.

`Prolog: [-chars]`
`Java: String` *M*`()`
: The Java method should return an object of class `String`, which will be converted to a code list.

`Prolog: [-codes]`
`Java: String` *M*`()`
: `[-codes]` is an alias for `[-chars]`.

`Prolog: [-string]`
`Java: String` *M*`()`
: The Java method should return an object of class `String`, which will be converted to an atom.

10.19.8.4 Global vs. Local References

It is important to understand the rules determining the life-span of Java object references. These are similar in spirit to the SP_term_refs of the C-Prolog interface, but since they are used to handle Java objects instead of Prolog terms they work a little differently.

Java object references (*currently* represented in Prolog as `'$java_object'/1` terms) exist in two flavors: *local* and *global*. Their validity are governed by the following rules.

1. A local reference is valid until Prolog returns to Java or the reference is deleted with `jasper_delete_local_ref/2`. It is only valid in the (native) thread in which is was created. As a rule of thumb a local reference can be used safely as long as it is not saved away using `assert/3` or similar.

   Since local references are *never* reclaimed until Prolog returns to Java (which may never happen) you should typically call `jasper_delete_local_ref/2` when your code is done with an object.
2. A global reference is valid until explicitly freed. It can be used from any native thread.
3. All objects returned by Java methods are converted to local references.
4. Java exceptions not caught by Java are thrown as Prolog exceptions consisting of a *global* reference to the exception object, see Section 10.19.8.5 [Handling Java Exceptions], page 615.

Local references can be converted into global references (`jasper_create_global_ref/3`). When the global reference is no longer needed, it should be deleted using `jasper_delete_global_ref/2`.

For a more in-depth discussion of global and local references, consult the JNI Documentation (`https://docs.oracle.com/en/java/javase/11/docs/specs/jni/index.html`).

Using a local (or global) reference that has been deleted (either explicitly or by returning to Java) is illegal and will generally lead to crashes. This is a limitation of the Java Native Interface used to implement the low level interface to Java.

10.19.8.5 Handling Java Exceptions

If a Java method throws an exception, e.g. by using `throw new Exception("...")` and the exception is not caught by Java, then it is passed on as a Prolog exception. The thrown term is a *global* reference to the Exception object. The following example code illustrates how to handle Java exceptions in Prolog:

```
exception_example(JVM, ...) :-
   catch(
         %% Call Java method that may raise an exception
         jasper_call(JVM, ...),
         Excp,
         (
           ( is_java_exception(JVM, Excp)
           -> print_exception_info(JVM, Excp)
           ; throw(Excp)       % pass non-Java exceptions to caller
           )
         )
        ).

is_java_exception(_JVM, Thing) :- var(Thing), !, fail.
is_java_exception(_JVM, Thing) :-
   Thing = java_exception(_),      % misc error in Java/Prolog glue
   !.
is_java_exception(JVM, Thing) :-
   jasper_is_object(JVM, Thing),
   jasper_is_instance_of(JVM, Thing, 'java/lang/Throwable').
```

```
print_exception_info(_JVM, java_exception(Message)) :- !,
   format(user_error, '~NJasper exception: ~w~n', [Message]).
print_exception_info(JVM, Excp) :-
   /*
   // Approximate Java code
   {
      String messageChars = excp.getMessage();
   }
   */
   jasper_call(JVM,
               method('java/lang/Throwable', 'getMessage', [instance]),
               get_message(+object('java/lang/Throwable'), [-chars]),
               get_message(Excp, MessageChars)),
   /* // Approximate Java code
   {
      StringWriter stringWriter = new StringWriter();
      PrintWriter printWriter =  new PrintWriter(stringWriter);
      excp.printStackTrace(printWriter);
      printWriter.close();
      stackTraceChars = StringWriter.toString();
   }
   */
   jasper_new_object(JVM, 'java/io/StringWriter',
                     init, init, StringWriter),
   jasper_new_object(JVM, 'java/io/PrintWriter',
                     init(+object('java/io/Writer')),
                     init(StringWriter), PrintWriter),
   jasper_call(JVM,
               method('java/lang/Throwable', 'printStackTrace', [instance]),
               print_stack_trace(+object('java/lang/Throwable'),
                                 +object('java/io/PrintWriter')),
               print_stack_trace(Excp, PrintWriter)),
   jasper_call(JVM,
               method('java/io/PrintWriter','close',[instance]),
               close(+object('java/io/PrintWriter')),
               close(PrintWriter)),
   jasper_call(JVM,
               method('java/io/StringWriter','toString',[instance]),
               to_string(+object('java/io/StringWriter'),[-chars]),
               to_string(StringWriter, StackTraceChars)),
   jasper_delete_local_ref(JVM, PrintWriter),
   jasper_delete_local_ref(JVM, StringWriter),
   %% ! exceptions are thrown as global references
   jasper_delete_global_ref(JVM, Excp),
   format(user_error, '~NJava Exception: ~s\nStackTrace: ~s~n',
          [MessageChars, StackTraceChars]).
```

10.19.8.6 Deprecated Jasper API

The information in this section is only of interest to those that need to read or modify code that used `library(jasper)` before release 3.8.5.

A different way of doing method call and creating objects was used in versions of `library(jasper)` predating release 3.8.5. Use of these facilities are strongly discouraged although they are still available in the interest of backward compatibility.

The old method call predicates are `jasper_call_static/6` and `jasper_call_instance/6` as well as the old way of calling `jasper_new_object/5`.

10.19.8.7 Deprecated Argument Conversions

The pre release 3.8.5 method call predicates in this library use a specific form of argument lists containing conversion information so the predicates know how to convert the input arguments from Prolog datatypes to Java datatypes. This is similar to the (new) mechanism described in Section 10.19.8.3 [Conversion between Prolog Arguments and Java Types], page 610. The argument lists are standard Prolog lists containing terms on the following form:

`jboolean(`*X*`)`
: *X* is the atom `true` or `false`, representing a Java `boolean` primitive type.

`jbyte(`*X*`)` *X* is an integer, which is converted to a Java `byte`.

`jchar(`*X*`)` *X* is an integer, which is converted to a Java `char`.

`jdouble(`*X*`)`
: *X* is a float, which is converted to a Java `double`.

`jfloat(`*X*`)`
: *X* is a float, which is converted to a Java `float`.

`jint(`*X*`)` *X* is an integer, which is converted to a Java `int`.

`jlong(`*X*`)` *X* is an integer, which is converted to a Java `long`.

`jshort(`*X*`)`
: *X* is an integer, which is converted to a Java `short`.

`jobject(`*X*`)`
: *X* is a reference to a Java object, as returned by `jasper_new_object/5` (see Section 10.19.8.2 [Jasper Library Predicates], page 607).

`jstring(`*X*`)`
: *X* is an atom, which is converted to a Java `String`.

If the Prolog term does not fit in the corresponding Java data type (`jbyte(4711)`, for example), then the result is undefined.

10.19.8.8 Deprecated Jasper Predicates

`jasper_new_object(+`*JVM*`,+`*Class*`,+`*TypeSig*`,+`*Args*`,-`*Object*`)` *obsolescent*
: Creates a new Java object.

JVM A reference to the Java VM, as obtained by `jasper_initialize/[1,2]`.

Class An an atom containing the *fully qualified classname* (i.e. package name separated with '/', followed by the class name), for example `java/lang/String`, `se/sics/jasper/SICStus`.

TypeSig The *type signature* of the class constructor. A type signature is a string that uniquely defines a method within a class.

Args A list of argument specifiers. See Section 10.19.8.7 [Deprecated Argument Conversions], page 617.

Object A term on the form `'$java_object'(X)`, where X is a Java object reference. This is the Prolog handle to the Java object. See Section 10.19.8.4 [Global vs. Local References], page 614.

10.20 JSON format serialization—`library(json)`

This library module provides some utilities for reading and writing structured data using the JSON (`https://json.org/`) (JavaScript Object Notation) serialization format. The library module is part of SICStus Prolog since release 4.5.0.

JSON is a light-weight, language independent, data-interchange format with good support in many environments. As such, it is a convenient format when transferring data between Prolog and other programming languages. The format is specified in ECMA-404 and in RFC 8259.

The Prolog representation of JSON values is as follows:

Number A JSON number is represented as the corresponding Prolog number; as a float when the JSON number has an exponent or a fractional part, otherwise as an integer.

String A JSON string is represented as the corresponding Prolog atom (escaped surrogate pairs are combined into the corresponding Unicode code point).

Array A JSON array is represented as a list of the corresponding Prolog terms.

Object A JSON object is a sequence of *`name`*`:`*`value`* pairs, where each name is a JSON string and each value is an arbitrary JSON value. It is represented as a term `json(`*`Members`*`)` where *Members* is a list of *`Name`*`=`*`Value`* pairs, where *Name* is a representation of the JSON string name and *Value* is a representation of the JSON value.

`null`
`true`
`false` These special JSON literals are, by default, translated to the Prolog terms `@(null)`, `@(true)`, and `@(false)`, respectively.

Examples:

```
123 ⇒ 123

12.3 ⇒ 12.3

12E3 ⇒ 12.0E3

"foo" ⇒ 'foo'

null ⇒ @(null)

["a", 2, "bar"] ⇒ ['a', 2, 'bar']

{"age": 42,
 "name": {"first":"Kim", "last":"Jones"},
 "children": ["Lisa","Jim","John"]
}
⇒
json(['age'=42,
      'name'=json(['first'='Kim', 'last'='Jones']),
      'children'=['Lisa','Jim','John']])
```

It is possible to specify other Prolog representations of a JSON value using the option argument. See below for details.

10.20.1 Options

The following options are used. They are valid for all predicates that takes options, unless stated otherwise.

`compact(`*Boolean*`)`

Valid values for *Boolean* are `true` and `false` (default).

If `false` (default), JSON values are written with extra whitespace and end-of-line characters to make it easier for humans to read. The details of the non-compact format is subject to change without notice.

If `true`, JSON values are written with a minimum of whitespace. Since this implies that no end-of-line characters will be written, it makes it possible to read the resulting JSON as a single line.

Only valid for predicates that write.

`ascii(`*Boolean*`)`

Valid values for *Boolean* are `true` (default) and `false`.

If `true` (default), JSON values are written using only 7-bit ASCII characters, which makes the format less sensitive to stream encodings.

If `false`, JSON values are written using full Unicode. In this case any streams should use UTF-8 encoding.

Only valid for predicates that write.

`end_of_file(`*ErrorOrTerm*`)`
: Specifies what happens if an end of file is encountered outside any JSON value, e.g. when `json_read/3` has only seen JSON whitespace.

  If *ErrorOrTerm* is the atom `error` (the default) then such an end of file is treated in the same way as an end of file inside a JSON value, i.e. it throws a syntax error.

  Otherwise, an end of file outside any JSON value causes *ErrorOrTerm* to be returned as the value. In this case, the the recommended value of *ErrorOrTerm* is `@(eof)`, although any term (except `error`, see above) is permitted.

  Treating top-level end of file specially is useful when the stream can contain several consecutive JSON values, e.g. when the stream represents a sequence of messages, like in the JSON-RPC server.

  Only valid for predicates that read.

`null(`*X*`)`
`true(`*X*`)`
`false(`*X*`)`
: The specified term *X*, which may be a variable, is used for representing the corresponding JSON literal.

`array_tag(`*Tag*`)`
: The *Tag* must be an atom.

  A JSON array is represented as the compound term *Tag*`(`*Elements*`)`, where *Elements* is a list of the representations of the array elements. This may be useful if you need to be able to distinguish between an empty JSON array (`[]`), and a JSON string `"[]"`, since these have the same Prolog representation (the atom `[]`) in the default representation.

  If this option is not specified (the default), then JSON arrays are represented as a list of the representations of the array elements.

`object_tag(`*Tag*`)`
: The *Tag* must be an atom. *Tag* defaults to `'json'`.

  A JSON object is represented as the compound term *Tag*`(`*Members*`)`, where *Members* is a list of *Name*`=`*Value* pairs, where *Name* is a representation of the JSON string name and *Value* is a representation of the JSON value.

`width(`*Width*`)`
: This option is present for compatibility with other systems.

  If *Width* is `0` (zero), it is treated as a synonym for `compact(true)`. Otherwise, the option is currently ignored.

  Only valid for predicates that write.

`value_string_as(`*Value*`)`
`step(`*Value*`)`
`tab(`*Value*`)`
`serialize_unknown(`*Value*`)`
: These options are present for compatibility with other systems. They are currently ignored.

  Only valid for predicates that write.

10.20.2 Exported Predicates

The *Options* argument is described in the module documentation.

`json_read(+`*Stream*`, -`*Term*`)`
`json_read(+`*Stream*`, -`*Term*`, +`*Options*`)`
: Reads a single JSON value from the text stream *Stream* and unifies it with *Term*.

`json_write(+`*Stream*`, +`*Term*`)`
`json_write(+`*Stream*`, +`*Term*`, +`*Options*`)`
: Write the JSON value *Term* to the text stream *Stream*.

`is_json_term(+`*Term*`)`
`is_json_term(+`*Term*`, +`*Options*`)`
: True if the *Term* is a valid representation of a JSON value.

`json_to_codes(+`*Term*`, -`*JSONCodes*`)`
`json_to_codes(+`*Term*`, -`*JSONCodes*`, +`*Options*`)`
: Writes *Term* as JSON and unifies *JSONCodes* with the list of resulting character codes.

`json_to_atom(+`*Term*`, -`*JSONAtom*`)`
`json_to_atom(+`*Term*`, -`*JSONAtom*`, +`*Options*`)`
: Writes *Term* as JSON and unifies *JSONAtom* with an atom consisting of the resulting character codes.

`json_from_codes(+`*JSONCodes*`, -`*Term*`)`
`json_from_codes(+`*JSONCodes*`, -`*Term*`, +`*Options*`)`
: Converts a JSON text, represented as the list of character codes *JSONCodes*, into the corresponding Prolog term *Term*.

`json_from_atom(+`*JSONAtom*`, -`*Term*`)`
`json_from_atom(+`*JSONAtom*`, -`*Term*`, +`*Options*`)`
: Converts a JSON text, represented as the character codes of *JSONAtom*, into the corresponding Prolog term *Term*.

A small example:

```
| ?- use_module(library(json)).
...
| ?- JSONCodes = "{\"foo\": 42, \"bar\": null}",
     json_from_codes(JSONCodes, JSONTerm),
     json_to_atom(JSONTerm, JSONAtom, [compact(true)]).
JSONCodes = [123,34,102,111,111,34,58,32,52,50|...],
JSONTerm = json([foo=42,bar= @(null)]),
JSONAtom = '{"foo":42,"bar":null}' ?
yes
| ?-
```

10.21 JSON mediated process communication— `library('jsonrpc/jsonrpc_server')`

This library implements a generic JSON-RPC server where the requests are handled by user-supplied hooks.

This library should be considered pre-release, in that it may evolve, also incompatibly, as we gain more experience with how it is used.

Please note: You should always take the security implications into account if exposing any service to untrusted clients, e.g. on Internet.

The server can only handle one client connection, i.e. it does not provide any facility for multiplexing between different client streams.

The server implements both "ordinary" JSON-RPC messages, dispatched to the user-supplied "request hook", and "Prolog-style" messages (which provide things like multiple solutions, backtracking, failure and cut), dispatched to the user supplied "call hook".

See Section 10.22 [Simple JSON-RPC Server], page 630, for a simplified way to use this module. Its documentation also contains examples.

The basic structure of the server is a loop that repeatedly reads one request and lets the user-supplied hook (or hooks) handle it, until the hook tells the server to return from the loop (or a fatal error occurs).

A user-specified state is threaded through the loop and the hooks, so the hooks can use and modify the state as they process the incoming requests. The state can be any non-variable term, it does not have to be representable as JSON. For instance, the state could contain constrained variables (as used by `library(clpfd)`).

10.21.1 Requests

For our purposes, a JSON-RPC request object (henceforth request) is a JSON (`https://json.org`) object, with the following members:

`jsonrpc` A string with value `"2.0"`.

`id` An integer identifier established by the client for referring to this request. Identifiers should be unique, although this is not currently a strict requirement.

If the identifier is absent, this indicates a special kind of request, a "notification", and a variable will be used. Notifications are currently not implemented.

`method` A string naming the method to invoke.

`params` An optional object or array with parameters to the method. If not supplied, the empty list will be used.

other members are allowed, but will be ignored.

An incoming request is represented as a *request term* `request(Method,Id,Params,RPC)` where each argument is the Prolog representation of the corresponding JSON value (see `library(json)` for details), and *RPC* is the representation of the entire request.

10.21.2 The Request Hook

When a request comes in from the client, the request hook will be called with four arguments:

Message This is the request term as described above.

ResultDescription
On success, the request hook should bind this to a value that specifies how the server should continue.

`result(JSONValue)`
This is the common case, and tells the server to reply to the client with the `JSONValue` as the result. The value should use the representation of the JSON library. If no specific result value is desired, you can specify the JSON null, i.e. `@(null)`.

`quit(JSONValue)`
This is like `result(JSONValue)` but also tells the server to quit, i.e. the server loop will return to the caller.

`error(ErrorCode, Message)`
Replies to the client with an error response with the specified error code and error message (a string). The error code must be an integer outside the range reserved by this library and by the JSON-RPC specification, see Section 10.21.4 [Responses], page 627, for details. The *Message* should be a short string that briefly describes the error.

Please note: this is not considered an error (or failure) by the server itself, i.e. any remaining processing of the request will proceed as usual. In particular the request will be considered handled by the request hook, and no fallback processing will happen.

StateIn This is an input argument specifying the current state. The initial state is specified when the server is started. You can use any non-variable term as state, it does not have to be a value that can be represented as JSON.

StateOut This is an output argument specifying the new state to use for subsequent requests.

If the request hook fails, the server will do its default processing, which includes handling the "Prolog-style" messages. For this reason it is important that the request hook quietly fails for any method it does not recognize.

10.21.3 Prolog-style Messages

If a call hook was specified, it will be used for handling the special methods '`call`' and '`once`' (unless the request hook decides to handle these methods in some other way). The `params` member of these messages specifies how to create a Prolog term that will then be passed to the call hook.

10.21.3.1 Specifying the Term

The `params` member can specify the term in two different ways, either directly using a name and a list (JSON array) of arguments, or indirectly using a string with text in Prolog syntax which will be read to create the corresponding term. The `params` should be one of:

`[F|Args]`. A JSON array with one or more arguments, or

An object with members `name` with value *F* and `args` with value *Args*.
: The value *F* should be a string denoting the name of the callable term, and the *Args* should be an array of the zero or more arguments. The term will be created similarly to `Term =.. [F|Args]`.

An object with members `read` and (optionally) `bindings`.
: The value of the `read` member should be a string in Prolog syntax, including a final full stop, and the term will be created by reading from this string.

  If `bindings` is supplied, it should be an object where the value of each member will be used for providing an initial value of the variable with the same name (if any) in the term. Extraneous members are ignored.

  The variable names and their values will be recorded when reading the term, as with the `read_term/3` option `variable_names/1`. This value will be passed to the call hook (for other ways of specifying the term, the variables will be an empty list).

Once the term has been created, it is passed, together with the list of named variables, to the call hook, similarly to how the request hook is invoked, but with some special considerations for handling backtracking and cut.

10.21.3.2 The Call Hook

When a Prolog-style request comes in from the client, the call hook will be called with five arguments:

Message
: This is the request term as described above.

Variables
: This is the list of variable names and values for the term, if the term was read from a string (with any bindings specified in the request already applied). This can be used for giving special meaning to variables that occur deep within the term, without the server code needing to know the exact structure of the term that the client sent.

ResultDescription
: On success, the request hook should bind this to a value that specifies how the server should continue.

  `result(JSONValue)`
  : This is the same as for the request hook.

  `quit(JSONValue)`
  : **Not supported**. Unlike the request hook, a call hook cannot tell the server to quit.

`error(ErrorCode, Message)`
: This is the same as for the request hook.

  Please note: this is not considered an error (or failure) by the server itself, i.e. any remaining processing of the request will proceed as usual. In particular the `call` request will still be active and must be closed with `cut` or `retry`.

StateIn
: This is an input argument specifying the current state. The initial state is specified when the server is started. You can use any non-variable term as state, it does not have to be a value that can be represented as JSON.

StateOut
: This is an output argument specifying the new state to use for subsequent requests.

If the call hook fails, possibly after a control message, this will be reported back to the client as a failure response (see Section 10.21.4 [Responses], page 627, below).

10.21.3.3 Single Solution Request

If the incoming request specifies the method `once`, a term is created as above, and the call hook will be called as if by `once/1`, i.e. it can succeed or fail (or throw an error), but it cannot leave any choice points behind.

If the call hook succeeds, the response will be as specified by the *ResultDescription* argument. If the call fails, a failure response will be sent back to the client.

In most cases an ordinary request, handled by the request hook, is preferable, unless the additional ways to specify the term is required, or it is important to be able to report failure as distinct from unhandled.

10.21.3.4 Multi-Solution Request

If the incoming request specifies the method `call`, a term is created as above, and the call hook will be called as if by `call/1`, i.e. it can succeed or fail (or throw an error), *and* it can leave choice points behind.

If the call hook succeeds, it is becomes *active*, and the response will be as specified by the *ResultDescription* argument. If the call fails, the call will not become active, and a failure response will be sent back to the client.

An `active` call corresponds to a Prolog choicepoint and will consume resources in the server until the call is *closed* by a *control message*, i.e. by a cut (see Section 10.21.3.6 [Cut], page 627), or by a (failing) retry (see Section 10.21.3.5 [Backtracking], page 626). A call request should specify a unique identifier member, to ensure that any cut or retry can refer to it unambiguously.

10.21.3.5 Backtracking

A `reply` request should have an object as parameter, and the object should have a member `call_id` that specifies the identifier of the active call to retry, i.e. the call to backtrack into to obtain a new solution from the call hook.

Please note: Currently, only the most recent active call can be the target of a `reply` request.

When the active call is retried the result from the call hook will be handled in the same way as the initial call. I.e. if the call hook succeeds again, the call is still active (with the original call id), if the call fails or throws an error, the call is closed.

10.21.3.6 Cut

A `cut` request should have an object as parameter, and the object should have a member `call_id` that specifies the identifier of the active call to cut.

This is much like an ordinary cut (i.e. (!)/0), in that all alternatives for the target call as well as for any more recent active calls are pruned, and the pruned calls are no longer active.

In (the unlikely) case the cut caused failure or an exception to be thrown, this is reported back in the same way as the original call request. In the expected case, when the cut just succeeds, a JSON null value is returned as the result. In either case, the target call, and any more recent active callse, are *closed*.

10.21.4 Responses

Each request results in a *response*, a JSON object sent back to the client. A response has the following members:

`jsonrpc` A string with value `"2.0"`.

`id` The `id` from the request. This is one reason why it is helpful to ensure that each request has a unique identifier.

`result` If the request completed normally (i.e. did not cause an error or failed) this member will be present and will contain the result specified by the hook that handled the request. If a `request` member is present, the `error` member, below, will not be present.

`error` The response is an *error response*. If the request caused an error, failed or a handler asked for an error to be reported, this member will be present and will contain a JSON object that describes the error. If an `error` member is present, the `result` member, above, will not be present.

The value of the `error` member will be an object, with the following members:

`code` An integer code describing the error. Error code `-32768` to `-32000` are reserved by the JSON-RPC standard. The reserved error codes currently defined by the JSON-RPC standard are: '`Parse error`' (`-32700`), '`Invalid Request`' (`-32600`), '`Method not found`' (`-326601`), '`Invalid params`' (`-32602`), and '`Internal error`' (`-32603`).

'`Method not found`' will be reported if the request hook fails (unless there is a call hook and the request is one of the Prolog-style requests).

The server can also report one of the following errors:

`-4711` This indicates a *failure response*. This is used when one of the Prolog-style requests causes a goal to fail. Note that this does not indicate that there was an error.

`-4712` This is used when one of the Prolog-style requests causes an error exception to be thrown, i.e. this indicates that there was an error in one of the hooks.

`-4713` This is used when a `cut` or `retry` request refers to a `request` that is not active (anymore).

`message` A (short) string describing the error.

`data` An optional value (primitive or structured) with additional information about the error.

10.21.5 Predicates

Exported predicates:

`jsonrpc_server_main(+StateIn, -StateOut, +RequestHook, +CallHook, +Options)`
`jsonrpc_server_main(+StateIn, -StateOut, +RequestHook, +Options)`

This starts the server, with the specified initial state (*StateIn*), hooks, and options. See the module documentation for a description of the request hook and the (optional) call hook. When the server exits, the *StateOut* argument will be bound to the final value of the state.

If a *CallHook* is not specified, the "Prolog-style" requests will not be treated specially, i.e. the request hook can handle them as ordinary requests, if desired, otherwise they will just cause a '`Method not found`' error response.

The *RequestHook* will be invoked as `RequestHook(Message, ResultDescription, StateIn, StateOut)`, where *Message* is the JSON-RPC request, *StateIn* is the current server state, and on success, `ResultDescription` describes the result of invoking the hook, and *StateOut* is the new server state. See the module documentation for retails.

The *CallHook* will be invoked as `CallHook(Term, Variables, ResultDescription, StateIn, StateOut)`, where *Term* is a term as specified in a `once` or `call` request, *Variables* is the names and values of the variables in the *Term*, the other arguments are similar as for the *RequestHook*. See the module documentation for retails.

Options is a list of options, the valid options are:

`in(InStream)`

The (text) stream from which the server reads JSON data. The stream should use UTF-8 encoding for maximum compatibility with JSON.

`out(OutStream)`

The (text) stream to which the server writes JSON data. The stream should use UTF-8 encoding for maximum compatibility with JSON.

`read_options(JSONReadOptions)`
: *Extra* options passed to `json_read/3` when reading from the *InStream*. The default is the empty list, and it is not recommended to change this.

  In addition to these extra options, a default set of options is also passed to `json_read/3`.

`write_options(JSONWriteOptions)`
: *Extra* options passed to `json_write/3` when writing to the *OutStream*. The default is the empty list, and it is not recommended to change this.

  In addition to these extra options, a default set of options is also passed to `json_write/3`. One of these default options is `compact(true)`, which ensures that each written response will be a single line.

`logging(Boolean)`
: Whether to use logging (to `user_error`). *Boolean* is one of `true` or `false` (default).

10.22 Simpler use of JSON mediated process communication—`library('jsonrpc/simple_jsonrpc_server')`

This module provides a simplified interface to the JSON-RPC library (see Section 10.21 [JSON-RPC Server library], page 623).

This library should be considered pre-release, in that it may evolve, also incompatibly, as we gain more experience with how it is used.

Please note: You should always take the security implications into account if exposing any service to untrusted clients, e.g. on Internet.

This module simplifies calling of the underlying server library and adds some features for easier debugging and troubleshooting. It provides utilities for attaching the server process to a SPIDER debugger session, making it possible to do interactive debugging of a server. It also contains a simple logging facility.

Several of the options can be set using environment variables (or system properties), which is especially useful when the server is launched as a sub-process of some other program that you do not directly control. For instance, this makes it possible to have a C program that runs the Prolog server as a sub-process, but still interactively debug the Prolog sub-process using SPIDER.

The names of these environment variables can be set as an option, so the environment variables used for different servers do not conflict, even if launched in the same shell environment.

Exported predicates:

`simple_jsonrpc_server_entrypoint(RequestHook, CallHook, EntrypointOptions)`
`simple_jsonrpc_server_entrypoint(RequestHook, EntrypointOptions)`

The *RequestHook* and optional *CallHook* are passed to `jsonrpc_server:jsonrpc_server_main/[4,5]` when (if) the server is started, see its documentation for details.

The *EntrypointOptions* is a list of options:

`environment(V)`

V can be one of `false` (default), `true`, or `true(Prefix)`, where *Prefix* is an atom.

If *V* is `false` no environment variables or system properties will be used for setting default option values.

If *V* is `true` or `true(Prefix)`, some default options can be set using environment variables, as follows:

For each such option, a "base name" is documented, e.g. `SERVER_LOGGING` for the `logging/1` option. If the environment variable is set in the environment, its value will be used for setting the default for the corresponding option (i.e. options in *EntrypointOptions* always takes precedence).

If a *Prefix* is specified, it is prefixed to the base name to obtain the name of the environment variable. For instance, with the option `environment(true('MY_ENGINE_'))`, the default value for the `logging/1` option will be taken from the environment variable `MY_ENGINE_SERVER_LOGGING`, if set.

Note that the boolean option values `true` and `false` corresponds to `yes` and `no` when specified using an environment variable. As usual, it is possible to use system properties instead of environment variables.

`state(StateIn)`
: This is passed as the input state to the server.

`start(Boolean)`
: *Boolean* is *true* (default) or *false*. If *Boolean* is *true* the server is started, otherwise the arguments are recorded and the server can be started later with `simple_jsonrpc_server_start_from_saved_options/0`. The latter is useful when doing interactive debugging, e.g. using the `attach_spider(true)` option, below.

  The environment variable base name for this option is `SERVER_AUTOSTART` and setting it to `no` changes the default to `start(false)`.

`logging(Boolean)`
: *Boolean* is `true` or `false` (default). If `true`, logging is enabled, both for the exported `simple_jsonrpc_server_log/2` and for the server.

  The environment variable base name for this option is `SERVER_LOGGING` and setting it to `yes` changes the default to `logging(true)`.

`halt(Boolean)`
: *Boolean* is `true` (default) or `false`. If `true` the server will call `halt/0` on exit, ending the Prolog process. Halting automatically is often useful when invoked as a sub-process, but may be inconvenient when doing interactive debugging of the server code.

  The environment variable base name for this option is `SERVER_HALT` and setting it to `no` changes the default to `halt(false)`.

`attach_spider(How)`
: *How* is one of `true`, `try` or `false` (default). If `true` or `try` an attempt is made to attach to a SPIDER session (SPIDER should be waiting to "Attach to Prolog Process"), before the server is started. If *How* is `try`, failure to attach is silently ignored (but logged, if logging is enabled).

  The environment variable base name for this option is `SERVER_ATTACH_SPIDER` and setting it to `yes` or `try` changes the default to `attach_spider(true)` and `attach_spider(try)`, respectively.

If attaching to SPIDER it is often useful to also specify `start(false)` and `halt(false)`, possibly using environment variables, as described above.

`simple_jsonrpc_server_start_from_saved_options`
: Start the server using the recorded options and state from the entry point (`simple_jsonrpc_server_entrypoint/[2,3]`). Fails if there is no saved information.

  This is useful for interactive debugging of the server, e.g. when specifying the options `attach_spider(true)` and `start(false)`. In this case, once the server has attached to SPIDER, you can start the server in the debugger using `trace, simple_jsonrpc_server_start_from_saved_options.`.

`simple_jsonrpc_server_saved_options(-RequestHook, -CallHook, -EntrypointOptions, -Options)`
: The entry point options and `jsonrpc_server` options that was used in, and recorded by, `simple_jsonrpc_server_entrypoint/[2,3]`. This is useful while debugging, e.g. to manually (re-) start the server with the original options. See `simple_jsonrpc_server_start_from_saved_options/0`.

`simple_jsonrpc_server_log(+FormatControl, +FormatArgs)`
: This is like `format(user_error, FormatControl, FormatArgs)`, but adds a prefix (‘`SSERVER`’) before, and a newline after the logged text. Does nothing unless logging is on.

  The *FormatControl* should produce one line of output, e.g. it should not contain `~n` or `~N`.

`simple_jsonrpc_server_try_attach_spider`
: Attempt to attach to a SPIDER session (that should be trying to ‘`Attach to Prolog Process`’). Fails if no connection could be made, succeeds also if already connected. This can be useful to call from a JSON-RPC request while debugging.

  If it was possible to attach to SPIDER, the prolog flag `informational` is set to `on`, to ensure the debugger and toplevel interaction works properly.

  Please note: This should not be called before the JSON-RPC server has been started since it may change the active current input/output streams in unexpected ways. See the `attach_spider/1` option to `simple_jsonrpc_server_entrypoint/[2,3]`.

`simple_jsonrpc_server_detach_spider`
: Detach from a SPIDER session. Does nothing if not attached.

10.23 Examples

The following two examples showcase two very simple but complete servers, the first one using just “plain” requests (i.e. only a request hook, the second one using both a request hook and a call hook, where the call hook is used for backtracking over a data structure.

In these simple examples the state is a ground term that can directly be used as JSON data. This is not a requirement, and is probably rare in practice. More realistic code would

use a more elaborate state, containing Prolog data that cannot directly be used as JSON data, and may contain variables. Among the example files is a program that maintain a collection of variables where the variables are constrained using `library(clpfd)`.

10.23.1 Minimal Request Hook

This example implements a request hook that can manipulate a state consisting of a single integer.

```
% counter_server.pl
:- module(counter_server, [counter_server_entrypoint/0]).
:- use_module(simple_jsonrpc_server, []).

counter_server_entrypoint :-
   simple_jsonrpc_server_entrypoint(request_hook, [state(0)]).

request_hook(Message, ResultDescription, State1, State) :-
    Message = request(Method,_Id,_Params,_RPC),
    request_hook1(Method, ResultDescription, State1, State).

% Requests:
% 'current' (return current counter)
% 'increment' (increment and return new value)
% 'quit' (exit the server).
request_hook1('current', ResultDescription, StateIn, StateOut) :-
    ResultDescription = result(StateIn),
    StateOut = StateIn.
request_hook1('increment', ResultDescription, StateIn, StateOut) :-
    StateOut is StateIn + 1,
    ResultDescription = result(StateOut).
request_hook1('quit', ResultDescription, StateIn, StateOut) :-
    ResultDescription = quit('Bye'),
    StateOut = StateIn.
```

Example transcript, that reads the initial counter, and increments it a few times and finally tells the server to quit:

```
$ sicstus -l counter_server --goal 'counter_server_entrypoint.'
% ...
% compiled ... counter_server.pl ...
|: {"jsonrpc":"2.0","id":1,"method":"current"}
⇒ {"jsonrpc":"2.0","id":1,"result":0}
|: {"jsonrpc":"2.0","id":2,"method":"increment"}
⇒ {"jsonrpc":"2.0","id":2,"result":1}
|: {"jsonrpc":"2.0","id":3,"method":"increment"}
⇒ {"jsonrpc":"2.0","id":3,"result":2}
|: {"jsonrpc":"2.0","id":3,"method":"quit"}
⇒ {"jsonrpc":"2.0","id":3,"result":"Bye"}
$
```

Since this is run from the terminal, SICStus will prompt with '`|:`' while waiting for input. The JSON text on those lines is the input to the program, the '⇒' precedes responses, i.e the output from the program.

10.23.2 Minimal Call Hook

This example implements a call hook that can backtrack over a state consisting of a list of atoms. In this simple case we do not need to convert between Prolog and JSON representations, since a Prolog list of atoms will correspond to a JSON array of strings. As in the previous example, '`|:`' comes before input, whereas '⇒' comes before responses.

```
% member_server.pl
:- module(member_server, [member_server_entrypoint/0]).
:- use_module(library(lists), [reverse/2]).
:- use_module(simple_jsonrpc_server, []).

member_server_entrypoint :-
    State = [a,b,c],
    simple_jsonrpc_server_entrypoint(request_hook, call_hook, [state(State)]).

% The only "plain" request we accept is 'quit', to exit the server.
request_hook(Message, ResultDescription, StateIn, StateOut) :-
    Message = request(Method,_Id,_Params,_RPC),
    request_hook1(Method, ResultDescription, StateIn, StateOut).

% Requests:
% 'quit' (exit the server).
request_hook1('quit', ResultDescription, StateIn, StateOut) :-
    ResultDescription = quit('Bye'),
    StateOut = StateIn.


% Requests:
% 'elements' (return all the elements in the list)
% 'member' (return each element in turn on backtracking)
% 'reverse' (reverse the list in the state)
% The state is a list of atoms, which can thus be used as JSON data
% as-is.
call_hook(elements, _Variables, ResultDescription, StateIn, StateOut) :-
    ResultDescription = result(StateIn),
    StateOut = StateIn.
call_hook(member, _Variables, ResultDescription, StateIn, StateOut) :-
    member(Element, StateIn), % Backtrack over the list.
    ResultDescription = result(Element),
    StateOut = StateIn.
call_hook(reverse, _Variables, ResultDescription, StateIn, StateOut) :-
    reverse(StateIn, StateOut),
    ResultDescription = result(@(null)).
```

The first part of the example starts the server, retrieves the contents using a `once`-request with `elements` as the term. Since this is using `once`, it will not add to the stack of active calls.

```
$ sicstus -l member_server --goal "member_server_entrypoint."
% ...
% compiled ... member_server.pl ...
|: {"jsonrpc":"2.0","id":1,"method":"once","params":["elements"]}
⇒ {"jsonrpc":"2.0","id":1,"result":["a","b","c"]}
```

The client (i.e., in this case, the user at the keyboard) then uses a `call` request, with the term `member`, which will invoke the `call_hook/5` which will call `member/2` which will succeed with the first element (the JSON string `"a"`) of the list, which will also be the (first) result of this call. This call, with '`id`' 2, will then be referred to by `retry` and `cut` requests, below.

```
|: {"jsonrpc":"2.0","id":2,"method":"call","params":["member"]}
⇒ {"jsonrpc":"2.0","id":2,"result":"a"}
```

Just to demonstrate that you can send other requests between a `call` request and subsequent `retry` or `cut`, we now once again look at the state (it is unchanged, as expected).

```
|: {"jsonrpc":"2.0","id":3,"method":"once","params":["elements"]}
⇒ {"jsonrpc":"2.0","id":3,"result":["a","b","c"]}
```

Now we ask for a new solution from the active call, i.e. the next solution from the call to `member/2`. This succeeds, a second time, and returns `"b"`. Asking for the next solution returns the last element of the list, `"c"`.

```
|: {"jsonrpc":"2.0","id":4,"method":"retry","params":{"call_id":2}}
⇒ {"jsonrpc":"2.0","id":4,"result":"b"}
|: {"jsonrpc":"2.0","id":5,"method":"retry","params":{"call_id":2}}
⇒ {"jsonrpc":"2.0","id":5,"result":"c"}
```

If we now ask for yet another solution, we get back an error response, telling us that there were no more solution and that the call is no longer active:

```
|: {"jsonrpc":"2.0","id":6,"method":"retry","params":{"call_id":2}}
⇒ {"jsonrpc":"2.0","id":6,"error":{"code":-4711,"message":"Failure"}}
```

Since the call with identifier 2 is no longer active, an attempt to cut this goal will give an error: (output reformatted)

```
|: {"jsonrpc":"2.0","id":7,"method":"cut","params":{"call_id":2}}
⇒ {"jsonrpc":"2.0","id":7,
            "error":{"code":-4713,"message":"No active call",
                     "data":{"jsonrpc":"2.0","id":7,
                             "method":"cut","params":{"call_id":2}}}}
```

The error did not break anything, we can now request the elements, reverse the state, and when once again looking at the elements we find that the list in state has indeed been reversed:

```
|: {"jsonrpc":"2.0","id":8,"method":"once","params":["elements"]}
⇒ {"jsonrpc":"2.0","id":8,"result":["a","b","c"]}
|: {"jsonrpc":"2.0","id":9,"method":"once","params":["reverse"]}
⇒ {"jsonrpc":"2.0","id":9,"result":null}
|: {"jsonrpc":"2.0","id":10,"method":"once","params":["elements"]}
⇒ {"jsonrpc":"2.0","id":10,"result":["c","b","a"]}
```

As before, we now use a `call` request to call `member/2`, resulting in an active call (with id 11). Since the state list was reversed above, the first element is `"c"`. We ask for one more solution, finding `"b"`.

```
|: {"jsonrpc":"2.0","id":11,"method":"call","params":["member"]}
⇒ {"jsonrpc":"2.0","id":11,"result":"c"}
|: {"jsonrpc":"2.0","id":12,"method":"retry","params":{"call_id":11}}
⇒ {"jsonrpc":"2.0","id":12,"result":"b"}
```

Finally, we do not want any more solutions from this goal, so instead of asking for more elements we cut away the remaining alternatives. The call is now no longer active.

```
|: {"jsonrpc":"2.0","id":13,"method":"cut","params":{"call_id":11}}
⇒ {"jsonrpc":"2.0","id":13,"result":null}
```

Finally we look at the state once again, and tell the server to quit:

```
|: {"jsonrpc":"2.0","id":14,"method":"once","params":["elements"]}
⇒ {"jsonrpc":"2.0","id":14,"result":["c","b","a"]}
|: {"jsonrpc":"2.0","id":15,"method":"quit"}
⇒ {"jsonrpc":"2.0","id":15,"result":"Bye"}
```

10.24 Process Communication— library(linda/[server,client])

Linda is a concept for process communication.

For an introduction and a deeper description, see [Carreiro & Gelernter 89a] or [Carreiro & Gelernter 89b], respectively.

One process is running as a server and one or more processes are running as clients. The processes are communicating with sockets and supports networks.

The server is in principle a blackboard on which the clients can write (`out/1`), read (`rd/1`) and remove (`in/1`) data. If the data is not present on the blackboard, then the predicates suspend the process until they are available.

There are some more predicates besides the basic `out/1`, `rd/1` and `in/1`. The `in_noblock/1` and `rd_noblock/1` does not suspend if the data is not available—they fail instead. A blocking fetch of a conjunction of data can be done with `in/2` or `rd/2`.

Example: A simple producer-consumer. In client 1:

```
producer :-
        produce(X),
        out(p(X)),
        producer.

produce(X) :- .....
```

In client 2:

```
consumer :-
        in(p(A)),
        consume(A),
        consumer.

consume(A) :- .....
```

Example: Synchronization

```
        ...,
        in(ready),  %Waits here until someone does out(ready)
        ...,
```

Example: A critical region

```
        ...,
        in(region_free),  % wait for region to be free
        critical_part,
        out(region_free), % let next one in
        ...,
```

Example: Reading global data

```
            ...,
            rd(data(Data)),
            ...,

    or, without blocking:
            ...,
            rd_noblock(data(Data)) ->
                  do_something(Data)
            ;     write('Data not available!'),nl
            ),
            ...,
```

Example: Waiting for one of several events

```
            ...,
            in([e(1),e(2),...,e(n)], E),
    %  Here is E instantiated to the first tuple that became available
            ...,
```

10.24.1 Linda Server

The server is the process running the "blackboard process". It is an ordinary SICStus process, which can be run on a separate machine if necessary.

To load the package, enter the query

```
| ?- use_module(library('linda/server')).
```

and start the server with `linda/[0,1]`.

`linda`

Starts a Linda-server in this SICStus. The network address is written to the current output stream as *Host:PortNumber*.

`linda(:Options)`

Starts a Linda-server in this SICStus. Each option on the list *Options* is one of

`Address-Goal`

where *Address* must be unifiable with *Host:Port* and *Goal* must be instantiated to a goal.

When the linda server is started, *Host* and *Port* are bound to the server host and port respectively and the goal *Goal* is called. A typical use of this would be to store the connection information in a file so that the clients can find the server to connect to.

For backward compatibility, if *Options* is not a list, then it is assumed to be an option of the form *`Address-Goal`*.

Before release 3.9.1, *Goal* needed an explicit module prefix to ensure it was called in the right module. This is no longer necessary since `linda/1` is now a meta-predicate.

`accept_hook(`*Client*`,`*Stream*`,`*Goal*`)`
: When a client attempts to connects to the server *Client* and *Stream* will be bound to the IP address of the client and the socket stream connected to the client, respectively. The *Goal* is then called, and if it succeeds, then the client is allowed to connect. If *Goal* fails, then the server will close the stream and ignore the connection request. A typical use of this feature would be to restrict the addresses of the clients allowed to connect. If you require bullet proof security, then you would probably need something more sophisticated.

Example:

```
| ?- linda([(Host:Port)-mypred(Host,Port),
           accept_hook(C,S,should_accept(C,S))]).
```

will call `mypred/2` when the server is started. `mypred/2` could start the client-processes, save the address for the clients etc. Whenever a client attempts to connect from a host with IP address *Addr*, a bi-directional socket stream *Stream* will be opened to the client, and `should_accept(`*Addr*`,`*Stream*`)` will be called to determine if the client should be allowed to connect.

10.24.2 Linda Client

The clients are one or more SICStus processes that have connection(s) to the server.

To load the package, enter the query

```
| ?- use_module(library('linda/client')).
```

Some of the following predicates fail if they do not receive an answer from the Linda-server in a reasonable amount of time. That time is set with the predicate `linda_timeout/2`.

`linda_client(+`*Address*`)`
: Establishes a connection to a Linda-server specified by *Address*. The *Address* is of the format *Host:PortNumber* as given by `linda/[0,1]`.

  It is not possible to be connected to two Linda-servers at the same time.

  This predicate can fail due to a timeout.

`close_client`
: Closes the connection to the server.

`shutdown_server/0`
: Sends a Quit signal to the server, which immediately stops accepting new connections before `shutdown_server/0` returns. The server continues running after receiving this signal, processing requests from existing clients, until such time as all the clients have closed their connections. It is up to the clients to tell each other to quit. When all the clients are done, the server stops (i.e. `linda/[0,1]` succeeds). Courtesy of Malcolm Ryan. Note that `close_client/0` should be

called *after* `shutdown_server/0`. `shutdown_server/0` will raise an error if there is no connection between the client and the server.

The behavior of `shutdown_server/0` changed in SICStus Prolog 4.2. In previous releases the server continued to accept new connections after being told to shutdown. Now it immediately stops listening for new connections and releases the listening socket and these server actions happens before the client returns from `shutdown_server/0`.

`linda_timeout(?OldTime, ?NewTime)`
This predicate controls Linda's timeout. *OldTime* is unified with the old timeout and then timeout is set to *NewTime*. The value is either `off` or of the form *Seconds:Milliseconds*. The former value indicates that the timeout mechanism is disabled, that is, eternal waiting. The latter form is the *timeout-time*.

`out(+Tuple)`
Places the tuple *Tuple* in Linda's tuple-space.

`in(?Tuple)`
Removes the tuple *Tuple* from Linda's tuple-space if it is there. If not, then the predicate blocks until it is available (that is, someone performs an `out/1`).

`in_noblock(?Tuple)`
Removes the tuple *Tuple* from Linda's tuple-space if it is there. If not, then the predicate fails.

This predicate can fail due to a timeout.

`in(+TupleList, ?Tuple)`
As `in/1` but succeeds when either of the tuples in *TupleList* is available. *Tuple* is unified with the fetched tuple. If that unification fails, then the tuple is *not* reinserted in the tuple-space.

`rd(?Tuple)`
Succeeds if *Tuple* is available in the tuple-space, suspends otherwise until it is available. Compare this with `in/1`: the tuple is *not* removed.

`rd_noblock(?Tuple)`
Succeeds if *Tuple* is available in the tuple-space, fails otherwise.

This predicate can fail due to a timeout.

`rd(+TupleList, ?Tuple)`
As `in/2` but does not remove any tuples.

`bagof_rd_noblock(?Template, +Tuple, ?Bag)`
Bag is the list of all instances of *Template* such that *Tuple* exists in the tuple-space.

The behavior of variables in *Tuple* and *Template* is as in `bagof/3`. The variables could be existentially quantified with `^/2` as in `bagof/3`.

The operation is performed as an atomic operation.

This predicate can fail due to a timeout.

Example: Assume that only one client is connected to the server and that the tuple-space initially is empty.

```
| ?- out(x(a,3)), out(x(a,4)), out(x(b,3)), out(x(c,3)).

| ?- bagof_rd_noblock(C-N, x(C,N), L).

C = _32,
L = [a-3,a-4,b-3,c-3],
N = _52

| ?- bagof_rd_noblock(C, N^x(C,N), L).

C = _32,
L = [a,a,b,c],
N = _48
```

10.25 List Operations—`library(lists)`

This library module provides operations on lists. Exported predicates:

`select(?Element, ?Set, ?Residue)`
: is true when *Set* is a list, *Element* occurs in *Set*, and *Residue* is everything in *Set* except *Element* (things stay in the same order).

`selectchk(+Element, +Set, ?Residue)`
: is to `select/3` what `memberchk/2` is to `member/2`. That is, it locates the first occurrence of *Element* in *Set*, and deletes it, giving *Residue*. It is steadfast in *Residue*.

`append(+ListOfLists, -List)`
: is true when *ListOfLists* is a list *[L1,...,Ln]* of lists, *List* is a list, and appending *L1*, ..., *Ln* together yields *List*. *ListOfLists must* be a proper list. Additionally, either *List* should be a proper list, or each of *L1*, ..., *Ln* should be a proper list. The behavior on non-lists is undefined. *ListOfLists* must be proper because for any given solution, infinitely many more can be obtained by inserting nils ([]) into *ListOfList*. Could be defined as:

```
append(Lists, Appended) :-
    (   foreach(List,Lists),
        fromto(Appended,S0,S,[])
    do  append(List, S, S0)
    ).
```

`append(?Prefix, ?Tail1, ?List1, ?Tail2, ?List2)`
: is true when `append(Prefix, Tail1, List1)` and `append(Prefix, Tail2, List2)` are both true. You could call `append/3` twice, but that is order- dependent. This will terminate if *Prefix* is a proper list or if either *List1* or *List2* is a proper list.

`correspond(?X, ?Xlist, ?Ylist, ?Y)`
: is true when *Xlist* and *Ylist* are lists, *X* is an element of *Xlist*, *Y* is an element of *Ylist*, and *X* and *Y* are in similar places in their lists. No relation is implied between other elements of *Xlist* and *Ylist*. For a similar predicate without the cut, see `select/4`.

`delete(+List, +Kill, -Residue)`
: is true when *List* is a list, in which *Kill* may or may not occur, and *Residue* is a copy of *List* with all elements equal to *Kill* deleted. To extract a single copy of *Kill*, use `select(Kill, List, Residue)`. *Kill* and the elements of *List* should be sufficiently instantiated for `\=` to be sound. Could be defined as:

```
delete(List, Kill, Residue) :-
    (   foreach(X,List),
        fromto(Residue,S0,S,[]),
        param(Kill)
    do  (X = Kill -> S0 = S ; S0 = [X|S])
    ).
```

`delete(+List, +Kill, +Count, -Residue)`
: is true when *List* is a list, in which *Kill* may or may not occur, and *Count* is a non-negative integer, and *Residue* is a copy of *List* with the first *Count* elements equal to *Kill* deleted. If *List* has fewer than *Count* elements equal to *Count*, all of them are deleted. *Kill* and the elements of *List* should be sufficiently instantiated for `\=` to be sound.

`is_list(+List)`
: succeeds when *List* is a proper list. That is, *List* is nil ([]) or a cons cell (*[Head|Tail]*) whose *Tail* is a proper list. A variable, or a list whose final tail is a variable, or a cyclic list, will fail this test.

`keys_and_values(?[K1-V1,...,Kn-Vn], ?[K1,...,Kn], ?[V1,...,Vn])`
: is true when its arguments look like the picture above. It is meant for splitting a list of *Key-Value* pairs (such as `keysort/2` wants and produces) into separate lists of *Keys* and of *Values*. It may just as well be used for building a list of pairs from a pair of lists. In fact one usually wants just the keys or just the values, but you can supply `_` as the other argument. For example, suppose you wanted to sort a list without having duplicates removed. You could do

```
keys_and_values(RawPairs, RawKeys, _),
keysort(RawPairs, OrdPairs),
keys_and_values(OrdPairs, OrdKeys, _).
```

  Could be defined as:

```
keys_and_values([], [], []).
keys_and_values([Key-Value|Pairs], [Key|Keys], [Value|Values]) :-
    keys_and_values(Pairs, Keys, Values).
```

`last(+List, -Last)`
: is true when *List* is a *List* and *Last* is its last element. There is also a `last(?Fore, ?Last, ?List)` whose argument order matches append/3. This could be defined as

```
last(L, X) :- append(_, [X], L).
```

`nextto(?X, ?Y, ?List)`
: is true when *X* and *Y* appear side-by-side in *List*. It could be written as

```
nextto(X, Y, List) :- append(_, [X,Y|_], List).
```

  It may be used to enumerate successive pairs from the list. *List* should be proper, otherwise `nextto/3` will generate it.

`nth0(?N, ?List, ?Elem)`
: is true when *Elem* is the *N*th member of *List*, counting the first as element 0. That is, throw away the first *N* elements and unify *Elem* with the next. E.g. `nth0(0, [H|T], H)`. Either *N* should be an integer, or *List* should be proper.

`nth1(?N, ?List, ?Element)`
: is true when *Elem* is the *Nth* member of *List*, counting the first as element 1. That is, throw away the first *N-1* elements and unify *Elem* with the next element (the *Nth*). E.g. `nth1(1, [H|T], H)`. This is just like `nth0/3` except that it counts from 1 instead of 0. Either *N* should be an integer, or *List* should be proper.

`nth0(?N, ?List, ?Elem, ?Rest)`
: unifies *Elem* with the *Nth* element of *List*, counting from 0, and *Rest* with the other elements. It can be used to select the *Nth* element of *List* (yielding *Elem* and *Rest*), or to insert *Elem before* the *Nth* (counting from 0) element of *Rest*, when it yields *List*, e.g. `nth0(2, List, c, [a,b,d,e])` unifies *List* with `[a,b,c,d,e]`. This can be seen as inserting *Elem after* the *Nth* element of *Rest* if you count from 1 rather than 0. Either *N* should be an integer, or *List* or *Rest* should be proper.

`nth1(?N, ?List, ?Elem, ?Rest)`
: unifies *Elem* with the *Nth* element of *List*, counting from 1, and *Rest* with the other elements. It can be used to select the *Nth* element of *List* (yielding *Elem* and *Rest*), or to insert *Elem before* the *Nth* (counting from 1) element of *Rest*, when it yields *List*, e.g. `nth1(2, List, b, [a,c,d,e])` unifies *List* with `[a,b,c,d,e]`. Either *N* should be an integer, or *List* or *Rest* should be proper.

`one_longer(?Longer, ?Shorter)`
: is true when

```
length(Longer,N), length(Shorter,M), succ(M,N)
```

for some integers *M*, *N*. It was written to make `{nth0,nth1}/4` able to find the index, just as `same_length/2` is useful for making things invertible.

`perm(+List, ?Perm)`
: is true when *List* and *Perm* are permutations of each other. The main use of `perm/2` is to generate permutations. You should not use this predicate in new programs; use `permutation/2` instead. *List* must be a proper list. *Perm* may be partly instantiated.

`permutation(?List, ?Perm)`
: is true when *List* and *Perm* are permutations of each other. Unlike `perm/2`, it will work even when *List* is not a proper list. Any way, it works by generating permutations of *List* and unifying them with *Perm*. Be careful: this is quite efficient, but the number of permutations of an *N*-element list is *N!*, and even for a 7-element list that is 5040.

`perm2(?A,?B, ?C,?D)`
: is true when *{A,B} = {C,D}*. It is very useful for writing pattern matchers over commutative operators.

`proper_length(+List, ?Length)`
: succeeds when *List* is a proper list, binding *Length* to its length. That is, `is_list(List), length(List, Length)`. Will fail for cyclic lists.

`remove_dups(+List, ?Pruned)`
: removes duplicated elements from *List*, which should be a proper list. If *List* has non-ground elements, *Pruned* may contain elements which unify; two elements will remain separate iff there is a substitution which makes them different. E.g. *[X,X] -> [X]* but *[X,Y] -> [X,Y]*. The surviving elements, by ascending standard order, is unified with *Pruned*.

`reverse(?List, ?Reversed)`
: is true when *List* and *Reversed* are lists with the same elements but in opposite orders. Either *List* or *Reversed* should be a proper list: given either argument the other can be found. If both are incomplete `reverse/2` can backtrack forever trying ever longer lists.

`rev(+List, ?Reversed)`
: is a version of `reverse/2` which only works one way around. Its *List* argument must be a proper list whatever *Reversed* is. You should use `reverse/2` in new programs, though `rev/2` is faster when it is safe to use it.

`same_length(?List1, ?List2)`
: is true when *List1* and *List2* are both lists and have the same number of elements. No relation between the values of their elements is implied. It may be used to generate either list given the other, or indeed to generate two lists of the same length, in which case the arguments will be bound to lists of length 0, 1, 2, ... If either *List1* or *List2* is bound to a proper list, same_length is determinate and terminating.

`same_length(?List1, ?List2, ?Length)`
: is true when *List1* and *List2* are both lists, *Length* is a non-negative integer, and both *List1* and *List2* have exactly *Length* elements. No relation between the elements of the lists is implied. If *Length* is instantiated, or if either *List1* or *List2* is bound to a proper list, same_length is determinate and terminating.

`select(?X, ?Xlist, ?Y, ?Ylist)`
: is true when X is the Kth member of *Xlist* and Y the Kth element of *Ylist* for some K, and apart from that *Xlist* and *Ylist* are the same. You can use it to replace X by Y or vice versa. Either *Xlist* or *Ylist* should be a proper list.

`selectchk(?X, +Xlist, ?Y, +Ylist)`
: is to `select/4` as `memberhck/2` is to `member/2`. That is, it finds the first K such that X unifies with the Kth element of *Xlist* and Y with the Kth element of *Ylist*, and it commits to the bindings thus found. If you have *Keys* and *Values* in "parallel" lists, you can use this to find the *Value* associated with a particular *Key* (much better methods exist). Except for argument order, this is identical to `correspond/4`, but `selectchk/4` is a member of a coherent family. Note that the arguments are like the arguments of `memberchk/2`, twice.

`shorter_list(?Short, ?Long)`
: is true when *Short* is a list is strictly shorter than *Long*. *Long* doesn't have to be a proper list provided it is long enough. This can be used to generate lists shorter than *Long*, lengths 0, 1, 2... will be tried, but backtracking will terminate with a list that is one element shorter than *Long*. It cannot be used to generate lists longer than *Short*, because it doesn't look at all the elements of the longer list.

`subseq(?Sequence, ?SubSequence, ?Complement)`
: is true when *SubSequence* and *Complement* are both subsequences of the list *Sequence* (the order of corresponding elements being preserved) and every element of *Sequence* which is not in *SubSequence* is in the *Complement* and vice versa.

That is, `length(Sequence) = length(SubSequence)+length(Complement)`, e.g. `subseq([1,2,3,4], [1,3,4], [2])`. This was written to generate subsets and their complements together, but can also be used to interleave two lists in all possible ways.

`subseq0(+`*`Sequence`*`, ?`*`SubSequence`*`)`
is true when *SubSequence* is a subsequence of *Sequence*, but may be *Sequence* itself. Thus `subseq0([a,b], [a,b])` is true as well as `subseq0([a,b], [a])`. *Sequence* must be a proper list, since there are infinitely many lists with a given *SubSequence*.

```
?- setof(X, subseq0([a,b,c],X), Xs).
Xs = [[],[a],[a,b],[a,b,c],[a,c],[b],[b,c],[c]]
?- bagof(X, subseq0([a,b,c,d],X), Xs).
Xs = [[a,b,c,d],[b,c,d],[c,d],[d],[],[c],[b,d],[b],[b,c],[a,c,d],
      [a,d],[a],[a,c],[a,b,d],[a,b],[a,b,c]]
```

`subseq1(+`*`Sequence`*`, ?`*`SubSequence`*`)`
is true when *SubSequence* is a proper subsequence of *Sequence*, that is it contains at least one element less. *Sequence* must be a proper list, as *SubSequence* does not determine *Sequence*.

`sumlist(+`*`Numbers`*`, ?`*`Total`*`)`
is true when *Numbers* is a list of integers, and *Total* is their sum. *Numbers* should be a proper list. Could be defined as:

```
sumlist(Numbers, Total) :-
    (   foreach(X,Numbers),
        fromto(0,S0,S,Total)
    do  S is S0+X
    ).
```

`transpose(?`*`X`*`, ?`*`Y`*`)`
is true when *X* is a list of the form *[[X11,...,X1m],...,[Xn1,...,Xnm]]* and *Y* is its transpose, that is, *Y = [[X11,...,Xn1],...,[X1m,...,Xnm]]* We insist that both lists should have this rectangular form, so that the predicate can be invertible. For the same reason, we reject empty arrays with *m = 0* or *n = 0*.

`append_length(?`*`Prefix`*`, ?`*`Suffix`*`, ?`*`List`*`, ?`*`Length`*`)`
is true when

```
append(Prefix, Suffix, List), length(Prefix, Length).
```

The normal use of this is to split a *List* into a *Prefix* of a given *Length* and the corresponding *Suffix*, but it can be used any way around provided that *Length* is instantiated, or *Prefix* is a proper list, or *List* is a proper list.

`append_length(?`*`Suffix`*`, ?`*`List`*`, ?`*`Length`*`)`
is true when there exists a list *Prefix* such that `append_length(`*`Prefix`*`, `*`Suffix`*`, `*`List`*`, `*`Length`*`)` is true. When you don't want to know the *Prefix*, you should call this predicate, because it doesn't construct the *Prefix* argument, which `append_length/4` would do.

`prefix_length(?List, ?Prefix, ?Length)`
is true when

```
prefix(List, Prefix) &
length(Prefix, Length).
```

The normal use of this is to find the first *Length* elements of a given *List*, but it can be used any way around provided that *Length* is instantiated, or *Prefix* is a proper list, or *List* is a proper list. It is identical in effect to `append_length(Prefix, _, List, Length)`.

`proper_prefix_length(?List, ?Prefix, ?Length)`
is true when

```
proper_prefix(List, Prefix) &
length(Prefix, Length).
```

The normal use of this is to find the first *Length* elements of a given *List*, but it can be used any way around provided that *Length* is instantiated, or *Prefix* is a proper list, or *List* is a proper list. It is logically equivalent to `prefix(Prefix, List, Length), Length > 0`.

`suffix_length(+List, ?Suffix, ?Length)`
is true when

```
suffix(List, Suffix) &
length(Suffix, Length).
```

The normal use of this is to return the last *Length* elements of a given *List*. For this to be sure of termination, *List* must be a proper list. The predicate suffix/2 has the same requirement. If *Length* is instantiated or *Suffix* is a proper list, this predicate is determinate.

`proper_suffix_length(+List, ?Suffix, ?Length)`
is true when

```
proper_suffix(List, Suffix) &
length(Suffix, Length).
```

The normal use of this is to return the last *Length* elements of a given *List*. For this to be sure of termination, *List* must be a proper list. The predicate proper_suffix/2 has the same requirement. If *Length* is instantiated or *Suffix* is a proper list, this predicate is determinate.

`rotate_list(+Amount, ?List, ?Rotated)`
is true when *List* and *Rotated* are lists of the same length, and

```
append(Prefix, Suffix, List) &
append(Suffix, Prefix, Rotated) &
(   Amount >= 0 & length(Prefix, Amount)
|   Amount =< 0 & length(Suffix, Amount)
).
```

That is to say, *List* rotated LEFT by *Amount* is *Rotated*. If either *List* or *Rotated* is bound to a proper list, rotate_list is determinate.

`rotate_list(?List, ?Rotated)`
: is true when `rotate_list(1, List, Rotated)`, but is a bit less heavy-handed. `rotate_list(X, Y)` rotates *X* left one place yielding *Y*. `rotate_list(Y, X)` rotates *X* right one place yielding *Y*. Either *List* or *Rotated* should be a proper list, in which case rotate_list is determinate and terminating.

`sublist(+Whole, ?Part, ?Before, ?Length, ?After)`
`sublist(+Whole, ?Part, ?Before, ?Length)`
`sublist(+Whole, ?Part, ?Before)`
: is true when

- *Whole* is a list – it must be proper already
- *Part* is a list
- *Whole* = *Alpha* `||` *Part* `||` *Omega*
- `length(Alpha, Before)`
- `length(Part, Length)`
- `length(Omega, After)`

`cons(?Head, ?Tail, ?List)`
: is true when *Head* is the head of *List* and *Tail* is its tail. i.e. `append([Head], Tail, List)`. No restrictions.

`last(?Fore, ?Last, ?List)`
: is true when *Last* is the last element of *List* and *Fore* is the list of preceding elements, e.g. `append(Fore, [Last], List)`. *Fore* or *Last* should be proper. It is expected that *List* will be proper and *Fore* unbound, but it will work in reverse too.

`head(?List, ?Head)`
: is true when *List* is a non-empty list and *Head* is its head. A list has only one head. No restrictions.

`tail(?List, ?Tail)`
: is true when *List* is a non-empty list and *Tail* is its tail. A list has only one tail. No restrictions.

`prefix(?List, ?Prefix)`
: is true when *List* and *Prefix* are lists and *Prefix* is a prefix of *List*. It terminates if either argument is proper, and has at most *N+1* solutions. Prefixes are enumerated in ascending order of length.

`proper_prefix(?List, ?Prefix)`
: is true when *List* and *Prefix* are lists and *Prefix* is a proper prefix of *List*. That is, *Prefix* is a prefix of *List* but is not *List* itself. It terminates if either argument is proper, and has at most *N* solutions. Prefixes are enumerated in ascending order of length.

`suffix(?List, ?Suffix)`
: is true when *List* and *Suffix* are lists and *Suffix* is a suffix of *List*. It terminates only if *List* is proper, and has at most *N+1* solutions. Suffixes are enumerated in descending order of length.

`proper_suffix(?List, ?Suffix)`
: is true when *List* and *Suffix* are lists and *Suffix* is a proper suffix of *List*. That is, *Suffix* is a suffix of *List* but is not *List* itself. It terminates only if *List* is proper, and has at most *N* solutions. Suffixes are enumerated in descending order of length.

`segment(?List, ?Segment)`
: is true when *List* and *Segment* are lists and *Segment* is a segment of *List*. That is, *List* = `_` `<>` *Segment* `<>` `_` . Terminates only if *List* is proper. If *Segment* is proper it enumerates all solutions. If neither argument is proper, it would have to diagonalize to find all solutions, but it doesn't, so it is then incomplete. If *Segment* is proper, it has at most *N+1* solutions. Otherwise, it has at most *(1/2)(N+1)(N+2)* solutions.

`proper_segment(?List, ?Segment)`
: is true when *List* and *Segment* are lists and *Segment* is a proper segment of *List*. It terminates only if *List* is proper. The only solution of `segment/2` which is not a solution of `proper_segment/2` is `segment(List,List)`. So `proper_segment/2` has one solution fewer.

`cumlist(:Pred, +[X1,...,Xn], ?V0, ?[V1,...,Vn])`
`cumlist(:Pred, +[X1,...,Xn], +[Y1,...,Yn], ?V0, ?[V1,...,Vn])`
`cumlist(:Pred, +[X1,...,Xn], +[Y1,...,Yn], +[Z1,...,Zn], ?V0, ?[V1,...,Vn])`
: `cumlist/4` maps a ternary predicate *Pred* down the list *[X1,...,Xn]* just as `scanlist/4` does, and returns a list of the results. It terminates when the lists runs out. If *Pred* is bidirectional, it may be used to derive *[X1...Xn]* from *V0* and *[V1...Vn]*, e.g. `cumlist(plus, [1,2,3,4], 0, /* -> */ [1,3,6,10])` and `cumlist(plus, [1,1,1,1], /* <- */ 0, [1,2,3,4])`. Could be defined as:

```
cumlist(Pred, Xs, V0, Cum) :-
    (   foreach(X,Xs),
        foreach(V,Cum),
        fromto(V0,V1,V,_),
        param(Pred)
    do  call(Pred,X,V1,V)
    ).

cumlist(Pred, Xs, Ys, V0, Cum) :-
    (   foreach(X,Xs),
        foreach(Y,Ys),
        foreach(V,Cum),
        fromto(V0,V1,V,_),
        param(Pred)
    do  call(Pred,X,Y,V1,V)
    ).

cumlist(Pred, Xs, Ys, Zs, V0, Cum) :-
    (   foreach(X,Xs),
        foreach(Y,Ys),
        foreach(Z,Zs),
        foreach(V,Cum),
        fromto(V0,V1,V,_),
        param(Pred)
    do  call(Pred,X,Y,Z,V1,V)
    ).
```

`maplist(:Pred, +List)`
: succeeds when *Pred(X)* succeeds for each element *X* of *List*. *List* should be a proper list. Could be defined as:

```
maplist(Pred, Xs) :-
    (   foreach(X,Xs),
        param(Pred)
    do  call(Pred, X)
    ).
```

`maplist(:Pred, +OldList, ?NewList)`
: succeeds when *Pred(Old,New)* succeeds for each corresponding *Old* in *OldList*, *New* in *NewList*. Either *OldList* or *NewList* should be a proper list. Could be defined as:

```
maplist(Pred, Xs, Ys) :-
    (   foreach(X,Xs),
        foreach(Y,Ys),
        param(Pred)
    do  call(Pred, X, Y)
    ).
```

`maplist(:Pred, +Xs, ?Ys, ?Zs)`

is true when *Xs*, *Ys*, and *Zs* are lists of equal length, and *Pred(X, Y, Z)* is true for corresponding elements *X* of *Xs*, *Y* of *Ys*, and *Z* of *Zs*. At least one of *Xs*, *Ys*, and *Zs* should be a proper list. Could be defined as:

```
maplist(Pred, Xs, Ys, Zs) :-
    (   foreach(X,Xs),
        foreach(Y,Ys),
        foreach(Z,Zs),
        param(Pred)
    do  call(Pred, X, Y, Z)
    ).
```

`map_product(Pred, Xs, Ys, PredOfProduct)`

Just as `maplist(P, Xs, L)` is the analogue of Miranda's

```
let L = [ P x | x <- Xs ]
```

so `map_product(P, Xs, Ys, L)` is the analogue of Miranda's

```
let L = [ P x y | x <- Xs; y <- Ys ]
```

That is, if *Xs = [X1,...,Xm]*, *Ys = [Y1,...,Yn]*, and *P(Xi,Yj,Zij)*, *L = [Z11,...,Z1n,Z21,...,Z2n,...,Zm1,...,Zmn]*. It is as if we formed the Cartesian product of *Xs* and *Ys* and applied *P* to the *(Xi,Yj)* pairs. *Xs* and *Ys* should be proper lists. Could be defined as:

```
map_product(Pred, Xs, Ys, Zs) :-
    (   foreach(X,Xs),
        fromto(Zs,S0,S,[]),
        param([Ys,Pred])
    do  (   foreach(Y,Ys),
            fromto(S0,[Z|S1],S1,S),
            param([X,Pred])
        do  call(Pred, X, Y, Z)
        )
    ).
```

`scanlist(:Pred, [X1,...,Xn], ?V1, ?V)`
`scanlist(:Pred, [X1,...,Xn], [Y1,...,Yn], ?V1, ?V)`
`scanlist(:Pred, [X1,...,Xn], [Y1,...,Yn], [Z1,...,Zn], ?V1, ?V)`

`scanlist/4` maps a ternary relation *Pred* down a list. The computation is *Pred(X1,V1,V2)*, *Pred(X2,V2,V3)*, ..., *Pred(Xn,Vn,V)* So if *Pred* is `plus/3`, `scanlist(plus, [X1,...,Xn], 0, V)` puts the sum of the list elements in *V*. Note that the order of the arguments passed to Pred is the same as the order of the arguments following Pred. This also holds for scanlist/5 and scanlist/6, e.g. scanlist(Pred, Xs, Ys, Zs, V1, V) calls Pred(X3,Y3,Z3,V3,V4). Could be defined as:

```
scanlist(Pred, Xs, V0, V) :-
    (   foreach(X,Xs),
        fromto(V0,V1,V2,V),
        param(Pred)
    do  call(Pred, X, V1, V2)
    ).

scanlist(Pred, Xs, Ys, V0, V) :-
    (   foreach(X,Xs),
        foreach(Y,Ys),
        fromto(V0,V1,V2,V),
        param(Pred)
    do  call(Pred, X, Y, V1, V2)
    ).

scanlist(Pred, Xs, Ys, Zs, V0, V) :-
    (   foreach(X,Xs),
        foreach(Y,Ys),
        foreach(Z,Zs),
        fromto(V0,V1,V2,V),
        param(Pred)
    do  call(Pred, X, Y, Z, V1, V2)
    ).
```

`some(:Pred, +List)`
: succeeds when *Pred(Elem)* succeeds for some *Elem* in *List*. It will try all ways of proving *Pred* for each *Elem*, and will try each *Elem* in the *List*. `somechk/2` is to `some/2` as `memberchk/2` is to `member/2`.

```
member(X,L)     <-> some(=(X), L).
memberchk(X, L) <-> somechk(=(X), L).
some(Pred,L)    <-> member(X, L), call(Pred,X).
```

This acts on backtracking like member/2; List should be a proper list.

`some(:Pred, +[X1,...,Xn], ?[Y1,...,Yn])`
: is true when *Pred(Xi, Yi)* is true for some *i*.

`some(:Pred, +[X1,...,Xn], ?[Y1,...,Yn], ?[Z1,...,Zn])`
: is true when *Pred(Xi, Yi, Zi)* is true for some *i*.

`somechk(:Pred, +[X1,...,Xn])`
: is true when *Pred(Xi)* is true for some *i*, and it commits to the first solution it finds (like `memberchk/2`).

`somechk(:Pred, +[X1,...,Xn], ?[Y1,...,Yn])`
: is true when *Pred(Xi, Yi)* is true for some *i*, and it commits to the first solution it finds (like `memberchk/2`).

`somechk(:Pred, +[X1,...,Xn], ?[Y1,...,Yn], ?[Z1,...,Zn])`
: is true when *Pred(Xi, Yi, Zn)* is true for some *i*, and it commits to the first solution it finds (like `memberchk/2`).

`convlist(:Rewrite, +OldList, ?NewList)`
: is a sort of hybrid of `maplist/3` and `include/3`. Each element of *NewList* is the image under *Rewrite* of some element of *OldList*, and order is preserved, but elements of *OldList* on which *Rewrite* is undefined (fails) are not represented. Thus if `foo(K,X,Y) :- integer(X), Y is X+K.` then `convlist(foo(1), [1,a,0,joe(99),101], [2,1,102]).` *OldList* should be a proper list. Could be defined as:

```
convlist(Pred, Xs, News) :-
    (   foreach(X,Xs),
        fromto(News,S0,S,[]),
        param(Pred)
    do  (call(Pred,X,N) -> S0 = [N|S] ; S0 = S)
    ).
```

`exclude(:Pred, +Xs, ?SubList)`
`exclude(:Pred, +Xs, +Ys, ?SubList)`
`exclude(:Pred, +Xs, +Ys, +Zs, ?SubList)`
: succeeds when *SubList* is the sublist of *Xs* containing all the elements *Xi[,Yi[,Zi]]* for which *Pred(Xi[,Yi[,Zi]])* is *false*. That is, it removes all the elements satisfying *Pred*. *Xs*, *Ys* or *Zs* should be a proper list. Could be defined as:

```
exclude(Pred, Xs, News) :-
    (   foreach(X,Xs),
        fromto(News,S0,S,[]),
        param(Pred)
    do  (call(Pred,X) -> S0 = S ; S0 = [X|S])
    ).

exclude(Pred, Xs, Ys, News) :-
    (   foreach(X,Xs),
        foreach(Y,Ys),
        fromto(News,S0,S,[]),
        param(Pred)
    do  (call(Pred,X,Y) -> S0 = S ; S0 = [X|S])
    ).

exclude(Pred, Xs, Ys, Zs, News) :-
    (   foreach(X,Xs),
        foreach(Y,Ys),
        foreach(Z,Zs),
        fromto(News,S0,S,[]),
        param(Pred)
    do  (call(Pred,X,Y,Z) -> S0 = S ; S0 = [X|S])
    ).
```

`include(:Pred, +Xs, ?SubList)`
`include(:Pred, +Xs, +Ys, ?SubList)`
`include(:Pred, +Xs, +Ys, +Zs, ?SubList)`
succeeds when *SubList* is the sublist of *Xs* containing all the elements *Xi[,Yi[,Zi]]* for which *Pred(Xi[,Yi[,Zi]])* is *true*. That is, it retains all the elements satisfying *Pred*. *Xs*, *Ys* or *Zs* should be a proper list. Could be defined as:

```
include(Pred, Xs, News) :-
    (   foreach(X,Xs),
        fromto(News,S0,S,[]),
        param(Pred)
    do  (call(Pred,X) -> S0 = [X|S] ; S0 = S)
    ).

include(Pred, Xs, News) :-
    (   foreach(X,Xs),
        fromto(News,S0,S,[]),
        param(Pred)
    do  (call(Pred,X) -> S0 = [X|S] ; S0 = S)
    ).

include(Pred, Xs, Ys, News) :-
    (   foreach(X,Xs),
        foreach(Y,Ys),
        fromto(News,S0,S,[]),
        param(Pred)
    do  (call(Pred,X,Y) -> S0 = [X|S] ; S0 = S)
    ).

include(Pred, Xs, Ys, Zs, News) :-
    (   foreach(X,Xs),
        foreach(Y,Ys),
        foreach(Z,Zs),
        fromto(News,S0,S,[]),
        param(Pred)
    do  (call(Pred,X,Y,Z) -> S0 = [X|S] ; S0 = S)
    ).
```

`partition(:Pred, +List, ?Less, ?Equal, ?Greater)`
is a relative of `include/3` and `exclude/3` which has some pretensions to being logical. For each *X* in *List*, we call *Pred(X,R)*, and route *X* to *Less*, *Equal*, or *Greater* according as *R* is `<`, `=`, or `>` .

`group(:Pred, +List, ?Front, ?Back)`
is true when `append(Front, Back, List)`, `maplist(Pred, Front)`, and *Front* is as long as possible.

`group(:Pred, +Key, +List, ?Front, ?Back)`
: is true when `append(Front, Back, List)`, `maplist(call(Pred,Key), Front)`, and *Front* is as long as possible. Strictly speaking we don't need it; `group(call(Pred,Key), List, Front, Back)` would do just as well.

`group(:Pred, +List, ?ListOfLists)`
: is true when `append(ListOfLists, List)`, each element of *ListOfLists* has the form *[Head|Tail]* such that `group(Pred, Head, Tail, Tail, [])`, and each element of *ListOfLists* is as long as possible. For example, if you have a keysorted list, and define `same_key(K-_, K-_)`, then `group(same_key, List, Buckets)` will divide *List* up into *Buckets* of pairs having the same key.

`ordered(+List)`
: is true when *List* is a list of terms *[T1,T2,...,Tn]* such that for all *k* in *2..n* *Tk-1* `@=<` *Tk*, i.e. *T1* `@=<` *T2* `@=<` *T3* ... The output of `keysort/2` is always ordered, and so is that of `sort/2`. Beware: just because a list is ordered does not mean that it is the representation of an ordered set; it might contain duplicates.

`ordered(+P, +[T1,T2,...,Tn])`
: is true when *P(T1,T2) & P(T2,T3) &* ... That is, if you take *P* as a "comparison" predicate like `@=<`, the list is ordered. This is good for generating prefixes of sequences, e.g. `L = [1,_,_,_,_], ordered(times(2), L)` yields `L = [1,2,4,8,16]`.

`max_member(?Xmax, +[X1,...,Xn])`
: unifies *Xmax* with the maximum (in the sense of `@=<`) of *X1*,...,*Xn*. The list should be proper. If it is empty, the predicate fails quietly. Could be defined as:

```
max_member(Maximum, [Head|Tail]) :-
    (   foreach(X,Tail),
        fromto(Head,M0,M,Maximum)
    do  (X@=<M0 -> M = M0 ; M = X)
    ).
```

`min_member(?Xmin, +[X1,...,Xn])`
: unifies *Xmin* with the minimum (in the sense of `@=<`) of *X1*,...,*Xn*. The list should be proper. If it is empty, the predicate fails quietly. Could be defined as:

```
min_member(Minimum, [Head|Tail]) :-
    (   foreach(X,Tail),
        fromto(Head,M0,M,Minimum)
    do  (M0@=<X -> M = M0 ; M = X)
    ).
```

`max_member(:P, ?Xmax, +[X1,...,Xn])`
: unifies *Xmax* with the maximum element of *[X1,...,Xn]*, as defined by the comparison predicate *P*, which should act like `@=<` . The list should be proper. If it is empty, the predicate fails quietly. Could be defined as:

```
max_member(Pred, Maximum, [Head|Tail]) :-
    (   foreach(X,Tail),
        fromto(Head,M0,M,Maximum),
        param(Pred)
    do  (call(Pred,X,M0) -> M = M0 ; M = X)
    ).
```

`min_member(:P, ?Xmin, +[X1,...,Xn])`
: unifies *Xmin* with the minimum element of *[X1,...,Xn]*, as defined by the comparison predicate *P*, which should act like `@=<` . The list should be proper. If it is empty, the predicate fails quietly. Could be defined as:

```
min_member(Pred, Minimum, [Head|Tail]) :-
    (   foreach(X,Tail),
        fromto(Head,M0,M,Minimum),
        param(Pred)
    do  (call(Pred,M0,X) -> M = M0 ; M = X)
    ).
```

`select_min(?Element, +Set, ?Residue)`
: unifies *Element* with the smallest (in the sense of `@=<`) element of *Set*, and *Residue* with a list of all the other elements.

`select_min(:Pred, ?Element, +Set, ?Residue)`
: find the least *Element* of *Set*, i.e. *Pred(Element,X)* for all *X* in *Set*.

`select_max(?Element, +Set, ?Residue)`
: unifies *Element* with the (leftmost) maximum element of the *Set*, and *Residue* to the other elements in the same order.

`select_max(:Pred, ?Element, +Set, ?Residue)`
: find the greatest *Element* of *Set*, i.e. *Pred(X,Element)* for all *X* in *Set*.

`increasing_prefix(?Sequence, ?Prefix, ?Suffix)`
: is true when `append(Prefix, Suffix, Sequence)` and *Prefix*, together with the first element of *Suffix*, forms a monotone non-decreasing sequence, and no longer Prefix will do. Pictorially,

```
Sequence = [x1,...,xm,xm+1,...,xn]
Prefix   = [x1,...,xm]
Suffix     = [xm+1,...,xn]
x1 @=< x2 @=< ... @=< xm @=< xm+1
not xm+1 @=< xm+2
```

  This is perhaps a surprising definition; you might expect that the first element of *Suffix* would be included in *Prefix*. However, this way, it means that if Sequence is a strictly decreasing sequence, the *Prefix* will come out empty.

`increasing_prefix(:Order, ?Sequence, ?Prefix, ?Suffix)`
: is the same as `increasing_prefix/3`, except that it uses the binary relation *Order* in place of `@=<`.

`decreasing_prefix(?Sequence, ?Prefix, ?Suffix)`
`decreasing_prefix(:Order, ?Sequence, ?Prefix, ?Suffix)`
: is the same, except it looks for a decreasing prefix. The order is the converse of the given order. That is, where `increasing_prefix/[3,4]` check *X(R)Y*, these routines check *Y(R)X*.

`clumps(+Items, -Clumps)`
: is true when *Clumps* is a list of lists such that

  - `append(Clumps, Items)`
  - for each *Clump* in *Clumps*, all the elements of *Clump* are identical (`==`)

  Items must be a proper list of terms for which sorting would have been sound. In fact, it usually is the result of sorting.

`keyclumps(+Pairs, ?Clumps)`
: is true when *Pairs* is a list of pairs and *Clumps* a list of lists such that

  - `append(Clumps, Pairs)`
  - for each *Clump* in *Clumps*, all of the *Key-Value* pairs in *Clump* have identical (`==`) *Keys*.

  Pairs must be a proper list of pairs for which keysorting would have been sound. In fact, it usually is the result of keysorting.

`clumped(+Items, ?Counts)`
: is true when *Counts* is a list of *Item-Count* pairs such that if `clumps(Items, Clumps)`, then each *Item-Count* pair in *Counts* corresponds to an element *[Item/*1*/,...,Item/*Count*/]* of *Clumps*. *Items* must be a proper list of terms for which sorting would have been sound. In fact, it usually is the result of sorting.

`keyclumped(+Pairs, ?Groups)`
: is true when *Pairs* is a list of *Key-Item* pairs and *Groups* is a list of *Key-Items* pairs such that if `keyclumps(Pairs, Clumps)`, then for each *K-[I1,...,In]* pair in *Groups* there is a *[K-I1,...,K-In]* clump in *Clumps*. *Pairs* must be a proper list of pairs for which keysorting would have been sound. In fact, it usually is the result of keysorting.

10.26 External Storage of Terms (LMDB)—`library(lmdb)`

This library module handles storage and retrieval of terms on files. By using indexing, the store/retrieve operations are efficient also for large data sets. The package is an interface to the Lightning Memory-Mapped Database Manager (LMDB). The API is quite similar to the deprecated `library(bdb)`, and provides essentially the same functionality, although some details differ. The library module is part of SICStus Prolog since release 4.7.0.

10.26.1 Basics

The idea is to get a behavior similar to `assert/1`, `retract/1` and `clause/2`, but the terms are stored on file instead of in primary memory. Like the Prolog database, LMDB will store variables with attributes or with blocked goals as ordinary variables.

The differences compared with the Prolog database are:

- A *database* must be explicitly created, and occupies a file system directory. A database must be opened before any access and closed after the last access.
- The functors and the indexing specifications of the terms to be stored have to be given when the database is created. It is possible to index on other parts of the term than just the functor and first argument. (see Section 10.26.7 [LMDB DB-Spec Details], page 665).
- Changes are not guaranteed to affect the database until it is explicitly *synced*.

10.26.2 Current Limitations

- The terms are not necessarily fetched in the same order as they were stored.
- The number of terms ever inserted in a database cannot exceed 2^32-1.
- A size limit must be set at creation time. An LMDB database cannot grow beyond that limit.

10.26.3 Lightning Memory-Mapped Database Manager (LMDB)

LMDB is a software library that provides a transactional database in the form of a key-value store. LMDB stores arbitrary key/data pairs as byte arrays, has a range-based search capability, and supports multiple data items for a single key. LMDB is fully thread-aware and supports concurrent read/write access from multiple processes and threads.

For details on the underlying technology, we refer to the OpenLDAP home page `https://www.openldap.org/`.

10.26.4 The DB-Spec—Informal Description

The *db-spec* defines which functors are allowed and which parts of a term are used for indexing in a database. The syntax of a db-spec is a skeletal goal with no module. The db-spec is a list of atoms and compound terms where the arguments are either `+` or `-`. A term can be inserted in the database if there is a spec in the spec list with the same functor.

Multilevel indexing is not supported, terms have to be "flattened".

Every spec with the functor of the *indexed term* specifies an indexing. Every argument where there is a `+` in the spec is indexed on.

The idea of the db-spec is illustrated with a few examples. (A section further down explains the db-spec in a more formal way).

Given a spec of `[f(+,-), .(+,-), g, f(-,+)]` the indexing works as follows. (The parts with indexing are underlined.)

Term	*Store*	*Fetch*
`g(x,y)`	domain error	domain error
`f(A,B)`	`f(A,B)` `-`	instantiation error
`f(a,b)`	`f(a,b)  f(a,b)` `- -  -  -`	`f(a,b)` `- -`
`[a,b]`	`.(a,.(b,[]))` `- -`	`.(a,.(b,[]))` `- -`
`g`	`g` `-`	`g` `-`

The specification `[f(+,-), f(-,+)]` is different from `[f(+,+)]`. The first specifies that two indices are to be made whereas the second specifies that only one index is to be made on both arguments of the term.

10.26.5 Predicates

10.26.5.1 Conventions

The following conventions are used in the predicate descriptions below.

- The predicates that create and open databases can be given a list of options. An *Option* is one of:

  `mapsize(`*S*`)`
  : The mapsize, or size limit, of the database being created, in MiB. The default is 10MiB.

  `permission(`*S*`)`
  : The UNIX permission for files of the database being created. Ignored for Windows. The default is octal 664.

  `mode(`*S*`)` The access mode for the database being opened. One of the atoms `read` and `write`. If `read` (the default), no updates are allowed.

- *DBRef* is a reference to an open database. It is returned when the database is opened. The reference becomes invalid after the database has been closed. The reference corresponds to the LMDB environment notion. An environment physically consists of a directory containing the files needed to enable sharing databases between processes.
- *TermRef* is a reference to a term in a given database. The reference is returned when a term is stored. The reference stays valid even after the database has been closed and hence can be stored permanently as part of another term. However, if such references are stored in the database, automatic compression of the database (using `lmdb_compress/[2,3]`) is not possible, in that case the user has to write their own compressing predicate.

- *SpecList* is a description of the indexing scheme; see Section 10.26.7 [LMDB DB-Spec Details], page 665.
- *Term* is any Prolog term.
- *Iterator* is a non-backtrackable mutable object. It can be used to iterate through a set of terms stored in a database. The iterators are unidirectional.

10.26.5.2 Memory Leaks

In order to avoid memory leaks, databases and iterators should always be closed explicitly. Consider using `lmdb_with_db/[2,3]` and `lmdb_with_iterator/3` to automate the closing/deallocation of these objects.

> **Please note**: a database must not be closed while there are outstanding choices for some `lmdb_fetch/3` or `lmdb_enumerate/3` goal that refers to that database. Outstanding choices can be removed with a cut (`!`).

10.26.5.3 The Predicates

`lmdb_create(+`*Path*`, +`*SpecList*`)`
`lmdb_create(+`*Path*`, +`*SpecList*`, +`*Options*`)`
: Creates a brand new LMDB database with the given spec list. *Path* should be a file system path where a new directory can be created. If some file or directory already exists there, an exception is raised.

`lmdb_open(+`*Path*`, -`*DBRef*`)`
`lmdb_open(+`*Path*`, -`*DBRef*`, +`*Options*`)`
: Opens an existing database and unifies *DBRef* with its reference. *Path* should be a file system path to the directory that holds the database.

  Please note: Only one *DBRef* may be connected to the same *Path* at the same time in the same process. I.e., you must not call `lmdb_open/2` twice with the same *Path* without closing the *DBRef* before the second call.

`lmdb_with_db(+`*Path*`, :`*Goal*`)`
`lmdb_with_db(+`*Path*`, :`*Goal*`, +`*Options*`)`
: Opens an existing database, calls *Goal* with its reference, as if by `call(Goal, DBRef)`, and ensures that the database is closed afterwards. *Goal* may backtrack and succeed multiple times. *Path* should be a file system path to the directory that holds the database.

  Please note: see `lmdb_open/2` for restrictions on opening the same *Path* more than once at the same time.

`lmdb_close(+`*DBRef*`)`
: Closes the database referenced by *DBRef*.

`lmdb_store(+`*DBRef*`, +`*Term*`, -`*TermRef*`)`
: Stores *Term* in the database *DBRef*. *TermRef* is unified with a corresponding term reference. The functor of *Term* must match the functor of a spec in the db-spec associated with *DBRef*.

`lmdb_fetch(+DBRef, ?Term, ?TermRef)`
: Unifies *Term* with a term from the database *DBRef*. At the same time, *TermRef* is unified with a corresponding term reference. Backtracking over the predicate unifies with all terms matching *Term*.

  If *TermRef* is not instantiated, both the functor and the instantiatedness of *Term* must match a spec in the db-spec associated with *DBRef*.

  If *TermRef* is instantiated, the referenced term is read and unified with *Term*.

  If you simply want to find all matching terms, it is more efficient to use `lmdb_findall/5` or `lmdb_enumerate/3`.

`lmdb_erase(+DBRef, +TermRef)`
: Deletes the term from the database *DBRef* that is referenced by *TermRef*.

`lmdb_enumerate(+DBRef, ?Term, -TermRef)`
: Unifies *Term* with a term from the database *DBRef*. At the same time, *TermRef* is unified with a corresponding term reference. Backtracking over the predicate unifies with all terms matching *Term*.

  Implemented by linear search—the db-spec associated with *DBRef* is ignored.

`lmdb_findall(+DBRef, +Template, +Term, :Goal, -Bag)`
: Unifies *Bag* with the list of instances of *Template* in all proofs of *Goal* found when *Term* is unified with a matching term from the database *DBRef*. Both the functor and the instantiatedness of *Term* must match a spec in the db-spec associated with *DBRef*. Conceptually, this predicate is equivalent to `findall(Template, (lmdb_fetch(DBRef, Term, _), Goal), Bag)`.

`lmdb_compress(+DBRefFrom, +DBRefTo)`
: Copies the database given by *DBRefFrom* to a new database given by *DBRefTo*. The new database will be a compressed version of the first one in the sense that it will not have "holes" resulting from deletion of terms. Deleted term references will also be reused, which implies that references that refer to terms in the old database will be invalid in the new one.

  The terms of *DBRefFrom* will be appended to any existing terms of *DBRefTo*. Of course, *DBRefTo* must have an indexing specification that enables the terms in *DBRefFrom* to be inserted into it.

`lmdb_sync(+DBRef)`
: Flushes any cached information from the database referenced by *DBRef* to stable storage.

`lmdb_make_iterator(+DBRef, +Term, -Iterator)`
: Creates a new iterator and unifies it with *Iterator*. The iterator iterates through the terms that would be found by `lmdb_fetch(DBRef, Term, _)`.

  Every iterator created by `lmdb_make_iterator/3` must be destroyed with `lmdb_iterator_done/1`.

`lmdb_with_iterator(+DBRef, +Term, :Goal)`
: Creates a new iterator, calls *Goal* with it, as if by `call(Goal, Iterator)`, and ensures that the iterator is destroyed afterwards. *Goal* may backtrack and succeed multiple times. See the documentation of *lmdb_make_iterator/3*.

`lmdb_iterator_next(+Iterator, -Term, -TermRef)`
: *Iterator* advances to the next term, and *Term* and *TermRef* are unified with the term and its reference pointed to by *Iterator*. If there is no next term, the predicate fails.

`lmdb_iterator_done(+Iterator)`
: Deallocates *Iterator*, which must not be in use anymore.

`lmdb_property(+DBRef, -Property)`
: Unifies *Property* with one of the properties of the database given by *DBRef*, which are:

  `path(P)` The file system path of the database.

  `speclist(L)`
  : The *SpecList* with which the database was created.

  `mapsize(S)`
  : The mapsize, or size limit, of the database.

  `mode(S)` The access mode with which the database was opened. One of the atoms `read` and `write`.

  Enumerates all four properties on backtracking.

`lmdb_export(+DBRef, +ExportFile)`
: Exports the database given by *DBRef* to the text file *ExportFile*. *ExportFile* can be imported by `lmdb_import/2`.

`lmdb_import(+DBRef, +ImportFile)`
: Imports the text file *ImportFile* into the database given by *DBRef*.

  The `ImportFile` should have been written by `lmdb_export/2` or by the corresponding functionality in `library(bdb)`.

10.26.6 Example Session

This example creates a database, opens it, and add some values to it. Finally the values are read.

```
| ?- use_module(library(lmdb)). % only needed once per SICStus session.
...
| ?- lmdb_create(tempdb, [a(+,-)]).

| ?- lmdb_open(tempdb, R, [mode(write)]), assertz(tempdb(R)).
R = '$lmdb'(4611936272) ?

| ?- tempdb(R), lmdb_store(R, a(b,1), T).
R = '$lmdb'(4611936272),
T = '$db_termref'(0) ?

| ?- tempdb(R), lmdb_store(R, a(c,2), T).
R = '$lmdb'(4611936272),
T = '$db_termref'(1) ?

| ?- tempdb(R), lmdb_store(R, a(b,X), T).
R = '$lmdb'(4611936272),
T = '$db_termref'(2) ?

| ?- tempdb(R), lmdb_enumerate(R, Term, _).
R = '$lmdb'(4611936272),
Term = a(b,1) ? ;
R = '$lmdb'(4611936272),
Term = a(c,2) ? ;
R = '$lmdb'(4611936272),
Term = a(b,_A) ? ;

| ?- tempdb(R), lmdb_findall(R, Term, Term, ground(Term), Bag).
R = '$lmdb'(4611936272),
Bag = [a(b,1),a(c,2)] ?

| ?- retract(tempdb(R)), lmdb_close(R).
R = '$lmdb'(4611936272) ?
```

Later, in another (or the same) process, the stored data can be read.

```
| ?- use_module(library(lmdb)). % only needed once per SICStus session.
...
| ?- lmdb_open(tempdb, R, [mode(read)]), assertz(tempdb(R)).
R = '$lmdb'(4560556048) ?

| ?- tempdb(R), lmdb_findall(R, Term, Term, ground(Term), Bag).
R = '$lmdb'(4560556048),
Bag = [a(b,1),a(c,2)] ?

| ?- retract(tempdb(R)), lmdb_close(R).
R = '$lmdb'(4560556048) ?
```

10.26.7 DB-Spec—Details

A db-spec has the form of a *SpecList*:

speclist = `[`*spec1*, ..., *specM*`]`

spec = *functor*`(`*argspec1*, ..., *argspecN*`)`

argspec = `+ | -`

where *functor* is a Prolog atom. The case $N = 0$ is allowed.

A spec *F*`(`*argspec1*, ..., *argspecN*`)` is *applicable* to any nonvar term with principal functor F/N.

When storing a term T, we generate a hash code for every applicable spec in the db-spec, and a reference to T is stored with each of them. (More precisely, with each element of the set of generated hash codes). If T contains nonvar elements on each `+` position in the spec, then the hash code depends on each of these elements. If T does contain some variables on `+` position, then the hash code depends only on the functor of T.

When fetching a term Q, we look for an applicable spec for which there are no variables in Q on positions marked `+`. If no applicable spec can be found, a domain error is raised. If no spec can be found where on each `+` position a nonvar term occurs in Q, an instantiation error is raised. Otherwise, we choose the spec with the most `+` positions, breaking ties by choosing the leftmost one.

The terms that contain nonvar terms on every `+` position will be looked up using indexing based on the principal functor of the term and the principal functor of terms on `+` positions. The other (more general) terms will be looked up using an indexing based on the principal functor of the term only.

10.26.8 Exporting and Importing a Database

Since the database format of LMDB may change from version to version, it may become necessary to migrate a database when upgrading. Two predicates are provided for this purpose: `lmdb_export/2` and `lmdb_import/2`.

To ease migration from the legacy `library(bdb)` library, files exported with `bdb:db_export/[2,3]` can be imported into the LMDB format using `lmdb_import/2`.

10.27 Dense Array Operations—`library(logarr)`

This library module provides extendible arrays with logarithmic access time. **Please note:** the atom `$` is used to indicate an unset element, and the functor `$/4` is used to indicate a subtree. In general, array elements whose principal function symbol is `$` will not work.

Exported predicates:

`new_array(-A)`
: returns a new empty array *A*.

`is_array(+A)`
: checks whether *A* is an array.

`alist(+Array, -List)`
: returns a list of pairs *Index-Element* of all the elements of *Array* that have been set.

`aref(+Index, +Array, -Element)`
: unifies *Element* with *Array[Index]*, or fails if *Array[Index]* has not been set.

`arefa(+Index, +Array, -Element)`
: is as `aref/3`, except that it unifies *Element* with a new array if *Array[Index]* is undefined. This is useful for multidimensional arrays implemented as arrays of arrays.

`arefl(+Index, +Array, -Element)`
: is as `aref/3`, except that *Element* appears as `[]` for undefined cells.

`aset(+Index, +Array, +Element, -NewArray)`
: unifies *NewArray* with the result of setting *Array[Index]* to *Element*.

10.28 Mutable, Dense Array Operations—`library(mutarray)`

Prolog does not have an array type. Instead, one must use lists or trees, with logarithmic access time to the elements at best. This package provides operations on dense, mutable arrays, of elements indexed from 1 and up. It uses an array representation, which admits direct access to the elements and constant-time access to any element. Update operations also take constant time, except under some circumstances when the entire array must be copied, in which case such operations take linear time. Following are the exported predicates, where a *mutarray* is a *mutable* (see Section 4.8.9 [ref-lte-mut], page 135), the value of which is accessed and modified by the operations of this package.

`is_mutarray(+`*Array*`)`
: succeeds when *Array* is a *mutarray*.

`list_to_mutarray(+`*Items*`, -`*Array*`)`
: where *Items* should be a list of values. *Array* is unified with a new *mutarray* populated by the given values.

`new_mutarray(-`*Array*`)`
: unifies *Array* with a new *mutarray* of zero length.

`new_mutarray(-`*Array*`, +`*Size*`)`
: where *Size* should be a nonnegative integer. *Array* is unified with a new *mutarray* of the given size populated by brand new variables.

`mutarray_length(+`*MutArray*`, -`*Length*`)`
: *Length* is unified in constant time with the length of *MutArray*.

`mutarray_set_length(+`*MutArray*`, +`*Length*`)`
: sets the new length of *mutarray MutArray* to *Length*. If the *MutArray* becomes shorter, this runs in constant time in the best case. Otherwise, new brand new variables are added to the end of the array in linear time.

`mutarray_last(+`*MutArray*`, -`*Last*`)`
: *Last* is unified in constant time with the last element of *MutArray*. Merely fails if *MutArray* is of zero length.

`mutarray_to_list(+`*MutArray*`, -`*List*`)`
: *List* is unified with the list of elements of *MutArray*.

`mutarray_gen(+`*MutArray*`, -`*N*`, -`*Element*`)`
: is true when *Element* is the *N*:th element of the given *MutArray*. Iterates over all elements by increasing *N*.

`mutarray_get(+`*MutArray*`, +`*N*`, -`*Element*`)`
: unifies *Element* in constant time with the *N*:th element of *MutArray*.

`mutarray_put(+`*MutArray*`, +`*N*`, +`*Element*`)`
: sets the *N*:th element of *MutArray* to *Element*.

`mutarray_update(+`*MutArray*`, +`*N*`, -`*OldElement*`, +`*NewElement*`)`
: unifies *OldElement* with the *N*:th element of *MutArray*, and sets that element to *NewElement*.

`mutarray_append(+`*`MutArr`*`, +`*`MutArrOrValues`*`)`
: where *MutArrOrValues* should be a *mutarray* or a list of values, which is appended to the end of *MutArr*.

10.29 Mutable Dictionary Operations—`library(mutdict)`

Prolog does not have a dictionary type. Instead, one can use, e.g., AVL trees, with logarithmic access time. This package provides operations on mutable dictionaries. Such a *mutdict* is an unordered collection of items that consist of a key and a value. The only restrictions on items is that the key must be ground. The given *mutdict* can hold at most one item for any given key. It uses a hash table representation, which admits table lookup in constant time, if there are no hash collisions. Update operations also take constant time, except under some circumstances when the entire table must be copied, in which case such operations take linear time. In addition, the hash function takes time linear in the size of the key, and so simple keys are more efficient than compound terms. A *mutdict* is a *mutable* (see Section 4.8.9 [ref-lte-mut], page 135), the value of which is accessed and modified by the operations of this package. Following are the exported predicates:

`is_mutdict(+`*Dict*`)`
: succeeds when *Dict* is a *mutdict*.

`list_to_mutdict(+`*Items*`, -`*Dict*`)`
: unifies *Dict* with a new *mutdict* populated by *Items*, each of which should be of the form *Key*`-`*Value*.

`new_mutdict(-`*Dict*`)`
: unifies *Dict* with a new *mutdict*.

`mutdict_empty(+`*Dict*`)`
: succeeds when *Dict* is an empty *mutdict*.

`mutdict_size(+`*Dict*`, -`*Size*`)`
: unifies *Size* with the number of elements of the *mutdict* *Dict*.

`mutdict_gen(+`*Dict*`, -`*Key*`, -`*Value*`)`
: succeeds when *Dict* is a *mutdict* where one item consists of *Key* and *Value*. Iterates over all items, but in no specific order.

`mutdict_get(+`*Dict*`, +`*Key*`, -`*Value*`)`
: If there is an item of the *mutdict* with key *Key*, then its value is unified with *Value*. Otherwise, the goal fails.

`mutdict_put(+`*Dict*`, +`*Key*`, +`*Value*`)`
: If there is an item of the *mutdict* with key *Key*, then its value is simply replaced by *Value*; otherwise, adds the item consisting of *Key* and *Value* to the given *mutdict*.

`mutdict_update(+`*Dict*`, +`*Key*`, -`*OldValue*`, +`*NewValue*`)`
: If there is an item of the *mutdict* with key *Key*, then its value is unified with *OldValue* and replaced by *NewValue*. Otherwise, the goal fails.

`mutdict_delete(+`*Dict*`, +`*Key*`)`
: If there is an item of the *mutdict* with key *Key*, then it is deleted; otherwise, the goal merely succeeds.

`mutdict_clear(+`*Dict*`)`
: All items are deleted from the *mutdict*.

`mutdict_keys(+Dict, -Keys)`
: *Keys* is unified with the list of keys of *mutdict*. The list comes in no specific order, and is free of duplicates.

`mutdict_values(+Dict, -Values)`
: *Values* is unified with the list of values of *mutdict*. The list comes in no specific order, and can contain duplicates.

`mutdict_items(+Dict, -Items)`
: *Items* is unified with the list of items of *mutdict*. Each item is of the form `Key-Value`. The list comes in no specific order, and is free of duplicates.

`mutdict_append(+Dict, +DictOrItems)`
: where *DictOrItems* should be a *mutdict* or a list of items. For each item of *DictOrItems* of the form `Key-Value`, if there is an item of the *mutdict* with key *Key*, then its value is simply replaced by *Value*; otherwise, the item is added to the given *mutdict*.

10.30 The Objects Package—`library(objects)`

The SICStus Objects package enables programmers to write object-oriented programs in SICStus Prolog. The objects in SICStus Objects are modifiable data structures that provide a clean and efficient alternative to storing data in the Prolog database.

10.30.1 Introduction

The SICStus Objects package enables programmers to write object-oriented programs in SICStus Prolog. The objects in SICStus Objects are modifiable data structures that provide a clean and efficient alternative to storing data in the Prolog database.

This user's guide is neither an introduction to object-oriented programming nor an introduction to SICStus Prolog. A number of small, sample programs are described in this manual, and some larger programs are in the `demo` directory.

10.30.1.1 Using SICStus Objects

One of the basic ideas of object-oriented programming is the encapsulation of data and procedures into objects. Each object belongs to exactly one class, and an object is referred to as an instance of its class. A class definition determines the following things for its objects:

- slots, where an object holds data
- messages, the commands that can be sent to an object
- methods, the procedures the object uses to respond to the messages

All interaction with an object is by sending it messages. The command to send a message to an object has the form

```
Object MessageOp Message
```

where *Object* is an object, *MessageOp* is one of the message operators ('`<<`', '`>>`', or '`<-`') and *Message* is a message defined for the object's class. Roughly speaking, the '`>>`' message operator is used for extracting information from an object, '`<<`' is for storing information into an object, and '`<-`' is for any other sort of operation.

For example, using the point class defined in the next section, it would be possible to give the following command, which demonstrates all three message operators.

```
| ?- create(point, PointObj),
     PointObj >> x(InitX),
     PointObj >> y(InitY),
     PointObj << x(2.71828),
     PointObj << y(3.14159),
     PointObj <- print(user_output),
     nl(user_output).

(2.71828,3.14159)
PointObj = point(23461854),
InitX = 1.0,
InitY = 2.0
```

First it binds the variable `PointObj` to a newly created `point` object. Then, the two get messages (sent with the '`>>`' operator) fetch the initial values of the point's `x` and `y` slots, binding the variables `InitX` and `InitY` to these values. Next, the two put messages (sent with the '`<<`' operator) assign new values to the object's `x` and `y` slots. Finally, the send message (sent with the '`<-`' operator) instructs the point object to print itself to the `user_output` stream, followed by a newline. Following the goal, we see the point has been printed in a suitable form. Following this, the values of `PointObj`, `InitX`, and `InitY` are printed as usual for goals entered at the top-level prompt.

Because this goal is issued at the top-level prompt, the values of the variables `PointObj`, `InitX` and `InitY` are not retained after the command is executed and their values are displayed, as with any goal issued at the top-level prompt. However, the point object still exists, and it retains the changes made to its slots. Hence, objects, like clauses asserted to the Prolog database, are more persistent than Prolog variables.

Another basic idea of object-oriented programming is the notion of inheritance. Rather than defining each class separately, a new class can inherit the properties of a more general superclass. Or, it can be further specialized by defining a new subclass, which inherits its properties. (C++ uses the phrase "base class" where we use "superclass." It also uses "derived class" where we use "subclass.")

SICStus Objects uses term expansion to translate object-oriented programs into ordinary Prolog. (This is the same technique that Prolog uses for its DCG grammar rules.) As much as possible is done at compile time. Class definitions are used to generate Prolog clauses that implement the class's methods. Message commands are translated into calls to those Prolog clauses. And, inheritance is resolved at translation time.

SICStus Objects consists of two modules, `obj_decl` and `objects`. The `obj_decl` module is used at compile time to translate the object-oriented features of SICStus Objects. Any file that defines classes or sends messages should include the command

```
:- load_files(library(obj_decl),
              [when(compile_time), if(changed)]).
```

The `objects` module provides runtime support for SICStus Objects programs. A file that sends messages or asks questions about what classes are defined or to what class an object belongs should include the command:

```
:- use_module(library(objects)).
```

You will probably include both in most files that define and use classes.

Please note: A file that loads `library(obj_decl)` currently cannot recursively load another file that loads `library(obj_decl)`, because that would confuse the internal database being used by the package.

If you use the foreign resource linker, `splfr`, on a Prolog file that uses the `objects` package, then you must pass it the `--objects` option. This will make `splfr` understand the package's syntax extensions.

10.30.1.2 Defining Classes

A class definition can restrict the values of any slot to a particular C-style type. It can specify whether a slot is *private* (the default, meaning that it cannot be accessed except by that methods of that class), *protected* (like *private*, except that the slot can also be accessed by subclasses of the class), or *public* (meaning get and put methods for the slot are generated automatically), and it can specify an initial value. The class definition also may contain method clauses, which determine how instances of the class will respond to messages. A class definition may also specify one or more superclasses and which methods are to be inherited.

The point object created in the previous example had two floating point slots, named `x` and `y`, with initial values of 1.0 and 2.0, respectively. As we have seen, the `point` class also defined put and get methods for `x` and `y`, as well as a send method for printing the object. The put and get methods for `x` and `y` can be automatically generated simply by declaring the slots `public`, but the `print` method must be explicitly written. In addition, in order to be able to create instances of this class, we must define a `create` method, as explained in Section 10.30.2.3 [obj-scl-meth], page 678. We also provide a second `create` method, taking two arguments, allowing us to specify an `x` and `y` value when we first create a point object.

```
:- class point =
        [public x:float = 1.0,
         public y:float = 2.0].

Self <- create.

Self <- create(X, Y) :-
        Self << x(X),
        Self << y(Y).

Self <- print(Stream) :-
        Self >> x(X),
        Self >> y(Y),
        format(Stream, '(~w,~w)', [X,Y]).

:- end_class point.
```

The variable name `Self` in these clauses is arbitrary—any variable to the left of the message operator in the head of a method clause refers to the instance of the class receiving the message.

10.30.1.3 Using Classes

Given this definition, the following command creates an instance of the point class, assigning values to its `x` and `y` slots, and prints a description of the point.

```
| ?- create(point(3,4), PointObj),
     PointObj <- print(user_output).
```

The print message prints `(3.0,4.0)`. The variable `PointObj` is bound to a Prolog term of the form

```
point(Address)
```

where *Address* is essentially a pointer to the object.

In general, an object belonging to a class *ClassName* will be represented by a Prolog term of the form

```
ClassName(Address)
```

The name *ClassName* must be an atom. This manual refers to such a term as if it were the object, not just a pointer to the object. Users are strongly discouraged from attempting to do pointer arithmetic with the address.

After execution of this command, the point object still exists, but the variable `PointObj` can no longer be used to access it. So, while objects resemble clauses asserted into the Prolog database in their persistence, there is no automatic way to search for an object. Objects are not automatically destroyed when they are no longer needed. And, there is no automatic way to save an object from one Prolog session to the next. It is the responsibility

of the programmer to keep track of objects, perhaps calling the `destroy/1` predicate for particular objects that are no longer needed or asserting bookkeeping facts into the Prolog database to keep track of important objects.

10.30.1.4 Looking Ahead

The next few sections of this manual describe the SICStus Objects package in greater detail. In particular, they describe how to define classes, their methods and their slots, and how to reuse class definitions via inheritance. Small sample programs and program fragments are provided for most of the features described.

Experienced Prolog programmers may choose to skip over these sections and look at the sample programs in this package's demo directory, referring to the reference pages as necessary. Everyone is encouraged to experiment with the sample programs before writing their own programs.

10.30.2 Simple Classes

This section is about simple classes that inherit nothing—neither slots nor methods—from more general superclasses. Everything about these classes is given directly in their definitions, so they are the best starting point for programming with SICStus Objects.

The use of inheritance in defining classes is described in the next section. Classes that inherit properties from superclasses are called derived classes in some systems, such as C++. In general, the use of inheritance extends the properties of the simple classes in this section.

10.30.2.1 Scope of a Class Definition

A simple class definition begins with a statement of the form

```
:- class ClassName = [SlotDef, ...].
```

The class's slots are described in the list of *SlotDef* terms. It is possible, though not often useful, to define a class with no slots, by specifying the empty list. In that case the '`=`' and the list may be omitted.

The class's methods are defined following the `class/1` directive, by Prolog clauses. Most of this section is about defining and using methods.

The class definition ends with any of the following:

```
:- end_class ClassName.
```

or

```
:- end_class.
```

or the next `class/1` directive or the end of the file. The *ClassName* argument to `end_class/1` must match the class name in the corresponding `class/1` directive. It is not possible to nest one class definition inside another.

10.30.2.2 Slots

A slot description has the form

```
Visibility SlotName:SlotType = InitialValue
```

where *Visibility* and '`= InitialValue`' are optional. Each slot of a class must have a distinct name, given by the atom *SlotName*. The *Visibility*, *SlotType* and *InitialValue* parts of the slot description are described separately.

Visibility

A slot's visibility is either private, protected, or public. If its visibility is not specified, then the slot is private. The following example shows all four possibilities:

```
:- class example = [w:integer,
                    private   x:integer,
                    protected y:integer,
                    public    z:integer]
```

Slot `z` is public, `y` is protected, and both `x` and `w` are private.

Direct access to private slots is strictly limited to the methods of the class. Any other access to such slots must be accomplished through these methods. Making slots private will allow you later to change how you represent your class, adding and removing slots, without having to change any code that uses your class. You need only modify the methods of the class to accommodate that change. This is known as *information hiding*.

Protected slots are much like private slots, except that they can also be directly accessed by subclasses. This means that if you wish to modify the representation of your class, then you will need to examine not only the class itself, but also its subclasses.

Public slots, in contrast, can be accessed from anywhere. This is accomplished through automatically generated get and put methods named for the slot and taking one argument. In the example above, our `example` class would automatically support a get and put method named `z/1`. Note, however, that unlike other object oriented programming languages that support them, public slots in SICStus Objects do not violate information hiding. This is because you may easily replace a public slot with your own get and put methods of the same name. In this sense, a public slot is really only a protected slot with automatically generated methods to fetch and store its contents.

Within a method clause, any of the class's slots can be accessed via the `fetch_slot/2` and `store_slot/2` predicates. These are the only way to access private and protected slots. They may be used to define get and put methods for the class, which provide controlled access to the protected slots. But, they can only be used within the method clauses for the class, and they can only refer to slots of the current class and protected and public slots of superclasses.

In the slot description, `public`, `protected` and `private` are used as prefix operators. The `obj_decl` module redefines the prefix operator `public`, as follows:

```
:- op(600, fy, [public]).
```

Unless you use the obsolete `public/1` directive in your Prolog programs, this should cause no problems.

Types

A slot's type restricts the kinds of values it may contain. The slot is specified in the slot description by one of the following Prolog terms with the corresponding meaning. Most of these will be familiar, but the last four, `address`, `term`, *Class* and `pointer(`*Type*`)`, require some additional explanation:

`integer` signed integer, large enough to hold a pointer

`integer_64` *since release 4.3*
: 64-bit signed integer

`integer_32`
: 32-bit signed integer

`integer_16`
: 16-bit signed integer

`integer_8`
: 8-bit signed integer

`unsigned` unsigned integer, large enough to hold a pointer

`unsigned_64` *since release 4.3*
: 64-bit unsigned integer

`unsigned_32`
: 32-bit unsigned integer

`unsigned_16`
: 16-bit unsigned integer

`unsigned_8`
: 8-bit unsigned integer

`float` 64-bit floating point number

`float_32` 32-bit floating point number

`atom` Prolog atom

`address` Pointer. The `address` type is intended for use with foreign code. A slot of this type might store an address returned from a foreign function. That address might, in turn, be used in calling another foreign function. Hence, most Prolog programmers can safely ignore this type.

`term` Prolog term. The `term` type is for general Prolog terms. Such a slot can hold any of the other types. However, if you know a slot will be used to hold only values of a particular type, then it is more efficient to specify that type in the class definition.

Storing a term containing free variables is similar to asserting a clause containing free variables into the Prolog database. The free variables in the term are replaced with new variables in the stored copy. And, when you fetch the term from the slot, you are really fetching a copy of the term, again with new variables.

`Class` where *Class* is the name of a defined class. The class type is for any object in a class defined with SICStus Objects. Such a slot holds an object of its class or one of that class's descendants, or the `null` object.

`pointer(`*Type*`)`
where *Type* is an atom. The pointer type is intended for use with the Structs Package. It is similar to the `address` type, except that access to this slot yields, and update to this slot expects, a term of arity 1 whose functor is *Type* and whose argument is the address. Again, most Prolog programmers can safely ignore this type.

Initial Values

A slot description may optionally specify an initial value for the slot. The initial value is the value of the slot in every instance of the class, when the object is first created. The initial value must be a constant of the correct type for the slot.

If an initial value is not specified, then a slot is initialized to a value that depends on its type. All numbers are initialized to 0, of the appropriate type. Atom and term slots are initialized to the empty atom (`''`). Addresses and pointers are initialized to null pointers. And, objects are initialized to the `null` object.

More complicated initialization—not the same constant for every instance of the class—must be performed by create methods, which are described later.

The `null` object

The `null` object is a special object that is not an instance of any class, but that can be stored in a slot intended for any class of object. This is very much like the `NULL` pointer in C. This is useful when you do not yet have an object to store in a particular slot.

In Prolog, the `null` is represented by the atom `null`.

Note that because the `null` object is not really an object of any class, you cannot determine its class with `class_of/2`. Unless noted otherwise, when we write of an *object* in this document, we do not include the `null` object.

10.30.2.3 Methods

Some methods are defined by method clauses, between the `class/1` directive and the end of the class's definition. Others are generated automatically. There are three kinds of messages in SICStus Objects, distinguished by the message operator they occur with:

‘`>>`’ A get message, which is typically used to fetch values from an object's slots.

‘`<<`’ A put message, which is typically used to store values in an object's slots.

'<-' A send message, which is used for other operations on or involving an object.

SICStus Objects automatically generates some get and put methods. And, it expects particular message names with the send operator for create and destroy methods. For the most part, however, you are free to use any message operators and any message names that seem appropriate.

A method clause has one of these message operators as the principal functor of its head. Its first argument, written to the left of the message operator, is a variable. By convention, we use the variable `Self`. Its second argument, written to the right of the message operator, is a term whose functor is the name of the message and whose arguments are its arguments.

For example, in the class whose definition begins as follows, a 0-argument send message named `increment` is defined. No parentheses are needed in the clause head, because the precedence of the '`<-`' message operator is lower than that of the '`:-`' operator.

```
:- class counter = [public count:integer = 0].

Self <- increment :-
        Self >> count (X0),
        X1 is X0 + 1,
        Self << count (X1).
```

Its definition uses the automatically generated get and put methods for the public slot `count`.

It may look as though this technique is directly adding clauses to the `>>/2`, `<</2` and `<-/2` predicates, but the method clauses are transformed by term expansion, at compile time. However, the method clauses have the effect of extending the definitions of those predicates.

Methods are defined by Prolog clauses, so it is possible for them to fail, like Prolog predicates, and it is possible for them to be nondeterminate, producing multiple answers, upon backtracking. The rest of this section describes different kinds of methods.

Get and Put Methods

Get and put methods are generated automatically for each of a class's public slots. These are 1-argument messages, named after the slots.

In the point class whose definition begins with

```
:- class point =
        [public x:float=0,
         public y:float=0].
```

the get and put methods are automatically generated for the `x` and `y` slots. If the class defines a `create/0` method, then the command

```
| ?- create(point, PointObj),
     PointObj >>  x(OldX),
     PointObj >>  y(OldY),
     PointObj <<  x(3.14159),
     PointObj <<  y(2.71828).
```

creates a point object and binds both `OldX` and `OldY` to 0.0E+00, its initial slot values. Then, it changes the values of the `x` and `y` slots to 3.14159 and 2.71828, respectively. The variable `PointObj` is bound to the point object.

It is possible, and sometimes quite useful, to create get and put methods for slots that do not exist. For example, it is possible to add a polar coordinate interface to the point class by defining get and put methods for `r` and `theta`, even though there are no `r` and `theta` slots. The get methods might be defined as follows:

```
Self >> r(R) :-
        Self >> x(X),
        Self >> y(Y),
        R is sqrt(X*X + Y*Y).

Self >> theta(T) :-
        Self >> x(X),
        Self >> y(Y),
        T is atan(Y/X).
```

The put methods are left as an exercise.

In the rational number class whose definition begins with:

```
:- class rational =
        [public num:integer,
         public denom:integer].
```

get and put methods are automatically generated for the `num` and `denom` slots. It might be reasonable to add a get method for `float`, which would provide a floating point approximation to the rational in response to that get message. This is left as an exercise.

It is also possible to define get and put methods that take more than one argument. For example, it would be useful to have a put method for the point class that sets both slots of a point object. Such a method could be defined by

```
Self << point(X,Y) :-
        Self << x(X),
        Self << y(Y).
```

Similarly, a 2-argument get method for the rational number class might be defined as

```
Self >> (N/D) :-
        Self >> num(N),
        Self >> denom(D).
```

Note that the name of the put message is `(/)/2`, and that the parentheses are needed because of the relative precedences of the '`>>`' and '`/`' operators.

Put messages are used to store values in slots. Get messages, however, may be used either to fetch a value from a slot or to test whether a particular value is in a slot. For instance, the following command tests whether the `do_something/2` predicate sets the point object's `x` and `y` slots to 3.14159 and 2.71828, respectively.

```
| ?- create(point, PointObj),
     do_something(PointObj),
     PointObj >> x(3.14159),
     PointObj >> y(2.71828).
```

The `fetch_slot/2` predicate can similarly be used to test the value of a slot.

The effects of a put message (indeed, of any message) are not undone upon backtracking. For example, the following command fails:

```
| ?- create(point, PointObj),
     PointObj << x(3.14159),
     PointObj << y(2.71828),
     fail.
```

But, it leaves behind a point object with `x` and `y` slots containing the values 3.14159 and 2.71828, respectively. In this, storing a value in an object's slot resembles storing a term in the Prolog database with `assert/1`.

Some care is required when storing Prolog terms containing unbound variables in term slots. For example, given the class definition that begins with

```
:- class prolog_term = [public p_term:term].

Self <- create.
```

the following command would succeed:

```
| ?- create(prolog_term, TermObj),
     TermObj << p_term(foo(X,Y)),
     X = a,
     Y = b,
     TermObj >> p_term(foo(c,d)).
```

The reason is that the free variables in `foo(X,Y)` are renamed when the term is stored in the `prolog_term` object's `p_term` slot. This is similar to what happens when such a term is asserted to the Prolog database:

```
| ?- retractall(foo(_,_)),
     assert(foo(X,Y)),
     X = a,
     Y = b,
     foo(c,d).
```

However, this goal would fail, because `c` and `d` cannot be unified:

```
| ?- create(prolog_term, TermObj),
     TermObj << p_term(foo(X,X)),
     TermObj >> p_term(foo(c,d)).
```

Direct Slot Access

Get and put methods are not automatically generated for private and protected slots. Those slots are accessed by the `fetch_slot/2` and `store_slot/2` predicates, which may only appear in the body of a method clause and which always operate on the object to which the message is sent. It is not possible to access the slots of another object with these predicates.

You may declare a slot to be private or protected in order to limit access to it. However, it is still possible, and frequently useful, to define get and put methods for such a slot.

For example, if numerator and denominator slots of the rational number class were private rather than public, then it would be possible to define put methods to ensure that the denominator is never 0 and that the numerator and denominator are relatively prime. The get methods merely fetch slot values, but they need to be defined explicitly, since the slots are private. The new definition of the rational number class might start as follows:

```
:- class rational =
        [num:integer=0,
         denom:integer=1].

Self >> num(N) :-
        fetch_slot(num, N).

Self >> denom(D) :-
        fetch_slot(denom, D).

Self >> (N/D) :-
        Self >> num(N),
        Self >> denom(D).
```

One of the put methods for the class might be

```
Self << num(NO) :-
        fetch_slot(denom, DO)
        reduce(NO, DO, N, D),
        store_slot(num, N),
        store_slot(denom, D).
```

where the `reduce/4` predicate would be defined to divide `NO` and `DO` by their greatest common divisor, producing `N` and `D`, respectively.

The definition of `reduce/4` and the remaining put methods is left as an exercise. The put methods should fail for any message that attempts to set the denominator to 0.

Send Methods

Messages that do something more than fetch or store slot values are usually defined as send messages. While the choice of message operators is (usually) up to the programmer, choosing them carefully enhances the readability of a program.

For example, print methods might be defined for the point and rational number classes, respectively, as

```
Self <- print(Stream) :-
        Self >> x(X),
        Self >> y(Y),
        format(Stream, "(~w,~w)", [X, Y]).
```

and

```
Self <- print(Stream) :-
        fetch_slot(num, N),
        fetch_slot(denom, D),
        format(Stream, "~w/~w", [N, D]).
```

These methods are used to access slot values. But, the fact that the values are printed to an output stream makes it more reasonable to define them as send messages than get messages.

Frequently send methods modify slot values. For example, the point class might have methods that flip points around the x and y axes, respectively:

```
Self <- flip_x :-
        Self >> y(Y0),
        Y1 is -1 * Y0,
        Self << y(Y1).

Self <- flip_y :-
        Self >> x(X0),
        X1 is -1 * X0,
        Self << x(X1).
```

And, the rational number class might have a method that swaps the numerator and denominator of a rational number object. It fails if the numerator is 0.

```
Self <- invert :-
        fetch_slot(num, N)
        N =\= 0,
        fetch_slot(denom, D)
        store_slot(num, D),
        store_slot(denom, N).
```

These methods modify slot values, but they do not simply store values that are given in the message. Hence, it is more reasonable to use the send operator.

It is possible for a method to produce more than one answer. For example, the class whose definition begins with

```
:- class interval =
        [public lower:integer,
         public upper:integer].
```

might define a send method

```
Self <- in_interval(X) :-
        Self >> lower(L),
        Self >> upper(U),
        between(L, U, X).
```

which uses the `between/3` predicate from `library(between)`. The `in_interval` message will bind `X` to each integer, one at a time, between the lower and upper slots, inclusive. It fails if asked for too many answers.

The rest of this section describes particular kinds of send messages.

Create and Destroy Methods

Objects are created with the `create/2` predicate. When you define a class, you must specify all the ways that instances of the class can be created. The simplest creation method is defined as

```
Self <- create.
```

If this method were defined for *Class*, then the command

```
| ?- create(Class, Object).
```

would create an instance of *Class* and bind the variable `Object` to that instance. All slots would receive their (possibly default) initial values.

More generally, if the definition for *Class* contains a create method

```
Self <- create(Arguments) :-
        Body.
```

then the command

```
| ?- create(Class(Arguments), Object).
```

will create an instance of *Class* and execute the *Body* of the create method, using the specified *Arguments*. The variable *Object* is bound to the new instance.

If a simple class definition has no create methods, then it is impossible create instances of the class. While the absence of create methods may be a programmer error, that is not always the case. Abstract classes, which are classes that cannot have instances, are often quite useful in defining a class hierarchy.

Create methods can be used to initialize slots in situations when specifying initial slot values will not suffice. (Remember that initial values must be specified as constants at compile time). The simplest case uses the arguments of the create message as initial slot values. For example, the definition of the point class might contain the following create method.

```
Self <- create(X,Y) :-
        Self << x(X),
        Self << y(Y).
```

If used as follows

```
| ?- create(point(3.14159, 2.71828), PointObj),
     PointObj >> x(X),
     PointObj >> y(Y).
```

then it would give `X` and `Y` the values of 3.14159 and 2.71828, respectively.

In some cases, the create method might compute the initial values. The following (partial) class definition uses the `datime/1` predicate from `library(system)` to initialize its year, month and day slots.

```
:- class date_stamp =
        [year:integer,
         month:integer,
         day:integer].

Self <- create :-
        datime(datime(Year,Month,Day,_Hour,_Min,_Sec),
        store_slot(year, Year),
        store_slot(month, Month),
        store_slot(day, Day).
```

All three slots are private, so it will be necessary to define get methods in order to retrieve the time information. If no put methods are defined, however, then the date cannot be modified after the `date_stamp` object is created (unless some other method for this class invokes `store_slot/2` itself).

Create methods can do more than initialize slot values. Consider the `named_point` class, whose definition begins as follows:

```
:- class named_point =
        [public name:atom,
         public x:float=1,
         public y:float=0].

Self <- create(Name, X, Y) :-
        Self << name(Name),
        Self << x(X),
        Self << y(Y),
        assert(name_point(Name, Self)).
```

Not only does the `create/3` message initialize the slots of a new `named_point` object, but it also adds a `name_point/2` fact to the Prolog database, allowing each new object to be found by its name. (This create method does not require the `named_point` object to have a unique name. Defining a `uniq_named_point` class is left as an exercise.)

An object is destroyed with the `destroy/1` command. Unlike `create/2`, `destroy/1` does not require that you define a `destroy` method for a class. However, `destroy/1` will send a destroy message (with no arguments) to an object before it is destroyed, if a `destroy` method is defined for the object's class.

If a `named_point` object is ever destroyed, then the address of the object stored in this name `point/2` fact is no longer valid. Hence, there should be a corresponding destroy method that retracts it.

```
Self <- destroy :-
        Self >> name(Name),
        retract(name_point(Name, Self)).
```

Similar create and destroy methods can be defined for objects that allocate their own separate memory or that announce their existence to foreign code.

Instance Methods

Instance methods allow each object in a class to have its own method for handling a specified message. For example, in a push-button class it would be convenient for each instance (each push-button) to have its own method for responding to being pressed.

The declaration

```
:- instance_method Name/Arity, ....
```

inside a class definition states that the message *Name/Arity* supports instance methods. If the class definition defines a method for this message, then it will be treated as a default method for the message.

The `define_method/3` predicate installs a method for an object of the class, and the `undefine_method/3` predicate removes that method.

Suppose that the `date_stamp` class, defined earlier, declared an instance method to print the year of a `date_stamp` instance.

```
:- instance_method print_year/1.

Self <- print_year(Stream) :-
        Self >> year(Y0),
        Y1 is Y0 + 1970,
        format(Stream, "~d", [Y1]).
```

The arithmetic is necessary because UNIX dates are based on January 1, 1970.

If a particular `date_stamp` object's date were to be printed in Roman numerals, then it could be given a different `print_year` method, using the `define_method/3` predicate.

```
| ?- create(date_stamp, DateObj),
     define_method(DateObj,
                   print_year(Stream),
                   print_roman_year(Stream, DateObj)).
```

If this `date_stamp` object is created in 1994, then a `print_year` message sent to it would print the current year as

```
MCMXCIV
```

Defining the predicate `print_roman_year/2` is left as an exercise. It must be able to access the `year` slot of a `date_stamp` object. Because it is not defined by a method clause within the class definition, `print_roman_year/2` cannot use the `get_slot/2` predicate.

None of `instance_method/1`, `define_method/3`, `undefine_method/3` specify a message operator. Instance methods can only be defined for send messages.

10.30.3 Inheritance

This section describes the additional features (and the additional complexity) of defining classes with inheritance in SICStus Objects. Most of what was said about classes in the previous section remains true in these examples.

10.30.3.1 Single Inheritance

The simplest case is when a new class inherits some properties (slots and methods) from a single superclass. That superclass may, in turn, be defined in terms of its superclass, etc. The new class, its superclass, its superclass's superclass (if any) and so on are all ancestors of the new class.

Class Definitions

The definition of a class with a single superclass begins with a `class/1` directive of the form

```
:- class ClassName = [SlotDef, ...] +  SuperClass.
```

where the list of *SlotDef* descriptions may be empty. In that case, the definition can simplified to

```
:- class ClassName = SuperClass.
```

The class *SuperClass* must be a defined class when this definition is given.

In SICStus Objects, a subclass inherits all the slots of its superclass. And, by default, it inherits all the methods of its superclass. The remainder of this section describes what the programmer can do to control this inheritance.

Slots

A class's slots are a combination of those explicitly defined in its slot description list and the slots it inherits from its superclass. In SICStus Objects, a class inherits all the slots of its superclass. It follows that a class inherits all the slots of all its ancestors.

The programmer's control over inheritance of slots is limited. It is not possible to rename an inherited slot, nor is it possible to change its type, unless it is a class slot. It is possible to change a slot's initial value. And, it is possible to effectively change a slot's visibility.

To change the initial value or the type (when allowed) of a slot, include a new *SlotDef* in the list of slot descriptions for the class, with the same slot name and a new type or initial value. The type of a class slot can only be changed to a subclass of the type of the superclass's slot. The new initial value must still be a constant of the appropriate type.

The `named_point` class, defined earlier, could have better been defined from the point class, which began as follows:

```
:- class point =
        [public x:float=0,
         public y:float=0].
```

The definition of the `named_point` class would then begin with

```
:- class named_point =
        [public name:atom,
         public x:float=1.0] + point.
```

This `named_point` class has public slots named `name`, `x` and `y`, with the same types and initial values as the earlier `named_point` definition, which did not use inheritance. This `named_point` class also inherits all the methods of the `point` class, which saves us from having to write them again (and maintain them).

A slot that was private or protected in a superclass may be defined as public. This will cause get and put methods to be generated in the subclass. A slot that was public in a superclass may be defined as protected or private, but this does not prevent it from inheriting the get and put methods of the superclass. For that, the `uninherit/1` directive, defined below, is needed.

Methods

In SICStus Objects, by default, a class inherits all the methods of its superclass. The programmer has more control over the inheritance of methods than the inheritance of slots, however. In particular, methods can be uninherited and they can be redefined.

To prevent a method from being inherited, use the `uninherit/1` directive. For example, suppose that the class `point` is defined as before. That is, its definition begins as follows:

```
:- class point =
        [public x:float=0,
         public y:float=0].
```

Because both slots are public, a put method is automatically generated for each, which allows their values to be changed.

The definition of a new class `fixed_point` might begin as follows:

```
:- class fixed_point = point.

:- uninherit
        point << (x/1),
        point << (y/1).

Self <- create(X, Y) :-
        store_slot(x, X),
        store_slot(y, Y).
```

The parentheses are necessary because of the precedences of the '`<<`' and '`/`' operators.

Because the put methods from `point` are not inherited, no instance of the `fixed_point` class can change its `x` and `y` values once created—unless the class definition contains another method for doing so. The get methods are inherited from `point`, however.

To redefine a method, simply include method clauses for its message within a class's definition. The new method clauses replace, or shadow, the inherited method clauses for this class.

Another way to prevent the `x` and `y` slots of the `fixed_point` class from being modified would be to shadow the put methods. For example, they might be redefined as

```
Self << x(_) :-
        format(user_error, "cannot modify x slot value.~n.", []),
        fail.

Self << y(_) :-
        format(user_error, "cannot modify y slot value.~n", []),
        fail.
```

Now attempts to modify the `x` or `y` values of a fixed point object generate a specific error message and fail. A more complicated version would raise an appropriate exception.

Send Super

Even when a superclass's method is shadowed or uninherited, it is possible to use the superclass's method inside a method clause for the new class. This makes it possible to define a "wrapper" for the superclass's method, which invokes the superclass's method without having to duplicate its code. This technique works with all message types.

Sending a message to a superclass is done with a command of the form

```
super MessageOp Message
```

where *MessageOp* is one of the message operators ('`<<`', '`>>`' or '`<-`') and *Message* is a message defined for the superclass. A generalization of this syntax may be used to specify which superclass to send the message to. This is discussed in Section 10.30.3.2 [obj-inh-mih], page 690.

Sending a message to a class's superclass can only be done within a message clause.

10.30.3.2 Multiple Inheritance

It is possible for a class to be defined with more than one superclass. Because the class inherits properties from multiple superclasses, this is referred to as multiple inheritance.

Multiple inheritance is a complex and controversial topic. What should be done about conflicting slot or method definitions? (This is sometimes called a "name clash.") What should be done about slots that are inherited from two or more superclasses, but that originate with a common ancestor class? (This is sometimes called "repeated inheritance".) Different systems take different approaches.

SICStus Objects supports multiple inheritance in a limited but still useful way. It does not allow repeated inheritance, and it places all the responsibility for resolving name clashes on the programmer. This section describes the multiple inheritance features of SICStus Objects.

Class Definitions

The definition of a class with multiple superclasses begins with a `class/1` directive of the form

```
:- class ClassName = [SlotDef, ...] + SuperClass + ....
```

The list of slot descriptions and the superclasses to the right of the '`=`' can appear in any order, without changing the class being defined. In fact, the slot descriptions can be partitioned into more than one list, without changing the class. However, it is best to adopt a fairly simple style of writing class definition and use it consistently.

Just as the slot names in a list of slot descriptions must be distinct, superclass names should not be repeated.

Slots

In SICStus Objects, the programmer has no control over multiple inheritance of slots. All slots from all superclasses are inherited. And, the superclasses should have no slot names in common.

As a consequence, in SICStus Objects no superclasses of a class should have a common ancestor. The only exception would be the unusual case where that common ancestor has no slots.

Methods

By default, all methods are inherited from all superclasses. Any of the superclasses' methods can be uninherited, as described earlier, by using the `uninherit/1` directive.

If the same message is defined for more than one superclass, however, then you must choose at most one method to inherit for the message. You may choose none. You may do this by defining a new method for the message (shadowing the superclasses' methods), or by using the `uninherit/1` directive, or by using the `inherit/1` directive.

The following is considered a classic example of multiple inheritance.

```
:- class toy.             % no slots in this class

Self >> size(small).

Self >> rolls(false).

:- end_class toy.

:- class truck.          % no slots in this class

Self >> size(large).

Self >> rolls(true).

:- end_class truck.
```

The idea expressed in these definitions is that most toys are small and do not roll. On the other hand, most trucks are large, but they do roll. A toy truck shares one feature with each class, but we can hardly expect a compiler to choose the correct one.

The definition of a new class, toy_truck, might begin with

```
:- class toy_truck = toy + truck.
```

Rather than redefine the get methods for `size` and `rolls`, we can specify which to inherit in two ways. One way is positive, stating which to inherit, and the other way is negative, stating which not to inherit.

The positive version would be

```
:- inherit
        toy >> (size/1),
        truck >> (rolls/1).
```

This is more convenient when a message is defined in several superclasses, because all but the chosen method are uninherited. And, it is probably easier to understand.

The negative version would be

```
:- uninherit
        toy >> (rolls/1),
        truck >> (size/1).
```

The `toy_truck` class would exhibit the same behavior with either definition.

It is possible to define methods that access the shadowed or uninherited methods of the superclasses, by sending the message to the superclasses. In the case of multiple inheritance, however, it may be necessary to specify which superclass to send the message to.

The `toy_truck` class, for example, might define these methods:

```
Self >> uninherited_size(S) :-
        super(truck) >> size(S).

Self >> uninherited_rolls(R) :-
        super(toy) >> rolls(R).
```

They provide access to the unchosen methods from `toy_truck`'s superclasses.

While these examples with the toy_truck class are clearly "toy" examples, the same techniques can be used in more realistic cases.

Abstract and Mixin Classes

While SICStus Objects only supports a limited form of multiple inheritance, its facilities are sufficient for working with so-called *mixin classes*.

The idea is to construct similar classes by first defining a class that contains the things the desired classes have in common. Typically, this will be an *abstract class*, which will have no instances itself. Then, provide the features that differentiate the desired classes with a set of mixin classes

Mixin classes that have nothing in common can safely be mixed together, to build the desired classes. The mixin classes will usually be abstract classes, also, because they are too specialized for their instances to be useful on their own.

The date_stamp class defined earlier would make a good mixin class. A similar `time_stamp` class might be (partially) defined as follows:

```
:- class time_stamp =
        [hour:integer,
         minute:integer,
         second:integer].

Self <- create :-
        time(time(Hour, Minute, Second)),
        store_slot(hour, Hour),
        store_slot(minute, Minute),
        store_slot(second, Second).
```

Another mixin class might be used to "register" objects in the Prolog database.

```
:- class registry = [name:atom].

Self <- create(Name) :-
        Self << name(Name),
        assert(registered(Name, Self)).

Self <- destroy :-
        Self >> name(Name),
        retract(registered(Name, Self)).
```

The `registry` mixin class could have been used with the `point` class to define the `named_point` class, which was an example from an earlier section.

The ability to send a message to an object's superclass is useful when working with mixin classes. Suppose the definition of a new class begins with

```
:- NewClass = OldClass + date + time + registry.
```

where *OldClass* is some previously defined class that lacks the features provided by the `date`, `time` and `registry` classes. (In fact, they should not have any slot names in common.) Then its create method can be defined by

```
Self <- create(Name) :-
        super(OldClass) <- create,
        super(date) <- create,
        super(time) <- create,
        super(registry) <- create(Name).
```

This avoids the need to duplicate the code in the create methods of OldClass and all three mixin classes.

10.30.3.3 Asking About Classes and Objects

It is possible to determine, at run time, what classes are defined, how they are related by inheritance, what class an object belongs to, etc. This section describes the predicates used for those purposes. Most of the predicates involve the class hierarchy, so they are properly

described in the section on inheritance. But, several can be useful even in programs that use only simple classes.

Most of these predicates come in pairs, where one predicate involves one class or its direct superclasses, and the other predicate involves all ancestors. For example, the `class_superclass/2` and `class_ancestor/2` predicates connect a currently defined class to its superclass(es) and to all its ancestors, respectively.

In all of these predicates, the ancestors of a class include not only superclasses and their ancestors, but also the class itself. A class cannot be a superclass of itself, by the rules of defining classes. However, it is convenient to consider every class an ancestor of itself, because then we may say that every property of a class is defined in one of its ancestors, without having to say "the class itself or a superclass or a superclass of a superclass, etc."

Objects

The `class_of/2` predicate is used to test whether an object is of a particular type or to determine the type of an object. Similarly, the `descendant_of/2` predicate relates an object to all ancestors of its class. (Remember that the object's class is, itself, an ancestor class of the object.)

Both require the first argument (the object) to be instantiated. That is, the predicates cannot be used to find objects of a given class. If you need to search among all the objects of a class, then you must provide a way to do it. One way to do this is to assert a fact connecting the class name to every object, when it is created. The named_point example of the previous section took that idea a step further by allowing each object to have a different name.

The `pointer_object/2` predicate relates an object's address (a pointer) to the object. Remember that an instance of *Class* is represented by a term of the form

```
Class(Address)
```

The `pointer_object/2` predicate requires that one of its arguments be instantiated, but it may be either one. Hence, just by knowing the address of an object (which possibly was returned by a foreign function) it is possible to determine the object's type.

Most Prolog programmers can safely ignore the `pointer_object/2` predicate, unless they are using SICStus Objects with foreign functions or with the Structs package.

Classes

The `current_class/1` predicate is used to ask whether a class is currently defined or to get the names of all currently defined classes.

The `class_superclass/2` predicate is used to test whether one class is a superclass of another, or to find a class's superclasses, or to find a class's subclasses, or to find all subclass-superclass pairs. The `class_ancestor/2` predicate is used in the same ways for the ancestor relation between currently defined classes.

As an example, the following goal finds all the ancestors of each currently defined class.

```
| ?- setof(C-As,
           (current_class(C),
            setof(A, class_ancestor(C,A), As)),
           L).
```

It binds `L` to a list of terms of the form *Class-AncestorList*, with one term for each currently defined class.

Arguably, this predicate violates the principle of information hiding, by letting you ask about how a class is defined. Therefore, you should generally avoid it. It may be useful, however, in debugging and in building programmer support tools.

Messages

The `message/4` predicate is used to ask whether a message is defined for a class or to find what messages are defined for a class, etc. It does not distinguish between messages whose methods are defined in the class itself and those that are inherited from a superclass.

The `direct_message/4` predicate is used to ask whether a message is not only defined for a class, but whether the method for that message is defined in the class itself. It can also be used to determine which methods are defined in a class. This ability to look inside a class definition makes `direct_message/4` an egregious violator of the principle of information hiding. Thus it, like `class_ancestor/2`, should mainly be confined to use in programmer support applications.

Both `message/4` and `direct_message/4` take the message operator as an argument, along with the class, message name and arity. Hence it is possible to use these predicates to ask about get, put or send messages.

It is not possible to ask about a class's slots, nor should it be. However, it is possible (and quite reasonable) to ask about the get and put messages that are defined for a class. For example, the following goal finds all the 1-argument messages that are defined for both the get and put message operators in the class *Class*.

```
| ?- setof(Message,
           (message(Class, <<, Msg, 1),
            message(Class, >>, Msg, 1)),
           L).
```

There may or may not be slots corresponding to these messages; that detail is hidden in the definition of *Class*. However, it should be possible to use *Class* as if the slots were there.

As an example, recall the polar coordinate interface to the point class, which defined get and put methods for `r` and `theta`, even though data was represented inside an object by rectangular coordinates `x` and `y`.

10.30.4 Term Classes

Sometimes it is convenient to be able to send messages to ordinary Prolog terms as if they were objects. Prolog terms are easier to create than objects, and unlike objects, they

are automatically garbage collected (see Section 10.30.5.2 [obj-tech-lim], page 700). Of course, unlike objects, Prolog terms cannot be modified. However, when a particular class of objects never needs to be dynamically modified, and does not need to be subclassed, it may be appropriate to define it as a *term class*.

A term class is defined much like an ordinary class: it begins with a '`:- class`' directive defining the class and its slots, follows with clauses defining the methods for this class, and ends with an '`:- end_class`' directive, the end of the file, or another '`:- class`' directive. The only difference is in the form of the '`:- class`' directive introducing a term class definition.

10.30.4.1 Simple Term Classes

The simplest sort of term class declaration has the following form:

```
:- class ClassName = term(Term).
```

This declares that any term that unifies with *Term* is an instance of class *ClassName*. For example, you might declare:

```
:- class rgb_color = term(color(_Red,_Green,_Blue)).

color(R,_G,_B) >> red(R).
color(_R,G,_B) >> green(G).
color(_R,_G,B) >> blue(B).

:- end_class rgb_color.
```

This would declare any term whose principal functor is `color` and arity is three to be an object of class `rgb_color`. Given this declaration, entering the goal

```
color(0.5, 0.1, 0.6) >> blue(B)
```

would bind `B` to 0.6.

Note that you cannot use `create/2` to create a term class instance. Since they are just ordinary terms, you can create them the same way you would create any ordinary Prolog term. Similarly, you cannot modify an existing term class instance.

You may specify a term class as the type of a slot of an ordinary class. This is effectively the same as specifying the type to be `term`. In particular, fetching and storing term class slots is not very efficient. Also, the default value for slots of term class type is `''`; this is because not enough is known about a simple term class to determine a better default. For an explanation of how to avoid these pitfalls, see Section 10.30.4.3 [obj-tcl-tce], page 697.

10.30.4.2 Restricted Term Classes

The intention of the `rgb_color` class presented above is to represent a color as a triple of floating point numbers between 0.0 and 1.0. But the above definition does not restrict the arguments of the `color` term in any way: *any* `color/3` term is considered to be an instance of the `rgb_color` class.

The second form of term class declaration allows you to specify constraints on instances of a term class. The form of such a declaration is as follows:

```
:- class ClassName = term(Term, Constraint).
```

This declares that any term that unifies with *Term* and satisfies *Constraint* is an instance of class *ClassName*. The *Constraint* term is an ordinary Prolog goal, which will usually share variables with *Term*.

To extend our `rgb_color` class example so that only `color/3` terms whose arguments are all floats between 0.0 and 1.0 are instances of `rgb_color`, we would instead begin the definition as follows:

```
:- class rgb_color =
         term(color(Red,Green,Blue),
              (float(Red),   Red >= 0.0,   Red =< 1.0,
               float(Green), Green >= 0.0, Green =< 1.0,
               float(Blue),  Blue >= 0.0,  Blue =< 1.0)).
```

Note the parentheses around the constraint in this example. Whenever the constraint contains multiple goals separated by commas, you will need to surround the goal with parentheses.

With this definition of the `rgb_color` class, only `color/3` terms whose arguments are all floating point numbers between 0 and 1 inclusive will be considered to be instances of `rgb_color`.

10.30.4.3 Specifying a Term Class Essence

As mentioned above, it is possible to specify a term class as the type of a slot of some other object. For example, we might declare

```
:- class colored_rectangle = [
        public origin:point,
        public size:size,
        public color:rgb_color].
```

This will store an `rgb_color` object (i.e., a `color/3` term) in the `color` slot of each `colored_rectangle` object. Unfortunately, though, SICStus Objects cannot tell what is the best way to store a term object, and therefore it stores it the same way it stores a slot declared to be of `term` type: using the Prolog database. This has all the efficiency disadvantages of `term` slots. In this case, however, we know that all that really needs to be saved in order to save an `rgb_color` object is the three arguments. We also know that each of these arguments is a floating point number, and because precision is not terribly critical in representing colors, each of these numbers can be stored as a `float`, rather than a `double`. In effect, we know that the *essence* of a `rgb_color` object is these three numbers; if we have them, then we can easily construct the `color/3` term. If we provide this information in the declaration of the `rgb_color` class, then SICStus Objects can store instances of the `rgb_color` class as 3

separate floats, rather than as a term, significantly improving the performance of creating or destroying a `colored_rectangle` object, as well as accessing or modifying its `color` slot.

The essence of a term class is specified with the following form of `class` declaration:

```
:- class ClassName = term(Term, Constraint, Essence).
```

where *Essence* is of the form

```
[Name1:Type1=i[Variable1], Name2:Type2=i[Variable2], ...]
```

and each *Name* is a distinct atom naming a slot, each *Type* is a slot type as specified in Section 10.30.2.2 [obj-scl-slt], page 676, and each *Variable* is an unbound variable appearing in *Term*. Providing a term essence not only makes storage of terms in ordinary object slots more efficient, it also gives a name to each "essential" slot of the term class. This allows you to use `fetch_slot` to fetch the slots of this class.

To extend our `rgb_color` example, we might introduce the `rgb_color` class with this declaration:

```
:- class rgb_color =
         term(color(Red,Green,Blue),
              (float(Red),   Red >= 0.0,   Red =< 1.0,
               float(Green), Green >= 0.0, Green =< 1.0,
               float(Blue),  Blue >= 0.0,  Blue =< 1.0),
              [red:float=Red, green:float=Green, blue:float=Blue]).
```

This declaration defines the `rgb_color` class exactly as the example declaration of the previous section: every `color/3` term whose arguments are all floating point numbers between 0.0 and 1.0 inclusive are instances of `rgb_color`. The difference is that with this declaration, ordinary classes that have slots of type `rgb_color`, such as the `colored_rectangle` example above, will be stored more efficiently, and their `rgb_color` slots will be accessed and modified much more efficiently. Also, it will be possible to use `fetch_slot(red, Red)` in the methods of the `rgb_color` class to fetch to red component of the message recipient, and similarly for `green` and `blue`.

10.30.5 Technical Details

This section will be expanded in future versions of SICStus Objects. For now, it provides a BNF grammar for the syntax of class definitions and a short list of some limitations of SICStus Objects.

10.30.5.1 Syntax of Class Definitions

The following BNF grammar gives a concise description of the syntax of class definitions. It assumes an understanding of Prolog syntax for the following items: *variable*, *atom*, *compound_term*, and *constant*. Slot types, particularly the `address`, `class` and `pointer` types, were discussed in an earlier section.

class_def ::= *class_begin* { *clause* | *method* } *class_end*

class_begin ::= `:-` `class` *class_name opt_class_spec* `.`

opt_class_spec ::= *empty* | `=` *class_spec*

class_spec ::= *multi_parent_or_slots* | *term_class_spec*

clause ::= *head opt_body* `.`

head ::= *atom* | *compound_term* `.`

method ::= *message_head opt_body* `.`

message_head ::= *message_goal*

class_end ::= `:-` `end_class` *opt_class_name* `.`
| *empty* /* if followed by *class_begin* or *eof* */

message ::= *atom* | *compound_term*

multi_parent_or_slots ::= *parent_or_slots* { `+` *parent_or_slots* }

parent_or_slots ::= *class_name* | `[]` | `[` *slot_def* {`,` *slot_def* } `]`

slot_def ::= *opt_visibility slot_name* `:` *slot_type opt_init_value*

opt_visibility ::= *empty* | `private` | `protected` | `public`

opt_init_value ::= *empty* | `=` *constant*

term_class_spec ::= `term(`*term opt_goal_essence*`)`

opt_goal_essence ::= *empty* | `,` *goal opt_essence*

opt_essence ::= *empty* | `,` *essence*

essence ::= `[` *variable* `:` *slot_type* { `,` *variable* `:` *slot_type* } `]`

opt_body ::= *empty* | `:-` *body*

body ::= *message_or_goal* { `,` *message_or_goal* }

message_or_goal ::= *message_goal* | *goal*

message_goal ::= *variable message_operator message*

message_operator ::= `<<` | `>>` | `<-`

opt_class_name ::= *empty* | *class_name*

class_name ::= *atom*

slot_name ::= *atom*

slot_type ::= `integer`
| `short`
| `char`
| `unsigned_short`
| `unsigned_char`
| `float`
| `double`
| `atom`
| `address`
| `term`
| *class_name*
| `pointer(`*atom*`)`

10.30.5.2 Limitations

This section summarizes the current limitations of SICStus Objects.

Debugging

When you debug SICStus Objects programs that were compiled using the `obj_decl` module, you are tracing the translated version of your code. This includes all method clauses and (some) message sending commands.

The source-linked debugger cannot connect compiled SICStus Objects code with the source code.

Garbage Collection

There is no garbage collection of objects. It is the responsibility of the programmer to keep track of unused objects. In particular, avoid doing the following:

```
| ?- create(Class, Object).
```

Unless the create message for *Class* made some provision for finding the new object again, it is now lost. It cannot be used, and it cannot be destroyed.

Multiple Inheritance

The provisions for multiple inheritance in this version of SICStus Objects are limited. In particular, there is no control over the inheritance of slots, which makes repeated inheritance impossible. However, it does support the mixin style of multiple inheritance.

Persistence

While objects are more persistent than Prolog variables, there is no automatic way to save objects from one execution of your program to the next. Hence they are less persistent than the clauses in the Prolog database.

If you need to save a set of objects from one Prolog session to another, then copy the objects to the Prolog database as terms, and save them to a '`.sav`' file. Then, after you reload the '`.sav`' file, rebuild the objects. Keep in mind that addresses are not valid from one session to another.

In short, there is no way to avoid initializing objects at run time.

10.30.6 Exported Predicates

The following reference pages, alphabetically arranged, describe the exported SICStus Objects predicates. They can be imported by an embedded command:

```
:- use_module(library(objects)).
```

10.30.6.1 `<-/2`

Synopsis

`+`*Obj* `<-` `+`*Mesg*

Arguments

Obj	*object*
Mesg	*term*

Description

Sends *Mesg* to *Obj*. A send message. The class of *Obj* must have a method defined for this message.

A clause with `<-/2` as the principal functor of its head is a method definition clause. Such clauses only occur within the scope of a class definition. They are expanded at compile time.

Exceptions

`instantiation_error`
: either argument is unbound.

`domain_error`
: *Mesg* is not *callable* or *Obj* is not a valid object.

`existence_error`
: *Mesg* is not a defined message for *Obj*.

Caveat

For reasons of efficiency, an Existence Error will only be raised if the code that sends the message is compiled with debugging enabled (see `debug_message`), or if the message is not determined at compile-time. In other circumstances, the message will simply fail.

Calls to the `<-/2` predicate will be compiled into more efficient code if the `obj_decl` module is loaded at compile time.

See Also

`<</2`, `>>/2`, `direct_message/4`, `message/4`

10.30.6.2 <</2

Synopsis

+*Obj* << +*Att*

Arguments

Obj	*object*
Att	*term*

Description

Sends a message to `Obj` to store the value of `Att` in the object. A put message. `Att` must be an attribute that can be stored in objects of `Obj`'s class.

A clause with `<</2` as the principal functor of its head is a method definition clause. Such clauses only occur within the scope of a class definition. They are expanded at compile time.

Put methods are automatically generated for public slots.

Exceptions

`instantiation_error`
: either argument is unbound.

`domain_error`
: *Mesg* is not *callable* or *Obj* is not a valid object.

`existence_error`
: *Mesg* is not a defined message for *Obj*.

Caveat

For reasons of efficiency, an Existence Error exception will only be raised if the code that sends the message is compiled with debugging enabled (see `debug_message`), or if the message is not determined at compile-time. In other circumstances, the message will simply fail.

Calls to the `<</2` predicate will be compiled into more efficient code if the `obj_decl` module is loaded at compile time.

See Also

`<-/2`, `>>/2`, `direct_message/4`, `message/4`, `store_slot/2`

10.30.6.3 >>/2

Synopsis

+*Obj* >> +-*Att*

Arguments

Obj	*object*
Att	*term*

Description

Sends a message to *Obj* that fetches the value of *Att* from the object. A get message. *Att* must be an attribute to fetch from *Obj*'s class.

A clause with `>>/2` as the principal functor of its head is a method definition clause. Such clauses only occur within the scope of a class definition. They are expanded at compile time.

Get methods are automatically generated for public slots.

Exceptions

`instantiation_error`
: either argument is unbound.

`domain_error`
: *Mesg* is not *callable* or *Obj* is not a valid object.

`existence_error`
: *Mesg* is not a defined message for *Obj*.

Caveat

For reasons of efficiency, an Existence Error exception will only be raised if the code that sends the message is compiled with debugging enabled (see `debug_message`), or if the message is not determined at compile-time. In other circumstances, the message will simply fail.

Calls to the `>>/2` predicate will be compiled into more efficient code if the `obj_decl` module is loaded at compile time.

See Also

`<-/2`, `<</2`, `direct_message/4`, `message/4`, `fetch_slot/2`

10.30.6.4 `class/1` *declaration*

Synopsis

```
:- class ClassName.

:- class ClassName = [SlotDef, ...].

:- class ClassName = Super.

:- class ClassName = [SlotDef, ...] + Super + ....

:- class ClassName = term(Term).

:- class ClassName = term(Term, Goal).

:- class ClassName = term(Term, Goal, Essence).
```

Arguments

ClassName
: *atom*

SlotDef
: *term*

Super
: *atom*

Description

The definition of class *ClassName* begins with this `class/1` directive and ends with the next `class/1` directive, the next `end_class/[0,1]` directive, or the end of the file, whichever comes first. All clauses that look like method definitions within the scope of the class definition (that is, which have one of `<-/2`, `<</2` or `>>/2` as the principal functors of their heads) are considered method definitions of the class.

You may provide as many slot definitions (*SlotDef*) and superclasses (*Super*) as you like. All superclasses must be previously defined classes.

A slot definition (SlotDef) has the form

```
Visibility SlotName:Type = InitialValue
```

where *Visibility* and '`= InitialValue`' are optional.

Visibility is either `public`, `protected`, or `private`. If it is omitted, then the slot is private.

SlotName must be an atom.

SlotType must be one of the following:

`integer`
: signed integer, large enough to hold a pointer

`integer_64` *since release 4.3*
: 64-bit signed integer

`integer_32`
: 32-bit signed integer

`integer_16`
: 16-bit signed integer

`integer_8`
: 8-bit signed integer

`unsigned` unsigned integer, large enough to hold a pointer

`unsigned_64` *since release 4.3*
: 64-bit unsigned integer

`unsigned_32`
: 32-bit unsigned integer

`unsigned_16`
: 16-bit unsigned integer

`unsigned_8`
: 8-bit unsigned integer

`float` 64-bit floating point number

`float_32` 32-bit floating point number

`atom` Prolog atom

`address` pointer

`term` Prolog term

`Class` pointer to an instance of *Class*, which must be a previously defined class

`pointer(`*`Type`*`)`
: like `address`, except that access to this slot yields, and update of this slot expects, a unary term whose functor is *Type*

InitialValue may be any constant appropriate for the slot's type.

Term, if specified, is any compound Prolog term. Class declarations of any of the last three forms introduce a *term class*, which defines any term that unifies with *Term* as an instance of the class being defined.

Goal, if specified, is any Prolog goal. This goal may be used to restrict which terms that unify with *Term* will be considered to be instance of the class being defined. The default *Goal* is `true`. Other than when it is `true`, *Goal* will usually share variables with *Term*.

Essence, if specified, is a list of terms of the form

```
Variable:Type
```

where *Variable* is a variable appearing somewhere in *Term* and *Type* is one of the possible *Slottype* types listed above. There should be a *Variable*`:`*Type* pair for every variable in *Term*. By specifying an essence, you permit much more space- and time-efficient storage of and access to term slots.

Caveat

Note that every class for which you want to be able to create instances must define at least one create method.

Examples

The following class definition is for a class named `point`, with two public slots, named `x` and `y`. Both slots are of type `integer` and have initial values of 1 and 2, respectively.

```
:- class point =
        [public x:integer=1,
         public y:integer=2].

Self <- create.
:- end_class point.
```

Because the slots are public, they have get and put methods generated automatically. Because the class has a create method defined, it is possible to create an instance with the command

```
| ?- create(point, PointObj).
```

which creates a `point` object and binds the variable `PointObj` to it.

Using the `point` class, we could create a class, `named_point`, which has an extra public slot, `name`.

```
:- class named_point =
        [public name:atom] + point.

Self <- create(Name, X, Y) :-
        Self << name(Name),
        Self << x(X),
        Self << y(Y).

:- end_class named_point.
```

The only way to create a `named_point` object requires specifying values for all three slots.

See Also

`end_class/[0,1]`

Section 10.30.2 [obj-scl], page 675, Section 10.30.4 [obj-tcl], page 695.

10.30.6.5 `class_ancestor/2`

Synopsis

`class_ancestor(?Class, ?Anc)`

Arguments

Class	*atom*
Anc	*atom*

Description

Anc is *Class* or an ancestor class of *Class*.

See Also

`class_superclass/2`

10.30.6.6 `class_method/1` *declaration*

Synopsis

```
:- class_method +Name/+Arity, ... .
```

Arguments

Name *atom*

Arity *integer*

Description

Declares that a class's method for send message *Name*/*Arity* is an ordinary method, not an instance method.

Used when the class being defined inherits an instance method from a superclass, to allow the class to define a non-instance method for the message. A descendant class may still declare this to be an instance method, so the same message may be an instance method for some classes and an ordinary class method for others.

Must occur within the scope of the class definition. Only applies to send messages.

See Also

`instance_method/1`

10.30.6.7 `class_superclass/2`

Synopsis

`class_superclass(?Class, ?Super)`

Arguments

Class *atom*

Super *atom*

Description

Class is an immediate subclass of *Super*.

See Also

`class_ancestor/2`

10.30.6.8 `class_of/2`

Synopsis

`class_of(+Obj, -Class)`

Arguments

Obj	*object*
Class	*atom*

Description

Class is the class of *Obj*.

Exceptions

`instantiation_error`
: *Obj* is unbound.

`type_error`
: *Obj* is not a valid object.

See Also

`pointer_object/2`

10.30.6.9 `create/2`

Synopsis

`create(+`*Descriptor*`,-`*Obj*`)`

Arguments

Descriptor
: *term*

Obj
: *object*

Description

Obj is a newly created and initialized object. Descriptor is a term describing the object to create. After memory is allocated and any slot initializations are performed, a create message is sent to the object.

The functor of *Descriptor* indicates the class to create. The arguments of the create message are the arguments of *Descriptor*.

Exceptions

`instantiation_error`
: *Descriptor* is unbound.

`domain_error`
: *Descriptor* is not a valid `create` descriptor.

`resource_error`
: unable to allocate enough memory for object.

Caveat

You must have a `create/`*N* method for every arity *N* you want to be able to use in creating instances of a class. This includes arity 0. If no such method exists, then a domain error will be raised.

Examples

Given the class definition

```
:- class point =
                [public x:integer=1,
                 public y:integer=2].

Self <- create.
Self <- create(X, Y) :-
                Self << x(X),
                Self << y(Y).
:- end_class point.
```

the command

```
| ?- create(point, Point1).
```

creates a `point` object, with the default slot values for `x` and `y`, and binds variable `Point1` to the new object. The command

```
| ?- create(point(10,15), Point2).
```

creates a `point` object with values 10 and 15 for slots `x` and `y`, respectively, and binds variable `Point2` to the new object.

See Also

`destroy/1`

10.30.6.10 `current_class/1`

Synopsis

`current_class(*`*`Class`*`)`

Arguments

Class *atom*

Description

`Class` is the name of a currently defined class.

10.30.6.11 `debug_message/0` *declaration*

Synopsis

```
:- debug_message.
```

Description

Prolog clauses following this directive will be compiled to send messages "carefully."

That is, a message sent to an object that does not understand the message will raise an exception, which describes both the message and the object receiving it. This also catches attempts to send an unbound message, to send a message to an unbound object, and similar errors.

See Also

`nodebug_message/0`

10.30.6.12 `define_method/3`

Synopsis

`define_method(+`*`Obj`*`, +`*`Message`*`, +`*`Body`*`)`

Arguments

Obj	*object*
Message	*term*
Body	*callable*

Description

Installs *Body* as the method for *Message* in the instance *Obj*. Following the execution of this goal, sending *Message* to *Obj* will execute *Body*, rather than the default method or a method previously defined with `define_method/3`.

Message must have been declared to be an instance method for the class of *Obj*.

Exceptions

`instantiation_error`
: any argument is unbound.

`type_error`
: *Obj* is not a compound term, or *Message* or *Body* is not *callable*.

`domain_error`
: *Message* does not specify an instance method for the class of *Obj*, or *Body* include a goal to fetch or store a non-existent slot.

See Also

`instance_method/1`, `undefine_method/3`

10.30.6.13 `descendant_of/2`

Synopsis

`descendant_of(+Obj, ?Class)`

Arguments

Obj	*object*
Class	*atom*

Description

Obj is an instance of *Class* or of a descendant of *Class*.

Exceptions

`instantiation_error`
: *Obj* is unbound.

`type_error`
: *Object* is not a valid object.

See Also

`class_ancestor/2`, `class_of/2`, `class_superclass/2`

10.30.6.14 `destroy/1`

Synopsis

`destroy(+Obj)`

Arguments

Obj *object*

Description

First, sends a `destroy` message to *Obj*, if such a message is defined for its class. A `destroy` message takes no argument. Unlike `create/2`, it is possible to destroy instances of a class even if it defines no `destroy` methods. Finally, disposes of *Obj*.

Exceptions

`instantiation_error`
: *Obj* is unbound.

`type_error`
: *Object* is not a valid object.

See Also

`create/2`

10.30.6.15 direct_message/4

Synopsis

```
direct_message(?Class, ?Op, ?Name, ?Arity)
```

Arguments

Class	*atom*
Op	*message_operator*
Name	*atom*
Arity	*integer*

Description

Name/*Arity* is an *Op* message directly understood (defined rather than inherited) by instances of *Class*. This predicate is used to test whether a message is defined for a class.

Op is one of `<-`, `>>`, or `<<`, specifying the kind of message.

This predicate violates the principle of information hiding by telling whether the method for a message is defined within a class or inherited. Hence its use in ordinary programs is discouraged. It may be useful, however, during debugging or in developing programming support tools.

See Also

`<-/2`, `<</2`, `>>/2`, `message/4`

10.30.6.16 `end_class/[0,1]` *declaration*

Synopsis

```
:- end_class.

:- end_class +ClassName.
```

Arguments

ClassName
: *atom*

Description

A class definition continues until the next `end_class/[0,1]` directive, the next `class/1` directive, or the end of the file, whichever comes first.

It is not possible to nest one class definition within another.

All clauses that look like method definitions (that is, which have one of `<-/2`, `<</2` or `>>/2` as the principal functors of their heads) are considered to be method definitions for the class.

Caveat

The argument to `end_class/1`, if specified, must match the class name of the preceding `class/1` directive.

See Also

`class/1`

10.30.6.17 `fetch_slot/2`

Synopsis

`fetch_slot(+SlotName, -Value)`

Arguments

SlotName *atom*

Value *term*

Description

Fetches *Value* from the slot specified by *SlotName*.

This predicate may only appear in the body of a method clause, and it always operates on the object to which that message is sent. It cannot be used to directly access the slots of another object.

Exceptions

`instantiation_error`
: *Slot* is unbound.

`domain_error`
: *Slot* is not the name of a slot of the current class.

`permission_error`
: *Slot* is a private slot of a superclass.

See Also

`>>/2`, `store_slot/2`

10.30.6.18 `inherit/1` *declaration*

Synopsis

`:- inherit` *+ClassName +Op +Name/+Arity*`, ....`

Arguments

ClassName *atom*

Op *message_operator*

Name *atom*

Arity *integer*

Description

ClassName names the class from which the message should be inherited, *Op* indicates which kind of message it is, and *Name* and *Arity* indicate the name and arity of the message to be inherited. You may include several inheritance specifications in one directive.

Caveat

Be careful of the precedences of the message operator and the `/` operator. You may need to use parentheses.

Examples

Suppose classes `toy` and `truck` are defined as follows:

```
:-class toy.
Self <- create.
Self >> size(small).
Self >> rolls(false).
:- end_class toy.

:- class truck.
Self <- create.
Self >> size(small).
Self >> rolls(true).
:- end_class truck.
```

Then `toy_truck` inherits its size from `toy` and the fact that it rolls from `truck`:

```
:- class toy_truck = toy + truck.
:- inherit
        toy <- (create/0),
        toy <- (size/1),
        truck <- (rolls/1).
:- end_class toy_truck.
```

Note that this is just a toy example.

See Also

`uninherit/1`

10.30.6.19 `instance_method/1` *declaration*

Synopsis

```
:- instance_method +Name/+Arity.
```

Arguments

Name *atom*

Arity *integer*

Description

The message *Name*/*Arity* is declared to support instance methods in a class. This means that instances of this class, and its descendants, may each define their own methods for this message.

A method defined for this message by the class is considered the default method for the message. An instance that does not define its own method uses the default. Defining a new method overrides this default method; there is no need to explicitly remove it.

An instance method is installed in an instance of the class with the `define_method/3` predicate. An instance method is removed from an instance of the class, reverting to the default method, with the `undefine_method/3` predicate.

Must occur within the scope of the class definition. Only applies to send messages.

See Also

`class_method/1`, `define_method/3`, `undefine_method/3`

10.30.6.20 message/4

Synopsis

`message(?Class, ?Op, ?Name, ?Arity)`

Arguments

Class	*atom*
Op	*message_operator*
Name	*atom*
Arity	*integer*

Description

Name/*Arity* is an *Op* message understood by instances of *Class*. This predicate is used to test whether a message is either defined for or inherited by a class.

Op is one of `<-`, `>>`, or `<<`, specifying the kind of message.

See Also

`<-/2`, `<</2`, `>>/2`, `direct_message/4`

10.30.6.21 `nodebug_message/0` *declaration*

Synopsis

```
:- nodebug_message.
```

Description

Prolog clauses following this directive are no longer compiled to send messages "carefully."

See Also

`debug_message/0`

10.30.6.22 `pointer_object/2`

Synopsis

```
pointer_object(+Addr,-Obj)

pointer_object(-Addr,+Obj)
```

Arguments

Addr	*integer*
Obj	*object*

Description

Addr is the address of object *Obj*. This can be used to get the address of an object or to get an object given its address.

Please note: This is a low level operation, passing an invalid address may crash the system.

Exceptions

`instantiation_error`
: both *Obj* and *Addr* are unbound.

`type_error`
: *Addr* is not an integer.

10.30.6.23 `store_slot/2`

Synopsis

`store_slot(+`*`SlotName`*`, +`*`NewValue`*`)`

Arguments

SlotName *atom*

NewValue *term*

Description

Stores *NewValue* in the slot specified by *SlotName*.

This predicate may only appear in the body of a method clause, and it always operates on the object to which that message is sent. It cannot be used to directly modify the slots of another object.

Exceptions

`instantiation_error`
: either argument is unbound.

`type_error`
: *NewValue* is not of the appropriate type for *Slotname*.

`domain_error`
: *Slotname* is not the name of a slot of the current class.

`permission_error`
: *Slotname* is a private slot of a superclass.

See Also

`<</2`, `fetch_slot/2`

10.30.6.24 `undefine_method/3`

Synopsis

`undefine_method(+Obj, +Name, +Arity)`

Arguments

Obj	*object*
Name	*atom*
Arity	*integer*

Description

Removes *Obj*'s current instance method for the *Name*/*Arity* message. After executing this goal, sending this message to *Obj* executes the class's default method for the message.

Name/*Arity* must have been declared to be an instance method for the class of *Obj*.

If *Obj* has no current instance method for the *Name*/*Arity* message, then the predicate has no effect.

Exceptions

`instantiation_error`
: any argument is unbound.

`type_error`
: *Obj* is not a compound term, *Name* is not an atom, or *Arity* is not an integer.

`domain_error`
: *Message* does not specify an instance method for the class of *Obj*.

See Also

`define_method/3`, `instance_method/1`

10.30.6.25 `uninherit/1` *declaration*

Synopsis

```
:- uninherit +Class +Op +Name/+Arity, ... .
```

Arguments

Class	*atom*
Op	*message_operator*
Name	*atom*
Arity	*integer*

Description

This prevents the class within whose scope this directive appears from inheriting the *Name*/*Arity* method of type *Op* from ancestor *Class*.

If *Class* is unbound, then the specified message is uninherited from all ancestors that define it.

Caveat

Note that if you define a message for your class, then you do not need to uninherit that message from its superclasses: it will automatically be shadowed.

Be careful of the precedences of the message operator and the `/` operator. You may need to use parentheses.

Examples

```
:- uninherit someclass << (foo/1),
             someclass >> (foo/1).
```

This prevents the get and put methods for the slot `foo` from being inherited from any ancestors of class `someclass`. In effect, it makes the `foo` slot a protected slot for this class.

See Also

`inherit/1`

10.30.7 Glossary

abstract class
: A class that cannot have instances. Abstract classes are helpful in designing a class hierarchy, to contain the common parts of several concrete classes.

ancestor
: One of a class's superclasses, one of its superclasses's superclasses, etc. Sometimes, for convenience, ancestor includes the class itself, along with its proper ancestors.

child
: A synonym for subclass.

class A class is defined by a description of the information its instances contain and the messages they respond to. Every object is an instance of one and only one class.

concrete class
A class that can have instances. Most classes are concrete.

create method
Specifies what actions should be taken when an instance of a class is created. A create method frequently provides initial slot values or specifies an action to be performed by the new object. A create message is sent to each new object by the `create/2` predicate. A create message is a kind of send message.

descendant
One of a class's subclasses, one of its subclasses's subclasses, etc. Sometimes the word descendant includes the class itself, along with its proper descendants.

destroy method
Specifies what actions should be taken when an instance of a class is destroyed. A destroy message is sent to an object by the `destroy/1` predicate. A destroy message is a kind of send message.

direct slot access
Fetching or storing a slot value without sending a message to the object. This should be used with care!

SICStus Objects allows direct access to a class's slots only within its method definitions, via the `fetch_slot/2` and `store_slot/2` predicates.

get message
A message that inquires about some aspect of an object. Typically used to fetch slot values. Get methods are automatically generated for public slots. Get messages are written with the '`>>`' operator.

inheritance
The process by which a class's slots and methods are determined from an ancestor.

initial value
The value a slot is initialized to when an object is created. Every slot has a default initial value, which depends upon its type. You may specify different initial values in a class definition.

instance Another word for object. The word instance draws attention to the class of which the object is an instance.

instance method
A method that may be defined differently for each instance of a class. The class may have a default method for this message, which is overridden by installing an instance method for a particular object.

message A command to an object to perform an operation or to modify itself, or an inquiry into some aspect of the object. In SICStus Objects, a message is either

a get message, a put message or a send message. The syntax for sending a message to an object is

```
Object Operator Message
```

where *Operator* is one of the following:

`>>` get message

`<<` put message

`<-` send message

method A class's implementation of a particular message. You send messages to an object, but you define methods for a class.

method clause
A Prolog clause used to define a method for a class. A method clause has one of `<-/2`, `<</2` or `>>/2` as the principal functor of its head, and it can only appear within the scope of its class's definition. A method's definition may contain more than one message clause.

mixin class
A class that is intended to be combined (mixed in) with other classes, via multiple inheritance, to define new subclasses.

multiple inheritance
When a class names more than one superclass. Typically, it inherits slots and methods from each. In SICStus Objects, two different superclasses should not use the same slot name. And, if a message is defined by more than one superclass, then the class definition must specify which method to inherit.

object A modifiable data item that holds information and responds to messages. Another word for instance.

parent class
A synonym for superclass.

private slot
A private slot is, by default, only accessible within methods of the class itself. Not even the descendants of the class may access its private slots, except through the class's methods. Get and put methods are not automatically generated for a private slot, so it is only accessed via the methods you define. If the visibility of a slot is not specified, then it is private, rather than public or protected.

protected slot
A protected slot is, by default, only accessible within methods of the class itself and its descendants. Get and put methods are not automatically generated for a protected slot, so it is only accessed via the methods you define. If the visibility of a slot is not specified, then it is private, rather than public or protected.

SICStus Objects `protected` is similar to `protected` in C++.

public slot A public slot is accessible via its own get and put methods, which are generated for it automatically. If no visibility is specified, then a slot is private, rather than public or protected.

put message
A message that modifies some aspect of an object. Typically used to store slot values. Put methods are automatically generated for public slots. Put messages are written with the '`<<`' operator.

send message
The most common sort of message. Used for performing an operation on an object or for performing an action that depends upon an object. Send messages are written with the '`<-`' operator.

send super
When a method for a class executes a shadowed superclass's method. This allows a class to put a "wrapper" around its superclass's method, making it unnecessary to duplicate the method just to make a small extension to it.

shadow When a class defines its own method for a message defined by one of its ancestors, the new method hides or "shadows" the ancestor's method. The new class's descendants will inherit its method for that message, rather than its ancestors. That is, a class always inherits the "closer" of two methods for a message.

slot A part of an instance that holds an individual datum. Like a member of a C struct or a field of a Pascal record.

subclass A class that is a more specific case of a particular class. This is the opposite of superclass. A class does not name its subclasses; they are inferred.

superclass A class that is a more general case of a particular class. Each class lists its superclasses.

term class A class whose instances are represented as ordinary Prolog terms. The functor of these objects need not be the name of the class, and the arity need not be one.

term slot A slot that can hold any Prolog term.

uninherit Specify that a method from a superclass should not be inherited. This is similar to shadowing the superclass's method, but does not specify a replacement for it.

visibility A slot may be defined to be either `public`, `protected`, or `private`. By default, if no visibility is specified, then a slot is private.

10.31 The ODBC Interface Library–`library(odbc)`

This library is an interface to an ODBC database driver. For an introduction to ODBC, see `http://msdn.microsoft.com/en-us/library/ms715408(VS.85).aspx` ("Introduction to ODBC"; Microsoft Web Page). ODBC 3.x is supported.

10.31.1 Overview

ODBC (Open Database Connectivity) is a standard API for using a DBMS (DataBase Management System). By using ODBC you can access data from a multitude of DBMSs without having to know the details of each DBMS.

`library(odbc)` is a layer on top of ODBC. It has predicates for opening the database, starting and executing a query, and retrieving the results of a query. The ODBC client application, i.e. this library, accesses all ODBC functionality via a service provided by the operating system, the ODBC Driver Manager (DM).

Some operating systems (e.g. Mac OS X and MS Windows) usually come with an ODBC Driver Manager preinstalled. For other, UNIX and UNIX-like, operating systems, unixODBC (`http://www.unixodbc.org`) is the most common but Mac OS X use iODBC (`http://www.iodbc.org`).

The ODBC Driver Manager does not, in itself, provide any database functionality. Instead the DM loads a ODBC driver specific to the particular Database Management System (DBMS) (when `odbc_db_open/[3,4,5]` is called).

How to install and configure an ODBC driver is beyond the scope of this document. Please consult the documentation for the particular DBMS you intend to use. Some popular DBMSs are MySQL and PostgreSQL which both provide ODBC drivers for many platforms.

10.31.2 Examples

A few examples will best illustrate how to use `library(odbc)`.

10.31.2.1 Example 1

The first example just verifies that ODBC is working and that some ODBC drivers have been configured in the ODBC Driver Manager.

```
:- use_module(library(odbc)).

example1 :-
    odbc_env_open(EnvHandle),
    odbc_list_DSN(EnvHandle, DSNs),
    odbc_env_close(EnvHandle),
    format('The known DSNs are: ~q~n', [DSNs]).
```

You begin by opening an environment. This is a handle which can be used for various calls to the ODBC Driver Manager (DM). You then ask the DM about the data sources, i.e. databases, it knows about. If this list is empty you need to install and configure the ODBC drivers appropriate for the database management system that you intend to use.

10.31.2.2 Example 2

This example is a simple SQL query using a fixed SQL string.

```
:- use_module(library(odbc)).

example_select :-
    odbc_env_open(EnvHandle),
    odbc_db_open('MyDatabase', EnvHandle, ConnectionHandle),
    odbc_query_open(ConnectionHandle, StatementHandle),
    odbc_query_execute_sql(StatementHandle,
                       'SELECT cookie,soft FROM bakery order by soft',
                       ResultSet),
    show_result(ResultSet),
    odbc_query_close(ResultSet),
    odbc_db_close(ConnectionHandle),
    odbc_env_close(EnvHandle).

show_result(ResultSet) :-
    odbc_sql_fetch(ResultSet, Row),
    show_result1(Row, ResultSet).

show_result1([], _ResultSet) :- !.
show_result1(Row, ResultSet) :-
    format('~w~n', [Row]),
    flush_output,
    odbc_sql_fetch(ResultSet, Row1),
    show_result1(Row1, ResultSet).
```

As always, you begin by opening an environment. You then connect to the database with `odbc_db_open/3`. The first argument is the identifier for the database in the DBMS. In this scenario, connecting to the database does not require a username and a password. The output from `odbc_db_open/3` is an opaque handle on the database.

First, `odbc_query_open/2` is used to create an SQL query, which is straightforward. Then, `odbc_query_execute_sql/3` is used to execute the SQL query. By executing an SQL query a *result set* is created. Each consecutive call of `odbc_sql_fetch/2` will retrieve one row from the result set.

10.31.2.3 Example 3

This example shows the use of parameter binding. The positional markers (*?*) in the SQL string are bound to the elements in the list in the third argument of odbc_query_execute_sql/5. The fourth argument is a list of datatypes corresponding to the parameters.

```
:- use_module(library(odbc)).

example2 :-
   odbc_env_open('SQL_OV_ODBC3', EnvHandle),
   odbc_db_open('MyDatabase', EnvHandle, ConnectionHandle),
   odbc_query_open(ConnectionHandle, StatementHandle),
   odbc_query_execute_sql(StatementHandle,
                          'INSERT INTO scratch (vehicle, wheels) VALUES (?, ?)',
                          ["railwaycar", 8],
                          ['SQL_VARCHAR', 'SQL_INTEGER'],
                          ResultSet),
   odbc_query_close(ResultSet),
   odbc_db_close(ConnectionHandle),
   odbc_env_close(EnvHandle).
```

10.31.2.4 Example 4

This example is similar to the second, but this time we ask the database what the datatypes of the columns of the table are with odbc_list_data_types/3.

```
:- use_module(library(odbc)).

example3 :-
   odbc_env_open(EnvHandle),
   odbc_db_open('MyDatabase', EnvHandle, ConnectionHandle),
   odbc_query_open(ConnectionHandle, StatementHandle),
   odbc_list_data_types(StatementHandle,
                        scratch(vehicle, wheels),
                        DataTypes),
   odbc_query_execute_sql(StatementHandle,
                          'INSERT INTO scratch (vehicle, wheels) VALUES (?, ?)',
                          ["railwaycar", 8],
                          DataTypes,
                          ResultSet),
   odbc_query_close(ResultSet),
   odbc_db_close(ConnectionHandle),
   odbc_env_close(EnvHandle).
```

10.31.3 Datatypes

10.31.3.1 Reading from the database

When reading data from the database the following datatypes are supported, with conversion to the corresponding prolog datatypes.

`SQL_CHAR`, `SQL_VARCHAR` etc.
: A list of character codes.

`SQL_BIT`
: The integer `0` for false, or `1` for true.

`SQL_INTEGER`, `SQL_TINYINT`, `SQL_SMALLINT`, etc.
: An integer.

`SQL_REAL`, `SQL_DOUBLE`, `SQL_FLOAT`
: A floating point number.

`SQL_DATE`
: A term `date(Year, Month, DayOfMonth)`, with one-based integer arguments. E.g. `date(2012,10,22)` means October 22, 2012.

`SQL_TIME`
: A term `time(Hour, Minute, Second)` with one-based integer arguments. E.g. `time(22,11,5)` means eleven minutes and five seconds past ten pm.

`SQL_TIMESTAMP`
: A term `timestamp(Year, Month, Day, Hour, Minute, Second, Fraction)` where the arguments have the same meaning as for `SQL_TIME` and `SQL_TIMESTAMP` and *Fraction* means fractional nanoseconds past, as an integer.

the SQL null value
: The atom `null`.

`SQL_BINARY` and other binary types
`SQL_INTERVAL_HOUR` and other interval types
`SQL_UTCTIME` and `SQL_UTCDATETIME`
: Currently not supported.

Note that atoms with names that start with an upper case letter, like `SQL_CHAR` must be quoted in Prolog, e.g. `'SQL_CHAR'`.

10.31.3.2 Writing to the database

When writing data to the database the following SQL datatypes are supported.

`SQL_CHAR`, `SQL_VARCHAR` etc.
: A list of character codes, or a list of atoms.

  For backwards compatibility only, an atom is also accepted, but note that the atoms `null` and `[]` have special meaning (as SQL null value and empty code list, respectively) and more atoms with special meaning may be introduced in the future. For compatibility with some ODBC drivers, the integer 0 and 1 are allowed, meaning `"0"` and `"1"`.

`SQL_BIT`
: The integer `0` for false, or `1` for true.

`SQL_INTEGER`, `SQL_TINYINT`, `SQL_SMALLINT`, etc.
: An integer.

`SQL_REAL`, `SQL_DOUBLE`, `SQL_FLOAT`
: A floating point number or a small integer.

`SQL_DATE`
: A term `date(Year, Month, DayOfMonth)`, as above.

`SQL_TIME`
: A term `time(Hour, Minute, Second)`, as above.

`SQL_TIMESTAMP`
: A term `timestamp(Year, Month, Day, Hour, Minute, Second, Fraction)`, as above.

the SQL null value
: The atom `null`.

`SQL_BINARY` and other binary types
`SQL_INTERVAL_HOUR` and other interval types
`SQL_UTCTIME` and `SQL_UTCDATETIME`
: Currently not supported.

if a value is out of range for the corresponding SQL type, e.g. a too large integer for `SQL_SMALLINT`, the result is undefined. Note that atoms with names that start with an upper case letter, like `SQL_CHAR` must be quoted in Prolog, e.g. `'SQL_CHAR'`.

10.31.4 Exceptions

When an error in the ODBC layer occurs, predicates in `library(odbc)` throw `error/2` exceptions. Both arguments of the `error/2` exception are the same and has the following form `odbc_error(`*`Detail, Goal`*`)`, where `Goal` is some goal where the error occurred, and *Detail* gives more information about the error. The *Detail* term can have the following form:

`data_conversion`
: Thrown in case of a error when converting to or from a SICStus data type from or to an ODBC data type.

`unsupported_datatype`
: Thrown when an SQL data type is unsupported when converting to or from a SICStus data type from or to an ODBC data type.

`unknown_datatype`
: Thrown when an unknown SQL data type is found when converting to or from a SICStus data type from or to an ODBC data type.

`type_error`
: Thrown when the Prolog data is of a type incompatible with the SQL data type when converting from a SICStus data type to an ODBC data type.

`native_code`
: Thrown in case of a error in the native code of `library(odbc)`.

`invalid_handle(handle_type, `*`InvalidHandle`*`, `*`ReturnCode`*`)`
: Thrown when an invalid handle type is specified.

`invalid_handle('HandleType'-`*`HandleType`*`, 'Handle'-`*`Handle`*`)`
: Thrown when an invalid handle is specified.

`invalid_handle(result_set, `*`ResultSet`*`)`
: Thrown when a Result Set handle is invalid.

`unknown_connection_option(`*`Options`*`)`
: Thrown when an unknown option was given when calling `odbc_db_open/[3,4,5]`.

`internal_error`
: Thrown when an internal error occurs in `library(odbc)`. Please report this to SICStus Support.

`diag(`*`ReturnCode`*`, `*`Recs`*`)`
: Thrown when an error occurs in the ODBC layer, e.g. a SQL syntax error. *Recs* is bound to the diagnostic records reported from ODBC.

`out_of_memory`
: Thrown when some operation runs out of memory.

there may be other *Details* and new *Details* may be added in the future.

10.31.5 Predicates

`odbc_env_open(-`*`EnvHandle`*`)`
: Opens an ODBC environment. Throws an exception if the environment could not be opened.

`odbc_db_open(+`*`Dbname`*`,+`*`EnvHandle`*`,-`*`ConnectionHandle`*`)`
: Opens a database with the name *Dbname*. The database cannot require a username and a password. *ConnectionHandle* is an opaque handle for accessing the database.

`odbc_db_open(+`*`Dbname`*`,+`*`EnvHandle`*`,+`*`Options`*`,-`*`ConnectionHandle`*`)`
: Opens a database with the name *Dbname*. *Options* should be a list of zero or more of:

  `username(+`*`Username`*`)`
  : The username for connecting to the database. The default is `''`.

  `password(+`*`Password`*`)`
  : The password for connection to the database. The default is `''`.

  `login_timeout(+`*`Timeout`*`)`
  : The number of seconds to wait for a login request to complete. If 0 is used, the login attempt will wait indefinitely. The default is driver-dependent.

  `connection_timeout(+`*`Timeout`*`)`
  : The number of seconds to wait for any request on the connection to complete. If the Timeout value is 0 (the default), there is no timeout.

  `raw(+`*`ConnectionOptions`*`)`
  : *ConnectionOptions* should be a list of atoms. They are passed, terminated by `;`, as extra options when opening the database.

  ConnectionHandle is an opaque handle for accessing the database.

`odbc_db_open(+`*`Dbname`*`,+`*`EnvHandle`*`,+`*`Options`*`,-`*`ConnectionHandle`*`,-`*`ConnectionString`*`)`
: Like `odbc_db_open/4` but also returns the completed connection string returned by the ODBC driver.

`odbc_query_open(+ConnectionHandle, -StatementHandle)`
: Creates a new database query. *ConnectionHandle* is a handle previously allocated with `odbc_db_open/[3,4,5]`.

`odbc_list_DSN(+EnvHandle,-DSNs)`
: *EnvHandle* is an opaque database handle. *DSNs* is unified with a list of all DSNs (Data Source Names). The list elements are X-Y where X is the DSN and Y its description.

`odbc_list_data_types(+StatementHandle, +TableDesc, -DataTypes)`
: Makes a list of the datatypes in a table. *StatementHandle* is a handle previously allocated with `odbc_query_open/2`. *TableDesc* is a description of the table and its columns of the form `tablename(columnname1, columnname2, ..., columnnameN)`, or of the form `[tablename, columnname1, columnname2, ..., columnnameN]` (the latter form is useful if the table has more than 255 columns). *DataTypes* is unified with a list of the corresponding datatypes, i.e. on the form `[datatype1, datatype2, ... datatypeN]`.

`odbc_current_table(+ConnectionHandle, ?TableName)` *since release 4.2*
: Enumerate the *proper* tables in the database, i.e. tables with attribute `'TABLE_TYPE'("TABLE")`.

  ConnectionHandle is a handle previously allocated with `odbc_db_open/[3,4,5]`. *TableName* is the name, as an atom, of the table.

  Note that `odbc_current_table/2` may exit nondeterminately even if all arguments are instantiated when it is called.

`odbc_current_table(+ConnectionHandle, ?TableName, ?Attribute)` *since release 4.2*
: Enumerate database tables and their attributes.

  ConnectionHandle is a handle previously allocated with `odbc_db_open/[3,4,5]`. *TableName* is the name, as an atom, of the table. *Attribute* is an attribute of the table.

  There are two kinds of attributes, *derived* attributes and *raw* attributes.

  The *derived* attributes are translations of raw attributes and other information and are in a format that is directly useful. There is currently only one derived attribute,

  `arity(Value)`
  : The number of columns in the table, as an integer.

    This attribute is always present.

  the set of derived attributes may be extended in the future.

  The raw attributes correspond directly to the (non-null) values returned from the ODBC function `SQLTables()` and are returned as is, wrapped in a functor with the same name as the attribute, e.g. `'TABLE_CAT'("foo")` would be returned for a table in the catalog "foo". Note that the names of the raw attributes are in all uppercase so you need to surround them with single quotes to

prevent their name from being parsed as a variable. Some of the raw attributes are,

`'TABLE_CAT'(`*Value*`)`
: Catalog name, as a code list. This attribute corresponds to the `TABLE_CAT` column, called `TABLE_QUALIFIER` in ODBC 2.0, as returned from the ODBC function `SQLTables()`.

`'TABLE_TYPE'(`*Value*`)`
: Table type, as a code list. This attribute corresponds to the `TABLE_TYPE` column, as returned from the ODBC function `SQLTables()`. The standard table types are `"TABLE"`, `"VIEW"`, `"SYSTEM TABLE"`, `"GLOBAL TEMPORARY"`, `"LOCAL TEMPORARY"`, `"ALIAS"`, and `"SYNONYM"`, but there can be data-source-specific types as well.

  This attribute is always present.

`'REMARKS'(`*Value*`)`
: Table descriptive text, as a code list. This attribute corresponds to the `REMARKS` column, as returned from the ODBC function `SQLTables()`.

see the ODBC documentation for `SQLTables()` for the full list of raw attributes and their meaning.

Note that `odbc_current_table/3` may exit nondeterminately even if one of more arguments are instantiated when it is called.

`odbc_table_column(+ConnectionHandle, ?TableName, ?ColumnName)` *since release 4.2*

Enumerate database table columns.

ConnectionHandle is a handle previously allocated with `odbc_db_open/[3,4,5]`. *TableName* is the name, as an atom, of the table. *ColumnName* is the name, as an atom, of the table.

`odbc_table_column(+ConnectionHandle, ?TableName, ?ColumnName, ?Attribute)` *since release 4.2*

Enumerate database table columns and their attributes.

ConnectionHandle is a handle previously allocated with `odbc_db_open/[3,4,5]`. *TableName* is the name, as an atom, of the table. *ColumnName* is the name, as an atom, of the table. *Attribute* is an attribute of the table.

There are two kinds of attributes, *derived* attributes and *raw* attributes.

The *derived* attributes are translations of raw attributes and other information and are in a format that is directly useful. There is currently only one derived attribute,

`nullable(`*Value*`)`
: `true` if the column is definitely nullable, or `false` if the column is definitely not nullable. The value is derived from the raw at-

tributes `NULLABLE` and `IS_NULLABLE`, see the documentation for `SQLColumns()` for details.

This attribute is not present if it can not be determined whether the column is nullable.

the set of derived attributes may be extended in the future.

The raw attributes correspond directly to the (non-null) values returned from the ODBC function `SQLColumns()` and are returned as is, wrapped in a functor with the same name as the attribute, e.g. `'TABLE_CAT'("foo")` would be returned for a column in a table in the catalog "foo". Note that the names of the raw attributes are in all uppercase so you need to surround them with single quotes to prevent their name from being parsed as a variable. Some of the raw attributes are,

`'REMARKS'(`*Value*`)`
: Column descriptive text, as a code list. This attribute corresponds to the `REMARKS` column, as returned from the ODBC function `SQLColumns()`.

`'ORDINAL_POSITION'(`*Value*`)`
: The ordinal position of the column in the table, starting at 1. This attribute corresponds to the `ORDINAL_POSITION` column, as returned from the ODBC function `SQLColumns()`.

  This attribute is always present.

See the ODBC documentation for `SQLColumns()` for the full list of raw attributes and their meaning.

Note that `odbc_table_column/4` may exit nondeterminately even if one of more arguments are instantiated when it is called.

`odbc_query_execute_sql(+`*StatementHandle*`, +`*SQLString*`, +`*ParamData*`, +`*ParamDataTypes*`, -`*ResultSet*`)`
: Executes an SQL query. *StatementHandle* is a handle previously allocated with `odbc_query_open/2`. *SQLString* is the SQL statement to be executed. The statement string may contain parameter markers. *ParamData* is a list of data to be bound to the parameter markers. *ParamDataTypes* is a list of data types corresponding to the *ParamData* list. *ResultSet* is bound to an opaque data structure describing the result of the query.

`odbc_query_execute_sql(+`*StatementHandle*`, +`*SQLString*`, -`*ResultSet*`)`
: *StatementHandle* is a handle previously allocated with `odbc_query_open/2`. *SQLString* is the SQL statement to be executed. *ResultSet* is bound to an opaque data structure describing the result of the query.

`odbc_sql_fetch(+`*ResultSet*`, -`*Row*`)`
: Fetch the next row from the result set. *ResultSet* is the result set from `odbc_query_execute_sql/[3,5]`. *Row* is unified with a non-empty list of data constituting a row in the result set, or with `[]` when there are no more rows. The elements in the *Row* are in the same order as in the corresponding query.

`odbc_query_close(+`*`Query`*`)`
: Closes the query represented by *Query*, which can be either a result set, e.g. as returned from `odbc_query_execute_sql/[3,5]`, or it can be a statement handle, as returned from `odbc_query_open/2`.

`odbc_db_close(+`*`ConnectionHandle`*`)`
: Closes the connection to the database.

`odbc_env_close(+`*`EnvHandle`*`)`
: Frees the environment handle.

10.32 Ordered Set Operations—`library(ordsets)`

This library module provides operations on sets represented as ordered lists with no duplicates. Thus `{c,r,a,f,t}` would be `[a,c,f,r,t]`. The ordering is defined by the `@<` family of term comparison predicates, which is the ordering used by `sort/2` and `setof/3`.

The benefit of the ordered representation is that the elementary set operations can be done in time proportional to the sum of the argument sizes rather than their product. You should use the operations defined here in preference to those in `library(sets)` unless there is a compelling reason why you can't. Some of the unordered set routines, such as `member/2`, `length/2` and `select/3` can be used unchanged on ordered sets; feel free so to use them.

There is no `ordset_to_list/2`, as an ordered set is a list already. Exported predicates:

`is_ordset(+`*List*`)`
: is true when *List* is a list of terms *[T1,T2,...,Tn]* and the terms are strictly increasing: *T1* `@<` *T2* `@<` ... `@<` *Tn*. The output of `sort/2` always satisfies this test. Anything which satisfies this test can be given to the predicates in this file, regardless of where you got it.

`list_to_ord_set(+`*List*`, -`*Set*`)`
: is true when *Set* is the ordered representation of the set represented by the unordered representation List. The only reason for giving it a name at all is that you may not have realized that `sort/2` could be used this way.

`ord_add_element(+`*Set1*`, +`*Element*`, -`*Set2*`)`
: Equivalent to `ord_union(`*Set1*`, [`*Element*`], `*Set2*`)`, but a bit faster.

`ord_del_element(+`*Set1*`, +`*Element*`, -`*Set2*`)`
: Equivalent to `ord_subtract(`*Set1*`, [`*Element*`], `*Set2*`)`, but a bit faster.

`ord_disjoint(+`*Set1*`, +`*Set2*`)`
: is true when the two ordered sets have no element in common.

`ord_intersect(+`*Set1*`, +`*Set2*`)`
: is true when the two ordered sets have at least one element in common.

`ord_intersection(+`*Set1*`, +`*Set2*`, -`*Intersection*`)`
: is true when *Intersection* is the ordered representation of *Set1* and *Set2*, provided that *Set1* and *Set2* are ordered sets.

`ord_intersection(+`*Set1*`, +`*Set2*`, ?`*Intersection*`, ?`*Difference*`)`
: is true when *Intersection* is the intersection of *Set1* and *Set2*, and *Difference* is *Set2* \ *Set1* (like in ord_union/4), provided that *Set1* and *Set2* are ordered sets.

`ord_intersection(+`*ListOfSets*`, -`*Intersection*`)`
: is true when *ListOfSets* is a nonempty proper list of ordered sets and *Intersection* is their intersection.

`ord_member(+`*Elt*`, +`*Set*`)`
: is true when *Elt* is a member of *Set*. Suggested by Mark Johnson.

`ord_nonmember(+Item, +Set)`
: is true when the given *Item* is *not* an element of the given *Set*.

`ord_seteq(+Set1, +Set2)`
: is true when the two arguments represent the same set. Since they are assumed to be ordered representations, they must be identical.

`ord_setproduct(+Set1, +Set2, -Product)`
: If *Set1* and *Set2* are ordered sets, *Product* will be an ordered set of *x1-x2* pairs. Note that we cannot solve for *Set1* and *Set2*, because there are infinitely many solutions when *Product* is empty, and may be a large number in other cases. Could be defined as:

```
ord_setproduct(Set1, Set2, Product) :-
    (   foreach(H1,Set1),
        param(Set2),
        fromto(Product,P1,P3,[])
    do  (   foreach(H2,Set2),
            param(H1),
            fromto(P1,[H1-H2|P2],P2,P3)
        do  true
        )
    ).
```

`ord_subset(+Set1, +Set2)`
: is true when every element of the ordered set *Set1* appears in the ordered set *Set2*.

`ord_subtract(+Set1, +Set2, -Difference)`
: is true when *Difference* contains all and only the elements of *Set1* which are not also in *Set2*.

`ord_symdiff(+Set1, +Set2, -Difference)`
: is true when *Difference* is the symmetric difference of *Set1* and *Set2*.

`ord_disjoint_union(+Set1, +Set2, -Union)`
: is true when *Set1* and *Set2* (given to be ordered sets) have no element in common, and *Union* is their union. The meaning is the same as

```
ord_disjoint(Set1, Set2),
ord_union(Set1, Set2, Union)
```

but it is more efficient.

`ord_union(+Set1, +Set2, -Union)`
: is true when *Union* is the union of *Set1* and *Set2*. Note that when something occurs in both sets, we want to retain only one copy.

`ord_union(+OldSet, +NewSet, -Union, -ReallyNew)`
: is true when *Union* is *NewSet U OldSet* and *ReallyNew* is *NewSet \ OldSet*. This is useful when you have an iterative problem, and you're adding some possibly new elements (*NewSet*) to a set (*OldSet*), and as well as getting the updated set (*Union*) you would like to know which if any of the "new" elements didn't already occur in the set (*ReallyNew*).

`ord_union(+`*ListOfSets*`, -`*Union*`)`
: is true when *ListOfSets* is given as a proper list of ordered sets and *Union* is their union. Letting K be the length of *ListOfSets*, and N the sum of the sizes of its elements, the cost is $O(N \lg K)$.

`ordset_order(+`*Xs*`, +`*Ys*`, -`*R*`)`
: is true when R is `<`, `=`, or `>` according as *Xs* is a subset of *Ys*, equal to *Ys*, or a superset of *Ys*. *Xs* and *Ys* are ordered sets.

10.33 The PiLLoW Web Programming Library—`library(pillow)`

This third-party library is unsupported, and included '`as-is`'.

The PiLLoW library ("Programming in Logic Languages on the Web") is a free Internet/WWW programming library for Logic Programming Systems that simplifies the process of writing applications for such environment. The library provides facilities for generating HTML or XML structured documents by handling them as Prolog terms, producing HTML forms, writing form handlers, processing HTML templates, accessing and parsing WWW documents (either HTML or XML), accessing code posted at HTTP addresses, etc.

PiLLoW is documented in its own reference manual, located in `https://cliplab.org/Software/pillow/pillow.html`. The following points are worth noting wrt. the PiLLoW reference manual:

- PiLLoW is automatically installed with the SICStus Prolog distribution. No extra action needs to be taken.
- PilloW comes as a single library module, `library(pillow)`.

  This subsumes the various `load_package/1` and `use_module/1` queries mentioned in the PiLLoW reference manual.

Further information can be found at the PiLLoW home page, `https://cliplab.org/Software/pillow/pillow.html`.

10.34 Plunit Interface—`library(plunit)`

10.34.1 Introduction

This library module provides a Prolog unit-test framework, initially developed by Jan Wielemaker for SWI-Prolog. The code and documentation was subsequently adapted for SICStus Prolog by SICS. The module is a third-party product, and not part of SICStus Prolog proper.

Automatic testing of software during development is probably the most important Quality Assurance measure. Tests can validate the final system, which is nice for your users. However, most (Prolog) developers forget that it is not just a burden during development.

- Tests document how the code is supposed to be used.
- Tests can validate claims you make on the Prolog implementation. Writing a test makes the claim explicit.
- Tests avoid big applications saying "no" after modifications. This saves time during development, and it saves *a lot* of time if you must return to the application a few years later or you must modify and debug someone else's application.

10.34.2 A Unit Test Box

Tests are written in normal Prolog. A unit test is a named collection of individual tests, enclosed within the directives:

```
:- begin_tests(Unit[,Options]).
```

and:

```
:- end_tests(Unit).
```

They can be embedded inside a normal source module, or be placed in a separate test-file that loads the files to be tested. The individual tests are defined by rules of the form:

```
test(Name[,Options]) :- test-body.
```

where *Name* is a ground term and *Options* is a list describing additional properties of the test. Here is a very simple example:

```
:- use_module(library(lists)).

:- begin_tests(lists).

test(reverse) :-
        reverse([a,b], [b,a]).

:- end_tests(lists).
```

The optional second argument of the unit test declaration as well as of the individual test-heads defines additional processing options. The following options are available:

`blocked(`*Reason*`)`

The test is currently disabled. Tests are flagged as blocked if they cannot be run for some reason. E.g. they crash Prolog, they rely on some service that is not available, they take too much resources, etc. Tests that fail but do not crash, etc. should be flagged using `fixme(`*Fixme*`)`. *Reason* should be an atom.

If this option appears more than once in a list of options, all but one of the occurrences are silently ignored.

`fixme(`*Reason*`)`

Similar to `blocked(`*Fixme*`)`, but the test is executed anyway. A summary is printed at the end of the test run. *Reason* should be an atom.

If this option appears more than once in a list of options, all but one of the occurrences are silently ignored.

`condition(`*Goal*`)`

Precondition for running the test. If the condition fails, then the test is skipped. The condition can be used as an alternative to the `setup` option. The only difference is that failure of a condition skips the test and is considered an error when using the `setup` option. *Goal* should be a callable.

If this option appears more than once in a list of options, the occurrences are combined into a conjunction, in the order they appear.

`nondet`

Available for individual test rules only. Unless this keyword appears in the option list, nondeterminate success of the test-body is considered an error.

It is an error to specify this more than once in a list of options.

`forall(`*Generator*`)`

Available for individual test rules only. Runs the same test for each solution of *Generator*. Each run invokes the `setup` and `cleanup` handlers. This can be used to run the same test with different inputs. If an error occurs, then the test is reported as '`name (forall bindings = `*vars*`)`', where *vars* indicates the bindings of variables in *Generator*, which should be a callable.

It is an error to specify this more than once in a list of options.

`setup(`*Goal*`)`

Goal is run before the test-body. Typically used together with the `cleanup` option to create and destroy the required execution environment. *Goal* should be a callable.

If this option appears more than once in a list of options, the occurrences are combined into a conjunction, in the order they appear.

`cleanup(`*Goal*`)`

Goal is always called after completion of the test-body, regardless of whether it fails, succeeds or raises an exception. This option or `call_cleanup/2` must be used by tests that require side effects that must be reverted after the test completes. *Goal* may share variables with a setup option and should be a callable.

If this option appears more than once in a list of options, the occurrences are combined into a conjunction, in the order they appear.

```
:- use_module(library(file_systems)).

:- begin_tests(hello).

create_file(Tmp) :-
        open(temp(plunit), write, Out, [if_exists(generate_unique_name)]),
        current_stream(Tmp, write, Out),
        portray_clause(Out, hello(_World)),
        close(Out).

test(read, [setup(create_file(Tmp)), cleanup(delete_file(Tmp))]) :-
        see(Tmp),
        read(Term),
        seen,
        Term = hello(_).

:- end_tests(hello).
```

Please note: Do not place directives that load source code between `:- begin_tests(`*Unit*`[,`*Options*`])` and `:- end_tests(`*Unit*`)`. Loading source files in this context can cause spurious error messages.

The following options specify how to verify the result of the test-body, and are only available for individual test rules. Unless stated otherwise, it is an error if more than one of them appears in a list of options. In some cases there are additional restrictions on which options can appear together.

`true`
`true(`*Test*`)`

The test-body as well as the goal *Test* must succeed. *Test* defaults to `true` and should be a callable that typically shares variables with the test-body. This is the same as inserting the test at the end of the conjunction, but makes the test harness print a "wrong answer" message as opposed to a general failure message.

If this option appears more than once in a list of options, the occurrences are combined into a conjunction, in the order they appear.

```
test(badadd, [true(A =:= 4)]) :-
        A is 1 + 2.
```

will yield the error message:

```
! /home/matsc/sicstus4/doc/foo.pl:11:
!       test badadd: wrong answer (compared using =:=)
!     Expected: 4
!     Got:      3
```

`all(`*AnswerTerm Cmp Instances*`)`

Similar to `true(`*AnswerTerm Cmp Instances*`)`, but used if you want to collect all solutions to a nondeterminate test. *AnswerTerm* should share variables with the test-body. Let *All* be the list of instances of *AnswerTerm* for each solution. Then the goal *Cmp*`(`*All*`,`*Instances*`)` must succeed. The tests in the example below are equivalent.

It is an error to specify this together with `nondet`.

```
test(all1, all(X == [1,2])) :-
        (X = 1 ; X = 2).

test(all2, true(Xs == [1,2])) :-
        findall(X, (X = 1 ; X = 2), Xs).
```

`set(`*AnswerTerm Cmp Instances*`)`

Similar to `all(`*AnswerTerm Cmp Instances*`)`, but sorts the *AnswerTerm* instances before the comparison. The tests in the example below are equivalent.

It is an error to specify this together with `nondet`.

```
test(set1, set(X == [1,2])) :-
        (X = 2 ; X = 1 ; X = 1).

test(set2, true(Ys == [1,2])) :-
        findall(X, (X = 2 ; X = 1 ; X = 1), Xs),
        sort(Xs, Ys).
```

`fail`

The test-body must fail.

It is an error to specify this together with `nondet`.

`exception(`*Expected*`)`
`throws(`*Expected*`)`

The test-body must raise an exception *Raised* that is checked wrt. *Expected* using `subsumes_term(`*Expected*`,` *Raised*`)`. I.e. the raised exception must be more specific than the specified *Expected*.

It is an error to specify this together with `nondet`.

`error(`*ISO*`)`
`error(`*ISO*`,`*Info*`)`

A shorthand for `exception(error(`*ISO*`,`*Info*`))`. *Info* defaults to an anonymous variable.

It is an error to specify this together with `nondet`.

10.34.3 Writing the Test-Body

The test-body is ordinary Prolog code. Without any options, the test-body must be designed to succeed *determinately*. Any other result is considered a failure. One of the options `fail`, `true`, `exception`, `throws` or `error` can be used to specify a different expected result. In this subsection we illustrate typical test-scenarios by testing built-in and library predicates.

10.34.3.1 Determinate Tests

Determinate tests are tests that must succeed exactly once, leaving no choicepoints behind. The test-body supplies proper values for the input arguments and verifies the output arguments. Verification can use test-options or be explicit in the test-body. The tests in the example below are equivalent.

```
test(add1) :-
        A is 1 + 2,
        A =:= 3.

test(add2, [true(A =:= 3)]) :-
        A is 1 + 2.
```

The test engine verifies that the test-body does not leave a choicepoint. We illustrate this using the test below:

```
test(member1) :-
        member(b, [a,b,c]).
```

Although this test succeeds, `member/2` leaves a choicepoint behind, which is reported by the test harness. To make the test silent, use one of the alternatives below.

```
test(member2) :-
        memberchk(b, [a,b,c]).

test(member3) :-
        member(b, [a,b,c]), !.

test(member4, [nondet]) :-
        member(b, [a,b,c]).
```

10.34.3.2 Nondeterminate Tests

Nondeterminate tests succeed zero or more times. Their results can be tested using `findall/3` followed by a value-check. The following are equivalent tests:

```
test(member5) :-
        findall(X, member(X, [a,b,c]), Xs),
        Xs == [a,b,c].

test(member6, true(Xs == [a,b,c])) :-
        findall(X, member(X, [a,b,c]), Xs).
```

10.34.3.3 Tests Expected to Fail

Tests that are expected to fail may be specified using the option `fail` or by negating the test-body using `\+`.

```
test(is_set) :-
        \+ is_set([a,a]).

test(is_set, [fail]) :-
        is_set([a,a]).
```

10.34.3.4 Tests Expected to Raise Exceptions

Tests that are expected to raise exceptions may be specified using the option `exception(`*`Expected`*`)` or one of its equivalents, or by wrapping the test in `on_exception/3` or `catch/3`. The following tests are equivalent:

```
test(div01) :-
     catch(A is 1/0, Excp, true),
     subsumes_term(error(evaluation_error(zero_divisor),_), Excp).

test(div02, [error(evaluation_error(zero_divisor))]) :-
     A is 1/0.

test(div03, [error(evaluation_error(zero_divisor),_)]) :-
     A is 1/0.

test(div04, [exception(error(evaluation_error(zero_divisor),_))]) :-
     A is 1/0.

test(div05, [throws(error(evaluation_error(zero_divisor),_))]) :-
     A is 1/0.
```

10.34.4 Running the Test-Suite

At any time, the tests can be executed by loading the program and running `run_tests/[0,1,2]`:

`run_tests`
: Run all individual tests of all test-units.

`run_tests(`*`Spec`*`)`
`run_tests(`*`Spec`*`,`*`Options`*`)`
: Run only the specified tests. The following options are available:

  `quiet` Suppresses informational messages.

  `verbose` Prints informational messages, e.g. messages for each successful test. This is the default.

  `passed(Count)`
  `failed(Count)`
  `skipped(Count)`
  : Binds *Count* to the number of non-blocked tests that were successful, failed or skipped, respectively. A test is skipped if one of its conditions fails.

The following will quietly run all tests, but print messages and fail if any of the tests were unsuccessful.

```
| ?- run_tests(all, [failed(0), quiet]).
```

Spec should be one of:

- The atom `all`, to run all tests. This is the default i.e. what `run_tests/0` does.
- a term *Unit* where *Unit* is the name of a test-unit, denotes all individual tests of the test-unit *Unit*, or
- a term *Unit:Test* where *Unit* is the name of a test-unit and *Test* is one of its individual tests, denotes the given test only, or
- a term *Unit:List* where *Unit* is the name of a test-unit and *List* is a list of its individual tests, denotes the given list of tests, or
- finally, a list of terms of one of the above forms.

Running single tests is particularly useful for tracing a test, e.g.:

```
| ?- trace, run_tests(lists:reverse).
```

`run_tests/[0,1,2]` prints a report during execution. The `quiet` options suppresses informational messages; in its absence, messages are printed in full as follows.

First, each test-unit report begins with a header:

```
% PL-Unit: Unit
```

Then comes a message (success or failure) for all specified tests not marked as `blocked` or `fixme`. Success messages are informational; others are error or warning messages. Any errors encountered while executing options are also reported. To close the test-unit, a footer is printed:

```
% done
```

After all test-units, a summary report is printed, stating:

- how many tests passed resp. failed and how may test were skipped
- which tests were blocked
- details for each test marked as `fixme`

10.34.5 Tests and Production Systems

Most applications do not want the test-suite to end up in the final application. There are several ways to achieve this. One way is to place all tests in separate files and not to load the tests when creating the production environment. Another way is to wrap each unit test box in a pair of `:- if(...)`, `:- endif` directives. For example, the test could be whether the `plunit` module has been loaded:

```
:- if(current_module(plunit)).
:- begin_tests(Unit[,Options]).
...
:- end_tests(Unit).
:- endif.
```

Alternatively, you can reserve a system property e.g. `enable_unit_tests` to control whether unit tests should be enabled. The property is enabled if you run SICStus Prolog as:

```
% sicstus -Denable_unit_tests=true
```

Then your Prolog source file could have the structure:

```
:- use_module(library(system), [environ/2]).

...

:- if(environ(enable_unit_tests, true)).
:- use_module(library(plunit)).
:- begin_tests(Unit[,Options])
...
:- end_tests(Unit)
:- endif.
```

10.35 Process Utilities—`library(process)`

This package contains utilities for process creation.

A process is represented by a *process reference*, a ground compound term. Both SICStus and the operating system maintain a state for each such process reference and they must therefore be released, either explicitly with `process_release/1` or implicitly by `process_wait/[2,3]`. Process references are created with `process_create/[2,3]` if explicitly requested with the `process/1` option. Process references are required in order to obtain the exit status of a process after `process_create/[2,3]` has returned.

Many of the predicates can accept a numeric operating system process id ("PID") but since process ids are subject to re-use by the OS this is less reliable and does not work if the process has already exited.

10.35.1 Examples

The following illustrates some common tasks. The process library is portable and works on all supported platforms, including UNIX, Linux and Windows. However, the examples are by necessity platform dependent. Unless otherwise noted, the examples will work on UNIX and similar systems only.

(If you are looking for something like the old SICStus 3 `system:system/1` and `system:popen/3`, See [unsafe_system], page 761.)

1. All the examples assume that you have first made this library available using e.g.
   ```
   | ?- use_module(library(process)).
   ```
2. Run the `date` command in the standard shell '`sh`'. The output of the command is sent to the terminal:
   ```
   | ?- process_create(path(sh),
        ['-c', date]).
   ```
3. Run the `date` command in the standard shell '`sh`'. Wait for the command to terminate before returning to Prolog. Fail if the process gets an error. The output of the command is sent to the terminal:
   ```
   | ?- process_create(path(sh),
        ['-c', date], [wait(exit(0))]).
   ```
   Using `wait/1` option in this way is a convenient way to ensure that the command has finished before Prolog continues.
4. Run the `date` command in the standard shell '`sh`'. The output of the command is received by Prolog:
   ```
   | ?- process_create(path(sh),
        ['-c', date], [stdout(pipe(S))]),
        read_line(S,L), close(S), atom_codes(Date,L).
   ...,
   Date = 'Fri Jan 24 12:59:26 CET 2014' ?
   ```
5. Pipe the output of the `date` command to a file:
   ```
   | ?- process_create(path(sh),
        ['-c', [date, '>', file('/tmp/foo.txt')]]).
   ```

6. Count the number of words in an atom, using the `wc` command:

```
| ?- process_create(path(wc), ['-w'],
     [stdin(pipe(In)), stdout(pipe(Out))]),
     write(In, 'a b c\n'), close(In),
     read_line(Out, L), close(Out), number_codes(N, L).
...
N = 3
```

   It may be preferable to let the input or output go via a file. This avoids deadlock in case the stream buffers fill up.

7. Count the number of unique words in a file, piping the output of the `uniq` command to the `wc` command:

```
| ?- process_create(path(sh),
     ['-c', ['uniq ', file('/tmp/foo.txt'), ' | wc -w']],
     [stdout(pipe(Out))]),
     read_line(Out, L), close(Out), number_codes(N, L).
...
N = 6
```

   Note that quoting is a problem (and potential security issue), so **never** pass untrusted data, like file names, to the shell using `-c` (see [Quoting and Security], page 760).

8. Run the `make` command with the `-n` (dry run) option, discarding output, fail if it does not succeed:

```
| ?- process_create(path(make), ['-n'],
     [stdout(null), wait(Exit)]),
     Exit = exit(0).
```

   By using the `wait/1` option, `process_create/3` will not return until the subprocess has exited and its exit status is available.

9. Run `ls` on a home directory in a subshell using the user's preferred shell:

```
| ?- process_create('$SHELL', ['-c', [ls, ' ', file('~/') ]]).
```

10. Run a command with output piped from a file and input provided by Prolog. This is similar to `popen('cat > ./myscript.sh',write,S)` in SICStus 3. This example also shows one way to create a shell script which is useful when more advanced shell interaction is needed. (The created script outputs the most common line in its input. It is used in the next example.)

```
| ?- process_create(path(sh),
     ['-c',
     'cat > ./myscript.sh && chmod a+x ./myscript.sh'],
     [stdin(pipe(S))]),
     write(S, '#! /bin/sh\n'),
     write(S, 'sort | uniq -c | sort -nr | head -n 1\n'),
     close(S).
```

    Please read [Quoting and Security], page 760, for problems with this approach.

11. Run a shell script with input piped from a file and output read by Prolog. This is similar to `popen('./myscript.sh < ./somefile.txt',read,S)` in SICStus 3.

```
| ?- open('somefile.txt',write,OF),
     write(OF,'hello\nworld\nhello\nhello\n'),close(OF),
     process_create(path(sh),
     ['-c', './myscript.sh < ./somefile.txt'],
     read_line(S, L), atom_codes(Line, L), close(S).
...,
Line = '   3 hello' ?
```

Please read [Quoting and Security], page 760, for problems with this approach.

12. Run a goal in a SICStus subprocess (UNIX and Windows):

```
| ?- process_create(application(sicstus),
     ['-f', '--noinfo', '--nologo',
     '--goal', 'read(X), call(X), halt.'],
     [stdin(pipe(In)), stdout(pipe(Out))]),
     format(In,'~q .~n', [(length([h,e,l,l,o], Len),
                           format('~q .~n', [Len]))]),
     close(In), read(Out,Answer), close(Out).
...,
Answer = 5
```

13. Run `notepad.exe` on a file `C:/foo.txt` under Windows:

```
| ?- process_create('$SYSTEMROOT/notepad.exe',
     [file('C:/foo.txt')]).
```

14. Open the default command shell under Linux or macOS:

```
| ?- process_create('$SHELL', [], [wait(Result)]).
$ echo 'Hello World'
Hello World
$ exit 42
exit
Result = exit(42) ?
yes
| ?-
```

Note that it is importart to use the `wait/1` option (or `process_wait/[2,3]`) so that the Prolog toplevel does not attempt to read from the same input stream as the subprocess.

15. Open the default command shell under Windows, in the same command window as that used by SICStus:

```
| ?- process_create('$COMSPEC',[],[wait(Result)]).
Microsoft Windows [Version 10.0.19043.1566]
(c) Microsoft Corporation. All rights reserved.

c:\>ECHO "Hello World"
"Hello World"

c:\>exit 42
Result = exit(42) ?
yes
| ?-
```

Note that it is importart to use the `wait/1` option (or `process_wait/[2,3]`) so that the Prolog toplevel does not attempt to read from the same input stream as the sub-process.

16. Open a command shell in a separate window under Windows, without waiting for the sub-process to exit:

```
| ?- process_create('$COMSPEC',[],[window(true)]).
```

10.35.1.1 Microsoft Windows Shell

On Windows, it is not possible to pass multiple parameters to a subprocess. When a subprocess is started, it receives exactly one argument and a quoting convention must be used to encode the parameters as the single argument actually passed to the process.

Unfortunately, there is no such universal quoting convention, every program can interpret its (single) argument in any way it sees fit.

Most programs use a convention established by the Microsoft C library. This is the convention used by `process_create/[2,3]` and it usually works well.

However, the command processor on Windows (`cmd.exe`) does not use the common convention and, except for very simple cases, passing arguments to `cmd.exe` will not work reliably.

Please note: Passing arguments to `cmd.exe` suffers from the same security vulnerabilities as those described in [Quoting and Security], page 760, below.

If you want to run commands using `cmd.exe`, it is best to create a batch (‘`.bat`’) file with your commands and then tell `cmd.exe` to run the batch file.

The following example illustrates how to create a Windows batch file that pipes some output to a file (`COMSPEC` is an environment variable containing the path to `cmd.exe`):

```
| ?- BatFileName='test.bat',
     open(BatFileName, write, S),
     write(S, 'date /T > "result.txt"\n'), close(S),
     process_create('$COMSPEC', ['/Q', '/C', file(BatFileName)],
     [wait(exit(0))]),
     open('result.txt', read, R),
     read_line(R,L),close(R),atom_codes(Date,L).
...,
Date = '2014-01-27 ',
... ?
```

More recent versions of Windows come with a redesigned command line processor, '`PowerShell`', which solves the problems associated with the traditional `cmd.exe` command line processor. In particular, it has a very general way to encode command line arguments, using '`base-64`' encoding. Currently, there is no direct support for PowerShell in this library, but the following example shows how to get the current week day both using a plain text command and with a base-64-encoded command

```
| ?- Command = '(get-date).DayOfWeek',
     process_create(path(powershell),
     ['-Command', Command],
     [stdout(pipe(S))]),
     read_line(S,L),atom_codes(Day,L).
...,
Day = 'Monday',
... ?

| ?- EncodedCommand =
       'KABnAGUAdAAtAGQAYQBOAGUAKQAuAEQAYQB5AE8AZgBXAGUAZQBrAA==',
     process_create(path(powershell),
     ['-encodedCommand', EncodedCommand],
     [stdout(pipe(S))]),
     read_line(S,L),atom_codes(Day,L).
...,
Day = 'Monday',
... ?
```

where the *EncodedCommand* value was created by encoding the string `'(get-date).DayOfWeek'` using Base 64. See the PowerShell documentation for details.

10.35.2 Quoting and Security

It easy to get undesired, and possibly harmful, effects if arbitrary data is passed without proper quoting to a shell. For instance, accepting arbitrary file names and passing them as part of a command line to a subshell can cause the shell to execute arbitrary, possibly malicious, code.

The following, vulnerable, predicates suffer from this problem. They are similar to predicates that existed in SICStus 3, and their fragility is one of the reasons process interaction was redesigned in SICStus 4.

```
% DO NOT USE. This code is vulnerable.
% Similar to system:system/1 in SICStus 3.
unsafe_system(Cmd) :-
   % pass Cmd to shell, wait for exit, fail on error.
   process_create(path(sh), ['-c', Cmd], [wait(exit(0))]).

% DO NOT USE. This code is vulnerable.
% Similar to system:popen/3 in SICStus 3.
unsafe_popen(Cmd, Direction, Pipe) :-
   % pass Cmd to shell, do not wait for exit,
   % connect to stdin or stdout of subprocess.
   ( Direction == read ->
     process_create(path(sh), ['-c', Cmd], [stdout(pipe(Pipe))])
   ; Direction == write ->
     process_create(path(sh), ['-c', Cmd], [stdin(pipe(Pipe))])
   ).
```

Now consider the task of passing the contents of some file *File* to a command `mycommand`. You may think the following is a good idea (it is not!):

```
% DO NOT USE. This code is vulnerable.
unsafe_command(File, S) :-
   atom_concat('./mycommand < ', File, Cmd),
   unsafe_popen(Cmd, read, S).
```

That works as expected if the `File` argument is a plain file with no characters that has special meaning to the shell, e.g.

```
File = './somefile.txt',
unsafe_command(File, S), read_line(S,L),close(S).
```

However, assume that the file name was obtained from some untrusted source and consider the following example:

```
File = '$(say bohoo)',
unsafe_command(File, S), read_line(S,L),close(S).
```

depending on the system this can have a quite scary effect, and illustrates how shell meta characters in the constructed command line can lead to potentially dangerous results.

The safest way to interact with the shell is to create shell scripts and pass arguments to the scripts as separate arguments to the shell. E.g.

```
% A safer version
safer_command(File, S) :-
   % pass the file as the first argument to mycommand.
   process_create(path(sh),
                  ['-c', file('./mycommand'), file(File)],
                  [stdout(pipe(S))]).
```

Exported predicates:

`process_create(+`*File*`, +`*Args*`)`
`process_create(+`*File*`, +`*Args*`, :`*Options*`)`

Start a new process running the program identified by *File* and the arguments specified in *Args*. The standard streams of the new process can be redirected to prolog streams. The exit status of the process can be obtained with `process_wait/[2,3]`.

File, is expanded as if by `absolute_file_name/2` (with arguments `access(execute)` and `file_type(executable)`) and is used to locate the file to execute.

The predefined file search path `path/1` (see Section 4.5 [ref-fdi], page 99) is especially useful here since it makes it easy to look up the names of an executable in the directories mentioned by the `PATH` environment variable. To run the Windows command shell `cmd` you would simply specify `path('cmd.exe')` (or `path(cmd)`), to start the UNIX Bash shell you would specify `path(bash)`.

Args is a list of argument specifications. Each argument specification is either a simple argument specification, see below, or a non-empty list of simple argument specifications. The expanded value of each element of *Args* is concatenated to produce a single argument to the new process. A *simple argument specification* can be one of:

an atom
: The atom name is used as the expanded value. Some operating systems only support 7-bit ASCII characters here. Even when some larger subset of Unicode is used it may not work correctly with all programs.

`file(`*File*`)`
: *File*, an atom, is treated as a file name and subject to an operating system specific transformation to ensure file name syntax and character set is appropriate for the new process. This is especially important under Windows where it ensures that the full Windows Unicode character set can be used.

  Please note: The *File* part of `file(`*File*`)` is not subject to syntactic rewriting, the argument specification `file/1` only adjusts for differences in file name syntax and character encoding between SICStus and the operating system. You must explicitly call `absolute_file_name/[2,3]` if you want to expand file search paths etc.

Options is a list of options:

`stdin(`*Spec*`)`
`stdout(`*Spec*`)`
`stderr(`*Spec*`)`
Each *Spec* specifies how the corresponding standard stream of the new process should be created. *Spec* can be one of:

`std` The new process shares the (OS level) standard stream with the Prolog process. This is the default. Note that, especially under Windows, the Prolog process may not have any OS level standard streams, or the OS streams may not be connected to a console or terminal. In such a case you need to use `pipe/[1,2]` spec, see below, and explicitly read (write) data from (to) the process.

`null` The stream is redirected to a null stream, i.e. a stream that discards written data and that is always at end of file when read.

`pipe(`*Stream*`)` *since release 4.0*
`pipe(`*Stream*`, `*StreamOptions*`)` *since release 4.3.2*
A new Prolog stream is created and connected to the corresponding stream of the new process. *StreamOptions* is a list of options affecting the created stream. The supported stream options are: `type/1`, `eol/1`, and `encoding/1`, with the same meaning as for `open/4` (see Section 11.3.148 [mpg-ref-open], page 1154).

The default, if no stream options are specified, is to use a text stream with the OS default character encoding.

This stream must be closed using `close/[1,2]`, it is not closed automatically when the new process exits.

`wait(-`*ExitStatus*`)` *since release 4.3*
The call will not return until the sub-process has terminated. *ExitStatus* will be bound to the exit status of the process, as described for `process_wait/2`.

`process(`*Proc*`)`
Proc will be bound to a process reference that can be used in calls to `process_wait/[2,3]` etc.. This process reference must be released, either explicitly with `process_release/1` or implicitly by `process_wait/[2,3]`. It is often easier to use the `wait/1` option if you just want to wait for the process to terminate.

`detached(`*Bool*`)`
Bool is either `true` or `false`. Specifies whether the new process should be "detached", i.e. whether it should be notified of terminal events such as `^C` interrupts. By default a new process is created detached if none of the standard streams are specified, explicitly or implicitly, as `std`.

`cwd(`*CWD*`)`

CWD is expanded as if by `absolute_file_name/2` and is used as the working directory for the new process.

By default, the working directory is the same as the Prolog working directory.

`window(`*Bool*`)`

Bool is either `true` or `false` (the default). Specifies whether the process should open in its own window.

Specifying `window(true)` may give unexpected results if the standard stream options `stdin/1`, `stdout/1` and `stderr/1` are specified with anything but their default value `std`.

Currently only implemented on Windows.

`environment(`*Env*`)` *since release 4.1*

Env is a list of *`VAR=VALUE`* for extra environment variables to pass to the sub-process in addition to the default process environment. *VAR* should be an atom. *VALUE* should be an argument specification, as described above. The *VALUE* is typically an atom but, especially on the Windows platform, it may be necessary to wrap file names in `file/1` to ensure file paths are converted to the native format. See Section "System Properties and Environment Variables" in *the SICStus Prolog Manual*, for more information.

`process_wait(+`*Process*`, -`*ExitStatus*`)`
`process_wait(+`*Process*`, -`*ExitStatus*`, +`*Options*`)`

Wait for a process to exit and obtain the exit status.

Process is either a process reference obtained from `process_create/3` or an OS process identifier. Specifying a process identifier is not reliable. The process identifier may have been re-used by the operating system. Under Windows, it is not possible to obtain the exit status using a process identifier if the process has already exited.

ExitStatus is one of:

`exit(`*ExitCode*`)`

The process has exited with exit code *ExitCode*. By convention processes use exit code zero to signify success and a (positive) nonzero value to specify failure.

`killed(`*SignalNumber*`)`

UNIX only, the process was killed by signal `SignalNumber` (a positive integer).

`timeout` The `timeout/1` option was specified and the process did not exit within the specified interval. In this case the process reference is not released, even if the `release/1` option is specified.

Options is a list of options:

`timeout(`*Seconds*`)`
: Specify a maximum time, in seconds, to wait for the process to terminate. *Seconds* should be an integer or floating point number or the atom `infinite` (the default) to specify infinite wait. If the specified timeout interval passes before the process exits, `process_wait/3` exits with *ExitStatus* set to `timeout` and the process reference is not released.

  Currently the UNIX implementation supports only timeout values 0 (zero) and `infinite`.

`release(`*Bool*`)`
: *Bool* is either `true` (the default) or `false`. Specifies whether the process reference should be released when `process_wait/3` exits successfully.

`process_id(-`*PID*`)`
: Obtain the process identifier of the current (i.e. Prolog) process.

`process_id(+`*Process*`, -`*PID*`)`
: Obtain the process identifier of the process reference *Process*.

`is_process(+`*Thing*`)`
: Returns true if *Thing* is a process reference that has not been released.

`process_release(+`*Process*`)`
: Release a process reference *Process* that has previously been obtained from `process_create/3`. This ensures that Prolog and the operating system can reclaim any resources associated with the process reference.

  Usually you would not call this. Either do not request the process reference when calling `process_create/3` or let `process_wait/[2,3]` reclaim the process reference when the process terminates.

`process_kill(+`*Process*`)`
`process_kill(+`*Process*`, +`*SignalSpec*`)`
: Send a signal to the process designated by *Process*. The signal can either be a non-negative integer or a signal name as an (all uppercase) atom.

  The following signal names are accepted under UNIX if the platform defines them: `SIGABRT`, `SIGALRM`, `SIGBUS`, `SIGCHLD`, `SIGCONT`, `SIGFPE`, `SIGHUP`, `SIGILL`, `SIGINT`, `SIGKILL` (the default), `SIGPIPE`, `SIGPOLL`, `SIGPROF`, `SIGQUIT`, `SIGSEGV`, `SIGSTOP`, `SIGSYS`, `SIGTERM`, `SIGTRAP`, `SIGTSTP`, `SIGTTIN`, `SIGTTOU`, `SIGURG`, `SIGUSR1`, `SIGUSR2`, `SIGVTALRM`, `SIGXCPU` and `SIGXFSZ`. However, many of these do not make sense to send as signals.

  Under Windows, which does not have the signal concept, the signal name `SIGKILL` (the default) is treated specially and terminates the process with `TerminateProcess(Process, -1)`. **Please note**: Using `process_kill/[2,3]` on Windows is not recommended. Also, on Windows, the call may throw an error if the process has already exited.

10.36 PrologBeans Interface—`library(prologbeans)`

10.36.1 Introduction

Please note: You should always take the security implications into account if exposing any service to untrusted clients, e.g. on Internet.

PrologBeans is a package for integrating Prolog with applications written in other languages. Currently Java and .NET are supported. PrologBeans is based on running Prolog as a separate server process, and the other part of the application as a client process. This makes PrologBeans automatically distributable since the server and the client can run on different computers anywhere on the Internet.

PrologBeans is designed to be used when client applications need to send queries to a Prolog server (and less intended for showing a GUI from a Prolog program). One typical

application would be to connect a Java or .NET based web application to a Prolog server (see examples later).

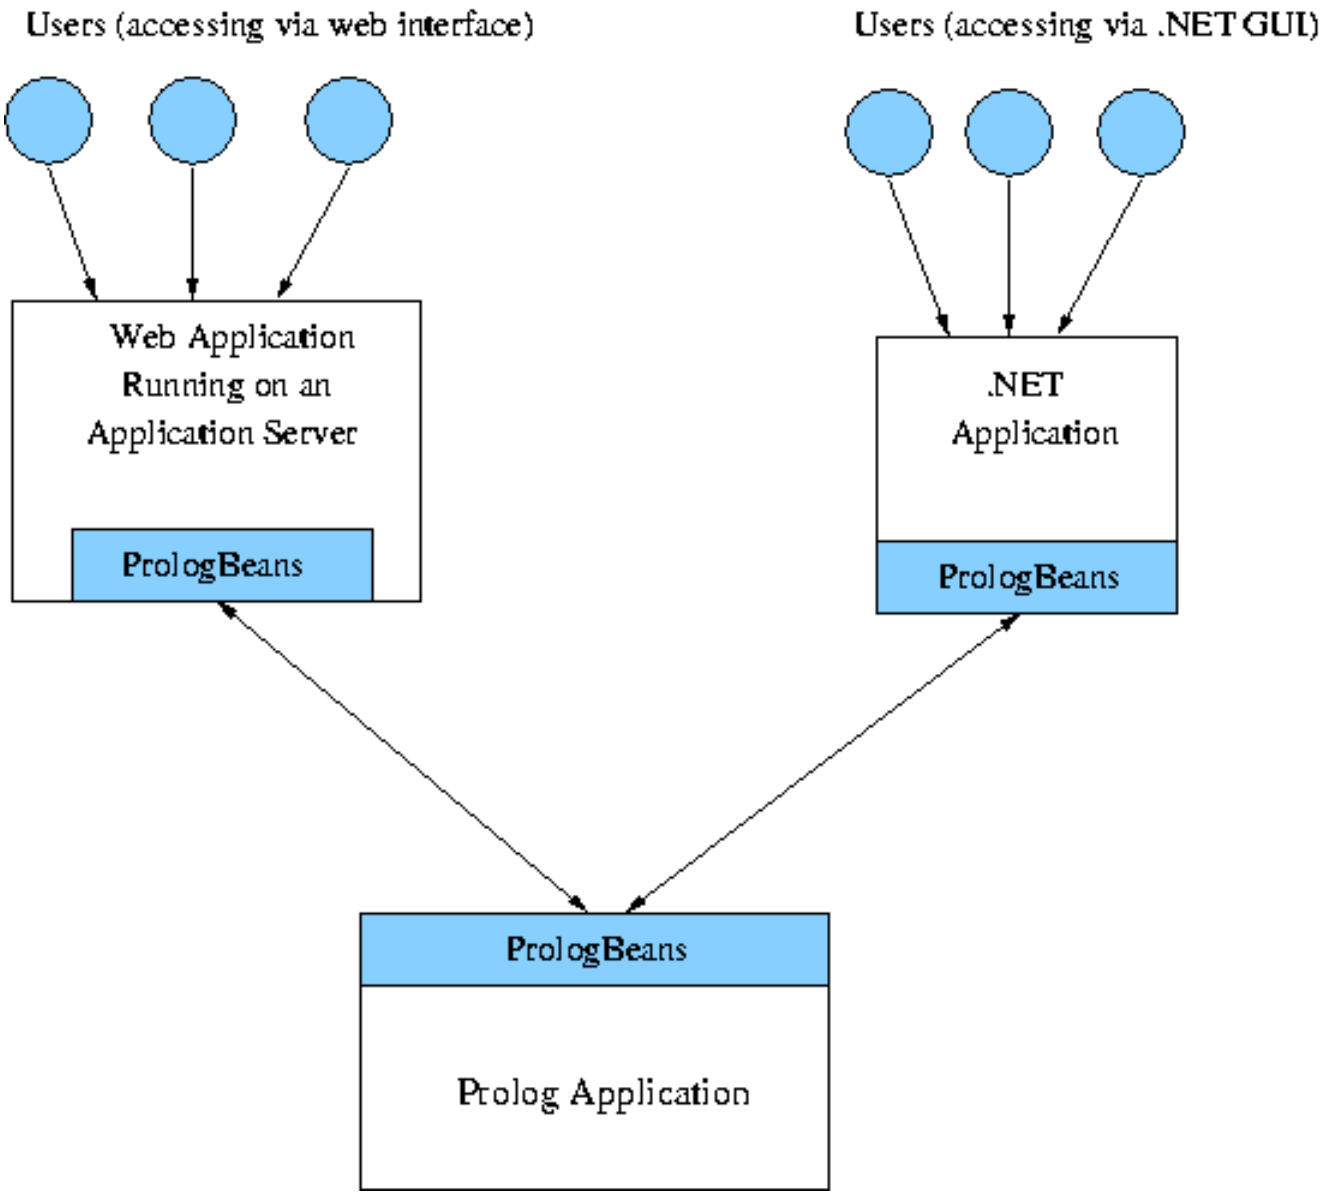

PrologBeans setup where the Prolog application serves several users accessing both via a web application server and a .NET GUI.

The PrologBeans package consists of two parts. The Prolog server is a library module, `library(prologbeans)`. The client is a class library, `prologbeans.jar` for Java (installed on all platforms), and `prologbeans.dll` for .NET (only installed on Microsoft Windows platforms).

Please note: The newer `library('jsonrpc/jsonrpc_server')` (see Section 10.21 [libjsonrpc], page 623) is probably an easier way to expose a Prolog program to a client written in some other programming language. One advantage is that it uses a standardized, text-based, protocol for communication, which makes it easier to integrate with arbitrary client languages (not just Java and C#), test, and troubleshoot. Another advantage is that the JSON-RPC library gives the client access to the full power of Prolog, including backtracking and constrained variables.

10.36.2 Features

The current version of PrologBeans is designed to be used mainly as a connection from the client (Java or .NET) to Prolog. Current features are:

- Socket based communication [Java and .NET]
- Allows the client application and Prolog server to run on different machines [Java and .NET]
- Multiple client applications can connect to same Prolog server [Java and .NET]
- Client applications can make use of several Prolog servers [Java and .NET]
- Allows Java Applets to access Prolog server [Java]
- Platform independent (e.g. any platform where Prolog and Java or .NET exist) [Java and .NET]
- Simplifies the use of Prolog in Java application servers (Tomcat, etc) [Java]
- Prohibits unwanted use of Prolog server by host control (only specified hosts can access the Prolog server) [Java and .NET]
- Supports Java servlet sessions [Java]
- Supports JNDI lookup (Java Naming and Directory Interface) [Java]
- Supports .NET server pages (ASPX). [.NET]

10.36.3 A First Example

This section provides an example to illustrate how PrologBeans can be used. This application has a simple Java GUI where the user can enter expressions that will be evaluated by an expression evaluation server.

```
import java.awt.*;
import java.awt.event.*;
import javax.swing.*;
import se.sics.prologbeans.*;

public class EvaluateGUI implements ActionListener {

  private JTextArea text = new JTextArea(20, 40);
  private JTextField input = new JTextField(36);
  private JButton evaluate = new JButton("Evaluate");
  private PrologSession session = new PrologSession();

  public EvaluateGUI() throws java.io.IOException
    {
    if ((Integer.getInteger("se.sics.prologbeans.debug", 0)).intValue() != 0) {
          session.setTimeout(0);
      }
    JFrame frame = new JFrame("Prolog Evaluator");
    Container panel = frame.getContentPane();
    panel.add(new JScrollPane(text), BorderLayout.CENTER);
    JPanel inputPanel = new JPanel(new BorderLayout());
    inputPanel.add(input, BorderLayout.CENTER);
    inputPanel.add(evaluate, BorderLayout.EAST);
    panel.add(inputPanel, BorderLayout. SOUTH);
    text.setEditable(false);
    evaluate.addActionListener(this);
    input.addActionListener(this);

    frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
    frame.pack();
    frame.setVisible(true);

    session.connect();
  }

  public void actionPerformed(ActionEvent event) {
    try {
      Bindings bindings = new Bindings().bind("E",
                          input.getText() + '.');
      QueryAnswer answer =
        session.executeQuery("evaluate(E,R)", bindings);
      PBTerm result = answer.getValue("R");
      if (result != null) {
        text.append(input.getText() + " = " + result + '\n');
        input.setText("");
      } else {
        text.append("Error: " + answer.getError() + '\n');
      }
    } catch (Exception e) {
      text.append("Error when querying Prolog Server: " +
                  e.getMessage() + '\n');
      e.printStackTrace();
    }
```

The Java code above first sets up the GUI with a text area for showing results, a text field for entering expressions, and a button for requesting an evaluation (the constructor `EvaluateGUI()`). It will also add itself as `ActionListener` on both the text field and the button. The method `actionPerformed(ActionEvent event)` will be called whenever the user has pressed `RET` or clicked on the button. `actionPerformed` first binds the variable E to the value of the text field, and then sends the query to the Prolog server with `session.executeQuery("evaluate(E,R)", bindings);`. If everything goes well, then the Prolog server will return an answer (bound to R), which will be appended to the text area.

```
:- module(evaluate,[main/0,my_predicate/2]).
:- use_module(library(prologbeans)).
:- use_module(library(codesio), [read_from_codes/2]).

%% Register acceptable queries and start the server (using default port)
main:-
    register_query(evaluate(C,P), my_predicate(C,P)),
    start.

%% We have received a code list
%% which needs to be converted into an expression
my_predicate(Chars, P) :-
    read_from_codes(Chars, X),
    P is X.
```

The Prolog code above first defines the module and imports the needed modules. Then, in the `main/0` predicate, it configures the server to answer queries on the form `evaluate(C,P)` and starts the server. The last few lines defines the predicate `my_predicate(Chars, P)`, which is the predicate that performs the evaluation. Note that, here, the expression to evaluate is represented as a code list and must be converted into a term before evaluation.

In general, arbitrary Prolog terms can be passed to the client via this mechanism, including terms containing unbound variables. However, any unbound variables with attributes or blocked goals attached to them will be replaced by plain, brand new variables. This is analogous to the way attributed variables are handled in terms that are written, copied, asserted, gathered as solutions to `findall/3` and friends, or raised as exceptions. If the attributes must be passed to the client, then the Prolog code can obtain them by using `copy_term/3` (see Section 4.8.7 [ref-lte-cpt], page 133).

Please note: the environment variable `SP_PATH` as used here is meant to be a shorthand (see Section 6.1 [CPL Notes], page 294), and does not need to be set explicitly.

To start the example, first start the Prolog server by going to the `%SP_PATH%\library\prologbeans\examples\evaluate` (Windows), or `$SP_PATH/library/prologbeans/examples/evaluate` (UNIX/Linux) directory and type:

```
% sicstus -l evaluate.pl --goal "main."
```

To start the GUI type (from the same directory as above):

`> java -classpath "%SP_PATH%\bin\prologbeans.jar;." EvaluateGUI` (Windows), or
`% java -classpath "$SP_PATH/bin/prologbeans.jar:." EvaluateGUI` (UNIX)

10.36.4 Prolog Server Interface

The Prolog interface is based on the idea of a Prolog server that provides its service by answering queries from external applications (typically Java applications). The Prolog interface in PrologBeans is defined in `library(prologbeans)`, which implements the Prolog server and exports the following predicates:

`start`
`start(+Options)`
: starts the Prolog server using the options specified. **Please note**: `start/[0,1]` will not return until a server shutdown occurs. *Options* should be a list of zero or more of:

  `port(?Val)`
  : an integer denoting the port number of the Prolog server. The default port, if no port option is present, is 8066. In the case of the default port being used, the Socket Reuse Address bit will be set in the underlying sockets layer. If `Val` is a variable, then some unused port will be selected by the OS, the actual port number can be obtained with `get_server_property/1`, typically from a `server_started` event listener.

  `accepted_hosts(+Val)`
  : a list of atoms denoting the hosts (in form of IP-addresses) that are accepted by the Prolog server (default: `['127.0.0.1']`).

  `session_timeout(+Val)`
  : an integer denoting the duration of a session in seconds. The session will be removed if it has been inactive more than this timeout when the session garbage collect starts. If the session timeout is set to zero, then there will be no garbage collection of sessions (default: `0`).

  `session_gc_timeout(+Val)`
  : an integer denoting the minimum time in seconds between two consecutive session garbage collections. If the timeout is set to zero, then there will be no garbage collection of sessions (default: `0`).

  For example:

```
:- start([port(7500),
          accepted_hosts(['127.0.0.1','99.8.7.6'])]).
```

`shutdown`
`shutdown(+Mode)`
: shuts down the server and closes the sockets and the streams after processing all available input. There are three modes:

  `now` as soon as possible (default).

`no_sessions`
: after all sessions have ended (all sessions have either been explicitly removed by request of the client application, or they have been garbage collected). **Please note**: there can still be connections to the Prolog server even when all sessions have ended.

`no_connections`
: after all connections to the Prolog server are closed. **Please note**: there can still be user sessions left when all connections have been closed.

`register_query(+`*Query*`, :`*PredicateToCall*`)`
`register_query(+`*Query*`, :`*PredicateToCall*`, +`*SessionVar*`)`
: registers a query and the corresponding goal. Before the registration, any previously registered query matching *Query* will be removed (as if by `unregister_query(`*Query*`)`). The goal *PredicateToCall* will be called when a query matching *Query* is received.

  Typically, *Query* and *PredicateToCall* share variables that are instantiated by the call, and the instantiated *Query* is passed back to the client. In general, variable bindings can be arbitrary Prolog terms, including terms containing unbound variables. However, any unbound variables with attributes or blocked goals attached to them will be replaced by plain, brand new variables. This is analogous to the way attributed variables are handled in terms that are written, copied, asserted, gathered as solutions to `findall/3` and friends, or raised as exceptions. If the attributes must be passed to the client, then the Prolog code can obtain them by using `copy_term/3` (see Section 4.8.7 [ref-lte-cpt], page 133).

  The goal is called determinately, i.e. it is never backtracked into. If it fails, then the term `no` is passed to the client instead of the instantiated *Query*. If it raises an exception *E*, then the term `error(`*E*`)` is passed to the client instead of the instantiated *Query*.

  Before calling the query, the variable *SessionVar*, if given, is bound to the id of the current session. Session ids are typically generated in web applications that track users and mark all consecutive web-accesses with the same session id.

`unregister_query(+`*Query*`)`
: unregisters all queries matching *Query*.

`session_get(+`*SessionID*`, +`*ParameterName*`, +`*DefaultValue*`, -`*Value*`)`
: returns the value of a given parameter in a given session. If no value exists, then it will return the default value. Arguments:

  SessionID is the id of the session for which values have been stored

  ParameterName
  : an atom, is the name of the parameter to retrieve

  DefaultValue
  : is the value that will be used if no value is stored

  Value is the stored value or the default value if nothing was stored

`session_put(+SessionID, +ParameterName, +Value)`
: stores the value of the given parameter. **Please note**: any pre-existing value for this parameter will be overwritten. Note that `session_put/3` will not be undone when backtracking (the current implementation is based on `assert`). Arguments:

  SessionID is the id of the session for the values to store

  ParameterName
  : an atom, is the name of the parameter to store

  Value the value to be stored

`register_event_listener(+Event, :PredicateToCall)`
`register_event_listener(+Event, :PredicateToCall, -Id)`
: Registers *PredicateToCall* to be called (as if by `once(PredicateToCall)`) when the event matching *Event* occurs (event matching is on principal functor only). If the goal fails or raises an exception, then a warning is written to `user_error` but the failure or exception is otherwise ignored. Arguments:

  Event is the event template; see below.

  PredicateToCall
  : an arbitrary goal.

  Id becomes bound to a (ground) term that can be used with `unregister_event_listener/1` to remove this event listener.

  The predefined events are as follows:

  `session_started(+SessionID)`
  : called before the first call to a query for this session

  `session_ended(+SessionID)`
  : called before the session is about to be garbage collected (removed)

  `server_started`
  : called when the server is about to start (enter its main loop)

  `server_shutdown`
  : called when the server is about to shut down

  Attempt to register an event listener for other events than the predefined events will throw an exception.

  More than one listeners can be defined for the same event. They will be called in some unspecified order when the event occurs.

`unregister_event_listener(+Id)`
: Unregister a previously registered event listener. The *Id* is the value returned by the corresponding call to `register_event_listener/3`. It is an error to attempt to unregister an event listener more than once.

10.36.5 Java Client Interface

The Java interface is centered around the class `PrologSession`, which represents a connection (or session) to a Prolog server. `PrologSession` contains static methods for looking up named `PrologSession` instances using JNDI (Java Naming and Directory Interface) as well as methods for querying the Prolog server. Other important classes are: `QueryAnswer`, which contains the answer for a query sent to the Prolog server; `PBTerm`, which represents a Prolog term; and `Bindings`, which supports stuffing of variable values used in queries.

A brief description of the provided Java classes are presented below. More information about the Java APIs is available in the JavaDoc files on the page `https://sicstus.sics.se/documentation.html`.

`PrologSession`
: The `PrologSession` object is the connection to the Prolog server. The constructor `PrologSession()` creates a `PrologSession` with the default settings (`host = localhost, port = 8066`.

`QueryAnswer`
: The `QueryAnswer` contains the answer (new bindings) for a query (or the error that occurred during the query process).

`PBTerm`
: The `PBTerm` object is for representing parsed Prolog terms.

`Bindings`
: `Bindings` is used for binding variables to values in a query sent to the Prolog. The values will be automatically stuffed before they are sent to the Prolog server.

10.36.6 Java Examples

The PrologBeans examples for Java can be found in the directory corresponding to the file search path `pbexamples`, defined as if by a clause:

```
user:file_search_path(pbexamples, library('prologbeans/examples')).
```

10.36.6.1 Embedding Prolog in Java Applications

If you have an advanced Prolog application that needs a GUI, then you can write a standalone Java application that handles the GUI and set up the Prolog server to call the right predicates in the Prolog application.

An example of how to do this can be found under the `pbexamples(evaluate)` directory (see the example code in Section 10.36.3 [PB First Example], page 768).

Another example of this is `pbexamples(pbtest)`, which illustrates several advanced features like:

- registering several queries
- listening to server events (`server_started`)
- shutting down the Prolog server from Java
- starting up the Prolog server from Java

- using dynamic (OS assigned) ports for the Java/Prolog communication

The example is run by executing the Java program `PBTest`:

> `> java -classpath "%SP_PATH%\bin\prologbeans.jar;." PBTest` (Windows), or
> `% java -classpath "$SP_PATH/bin/prologbeans.jar:." PBTest` (UNIX)

10.36.6.2 Application Servers

If you want to get your Prolog application to be accessible from an intranet or the Internet, then you can use this package to embed the Prolog programs into a Java application server such as Tomcat, WebSphere, etc.

An example of how to do this is provided in `pbexamples(sessionsum)`. This example uses sessions to keep track of users so that the application can hold a state for a user session (as in the example below, remember the sum of all expressions evaluated in the session).

```
<%@ page import = "se.sics.prologbeans.*" %>
<html>
<head><title>Sum Calculator</title></head>
<body bgcolor="white">
<font size=4>Prolog Sum Calculator, enter expression to evaluate:
<form><input type=text name=query></form>
<%
   PrologSession pSession =
   PrologSession.getPrologSession("prolog/PrologSession", session);
   pSession.connect();

   String evQuery = request.getParameter("query");
   String output = "";
   if (evQuery != null) {
     Bindings bindings = new Bindings().bind("E",evQuery + '.');
     QueryAnswer answer =
        pSession.executeQuery("sum(E,Sum,Average,Count)", bindings);
     PBTerm average = answer.getValue("Average");
     if (average != null) {
        PBTerm sum = answer.getValue("Sum");
        PBTerm count = answer.getValue("Count");

        output = "<h4>Average =" + average + ", Sum = "
        + sum + " Count = " + count + "</h4>";
     } else {
        output = "<h4>Error: " + answer.getError() + "</h4>";
     }
  }
%>
<%= output  %><br></font>
<p><hr>Powered by SICStus Prolog
</body></html>
```

The example shows the code of a JSP (Java Server Page). It makes use of the method `PrologSession.getPrologSession(String jndiName, HTTPSession session)`, which uses JNDI to look up a registered `PrologSession`, which is connected to the Prolog server. The variable *session* is in a JSP bound to the current `HTTPSession`, and the variable *request* is bound to the current `HTTPRequest`. Since the `HTTPSession` object `session` is specified all queries to the Prolog server will contain a session id. The rest of the example shows how to send a query and output the answer.

Example usage of sessions (from the `sessionsum` example) is shown below, and is from `pbexamples('sessionsum/sessionsum.pl')`:

```
:- module(sessionsum,[main/0,sum/5]).
:- use_module(library(prologbeans)).
:- use_module(library(codesio), [read_from_codes/2]).

%% Register the acceptable queries (session based)
main:-
    register_query(sum(C,Sum,Average,Count),
                   sum(C,Session,Sum,Average,Count),
                   Session),
    start.

%% The sum predicate which gets the information from a session database,
%% makes some updates and then stores it back in to the session store
%% (and returns the information back to the application server)
sum(ExprChars, Session, Sum, Average, Count) :-
    session_get(Session, sum, 0, OldSum),
    session_get(Session, count, 0, OldCount),
    read_from_codes(ExprChars, Expr),
    Val is Expr,
    Sum is OldSum + Val,
    Count is OldCount + 1,
    Average is Sum / Count,
    session_put(Session, sum, Sum),
    session_put(Session, count, Count).
```

In this example a query `sum/4` is registered to call `sum/5` where one of the variables, *Session* will be bound to the session id associated to the query. The `sum/5` predicate uses the `session_get/4` predicate to access stored information about the particular session, and then it performs the evaluation of the expression. Finally, it updates and stores the values for this session.

10.36.6.3 Configuring Tomcat for PrologBeans

This section will briefly describe how to set up a Tomcat server so that is it possible to test the example JSPs. Some knowledge about how to run Tomcat and how to set up your own web application is required. Detailed information about Tomcat is available at `http://jakarta.apache.org/tomcat/`.

The following example has been tested with Tomcat 9 on Ubuntu 22.04. **Please note:** Tomcat 10 has changed incompatibly and will give an error in Java, "Unable to compile class for JSP" caused by the migration from `javax.servlet` to "Jakarta EE". So, in order to use Prologbeans with Tomcat 10 you would probably need to modify `prologbeans.jar`.

Assuming that the environment variable `CATALINA_BASE` is set to the directory where Tomcat looks for its `webapps/` folder, do the following:

1. Create the directory `$CATALINA_BASE/webapps/PB_example`
2. Copy the

file `pbexamples('sessionsum/sessionsum.jsp')` to `$CATALINA_BASE/webapps/PB_example/sessionsum.jsp`

3. Create the directory `$CATALINA_BASE/webapps/PB_example/WEB-INF/lib`
4. Copy the file `$SP_PATH/bin/prologbeans.jar` to `$CATALINA_BASE/webapps/PB_example/WEB-INF/lib/prologbeans.jar`
5. Create the directory `$CATALINA_BASE/webapps/PB_example/META-INF`
6. Create the file `$CATALINA_BASE/webapps/PB_example/META-INF/context.xml` with the following content:

```
<Context docBase="PB_example">
   <Resource name="prolog/PrologSession" auth="Container"
             type="se.sics.prologbeans.PrologSession"
             factory="org.apache.naming.factory.BeanFactory" />
</Context>
```

7. Create the file `$CATALINA_BASE/webapps/PB_example/WEB-INF/web.xml` with the following content:

```
<?xml version="1.0" encoding="ISO-8859-1"?>
<!DOCTYPE web-app
     PUBLIC "-//Sun Microsystems, Inc.//DTD Web Application 2.3//EN"
    "http://java.sun.com/dtd/web-app_2_3.dtd">
<web-app>

    <resource-env-ref>
      <description>
        Object factory for PrologSession instances.
      </description>
      <resource-env-ref-name>
        prolog/PrologSession
      </resource-env-ref-name>
      <resource-env-ref-type>
        se.sics.prologbeans.PrologSession
      </resource-env-ref-type>
    </resource-env-ref>

</web-app>
```

8. Start SICStus, load `sessionsum.pl` and run main.
9. Start the Tomcat server.
10. In a web browser, enter `http://localhost:8080/PB_example/sessionsum.jsp`

10.36.7 .NET Client Interface

The class `PrologSession` in the .NET interface represents a connection to a Prolog server. `PrologSession` contains methods for establishing a connection and querying the Prolog server. Other important classes are: `QueryAnswer`, which contains the answer for a query sent to the Prolog server; `PBTerm`, which represents a Prolog term; and `Bindings`, which supports stuffing of variable values used in queries.

The `PrologSession` object is the connection to the Prolog server. The constructor `PrologSession()` creates a `PrologSession` with the default settings (`host = localhost`, `port = 8066`.

The interface is almost exactly as the Java version. See the C# source code (`library/prologbeans.NET/*.cs`) or the JavaDoc, for details.

10.36.8 .NET Examples

The PrologBeans examples for .NET can be found in the directory corresponding to the file search path `pbnetexamples`, defined as if by a clause:

```
user:file_search_path(pbnetexamples, library('prologbeans.NET/examples')).
```

10.36.8.1 C# Examples

.NET Embedding. If you have an advanced Prolog application that needs a GUI, then you can write a stand-alone .NET application that handles the GUI and set up the Prolog server to call the right predicates in the Prolog application.

An example of how to do this can be found under the `pbnetexamples('evaluate.NET')` directory. This example is the C# version of the example shown in Section 10.36.3 [PB First Example], page 768).

To start the example, first start the Prolog server by going to the `pbnetexamples('evaluate.NET')` directory and type:

```
> sicstus -l evaluate.pl --goal "main."
```

To start the GUI type (from the same directory as above):

```
> run.bat
```

Another example of this is `pbnetexamples('pbtest.NET')`, which illustrates several advanced features like:

- registering several queries
- listening to server events (`server_started`)
- shutting down the Prolog server from .NET
- starting up the Prolog server from .NET
- using dynamic (OS assigned) ports for the .NET/Prolog communication

The example is run by executing the C# program `PBTest`:

```
> PBTest
```

ASPX Servers Pages. If you want to get your Prolog application to be accessible from an intranet or the Internet, then you can use this package to embed the Prolog programs into a .NET ASP page which can be served by e.g. Internet Information Services.

An example of how to do this is provided in `pbnetexamples('prologasp.NET/eval.aspx')`. Consult your IIS documentation for how to configure it for an ASPX page. **The ASPX example has a number of security vulnerabilities and is for illustrative purposes only. Consult with an expert.**

10.36.8.2 Visual Basic Example

A Visual Basic .NET example can be found in `pbnetexamples('vb_examples.NET/calculator')`. It is a simple calculator similar to the first C# `EvaluateGUI` example in Section 10.36.3 [PB First Example], page 768. This example is in the form of a Visual Studio project.

To run the example:

1. Open the project files in Visual Studio .NET
2. Add a reference in Visual Studio .NET to the installed `prologbeans.dll`
3. Start sicstus with the following command:

```
sicstus -l %SP_PATH%/library/prologbeans/examples/evaluate/evaluate --goal "main."
```

4. Build and run the example in Visual Studio .NET

10.37 Queue Operations —`library(queues)`

This module provides an implementation of queues, where you can

- create an empty queue
- add an element at either end of a queue
- add a list of elements at either end of a queue
- remove an element from the front of a queue
- remove a list of elements from the front of a queue
- determine the length of a queue
- enumerate the elements of a queue
- recognize a queue
- print a queue nicely

The representation was invented by Mark Johnson of the Center for the Study of Language and Information. All operations are fast.

Exported predicates:

`empty_queue(?Queue)`
: is true when *Queue* represents an empty queue. It can be used to test whether an existing queue is empty or to make a new empty queue.

`singleton_queue(?X, ?Queue)`
: is true when *Queue* is a queue with just one element *X*.

`portray_queue(+Queue)`
: writes a queue out in a pretty form, as *Queue[elements]*. This form cannot be read back in, it is just supposed to be readable. While it is meant to be called only when `is_queue(Queue)` has been established, as by `user:portray(Q) :- is_queue(Q), !, portray_queue(Q)`. it is also meant to work however it is called.

`is_queue(+Queue)`
: is true when *Queue* is a queue. The elements of *Queue* do not have to be instantiated, and the *Back* of the *Queue* may or may not be. It can only be used to recognize queues, not to generate them. To generate queues, use `queue_length(Queue, _)`.

`queue_head(+Queue, -Head)`
: is true when *Head* is the first element of the given *Queue*. It does not remove *Head* from *Queue*; *Head* is still there afterwards. It can only be used to find *Head*, it cannot be used to make a *Queue*.

`queue_tail(?Queue, ?Tail)`
: is true when *Queue* and *Tail* are both queues and *Tail* contains all the elements of *Queue* except the first. Note that *Queue* and *Tail* share structure, so that you can add elements at the back of only one of them. It can solve for either argument given the other.

`queue_cons(?Head, ?Tail, ?Queue)`
: is true when *Head* is the head of *Queue* and *Tail* is the tail of *Queue*, that is, when *Tail* and *Queue* are both queues, and the elements of the *Queue* are *Head* followed by the elements of *Tail* in order. It can be used in either direction, so

```
queue_cons(+Head, +Q0, -Q)      adds Head to Q0 giving Q
queue_cons(-Head, -Q, +Q0)      removes Head from Q0 giving Q
```

`queue_last(?Last, ?Queue)`
: is true when *Last* is the last element currently in *Queue*. It does not remove *Last* from *Queue*; it is still there. This can be used to generate a non-empty *Queue*. The cost is *O(|Queue|)*.

`queue_last(+Fore, +Last, -Queue)`
: is true when *Fore* and *Queue* are both lists and the elements of *Queue* are the elements of *Fore* in order followed by *Last*. This is the operation which adds an element at the end of *Fore* giving *Queue*; it is not reversible, unlike `queue_cons/3`, and it side-effects *Fore*, again unlike `queue_cons/3`.

`append_queue(?List, ?Queue0, ?Queue)`
: is true when *Queue* is obtained by appending the elements of *List* in order at the front of *Queue0*, e.g. `append_queue([a,b,c], Queue[d,e], Queue[a,b,c,d,e])`. Use

```
append_queue([+X1,...,+Xn], +Q0, -Q) to add X1,...,Xn to Q0 giving Q
append_queue([-X1,...,-Xn], -Q, +Q0) to take X1...Xn from Q0 giving Q
```

  The cost is *O(n)* and the operation is pure.

`queue_append(+Queue0, +List, -Queue)`
: is true when *Queue* is obtained by appending the elements of *List* in order at the rear end of *Queue0*, e.g. `append_queue(Queue[a,b,c], [d,e], Queue[a,b,c,d,e])`. This is like `queue_last/3`; it side-effects *Queue0*.

`list_queue(?List, ?Queue)`
: is true when *Queue* is a queue and *List* is a list and both have the same elements in the same order. `list_queue/2` and `queue_list/2` are the same except for argument order.

`queue_list(?Queue, ?List)`
: is true when *Queue* is a queue and *List* is a list and both have the same elements in the same order. `queue_list/2` and `list_queue/2` are the same except for argument order.

`queue_length(?Queue, ?Length)`
: is true when *Queue* is a queue having *Length* elements. It may be used to determine the *Length* of a *Queue* or to make a *Queue* of given *Length*.

`queue_member(?Element, +Queue)`
: is true when *Element* is an element of *Queue*. It could be made to generate queues, but that would be rather inefficient. It bears the name `queue_member/2` because it is prepared to enumerate *Elements*.

`queue_memberchk(+Element, +Queue)`
: is true when the given *Element* is an element of *Queue*. Once it finds a member of *Queue* which unifies with *Element*, it commits to it. Use it to check a ground *Element*.

`map_queue(:Pred, +Queue[X1,...,Xn])`
: succeeds when *Pred(Xi)* succeeds for each element *Xi* of the *Queue*.

`map_queue(:Pred, +Queue[X1,...,Xn], ?Queue[Y1,...,Yn])`
: succeeds when *Pred(Xi,Yi)* succeeds for each corresponding pair of elements *Xi*, *Yi* of the two queues.

`map_queue_list(:Pred, ?Queue[X1,...,Xn], ?[Y1,...,Yn])`
: succeeds when *Pred(Xi, Yi)* is true for each corresponding pair *Xi,Yi* of elements of the *Queue* and the *List*. It may be used to generate either of the sequences from the other.

`map_list_queue(:Pred, ?[X1,...,Xn], ?Queue[Y1,...,Yn])`
: succeeds when *Pred(Xi, Yi)* is true for each corresponding pair *Xi,Yi* of elements of the *List* and the *Queue*. It may be used to generate either of the sequences from the other.

`some_queue(:Pred, +Queue[X1,...,Xn])`
: succeeds when *Pred(Xi)* succeeds for some *Xi* in the *Queue*. It will try all ways of proving *Pred(Xi)* for each *Xi*, and will try each *Xi* in the *Queue*. `somechk_queue/2` is to `some_queue/2` as `memberchk/2` is to `member/2`; you are more likely to want `somechk_queue/2`. This acts on backtracking like `member/2`; *Queue* should be proper.

`some_queue(:Pred, +Queue[X1,...,Xn], ?Queue[Y1,...,Yn])`
: is true when *Pred(Xi, Yi)* is true for some *i*.

`somechk_queue(:Pred, +Queue[X1,...,Xn])`
: is true when *Pred(Xi)* is true for some *i*, and it commits to the first solution it finds (like `memberchk/2`).

`somechk_queue(:Pred, +Queue[X1,...,Xn], ?Queue[Y1,...,Yn])`
: is true when *Pred(Xi, Yi)* is true for some *i*, and it commits to the first solution it finds (like `memberchk/2`).

10.38 Random Number Generator—`library(random)`

This library module provides a random number generator using algorithm AS 183 from the Journal of Applied Statistics as the basic algorithm. This algorithm is not cryptographically secure.

The state of the random number generator corresponds to a term `random(X,Y,Z,B)` where X is an integer in the range [1,30268], Y is an integer in the range [1,30306], Z is an integer in the range [1,30322], and B is a nonzero integer.

The random generator starts with the same default initial state on each run. See `setrand/1` for a way to initialize the random number generator with a new state when a more unpredictable initial state is desired.

Exported predicates:

`getrand(-`*RandomState*`)`
: returns the random number generator's current state

`setrand(+`*RandomState*`)`
: sets the random number generator's state to *RandomState*. *RandomState* can either be a random state previously obtained with `getrand/1`, or an arbitrary integer. The latter is useful when you want to initialize the random state to a fresh value. If *RandomState* is not an integer or a valid random state, it raises an error.

  The initial state of the random number generator is always the same. This means that subsequent runs will generate the same sequence of random numbers. This gives reproducible results which is good for testing but not always desirable. One way to get a new initial state is to set it based on the current time, e.g. by calling something like the following predicate early in your program:

```
:- use_module(library(system), [now/1]).
init_random_state :-
        now(X),
        setrand(X).
```

`maybe`
: succeeds determinately with probability 1/2, fails with probability 1/2. We use a separate "random bit" generator for this test to avoid doing much arithmetic.

`maybe(+`*Probability*`)`
: succeeds determinately with probability Probability, fails with probability *1-Probability*. Arguments =< 0 always fail, >= 1 always succeed.

`maybe(+`*P*`, +`*N*`)`
: succeeds determinately with probability P/N, where $0 =< P =< N$ and P and N are integers. If this condition is not met, it fails. It is equivalent to `random(0, N, X), X < P`, but is somewhat faster.

`random(-`*Uniform*`)`
: unifies *Uniform* with a new random number in [0.0,1.0)

`random(+L, +U, -R)`
: unifies R with a random integer in *[L,U)* when L and U are integers (note that U will *never* be generated), or to a random floating number in *[L,U)* otherwise.

`random_member(-Elem, +List)`
: unifies *Elem* with a random element of *List*, which must be proper. Takes *O(N)* time (average and best case).

`random_select(?Elem, ?List, ?Rest)`
: unifies *Elem* with a random element of *List* and *Rest* with all the other elements of *List* (in order). Either *List* or *Rest* should be proper, and *List* should/will have one more element than *Rest*. Takes $O(N)$ time (average and best case).

`random_subseq(+List, -Sbsq, -Cmpl)`
: unifies *Sbsq* with a random sub-sequence of *List*, and *Cmpl* with its complement. After this, `subseq(List, Sbsq, Cmpl)` will be true. Each of the *2**|List|* solutions is equally likely. Like its name-sake `subseq/3`, if you supply *Sbsq* and *Cmpl* it will interleave them to find *List*. Takes *O(N)* time. *List* should be proper.

`random_permutation(?List, ?Perm)`
: unifies *Perm* with a random permutation of *List*. Either *List* or *Perm* should be proper, and they should/will have the same length. Each of the *N!* permutations is equally likely, where `length(List, N)`. This takes *O(N lg N)* time and is bidirectional.

`random_perm2(A,B, X,Y)`
: unifies $X,Y = A,B$ or $X,Y = B,A$, making the choice at random, each choice being equally likely. It is equivalent to `random_permutation([A,B], [X,Y])`.

`random_numlist(+P, +L, +U, -List)`
: where P is a probability (0..1) and L=<U are integers unifies *List* with a random subsequence of the integers $L..U$, each integer being included with probability P.

10.39 Rem's Algorithm—`library(rem)`

This library module maintains equivalence classes using Rem's algorithm. Exported predicates:

`rem_create(+Size, -REM)`
: creates an equivalence representation function *REM* which maps each of the nodes *1..Size* to itself.

`rem_head(?Node, +REM, -Head)`
: is true when *Head* is the representative of the equivalence class that *Node* belongs to in the given *REM*.

`rem_equivalent(?Node1, ?Node2, +REM)`
: is true when *Node1* and *Node2* belong to the same equivalence class in the given *REM*.

`rem_add_link(?Node1, ?Node2, +OldREM, -NewREM)`
: is true when adding the equivalence *Node1*===*Node2* to the partition represented by *OldREM* yields a partition which is represented by *NewREM*. If *Node1* or *Node2* is uninstantiated, it will backtrack over all the nodes. It's not clear how useful this is.

10.40 Generic Sorting—`library(samsort)`

This library module provides generic sorting. Exported predicates:

`samsort(+RawList, -Sorted)`
: takes a proper list *RawList* and unifies *Sorted* with a list having exactly the same elements as *RawList* but in ascending order according to the standard order on terms.

`merge(+List1, +List2, -Merged)`
: is true when *Merged* is the stable merge of the two given lists. If the two lists are not ordered, the merge doesn't mean a great deal. Merging is perfectly well defined when the inputs contain duplicates, and all copies of an element are preserved in the output, e.g. merge("122357", "34568", "12233455678").

`samsort(:Order, +RawList, -SortedList)`
: takes a proper list *RawList* and a binary predicate *Order* and unifies *SortedList* with a list having exactly the same elements as *RawList* but in ascending order according to *Order*. This is only supposed to work when Order is transitive.

`merge(:Order, +List1, +List2, -Merged)`
: is like `merge/3` except that it takes an *Order* predicate as its first arguments, like all the generalized ordering routines.

`samkeysort(+RawList, -Sorted)`
: takes a proper list *RawList* of *Key-Value* pairs, and unifies *Sorted* with a list having exactly the same elements as *RawList* but in ascending order according to the standard order on the keys. `samkeysort/2` is stable in the sense that the relative position of elements with the same key is maintained.

`keymerge(+List1, +List2, -Merged)`
: is like `merge/3` except that it compares only the keys of its input lists.

10.41 Unordered Set Operations—`library(sets)`

This library module provides operations on sets represented as unordered lists with no repeated elements.

Please note: You should probably not use this module. The ordered representation used in `library(ordsets)` is **much more efficient**, but these routines were designed before sort/2 entered the language. Exported predicates:

`add_element(+`*Element*`, +`*Set1*`, -`*Set2*`)`
: is true when *Set1* and *Set2* are sets represented as unordered lists, and *Set2* = *Set1 U {Element}*. It may only be used to calculate *Set2* given *Element* and *Set1*.

`del_element(+`*Element*`, +`*Set1*`, -`*Set2*`)`
: is true when *Set1* and *Set2* are sets represented as unordered lists, and *Set2* = *Set1* \ *{Element}*. It may only be used to calculate *Set2* given *Element* and *Set1*. If *Set1* does not contain *Element*, *Set2* will be identical to *Set1* (the old version made a new copy of *Set1*). If *Set1* is not an unordered set, but contains more than one copy of *Element*, only the first will be removed. If you want to delete all copies of a given element, use `lists:delete/3`. For a version which fails if *Element* is not in *Set1*, use `selectchk/3`.

`disjoint(+`*Set1*`, +`*Set2*`)`
: is true when the two given sets have no elements in common. It is the opposite of `intersect/2`. If either of the arguments is improper, `disjoint/2` will fail.

`is_set(+`*List*`)`
: is true when *List* is a proper list that contains no repeated elements.

`pairfrom(?`*Set*`, ?`*Element1*`, ?`*Element2*`, ?`*Residue*`)`
: is true when *Set* is a list, *Element1* occurs in list, *Element2* occurs in list after *Element1*, and *Residue* is everything in *Set* bar the two *Elements*. The point of this thing is to select pairs of elements from a set without selecting the same pair twice in different orders.

`intersect(+`*Set1*`, +`*Set2*`)`
: is true when the two sets have a member in common. It assumes that both sets are known, and that you don't care which element it is that they share.

`subset(+`*Set1*`, +`*Set2*`)`
: is true when each member of *Set1* occurs in *Set2*. It can only be used to test two given sets; it cannot be used to generate subsets. There is no predicate for generating subsets as such, but the predicates `subseq/3`, `subseq0/2`, `subseq1/2` in `library(lists)` may do what you want (they preserve the order of elements within a list). Could be defined as:

```
subset(Set1, Set2) :-
    (   foreach(X,Set1),
        param(Set2)
    do  memberchk(X,Set2)
    ).
```

`set_order(+Xs, +Ys, -R)`
: is true when *R* is `<`, `=`, or `>` according as *Xs* is a subset of *Ys*, equivalent to *Ys*, or a superset of *Ys*.

`seteq(+Set1, +Set2)`
: is true when each Set is a subset of the other.

`list_to_set(+List, -Set)`
: is true when *List* and *Set* are lists, and *Set* has the same elements as *List* in the same order, except that it contains no duplicates. The two are thus equal considered as sets.

`power_set(+Set, -PowerSet)`
: is true when *Set* is a list and *PowerSet* is a list of lists which represents the power set of the set that Set represents.

`intersection(+Set1, +Set2, -Intersection)`
: is true when all three arguments are lists representing sets, and *Intersection* contains every element of *Set1* which is also an element of *Set2*, the order of elements in *Intersection* being the same as in *Set1*. That is, *Intersection* represents the intersection of the sets represented by *Set1* and *Set2*. Could be defined as:

```
intersection(Set1, Set2, Intersection) :-
    (   foreach(X,Set1),
        fromto(Intersection,S0,S,[]),
        param(Set2)
    do  (member(X, Set2) -> S0 = [X|S] ; S0 = S)
    ).
```

`intersection(+ListOfSets, -Intersection)`
: is true when *Intersection* is the intersection of all the sets in *ListOfSets*. The order of elements in *Intersection* is taken from the first set in *ListOfSets*. This has been turned inside out to minimize the storage turnover. Could be defined as:

```
intersection([Set1|Sets], Intersection) :-
    (   foreach(X,Set1),
        fromto(Intersection,S0,S,[]),
        param(Sets)
    do  (   (   foreach(Set,Sets),
                param(X)
            do  memberchk(X, Set)
            ) -> S0 = [X|S]
        ;   S0 = S
        )
    ).
```

`subtract(+Set1, +Set2, -Difference)`
: is like `intersect/3`, but this time it is the elements of *Set1* which *are* in *Set2* that are deleted. Note that duplicated *Elements* of *Set1* which are not in *Set2* are retained in *Difference*. Could be defined as:

```
subtract(Set1, Set2, Difference) :-
    (   foreach(X,Set1),
        fromto(Difference,S0,S,[]),
        param(Set2)
    do  (member(X, Set2) -> S0 = S ; S0 = [X|S])
    ).
```

`symdiff(+`*Set1*`, +`*Set2*`, -`*Difference*`)`
: is true when *Difference* is the symmetric difference of *Set1* and *Set2*, that is, if each element of *Difference* occurs in one of *Set1* and *Set2* but not both. The construction method is such that the answer will have no duplicates even if the *Sets* do.

`setproduct(+`*Set1*`, +`*Set2*`, -`*CartesianProduct*`)`
: is true when *Set1* is a set (list) and *Set2* is a set (list) and *CartesianProduct* is a set of *Elt1-Elt2* pairs, with a pair for for each element *Elt1* of *Set1* and *Elt2* of *Set2*. Could be defined as:

```
setproduct(Set1, Set2, Product) :-
    (   foreach(H1,Set1),
        param(Set2),
        fromto(Product,P1,P3,[])
    do  (   foreach(H2,Set2),
            param(H1),
            fromto(P1,[H1-H2|P2],P2,P3)
        do  true
        )
    ).
```

`disjoint_union(+`*Set1*`, +`*Set2*`, -`*Union*`)`
: is true when `disjoint(Set1, Set2)` and `union(Set1, Set2, Union)`, that is, *Set1* and *Set2* have no element in command and *Union* is their union. Could be defined as:

```
disjoint_union(Set1, Set2, Union) :-
    (   foreach(X,Set1),
        fromto(Union,[X|S],S,Set2),
        param(Set2)
    do  nonmember(X, Set2)
    ).
```

`union(+`*Set1*`, +`*Set2*`, -`*Union*`)`
: is true when `subtract(Set1,Set2,Diff)` and `append(Diff,Set2,Union)`, that is, when *Union* is the elements of *Set1* that do not occur in *Set2*, followed by all the elements of *Set2*. Could be defined as:

```
union(Set1, Set2, Union) :-
    (   foreach(X,Set1),
        fromto(Union,S0,S,Set2),
        param(Set2)
    do  (member(X, Set2) -> S0 = S ; S0 = [X|S])
    ).
```

`union(+`*`Set1`*`, +`*`Set2`*`, -`*`Union`*`, -`*`Difference`*`)`
is true when `union(Set1, Set2, Union)` and `subtract(Set1, Set2, Difference)`. Could be defined as:

```
union(Set1, Set2, Union, Difference) :-
    (   foreach(X,Set1),
        fromto(Union,S0,S,Set2),
        fromto(Difference,T0,T,[]),
        param(Set2)
    do  (   member(X, Set2) -> S0 = S, T0 = T
        ;   S0 = [X|S], T0 = [X|T]
        )
    ).
```

`union(+`*`ListOfSets`*`, -`*`Union`*`)`
is true when *Union* is the union of all the sets in *ListOfSets*. It has been arranged with storage turnover in mind. Could be defined as:

```
union(Sets, Union) :-
    (   foreach(Set,Sets),
        param(Answer)
    do  (   foreach(X,Set),
            param(Answer)
        do  memberchk(X, Answer)
        )
    ),
    append(Answer, [], Answer),     % cauterize it
    !,
    Union = Answer.
```

10.42 Socket I/O—library(sockets)

This library package defines a number of predicates for communicating over sockets.

To create a (bi-directional) stream connected to a remote server, use `socket_client_open/3`.

To open a port for remote clients to connect to, use `socket_server_open/[2,3]` and to open a stream to a connecting client, use `socket_server_accept/4`.

To be able to multiplex input and output from several streams (not necessarily socket streams) and incoming connections, use `socket_select/7`.

When opening a client or server socket a *socket address* needs to be specified. The address specifies the address family and family-specific information. The following formats are supported for socket addresses:

`inet(`*Nodename*`,`*Servname*`)`
Nodename`:`*Servname*
Servname This specifies the address for and ordinary internet socket (`AF_INET` or `AF_INET6`). *Nodename* is the internet address of the remote host, as an atom, something like `'sicstus.sics.se'` or `'193.10.64.51'`. The empty nodename `''` (the default), has special meaning, see the documentation for `socket_client_open/3` and `socket_server_open/[2,3]`. *Servname* is either a port number as an atom of decimal digits or as an integer, e.g. `'80'`, or `80`; alternatively some *well known port names* can be used, e.g. `'http'`. The set of well known port names is OS specific, portable code should use integer port numbers. *Servname* can also be a variable when opening a server socket with `socket_server_open/[2,3]`. In this case a available port is assigned automatically and Servname is bound to it.

`unix(`*Path*`)` *since release 4.0.3*
A Unix domain (`AF_UNIX`) socket is opened at the specified file system location. This is only supported on Unix-like platforms. *Path* is a file-name and is passed to `absolute_file_name/2`. There may be platform-specific restrictions on the length of the resulting pathname and the file system containing it.

All streams below can be read from as well as written to. All I/O predicates operating on streams can be used, for example `get_code/2`, `get_byte/2`, `read/2`, `write/2`, `format/3`, `current_stream/3`, etc. The predicates that create streams take options similar to `open/4`, e.g. to specify whether the stream is binary (the default) or text.

`socket_client_open(+`*Addr*`, -`*Stream*`, +`*Options*`)`
Creates a stream *Stream* connected to address *Addr*. See above for the allowed address formats. If the nodename is empty (`''`) then a connection is made to the local machine.

The stream is created using options from *Options*. Supported options include:

`type(binary)`
Create a binary stream (the default).

`type(text)`
: Create a text stream. The default encoding is Latin 1.

`eof_action(`*`Action`*`)`
: end of file action, as for `open/4`.

`encoding(`*`ENCODING`*`)` *since release 4.1*
: As for open/4. Implies `type(text)`.

`eol(`*`Eol`*`)` *since release 4.1*
: As for open/4. Implies `type(text)`.

To create a binary stream to some web server `sicstus.sics.se`, you would do e.g.

```
| ?- use_module(library(sockets)). % only needed once per SICStus session.
...
| ?- socket_client_open('sicstus.sics.se':80, Stream, [type(binary)]).
```

or, to make a text (Latin 1) stream to a `daytime` service in Hong Kong you could do:

```
| ?- use_module(library(sockets)). % only needed once per SICStus session.
...
| ?- socket_client_open('stdtime.gov.hk':daytime, S, [type(text)]),
     read_line(S, L),
     format('~s', [L]).
```

See the source code for `library('linda/client')` for a simple client.

`socket_server_open(`*`?Addr, -ServerSocket, +Options`*`)` *since release 4.0.3*
: Create a server socket *ServerSocket* that listens on address *Addr*. See above for the allowed address formats. If the nodename is empty (`''`) then any remote client machine is allowed to connect unless the option `loopback(true)` is also specified. *Addr* can specify an internet address where the port is a variable in which case a free port number is used and *Port* is bound to it. The common case is that Addr is a numeric port number or a variable that becomes bound to a free port number.

  The created server socket should be closed with `socket_server_close/1` eventually. Incoming connection can be accepted with `socket_server_accept/4` and waited for with `socket_select/7`. See the source code for `library('linda/server')` for a simple server that uses this predicate.

  Options is a list of options, currently

  `reuseaddr(Bool)` *since release 4.0.3*
  : *Bool* is either `true` or `false` (the default). If `true` then allow reuse of local addresses. For internet sockets this corresponds to the `SO_REUSEADDR` socket option. For unix domain sockets this means that the file will be deleted, if present, before opening.

  `numeric_nodename(Bool)` *since release 4.0.3*
  : *Bool* is either `true` or `false` (the default). If `true` then the nodename of an internet address will be treated as a numerical address and no name lookup will be performed.

`numeric_servname(Bool)` *since release 4.0.3*

Bool is either `true` or `false` (the default). If `true` then the servname of an internet address will be treated as a numerical port number and no lookup of well known port names will be performed.

`loopback(Bool)` *since release 4.0.3*

Bool is either `true` or `false` (the default). If `true` then the nodename will be ignored and the socket will only listen to connection from the loopback device, i.e. the local machine.

`socket_server_open(?Port, -ServerSocket)`

The same as `socket_server_open(Port, ServerSocket, [])`.

`socket_server_accept(+ServerSocket, -Client, -Stream, +StreamOptions)`

The first connection to socket *ServerSocket* is extracted, blocking if necessary. The stream *Stream* is created on this connection using *StreamOptions* as for `socket_client_open/3`. *Client* will be unified with an atom containing the numerical Internet host address of the connecting client. Note that the stream will be `type(binary)` unless `type(text)` is specified either explicitly or implicitly with `encoding/1` or other text-only options.

`socket_server_close(+ServerSocket)`

Close the server socket *ServerSocket* and stop listening on its port.

`socket_select(+ServerSockets,-SReady, +ReadStreams,-RReady, +WriteStreams,-WReady, +Timeout)`

Check for server sockets with incoming connections (i.e. ready for `socket_server_accept/4`), streams on *ReadStreams* ready for input, and streams on *WriteStreams* ready for output. The streams can be any kind of streams, they need not be socket streams. The ready server sockets are returned (in the same order) in *SReady*, the ready input streams in *RReady*, and the ready output streams in *WReady*.

An input (output) stream is ready for input (output) when an *item* can be read (written) without blocking. An item is a character for text streams and a byte for binary streams. Note that a stream is considered ready for I/O if the corresponding I/O operation will raise an error (such as if the stream is past end of stream).

Each entry in the input lists *ServerSockets*, *ReadStreams*, and *WriteStreams* can be either a server socket or stream respectively or a term *Term-Entry* where *Entry* is the server socket or stream and *Term* is some arbitrary term used for book-keeping. If an entry is associated with a term in this way then so will the corresponding ready entry.

If *TimeOut* is instantiated to `off`, the predicate waits until something is available. If *TimeOut* is a nonzero number (integer or floating point), then the predicate waits at most that number of seconds before returning. For backward compatibility, if *TimeOut* is *S:U* the predicate waits at most *S* seconds and *U* microseconds. If there is a timeout, all ready lists are unified with `[]`.

See the source code for `library('linda/server')` for a simple server that uses this predicate.

`current_host(?`*HostName*`)`

HostName is unified with the fully qualified name of the machine that the process is executing on. The call will also succeed if *HostName* is instantiated to the unqualified name of the machine in lower case. **Please note:** this predicate will fail if there are errors, e.g. if no domain has been configured.

10.43 Statistics Functions—`library(statistics)`

This library module provides commonly used sample and population statistics functions. In this module, a *Sample* is simply a proper list of numbers, normally floating-point; *Weight* is a proper list of numbers and should be of the same length as *Sample*.

Please note: These functions are plain textbook algorithms and we make no claims about numerical stability, avoiding loss of precision, etc.

Exported predicates:

`min(+Sample, -Value)`
: is true when *Value* is the smallest element of *Sample*.

`max(+Sample, -Value)`
: is true when *Value* is the largest element of *Sample*.

`min_max(+Sample, -Min, -Max)`
: is true when *Min* (*Max*) is the smallest (largest) element of *Sample*.

`range(+Sample, -Value)`
: is true when *Value* is the difference between the largest and smallest elements of *Sample*.

`mode(+Sample, -Values)`
: is true when *Values* is the most frequently occurring value(s) in *Sample*. If there is a unique value with maximum frequency, this value is returned as the only element of *Values*. Otherwise, *Values* contains the maximum frequency elements in increasing order. This predicate does not make much sense if the sample is continuous.

`mean(+Sample, -Value)`
`arithmetic_mean(+Sample, -Value)`
: is true when *Value* is the arithmetic mean of *Sample*.

`weighted_mean(+Weight, +Sample, -Value)`
: is true when *Value* is the arithmetic mean of *Sample* weighted by *Weight*.

`geometric_mean(+Sample, -Value)`
: is true when *Value* is the geometric mean of *Sample*.

`harmonic_mean(+Sample, -Value)`
: is true when *Value* is the harmonic mean of *Sample*.

`central_moment(K, +Sample, -Value)`
: is true when *Value* is the K-th central moment of *Sample*. Also known as the K-th central moment about the mean. K should be positive integer.

`skewness(+Sample, -Value)`
: is true when *Value* is the skewness of *Sample*. This is a measure of the asymmetry of its distribution. A sample with negative skew is said to be *left-skewed*. Most of its mass is on the right of the distribution, with the tail on the left. Vice versa for positive skew. A sample's skewness is undefined if its variance is zero.

`kurtosis(+Sample, -Value)`
: is true when *Value* is the excess kurtosis of *Sample*. This is a measure of the peakedness of its distribution. A high kurtosis indicates that most of the sample's variance is due to infrequent severe deviations, rather than frequent modest deviations. A sample's excess kurtosis is undefined if its variance is zero. In this implementation, the kurtosis of the normal distribution is 0.

`ml_variance(+Sample, -Value)`
`population_variance(+Sample, -Value)`
: is true when *Value* is the maximum likelihood estimate of the variance of *Sample*. Also known as the population variance, where the denominator is the length of *Sample*.

`sample_variance(+Sample, -Value)`
`unbiased_variance(+Sample, -Value)`
: is true when *Value* is the unbiased estimate of the variance of *Sample*. Also known as the sample variance, where the denominator is the length of *Sample* minus one.

`weighted_variance(+Weight, +Sample, -Value)`
: is true when *Value* is the weighted (biased) estimate of the variance of *Sample*.

`ml_standard_deviation(+Sample, -Value)`
`population_standard_deviation(+Sample, -Value)`
: is true when *Value* is the maximum likelihood estimate of the standard deviation of *Sample*. Also known as the population standard deviation, where the denominator is the length of *Sample*. Equals the square root of the population variance.

`sample_standard_deviation(+Sample, -Value)`
`unbiased_standard_deviation(+Sample, -Value)`
: is true when *Value* is the unbiased estimate of the standard deviation of *Sample*. Also known as the sample standard deviation, where the denominator is the length of *Sample* minus one. Equals the square root of the sample variance.

`weighted_standard_deviation(+Weight, +Sample, -Value)`
: is true when *Value* is the weighted (biased) estimate of the standard deviation of *Sample*. Equals the square root of the weighted (biased) variance.

`covariance(+Sample1, +Sample2, -Value)`
: is true when *Value* is the covariance of *Sample1* and *Sample2*.

`correlation(+Sample1, +Sample2, -Value)`
: is true when *Value* is the correlation of *Sample1* and *Sample2*. If there is no variance in *Sample1* or in *Sample2*, an error is raised.

`median(+Sample, -Value)`
: is true when *Value* is the median of *Sample*, that is, the value separating the higher half of the sample from the lower half. If there are an even number of observations, then the median is defined to be the smaller middle value. Same as the 0.5-fractile of *Sample*.

`fractile(`*P*`, +`*Sample*`, -`*Value*`)`
: is true when *Value* is the *P*-fractile of *Sample*, that is, the smallest value in the sample such that the fraction *P* of the sample is less than or equal to that value. *P* should be a number in (0.0,1.0].

`normalize(+`*Sample*`, -`*Normalized*`)`
: is true when *Normalized* is the normalized *Sample*, so that *Normalized* has a mean of 0 and a population standard deviation of 1.

10.44 The Structs Package—`library(structs)`

The `structs` package allows Prolog to hold pointers to C data structures, and to access and store into fields in those data structures. Currently, the only representation for a pointer supported by SICStus Prolog is an integer, so it is not possible to guarantee that Prolog cannot confuse a pointer with an ordinary Prolog term. What this package does is to represent such a pointer as a term with the type of the structure or array as its functor and the integer that is the address of the actual data as its only argument. We will refer such terms as *foreign terms*.

The package consists of two modules, `str_decl` and `structs`. The `str_decl` module is used at compile time to translate the structs-related constructs. Any file that defines or accesses structs should include the command:

```
:- load_files(library(str_decl),
              [when(compile_time), if(changed)]).
```

The `structs` module provides runtime support for structs. A file that accesses structs should include the command:

```
:- use_module(library(structs)).
```

You will probably include both in most files that define and access structs.

Please note: A file that loads `library(str_decl)` currently cannot recursively load another file that loads `library(str_decl)`, because that would confuse the internal database being used by the package.

Important caveats:

You should not count on future versions of the structs package to continue to represent foreign terms as compound Prolog terms. In particular, you should never explicitly take apart a foreign term using unification or `functor/3` and `arg/3`. You may use the predicate `foreign_type/2` to find the type of a foreign term, and `cast/3` (casting a foreign term to address) to get the address part of a foreign term. You may also use `cast/3` to cast an address back to a foreign term. You should use `null_foreign_term/2` to check if a foreign term is null, or to create a null foreign term of some type.

It should never be necessary to explicitly take apart foreign terms.

10.44.1 Foreign Types

There are two sorts of objects that Prolog may want to handle: *atomic* and *compound*. *Atomic* objects include numbers and atoms, and *compound* objects include data structures and arrays. To be more precise about it, an atomic type is defined by one of the following:

`integer` signed integer, large enough to hold a pointer.

`integer_64` *since release 4.3*

64 bit signed integer.

`integer_32`
: 32 bit signed integer.

`integer_16`
: 16 bit signed integer.

`integer_8`
: 8 bit signed integer.

`unsigned` unsigned integer, large enough to hold a pointer.

`unsigned_64` *since release 4.3*
: 64 bit unsigned integer.

`unsigned_32`
: 32 bit unsigned integer.

`unsigned_16`
: 16 bit unsigned integer.

`unsigned_8`
: 8 bit unsigned integer.

`float` 64 bit floating-point number.

`float_32` 32 bit floating-point number.

`atom` 32 bit Prolog atom number. Unique for different atoms, but not consistent across Prolog sessions. The atom is made non garbage collectable. See Section 6.4.2 [Atoms in C], page 306.

`string` A pointer to an encoded string. Represented as an atom in Prolog. **Please note**: This string must not be overwritten, as it constitutes the print name of an atom. Also, the atom and string are made non garbage collectable. See Section 6.4.2 [Atoms in C], page 306.

`address` An untyped pointer. Like `pointer(_)`, but `library(structs)` does no type checking for you. Represented as a Prolog integer.

`opaque` Unknown type. Cannot be represented in Prolog. A pointer to an opaque object may be manipulated.

Compound types are defined by one of the following:

`pointer(`*Type*`)`
: a pointer to a thing of type *Type*.

`array(`*Num*`,`*Type*`)`
: A chunk of memory holding *Num* (an integer) things of type *Type*.

`array(`*Type*`)`
: A chunk of memory holding some number of things of type *Type*. This type does not allow bounds checking, so it should be used with great care. It is also not possible to use this sort of array as an element in an array, or in a struct or union.

`struct(`*Fields*`)`
: A compound structure. *Fields* is a list of *Field*_name:*Type* pairs. Each *Field*_name is an atom, and each *Type* is any valid type.

`union(`*Members*`)`
: A union as in C. *Members* is a list of *Member*_name:*Type* pairs. Each *Member*_name is an atom, and each *Type* is any valid type. The space allocated for one of these is the maximum of the spaces needed for each member. It is not permitted to store into a union (you must get a member of the union to store into, as in C).

C programmers will recognize that the kinds of data supported by this package were designed for the C language. They should also work for other languages, but programmers must determine the proper type declarations in those languages. The table above makes clear the storage requirements and interpretation of each type.

Note that there is one important difference between the `structs` package and C: the `structs` package permits declarations of pointers to arrays. A pointer to an array is distinguished from a pointer to a single element. For example

```
pointer(array(integer_8))
```

is probably a more appropriate declaration of a C string type than

```
pointer(integer_8)
```

which is the orthodox way to declare a string in C.

10.44.1.1 Declaring Types

Programmers may declare new named data structures with the following procedure:

```
:- foreign_type
    Type_name = Type,
    ...,
    Type_name = Type.
```

where *Type_name* is an atom, and *Type* defines either an atomic or compound type, or is a previously-defined type name.

In Prolog, atomic types are represented by the natural atomic term (integer, float, or atom). Compound structures are represented by terms whose functor is the name of the type, and whose only argument is the address of the data. So a term `foo(123456)` represents the thing of type `foo` that exists at machine address 123456. And a term `integer(123456)` represents the integer that lives in memory at address 123456, *not* the number 123456.

For types that are not named, a type name is generated using the names of associated types and the dollar sign character (‘`$`’), and possibly a number. Therefore, users should not use ‘`$`’ in their type names.

10.44.2 Checking Foreign Term Types

The type of a foreign term may determined by the goal

```
foreign_type(+Foreign_term, -Type_name)
```

Note that `foreign_type/2` will fail if *Foreign_term* is not a foreign term.

10.44.3 Creating and Destroying Foreign Terms

Prolog can create or destroy foreign terms using

```
new(+Type, -Datum),
new(+Type, +Size, -Datum) and
dispose(+Datum)
```

where *Type* is an atom specifying what type of foreign term is to be allocated, and *Datum* is the foreign term. *Type* should be an atomic type or a previously-defined type name. The *Datum* returned by `new/[2,3]` is initialized to all zeroes. `dispose/1` is a dangerous operation, since once the memory is disposed, it may be used for something else later. If *Datum* is later accessed, then the results will be unpredictable. `new/3` is only used to allocate arrays whose size is not known beforehand, as defined by `array(Type)`, rather than `array(Num,Type)`.

10.44.4 Accessing and Modifying Foreign Term Contents

Prolog can get or modify the contents of a foreign term with the procedures

```
get_contents(+Datum, ?Part, ?Value)
put_contents(+Datum, +Part, +Value).
```

It can also get a pointer to a field or element of a foreign term with the procedure

```
get_address(+Datum, ?Part, ?Value).
```

For all three of these, *Datum* must be a foreign term, and *Part* specifies what part of *Datum* *Value* is. If *Datum* is an array, then *Part* should be an integer index into the array, where 0 is the first element. For a pointer, *Part* should be the atom `contents` and *Value* will be what the pointer points to. For a struct, *Part* should be a field name, and *Value* will be the contents of that field. In the case of `get_contents/3` and `get_address/3`, if *Part* is unbound, then `get_contents/3` will backtrack through all the valid parts of *Datum*, binding both *Part* and *Value*. A C programmer might think of the following pairs as corresponding to each other:

```
Prolog: get_contents(Foo, Bar, Baz)
     C: Baz = Foo->Bar

Prolog: put_contents(Foo, Bar, Baz)
     C: Foo->Bar = Baz

Prolog: get_address(Foo, Bar, Baz)
     C: Baz = &Foo->Bar.
```

The hitch is that only atomic and pointer types can be got and put by `get_contents/3` and `put_contents/3`. This is because Prolog can only hold pointers to C structures, not the structures themselves. This is not quite as bad as it might seem, though, since usually structures contain pointers to other structures, anyway. When a structure directly contains another structure, Prolog can get a pointer to it with `get_address/3`.

10.44.5 Casting

Prolog can "cast" one type of foreign term to another. This means that the foreign term is treated just as if it where the other type. This is done with the following procedure:

```
cast(+Foreign0, +New_type, -Foreign)
```

where *Foreign* is the foreign term that is the same data as *Foreign0*, only is of foreign type *New_type*. *Foreign0* is not affected. This is much like casting in C.

Casting a foreign term to `address` will get you the raw address of a foreign term. This is not often necessary, but it is occasionally useful in order to obtain an indexable value to use in the first argument of a dynamic predicate you are maintaining. An `address` may also be cast to a proper foreign type.

This predicate should be used with great care, as it is quite easy to get into trouble with this.

10.44.6 Null Foreign Terms

"NULL" foreign terms may be handled. The predicate

```
null_foreign_term(+Term, -Type)
null_foreign_term(-Term, +Type)
```

holds when *Term* is a foreign term of *Type*, but is NULL (the address is 0). At least one of *Term* and *Type* must be bound. This can be used to generate NULL foreign terms, or to check a foreign term to determine whether or not it is NULL.

10.44.7 Interfacing with Foreign Code

Foreign terms may be passed between Prolog and other languages through the foreign interface.

To use this, all foreign types to be passed between Prolog and another language must be declared with `foreign_type/2` before the `foreign/[2,3]` clauses specifying the foreign functions.

The `structs` package extends the foreign type specifications recognized by the foreign interface. In addition to the types already recognized by the foreign interface, any atomic type recognized by the `structs` package is understood, as well as a pointer to any named `structs` type.

For example, if you have a function

```
char nth_char(char *string, int n)
{
    return string[n];
}
```

then you might use it from Prolog as follows:

```
:- foreign_type cstring = array(integer_8).

foreign(nth_char, c, nth_char(+pointer(cstring), +integer, [-integer_8])).
```

This allows the predicate `nth_char/3` to be called from Prolog to determine the nth character of a C string.

Note that all existing foreign interface type specifications are unaffected, in particular `address/[0,1]` continue to pass addresses to and from Prolog as plain integers.

If you use the foreign resource linker, `splfr`, on a Prolog file that uses the `structs` package, then you must pass it the `--structs` option. This will make `splfr` understand foreign type specifications and translate them into C declarations in the generated header file (see Section 6.2.5 [The Foreign Resource Linker], page 300).

10.44.8 Examining Type Definitions at Run Time

The above described procedures should be sufficient for most needs. This module does, however, provide a few procedures to allow programmers to access type definitions. These may be a convenience for debugging, or in writing tools to manipulate type definitions.

The following procedures allow programmers to find the definition of a given type:

```
type_definition(?Type, ?Definition)
type_definition(?Type, ?Definition, ?Size)
```

where *Type* is an atom naming a type, *Definition* is the definition of that type, and *Size* is the number of bytes occupied by a foreign term of this type. *Size* will be the atom `unknown` if the size of an object of that type is not known. Such types may not be used as fields in structs or unions, or in arrays. However, pointers to them may be created. If *Type* is not bound at call time, then these procedures will backtrack through all current type definitions.

A definition looks much like the definition given when the type was defined with `type/1`, except that it has been simplified. Firstly, intermediate type names have been elided. For example, if `foo` is defined as `foo=integer`, and `bar` as `bar=foo`, then `type_definition(bar, integer)` would hold. Also, in the definition of a compound type, types of parts are always defined by type names, rather than complex specifications. So if the type of a field in a struct was defined as `pointer(fred)`, then it will show up in the definition as `'$fred'`. Of course, `type_definition('$fred', pointer(fred))` would hold, also.

The following predicates allow the programmer to determine whether or not a given type is atomic:

```
atomic_type(?Type)

atomic_type(?Type, ?Primitive_type)

atomic_type(?Type, ?Primitive_type, ?Size)
```

where *Type* is an atomic type. See Section 10.44.1 [str-fty], page 799, for the definition of an atomic type. *Primitive_type* is the primitive type that *Type* is defined in terms of. *Size* is the number of bytes occupied by an object of type *Type*, or the atom `unknown`, as above. If *Type* is unbound at call time, then these predicates will backtrack through all the currently defined atomic types.

10.44.9 Tips

1. Most important tip: do not subvert the `structs` type system by looking inside foreign terms to get the address, or use `functor/3` to get the type. This has two negative effects: firstly, if the `structs` package should change its representation of foreign terms, then your code will not work. But more importantly, you are more likely to get type mismatches, and likely to get unwrapped terms or even doubly wrapped terms where you expect wrapped ones.
2. Remember that a foreign term `fred(123456)` is not of type `fred`, but a pointer to `fred`. Looked at another way, what resides in memory at address 123456 is of type `fred`.
3. The wrapper put on a foreign term signifies the type of that foreign term. If you declare a type to be `pointer(opaque)` because you want to view that pointer to be opaque, when you get something of this type, then it will be printed as `opaque(456123)`. This is not very informative. It is better to declare

   ```
   fred = opaque,
   thing = struct([...,
                   part:pointer(fred),
                   ...
               ]).
   ```

   so that when you get the contents of the `part` member of a `thing`, it is wrapped as `fred(456123)`.

10.44.10 Example

The following example shows how to use `library(structs)` in a simple package for handling integer arrays. We define a module `minivec` with exported predicates for creating and disposing arrays, accessing its elements, and computing their sum. The summing operation is implemented in C and the rest in Prolog. Arrays are created using the `array(Type)` foreign type.

Note that the type declaration `int32` does not have to be given in the C source code, as it appears in the automatically generated header file `minivec_glue.h`. Note also how the foreign type specification `+pointer(int_array)` corresponds to the C type declaration `int32 *`.

```
                                                                % minivec.pl
:- module(minivec, [
        new_array/2,
        get_array/3,
        put_array/3,
        dispose_array/1,
        sum_array/2
        ]).

:- load_files(library(str_decl), [when(compile_time)]).
:- use_module(library(structs)).

:- foreign_type
        int32           = integer_32,
        int_array       = array(int32).

foreign(c_sum_array, c_sum_array(+integer,
                                 +pointer(int_array),
                                 [-integer])).

foreign_resource(minivec, [c_sum_array]).

:- load_foreign_resource(minivec).

new_array(Size, array(Size,Mem)) :-
        new(int_array, Size, Mem).

get_array(Index, array(_,Mem), Value) :-
        get_contents(Mem, Index, Value).

put_array(Index, array(_,Mem), Value) :-
        put_contents(Mem, Index, Value).

dispose_array(array(_,Mem)) :-
        dispose(Mem).

sum_array(array(Size,Mem), Sum) :-
        c_sum_array(Size, Mem, Sum).
```

```
                                                        /* minivec.c */
#include "minivec_glue.h"

SP_integer c_sum_array(SP_integer cnt, int32 *mem)
{
  int i;
  SP_integer sum = 0;

  for (i=0; i<cnt; i++)
    sum += mem[i];
  return sum;
}
```

```
                                                              # session
% splfr --struct minivec.pl minivec.c
% sicstus -l minivec
% compiling /home/matsc/sicstus4/Suite/minivec.pl...
% [...]
% compiled /home/matsc/sicstus4/Suite/minivec.pl in mod-
ule minivec, 30 msec 68388 bytes
SICStus 4.10.2 ...
Licensed to SICS
| ?- new_array(4, A),
     put_array(0,A,1),
     put_array(1,A,10),
     put_array(2,A,100),
     put_array(3,A,1000),
     sum_array(A,S),
     dispose_array(A).
A = array(4,int_array(1264224)),
S = 1111
```

A fragment from the generated header file:

```
                                                  /* minivec_glue.h */
#include <sicstus/sicstus.h>
#include <stdlib.h>
typedef int int32;
typedef int32 *(int_array)/* really an unknown-size array */;
extern SP_integer c_sum_array( SP_integer, int32 *);
```

10.45 Operating System Utilities—`library(system)`

This package contains utilities for invoking services from the operating system that do not fit elsewhere. This package contains utilities for invoking services from the operating system that does not fit elsewhere.

Exported predicates:

`now(-`*When*`)`
: Unifies the current date and time as a UNIX timestamp with *When*.

`datime(-`*Datime*`)`
: Unifies *Datime* with the current date and time as a `datime/6` record of the form `datime(`*Year*`,`*Month*`,`*Day*`,`*Hour*`,`*Min*`,`*Sec*`)`. All fields are integers.

`datime(+`*When*`,-`*Datime*`)`
`datime(-`*When*`,+`*Datime*`)`
: Convert a time stamp, as obtained by `now/1`, to a `datime/6` record. Can be used in both directions.

`sleep(+`*Seconds*`)`
: Puts the SICStus Prolog process asleep for *Second* seconds, where *Seconds* should be a non-negative number.

`environ(?`*Var*`, ?`*Value*`)`
: *Var* is the name of a system property or an environment variable, and *Value* is its value. Both are atoms. Can be used to enumerate all current system properties and environment variables.

  The same as `environ(`*Var*`, `*Value*`, merged)`.

`environ(?`*Var*`, ?`*Value*`, +`*Source*`)` *since release 4.1*
: *Var* is the name of an environment variable or system property, and *Value* is its value. Both are atoms. Can be used to enumerate all current environment variables and system properties.

  Source is one of `properties`, in which case only system properties are enumerated; `environment`, in which case only environment variables are enumerated; and `merged`, in which case both environment variables and system properties are enumerated. When *Source* is `merged` and an environment variable and a system property have equivalent names, the value of the system property is returned.

  On UNIX-like platforms, two names are equivalent if and only if they are identical. On Windows-like platforms, a case insensitive comparison is used.

  See Section 4.17.1 [System Properties and Environment Variables], page 228, for more information.

10.46 Tcl/Tk Interface—`library(tcltk)`

10.46.1 Introduction

This is a basic tutorial for those SICStus Prolog users who would like to add Tcl/Tk user interfaces to their Prolog applications. The tutorial assumes no prior knowledge of Tcl/Tk but, of course, does assume the reader is proficient in Prolog.

Aware that the reader may not have heard of Tcl/Tk, we will start by answering three questions: what is Tcl/Tk? what is it good for? what relationship does it have to Prolog?

10.46.1.1 What Is Tcl/Tk?

Tcl/Tk, as its title suggests, is actually two software packages: Tcl and Tk. Tcl, pronounced *tickle*, stands for *tool command language* and is a scripting language that provides a programming environment and programming facilities such as variables, loops, and procedures. It is designed to be easily extensible.

Tk, pronounced *tee-kay*, is just such an extension to Tcl, which is a *toolkit* for windowing systems. In other words, Tk adds facilities to Tcl for creating and manipulating user interfaces based on windows and widgets within those windows.

10.46.1.2 What Is Tcl/Tk Good For?

In combination the Tcl and Tk packages (we will call the combination simply Tcl/Tk) are useful for creating graphical user interfaces (GUIs) to applications. The GUI is described in terms of instances of Tk widgets, created through calls in Tcl, and Tcl scripts that form the glue that binds together the GUI and the application. (If you are a little lost at this point, then all will be clear in a moment with a simple example.)

There are lots of systems out there for adding GUIs to applications so why choose Tcl/Tk? Tcl/Tk has several advantages that make it attractive for this kind of work. Firstly, it is good for rapid prototyping of GUIs. Tcl is an interpreted scripting language. The scripts can be modified and executed quickly, with no compilation phase, so speeding up the development loop.

Secondly, it is easier to use a system based on a scripting language, such as Tcl/Tk, than many of the conventional packages available. For example, getting to grips with the X windows suite of C libraries is not an easy task. Tcl/Tk can produce the same thing using simple scripting with much less to learn. The penalty for this is that programs written in an interpreted scripting language will execute more slowly than those written using compiled C library calls, but for many interfaces that do not need great speed Tcl/Tk is fast enough and its ease of use more than outweighs the loss of speed. In any case, Tcl/Tk can easily handle hundreds of events per mouse movement without the user noticing.

Thirdly, Tcl/Tk is good for making cross-platform GUIs. The Tk toolkit has been ported to native look-and-feel widgets on Mac, PC (Windows), and UNIX (X windows) platforms. You can write your scripts once and they will execute on any of these platforms.

Lastly, the software is distributed under a free software license and so is available in both binary and source formats free of charge.

10.46.1.3 What Is Tcl/Tks Relationship to SICStus Prolog?

SICStus Prolog comes with a Prolog library for interfacing to Tcl/Tk. The purpose of the library is to enable Prolog application developers to add GUIs to their applications rapidly and easily.

10.46.1.4 A Quick Example of Tcl/Tk in Action

As a taster, we will show you two simple examples programs that use SICStus Prolog with the Tcl/Tk extensions: the ubiquitous "hello world" example; and a very simple telephone book look up example.

You are not expected to understand how these examples work at this stage. They are something for you to quickly type in to see how easy it is to add GUIs to Prolog programs through Tcl/Tk. After reading through the rest of this tutorial you will fully understand these examples and be able to write your own GUIs.

Here is the "Hello World" program; also in `library('tcltk/examples/ex1.pl')`:

```
:- use_module(library(tcltk)).

go :-
    tk_new([name('Example 1')], Interp),
    tcl_eval(Interp, 'button .fred -text "hello world" \
                      -command { puts "hello world"}', _),
    tcl_eval(Interp, 'pack .fred', _),
    tk_main_loop.
```

SICStus+Tcl/Tk hello world program.

To run it just start up SICStus (under Windows use `sicstus`, not `spwin`), load the program, and evaluate the Prolog goal `go`. The first line of the `go` clause calls `tk_new/2`, which creates a Tcl/Tk interpreter and returns a handle `Interp` through which Prolog will interact with the interpreter. Next a call to `tcl_eval/3` is made, which creates a button displaying the '`hello world`' text. Next a call is made to `tcl_eval/3` that causes the button to be displayed in the main application window. Finally, a call is make to `tk_main_loop/0` that passes control to Tcl/Tk, making sure that window events are serviced.

See how simple it is with just a three line Prolog program to create an application window and display a button in it. Click on the button and see what it does.

The reason you should use `sicstus` under Windows instead of `spwin` is that the latter does not have the C standard streams (`stdin`,`stdout`,`stderr`) and the Tcl command `puts` will give an error if there is no `stdout`.

The previous example showed us how to create a button and display some text in it. It was basically pure Tcl/Tk generated from within Prolog but did not have any interaction with Prolog. The following example demonstrates a simple callback mechanism. A name is typed into a text entry box, a button is pressed, which looks up the telephone number corresponding to the name in a Prolog database, and the telephone number is then displayed.

Here is the code; also in `library('tcltk/examples/ex2.pl')`:

```
:- use_module(library(tcltk)).

telephone(fred, '123-456').
telephone(wilbert, '222-2222').
telephone(taxi, '200-0000').
telephone(mary, '00-36-1-666-6666').

go :-
     tk_new([name('Example 2')], T),
     tcl_eval(T, 'entry .name -textvariable name',_),
     tcl_eval(T, 'button .search -text search -command { \
                      prolog telephone($name,X);         \
                      set result $prolog_variables(X) }', _),
     tcl_eval(T, 'label .result -relief raised -textvariable result', _),
     tcl_eval(T, 'pack .name .search .result -side top -fill x', _),
     tk_main_loop.
```

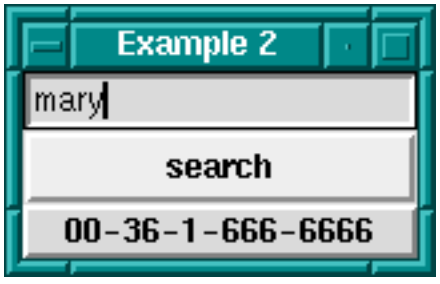

SICStus+Tcl/Tk telephone number lookup

Again, to run the example, start up SICStus Prolog, load the code, and run the goal `go`.

You will notice that three widgets will appear in a window: one is for entering the name of the person or thing that you want to find the telephone number for, the button is for initiating the search, and the text box at the bottom is for displaying the result.

Type *fred* into the entry box, hit the search button and you should see the phone number displayed. You can then try the same thing but with *wilbert*, *taxi* or *mary* typed into the text entry box.

What is happening is that when the button is pressed, the value in the entry box is retrieved, then the `telephone/2` predicate is called in Prolog with the entry box value as first argument, then the second argument of telephone is retrieved (by this time bound to the number) and is displayed below the button.

This is a very crude example of what can be done with the Tcl/Tk module in Prolog. For example, this program does not handle cases where there is no corresponding phone number or where there is more than one corresponding phone number. The example is just supposed to wet your appetite, but all these problems can be handled by Prolog + Tcl/Tk, although with a more sophisticated program. You will learn how to do this in the subsequent chapters.

10.46.1.5 Outline of This Tutorial

Now we have motivated using Tcl/Tk as a means of creating GUIs for Prolog programs, this document goes into the details of using Tcl/Tk as a means of building GUIs for SICStus Prolog applications.

Firstly, Tcl is introduced and its syntax and core commands described. Then the Tk extensions to Tcl are introduced. We show how with Tcl and Tk together the user can build sophisticated GUIs easily and quickly. At the end of this Tcl/Tk part of the tutorial an example of a pure Tcl/Tk program will be presented together with some tips on how to design and code Tcl/Tk GUIs.

The second phase of this document describes the SICStus Prolog `tcltk` library. It provides extensions to Prolog that allow Prolog applications to interact with Tcl/Tk: Prolog can make calls to Tcl/Tk code and vice versa.

Having reached this point in the tutorial the user will know how to write a Tcl/Tk GUI interface and how to get a Prolog program to interact with it, but arranging which process (the Prolog process or the Tcl/Tk process) is the dominant partner is non-trivial and so is described in a separate chapter on event handling. This will help the user choose the most appropriate method of cooperation between Tcl/Tk and Prolog to suit their particular application.

This section, the Tcl/Tk+Prolog section, will be rounded off with the presentation of some example applications that make use of Tcl/Tk and Prolog.

Then there is a short discussion section on how to use other Tcl extension packages with Tcl/Tk and Prolog. Many such extension packages have been written and when added to Prolog enhanced with Tcl/Tk can offer further functionality to a Prolog application.

The appendices provide a full listing with description of the predicates available in the `tcltk` SICStus Prolog library, and the extensions made to Tcl/Tk for interacting with Prolog.

Lastly, a section on resources gives pointers to where the reader can find more information on Tcl/Tk.

10.46.2 Tcl

Tcl is an interpreted scripting language. In this chapter, first the syntax of Tcl is described and then the core commands are described. It is not intended to give a comprehensive description of the Tcl language here but an overview of the core commands, enough to get the user motivated to start writing their own scripts.

For pointers to more information on Tcl; see Section 10.46.7 [Resources], page 900.

10.46.2.1 Syntax

A Tcl script consists of a series of strings separated from each other by a newline character. Each string contains a command or series of semi-colon separated commands. A command is a series of words separated by spaces. The first word in a command is the name of the command and subsequent words are its arguments.

An example is:

```
set a 1
set b 2
```

which is a Tcl script of two commands: the first command sets the value of variable `a` to `1`, and the second command sets the value of variable `b` to `2`.

An example of two commands on the same line separated by a semi-colon is:

```
set a 1; set b 2
```

which is equivalent to the previous example but written entirely on one line.

A command is executed in two phases. In the first phase, the command is broken down into its constituent words and various textual substitutions are performed on those words. In the second phase, the procedure to call is identified from the first word in the command, and the procedure is called with the remaining words as arguments.

There are special syntactic characters that control how the first phase, the substitution phase, is carried out. The three major substitution types are variable substitution, command substitution, and backslash substitution.

Variable substitution happens when a '`$`' prefixed word is found in a command. There are three types of variable substitution:

- `$`*`name`*
  - where *name* is a scalar variable. *name* is simply substituted in the word for its value. *name* can contain only letters, digits, or underscores.
- `$`*`name`*`(`*`index`*`)`
  - where *name* is the name of an array variable and *index* is the index into it. This is substituted by the value of the array element. *name* must contain only letters,

digits, or underscores. *index* has variable, command, and backslash substitution performed on it too.

- `${`*name*`}`
  - where *name* can have any characters in it except closing curly bracket. This is more or less the same as `$`*name* substitution except it is used to get around the restrictions in the characters that can form *name*.

An example of variable substitution is:

```
set a 1
set b $a
```

which sets the value of variable `a` to `1`, and then sets the value of variable `b` to the value of variable `a`.

Command substitution happens when a word contains an open square bracket, '`[`'. The string between the open bracket and matching closing bracket are treated as a Tcl script. The script is evaluated and its result is substituted in place of the original command substitution word.

A simple example of command substitution is:

```
set a 1
set b [set a]
```

which does the same as the previous example but using command substitution. The result of a `set a` command is to return the value of `a`, which is then passed as an argument to `set b` and so variable `b` acquires the value of variable `a`.

Backslash substitution is performed whenever the interpreter comes across a backslash. The backslash is an escape character and when it is encountered is causes the interpreter to handle the next characters specially. Commonly escaped characters are '`\a`' for audible bell, '`\b`' for backspace, '`\f`' for form feed, '`\n`' for newline, '`\r`' for carriage return, '`\t`' for horizontal tab, and '`\v`' for vertical tab. Double-backslash, '`\\`', is substituted with a single backslash. Other special backslash substitutions have the following forms:

- `\ooo`
  - the digits `ooo` give the octal value of the escaped character
- `\xHH`
  - the `x` denotes that the following hexadecimal digits are the value of the escaped character

Any other character that is backslash escaped is simply substituted by the character itself. For example, `\W` is replaced by `W`.

A further syntactic construction is used to *delay substitution*. When the beginning of a word starts with a curly bracket, '`{`', it does not do any of the above substitutions between the opening curly bracket and its matching closing curly bracket. The word ends with the

matching closing curly bracket. This construct is used to make the bodies of procedures in which substitutions happen when the procedure is called, not when it is constructed. Or it is used anywhere when the programmer does not want the normal substitutions to happen. For example:

```
puts {I have $20}
```

will print the string '`I have $20`' and will not try variable substitution on the '`$20`' part.

A word delineated by curly brackets is replaced with the characters within the brackets without performing the usual substitutions.

A word can begin with a *double-quote* and end with the matching closing double-quote. Substitutions as detailed above are done on the characters between the quotes, and the result is then substituted for the original word. Typically double-quotes are used to group sequences of characters that contain spaces into a single command word.

For example:

```
set name "Fred the Great"
puts "Hello my name is $name"
```

outputs '`Hello my name is Fred the Great`'. The first command sets the value of variable `name` to the following double-quoted string `"Fred the Great"`. The next command prints its argument, a single argument because it is a word delineated by double-quotes, that has had variable substitution performed on it.

Here is the same example but using curly brackets instead of double-quotes:

```
set name {Fred the Great}
puts {Hello my name is $name}
```

gives the output '`Hello my name is $name`' because substitutions are suppressed by the curly bracket notation.

And again the same example but without either curly brackets or double-quotes:

```
set name Fred the Great
puts Hello my name is $name
```

simply fails because both `set` and `puts` expect a single argument but without the word grouping effects of double-quotes or curly brackets they find that they have more than one argument and throw an exception.

Being a simple scripting language, Tcl does not have any real idea of data types. The interpreter simply manipulates strings. The Tcl interpreter is not concerned with whether those strings contain representations of numbers or names or lists. It is up to the commands themselves to interpret the strings that are passed to them as arguments in any manner those choose.

10.46.2.2 Variables

This has been dealt with implicitly above. A variable has a name and a value. A name can be any string whatsoever, as can its value.

For example,

```
set "Old King Cole" "merry soul"
```

sets the value of the variable named `Old King Cole` to the value `merry soul`. Variable names can also be numbers:

```
set 123 "one two three"
```

sets the variable with name `123` to the value `one two three`. In general, it is better to use the usual conventions — start with a letter then follow with a combination of letters, digits, and underscores — when giving variables names to avoid confusion.

Array variables are also available in Tcl. These are denoted by an array name followed by an array index enclosed in round brackets. As an example:

```
set fred(one) 1
set fred(two) 2
```

will set the variable `fred(one)` to the value `1` and `fred(two)` to the value `2`.

Tcl arrays are associative arrays in that both the array name and the array index can be arbitrary strings. This also makes multidimensional arrays possible if the index contains a comma:

```
set fred(one,two) 12
```

It is cheating in that the array is not stored as a multidimensional array with a pair of indices, but as a linear array with a single index that happens to contain a comma.

10.46.2.3 Commands

Now that the Tcl syntax and variables have been been dealt with, we will now look at some of the commands that are available.

Each command when executed returns a value. The return value will be described along with the command.

A quick word about the *notation* used to describe Tcl commands. In general, a description of a command is the name of the command followed by its arguments separated by spaces. An example is:

```
set varName ?value?
```

which is a description of the Tcl set command, which takes a variable name *varName* and an optional argument, a *value*.

Optional arguments are enclosed in question mark, *?*, pairs, as in the example.

A series of three dots ... represents repeated arguments. An example is a description of the `unset` command:

```
unset varName ?varName varName ...?
```

which shows that the `unset` command has at least one compulsory argument *varName* but has any number of subsequent optional arguments.

The most used *command over variables* is the `set` command. It has the form

```
set varName ?value?
```

The value of *value* is determined, the variable *varName* is set to it, and the value is returned. If there is no *value* argument, then the value of the variable is simply returned. It is thus used to set and/or get the value of a variable.

The `unset` command is used to remove variables completely from the system:

```
unset varName ?varName varName ...?
```

which given a series of variable names deletes them. The empty string is always returned.

There is a special command for incrementing the value of a variable:

```
incr varName ?increment?
```

which, given the name of a variable whose value is an integer string, increments it by the amount *increment*. If the *increment* part is left out, then it defaults to `1`. The return value is the new value of the variable.

Expressions are constructed from operands and operators and can then be evaluated. The most general expression evaluator in Tcl is the `expr` command:

```
expr arg ?arg arg ... arg?
```

which evaluates its arguments as an expression and returns the value of the evaluation.

A simple example expression is

```
expr 2 * 2
```

which when executed returns the value `4`.

There are different classes of operators: arithmetic, relational, logical, bitwise, and choice. Here are some example expressions involving various operators:

arithmetic	`$x * 2`
relational	`$x > 2`
logical	`($x == $y) || ($x == $z)`

bitwise `8 & 2`
choice `($a == 1) ? $x : $y`

Basically the operators follow the syntax and meaning of their ANSI C counterparts.

Expressions to the `expr` command can be contained in curly brackets in which case the usual substitutions are not done before the `expr` command is evaluated, but the command does its own round of substitutions. So evaluating a script such as:

```
set a 1
expr { ($a==1) : "yes" ? "no" }
```

will evaluate to `yes`.

Tcl also has a whole host of math functions that can be used in expressions. Their evaluation is again the same as that for their ANSI C counterparts. For example:

```
expr { 2*log($x) }
```

will return 2 times the natural log of the value of variable `x`.

Tcl has a notion of *lists*, but as with everything it is implemented through strings. A list is a string that contains words.

A simple list is just a space separated series of strings:

```
set a {one two three four five}
```

will set the variable `a` to the list containing the five strings shown. The empty list is denoted by an open and close curly bracket pair with nothing in between: `{}`.

For the Prolog programmer, there is much confusion between a Prolog implementation of lists and the Tcl implementation of lists. In Prolog we have a definite notion of the printed representation of a list: a list is a sequence of terms enclosed in square brackets (we ignore dot notation for now); a nested list is just another term.

In Tcl, however, a list is really just a string that conforms to a certain syntax: a string of space separated words. But in Tcl there is more than one way of generating such a string. For example,

```
set fred {a b c d}
```

sets `fred` to

```
"a b c d"
```

as does

```
set fred "a b c d"
```

because `{a b c d}` evaluates to the string `a b c d`, which has the correct syntax for a list. But what about nested lists? Those are represented in the final list-string as being contained in curly brackets. For example:

```
set fred {a b c {1 2 3} e f}
```

results in `fred` having the value

```
"a b c {1 2 3} e f"
```

The outer curly brackets from the `set` command have disappeared, which causes confusion. The curly brackets within a list denote a nested list, but there are no curly brackets at the top level of the list. (We cannot help thinking that life would have been easier if the creators of Tcl would have chosen a consistent representation for lists, as Prolog and LISP do.)

So remember: a list is really a string with a certain syntax, space separated items or words; a nested list is surrounded by curly brackets.

There are a dozen commands that operate on lists.

`concat` *?list list ...?*

This makes a list out of a series of lists by concatenating its argument lists together. The return result is the list resulting from the concatenation.

`lindex` *list index*

returns the *index*-th element of the *list*. The first element of a list has an index of 0.

`linsert` *list index value ?value ...?*

returns a new list in which the *value* arguments have been inserted in turn before the *index*-th element of *list*.

`list` *?value value ...?*

returns a list where each element is one of the *value* arguments.

`llength` *list*

returns the number of elements in list *list*.

`lrange` *list first last*

returns a slice of a list consisting of the elements of the list *list* from index *first* until index *last*.

`lreplace` *list first last ?value ... value?*

returns a copy of list *list* but with the elements between indices *first* and *last* replaced with a list formed from the *value* arguments.

```
lsearch ?-exact? ?-glob? ?-regexp? list pattern
```

returns the index of the first element in the list that matches the given pattern. The type of matching done depends on which of the switch is present `-exact`, `-glob`, `-regexp`, is present. Default is `-glob`.

```
lsort ?-ascii? ?-integer? ?-real? ?-command com-
mand? ?-increasing? ?-decreasing{? list
```

returns a list, which is the original list *list* sorted by the chosen technique. If none of the switches supplies the intended sorting technique, then the user can provide one through the `-command` *command* switch.

There are also two useful commands for converting between lists and strings:

```
join list ?joinString?
```

which concatenates the elements of the list together, with the separator *joinString* between them, and returns the resulting string. This can be used to construct filenames; for example:

```
set a {{} usr local bin}
set filename [join $a /]
```

results in the variable `filename` having the value `/usr/local/bin`.

The reverse of the `join` command is the `split` command:

```
split string ?splitChars?
```

which takes the string *string* and splits it into string on *splitChars* boundaries and returns a list with the strings as elements. An example is splitting a filename into its constituent parts:

```
set a [split /usr/local/src /]
```

gives `a` the value `{{} usr local src}`, a list.

Tcl has the four usual classes of *control flow* found in most other programming languages:

```
if...elseif...else, while, for, foreach, switch, and eval.
```

We go through each in turn.

The general form of an `if` command is the following:

```
if test1 body1 ?elseif test2 body2 elseif ...? ?else bodyn?
```

which when evaluated, evaluates expression *test1*, which if true causes *body1* to be evaluated, but if false, causes *test2* to be evaluated, and so on. If there is a final `else` clause, then its *bodyn* part is evaluated if all of the preceding tests failed. The return result of an `if` statement is the result of the last *body* command evaluated, or the empty list if none of the bodies are evaluated.

Conditional looping is done through the `while` command:

```
while test body
```

which evaluates expression *test*, which if true then evaluates *body*. It continues to do that until *test* evaluates to 0, and returns the empty string.

A simple example is:

```
set a 10
while {$a > 0} { puts $a; incr a -1 }
```

which initializes variable `a` with value ten and then loops printing out the value of `a` and decrementing it until its value is 0, when the loop terminates.

The `for` loop has the following form:

```
for init test reinit body
```

which initializes the loop by executing *init*, then each time around the loop the expression *test* is evaluated, which if true causes *body* to be executed and then executes *reinit*. The loop spins around until *test* evaluates to 0. The return result of a `for` loop is the empty string.

An example of a `for` loop:

```
for {set a 10} ($a>0) {incr a -1} {puts $a}
```

which initializes the variable `a` with value `10`, then goes around the loop printing the value of `a` and decrementing it as long as its value is greater than `0`. Once it reaches `0` the loop terminates.

The `foreach` command has the following form:

```
foreach varName list body
```

where *varName* is the name of a variable, *list* is an instance of a list, and *body* is a series of commands to evaluate. A `foreach` then iterates over the elements of a list, setting the variable *varName* to the current element, and executes *body*. The result of a `foreach` loop is always the empty string.

An example of a `foreach` loop:

```
foreach friend {joe mary john wilbert} {puts "I like $friend"}
```

will produce the output:

```
I like joe
I like mary
I like john
I like wilbert
```

There are also a couple of commands for controlling the flow of loops: `continue` and `break`.

`continue` stops the current evaluation of the body of a loop and goes on to the next one.

`break` terminates the loop altogether.

Tcl has a general switch statement, which has two forms:

```
switch ?options? string pattern body ?pattern body ... ?
switch ?options? string { pattern body ?pattern body ...? }
```

When executed, the switch command matches its *string* argument against each of the *pattern* arguments, and the *body* of the first matching pattern is evaluated. The matching algorithm depends on the options chosen, which can be one of

`-exact`	use exact matching
`-glob`	use glob-style matching
`-regexp`	use regular expression matching

An example is:

```
set a rob
switch -glob $a {
    a*z { puts "A to Z"}
    r*b { puts "rob or rab"}
}
```

which will produce the output:

```
rob or rab
```

There are two forms of the `switch` command. The second form has the command arguments surrounded in curly brackets. This is primarily so that multi-line switch commands can be formed, but it also means that the arguments in brackets are not evaluated (curly brackets suppress evaluation), whereas in the first type of switch statement the arguments are first evaluated before the switch is evaluated. These effects should be borne in mind when choosing which kind of switch statement to use.

The final form of control statement is `eval`:

```
eval arg ?arg ...?
```

which takes one or more arguments, concatenates them into a string, and executes the string as a command. The return result is the normal return result of the execution of the string as a command.

An example is

```
set a b
set b 0
eval set $a 10
```

which results in the variable `b` being set to `10`. In this case, the return result of the `eval` is `10`, the result of executing the string `"set b 10"` as a command.

Tcl has several *commands over strings*. There are commands for searching for patterns in strings, formatting and parsing strings (much the same as `printf` and `scanf` in the C language), and general string manipulation commands.

Firstly we will deal with formatting and parsing of strings. The commands for this are `format` and `scan` respectively.

```
format formatString ?value value ...?
```

which works in a similar to C's `printf`; given a format string with placeholders for values and a series of values, return the appropriate string.

Here is an example of printing out a table for base 10 logarithms for the numbers 1 to 10:

```
for {set n 1} {$n <= 10} {incr n} {
    puts [format "log10(%d) = %.4f" $n [expr log10($n)]]
}
```

which produces the output

```
ln(1) = 0.0000
ln(2) = 0.3010
ln(3) = 0.4771
ln(4) = 0.6021
ln(5) = 0.6990
ln(6) = 0.7782
ln(7) = 0.8451
ln(8) = 0.9031
ln(9) = 0.9542
ln(10) = 1.0000
```

The reverse function of `format` is `scan`:

```
scan string formatString varName ?varName ...?
```

which parses the string according to the format string and assigns the appropriate values to the variables. it returns the number of fields successfully parsed.

An example,

```
scan "qty 10, unit cost 1.5, total 15.0" \
     "qty %d, unit cost %f, total %f"    \
     quantity cost_per_unit total
```

would assign the value 10 to the variable `quantity`, 1.5 to the variable `cost_per_unit` and the value 15.0 to the variable `total`.

There are commands for performing two kinds of pattern matching on strings: one for matching using regular expressions, and one for matching using UNIX-style wildcard pattern matching (globbing).

The command for regular expressions matching is as follows:

```
regexp ?-indices? ?-nocase? exp string ?matchVar? ?subVar subVar ...?
```

where *exp* is the regular expression and *string* is the string on which the matching is performed. The regexp command returns 1 if the expression matches the string, 0 otherwise. The optional `-nocase` switch does matching without regard to the case of letters in the string. The optional *matchVar* and *subVar* variables, if present, are set to the values of string matches. In the regular expression, a match that is to be saved into a variable is enclosed in round braces. An example is

```
regexp {([0-9]+)} "I have 3 oranges" a
```

will assign the value 3 to the variable `a`.

If the optional switch `-indices` is present, then instead of storing the matching substrings in the variables, the indices of the substrings are stored; that is a list with a pair of numbers denoting the start and end position of the substring in the string. Using the same example:

```
regexp -indices {([0-9]+)} "I have 3 oranges" a
```

will assign the value `"7 7"`, because the matched numeral `3` is in the eighth position in the string, and indices count from 0.

String matching using the UNIX-style wildcard pattern matching technique is done through the `string match` command:

```
string match pattern string
```

where *pattern* is a wildcard pattern and *string* is the string to match. If the match succeeds, then the command returns 1; otherwise, it returns 0. An example is

```
string match {[a-z]*[0-9]} {a_$%^_3}
```

which matches because the command says match any string that starts with a lower case letter and ends with a number, regardless of anything in between.

There is a command for performing string substitutions using regular expressions:

```
regsub ?-all? ?-nocase? exp string subSpec varName
```

where *exp* is the regular expression and *string* is the input string on which the substitution is made, *subSpec* is the string that is substituted for the part of the string matched by the regular expression, and *varName* is the variable on which the resulting string is copied into. With the `-nocase` switch, the matching is done without regard to the case of letters in the input string. The `-all` switch causes repeated matching and substitution to happen on the input string. The result of a `regsub` command is the number of substitutions made.

An example of string substitution is:

```
regsub {#name#} {My name is #name#} Rob result
```

which sets the variable `result` to the value "My name is Rob". An example of using the `-all` switch:

```
regsub -all {#name#} {#name#'s name is #name#} Rob result
```

sets the variable `result` to the value "Rob's name is Rob" and it returns the value 2 because two substitutions were made.

The are a host of other ways to manipulate strings through variants of the `string` command. Here we will go through them.

To select a character from a string given the character position, use the `string index` command. An example is:

```
string index "Hello world" 6
```

which returns `w`, the 7th character of the string. (Strings are indexed from 0).

To select a substring of a string, given a range of indices use the `string range` command. An example is:

```
string range "Hello world" 3 7
```

which returns the string "lo wo". There is a special index marker named `end`, which is used to denote the the end of a string, so the code

```
string range "Hello world" 6 end
```

will return the string "world".

There are two ways to do simple search for a substring on a string, using the `string first` and `string last` commands. An example of `string first` is:

```
string first "dog" "My dog is a big dog"
```

find the first position in string "My dog is a big dog" that matches "dog". It will return the position in the string in which the substring was found, in this case 3. If the substring cannot be found, then the value -1 is returned.

Similarly,

```
string last "dog" "My dog is a big dog"
```

will return the value 16 because it returns the index of the last place in the string that the substring matches. Again, if there is no match, then -1 is returned.

To find the length of a string use `string length`, which given a string simply returns its length.

```
string length "123456"
```

returns the value 6.

To convert a string completely to upper case use `string toupper`:

```
string toupper "this is in upper case"
```

returns the string "THIS IS IN UPPER CASE".

Similarly,

```
string tolower "THIS IS IN LOWER CASE"
```

returns the string "this is in lower case".

There are commands for removing characters from strings: `string trim`, `string trimright`, and `string trimleft`.

```
string trim string ?chars?
```

which removes the characters in the string *chars* from the string *string* and returns the trimmed string. If *chars* is not present, then whitespace characters are removed. An example is:

```
string string "The dog ate the exercise book" "doe"
```

which would return the string "Th g at th xrcis bk".

`string trimleft` is the same as `string trim` except only leading characters are removed. Similarly `string trimright` removes only trailing characters. For example:

```
string trimright $my_input
```

would return a copy of the string contained in `$my_input` but with all the trailing whitespace characters removed.

There is a comprehensive set of commands for *file manipulation*. We will cover only the some of the more important ones here.

To open a file the `open` command is used:

```
open name ?access?
```

where *name* is a string containing the filename, and the option *access* parameter contains a string of access flags, in the UNIX style. The return result is a handle to the open file.

If *access* is not present, then the access permissions default to `"r"`, which means open for reading only. The command returns a file handle that can be used with other commands. An example of the use of the `open` command is

```
set fid [open "myfile" "r+"]
```

which means open the file `myfile` for both reading and writing and set the variable `fid` to the file handle returned.

To close a file simply use

```
close fileId
```

For example,

```
close $fid
```

will close the file that has the file handle stored in the variable `fid`.

To read from a file, the `read` command is used:

```
read fileId numBytes
```

which reads *numBytes* bytes from the file attached to file handle *fileId*, and returns the bytes actually read.

To read a single line from a file use `gets`:

```
gets fileId ?varName?
```

which reads a line from the file attached to file handle *fileId* but chops off the trailing newline. If variable *varName* is specified, then the string read in is stored there and the number of bytes is returned by the command. If the variable is not specified, then the command returns the string only.

To write to a file, use `puts`:

```
puts ?-nonewline? ?fileId? string
```

which outputs the string *string*. If the file handle *fileId* is present, then the string is output to that file; otherwise, it is printed on `stdout`. If the switch `-nonewline` is present, then a trailing newline is not output.

To check if the end of a file has been reached, use `eof`:

```
eof fileId
```

which, given a file handle *fileId* returns 1 if the end has been reached, and 0 otherwise.

The are a host of other commands over files and processes, which we will not go into here.

(For extra information on file I/O commands, refer to the Tcl manual pages.)

Tcl provides a way of *creating new commands*, called procedures, that can be executed in scripts. The arguments of a procedure can be call-by-value or call-by-reference, and there is also a facility for creating new user defined control structures using procedures.

A procedure is declared using the `proc` command:

```
proc name argList body
```

where the name of the procedure is *name*, the arguments are contained in *argList* and the body of the procedure is the script *body*. An example of a procedure is:

```
proc namePrint { first family } {
    puts "My first name is $first"
    puts "My family name is $family"
}
```

which can be called with

```
namePrint Tony Blair
```

to produce the output:

```
My first name is Tony
My family name is Blair
```

A procedure with no arguments is specified with an empty argument list. An example is a procedure that just prints out a string:

```
proc stringThing {} {
    puts "I just print this string"
}
```

Arguments can be given defaults by pairing them with a value in a list. An example here is a counter procedure:

```
proc counter { value { inc 1 } } {
    eval $value + $inc
}
```

which can be called with two arguments like this

```
set v 10
set v [counter $v 5]
```

which will set variable `v` to the value 15; or it can be called with one argument:

```
set v 10
set v [counter $v]
```

in which case `v` will have the value 11, because the default of the argument `inc` inside the procedure is the value 1.

There is a special argument for handling procedures with variable number of arguments, the `args` argument. An example is a procedure that sums a list of numbers:

```
proc sum { args } {
    set result 0;

    foreach n $args {
     set result [expr $result + $n ]
    }

    return $result;
}
```

which can be called like this:

```
sum 1 2 3 4 5
```

which returns the value 15.

The restriction on using defaulted arguments is that all the arguments that come after the defaulted ones must also be defaulted. If `args` are used, then it must be the last argument in the argument list.

A procedure can return a value through the `return` command:

```
return ?options? ?value?
```

which terminates the procedure returning value *value*, if specified, or just causes the procedure to return, if no value specified. (The *?options?* part has to do with raising exceptions, which we will will not cover here.)

The return result of a user defined procedure is the return result of the last command executed by it.

So far we have seen the arguments of a procedure are passed using the call-by-value mechanism. They can be passed call by reference using the `upvar` command:

```
upvar ?level? otherVar1 myVar1 ?otherVar2 myVar2 ...?
```

which makes accessible variables somewhere in a calling context with the current context. The optional argument *level* describes how many calling levels up to look for the variable. This is best shown with an example:

```
set a 10
set b 20

proc add { first second } {
    upvar $first f $second s
    expr $f+$s
}
```

which when called with

```
add a b
```

will produce the result 30. If you use call-by-value instead:

```
add $a $b
```

then the program will fail because when executing the procedure `add` it will take the first argument 10 as the level argument, a bad level. (Also variable `20` does not exist at any level.)

New control structures can be generated using the `uplevel` command:

```
uplevel ?level? arg ?arg arg ...?
```

which is like `eval`, but it evaluates its arguments in a context higher up the calling stack. How far up the stack to go is given by the optional *level* argument.

```
proc do { loop condition } {
    set nostop 1

    while { $nostop } {
        uplevel $loop
        if {[uplevel "expr $condition"] == 0} {
            set nostop 0
         }
    }
}
```

which when called with this

```
set x 5
do { puts $x; incr x -1 } { $x > 0 }
```

will print

```
5
4
3
2
1
```

(**Please note**: this does not quite work for all kinds of calls because of `break`, `continue`, and `return`. It is possible to get around these problem, but that is outside the scope of this tutorial.)

A word about the *scope of variables*. Variables used within procedures are normally created only for the duration of that procedure and have local scope.

It is possible to declare a variable as having global scope, through the `global` command:

```
global name1 ? name2 ...?
```

where *name1*, *name2*, . . ., are the names of global variables. Any references to those names will be taken to denote global variables for the duration of the procedure call.

Global variables are those variables declared at the topmost calling context. It is possible to run a `global` command at anytime in a procedure call. After such a command, the variable name will refer to a global variable until the procedure exits.

An example:

```
set x 10

proc fred { } {
    set y 20
    global x
    puts [expr $x + $y]
}

fred
```

will print the result `30` where 20 comes from the local variable `y` and 10 comes from the global variable `x`.

Without the `global x` line, the call to `fred` will fail with an error because there is no variable `x` defined locally in the procedure for the `expr` to evaluate over.

In common with other scripting languages, there is a command for *evaluating the contents of a file* in the Tcl interpreter:

```
source fileName
```

where *fileName* is the filename of the file containing the Tcl source to be evaluated. Control returns to the Tcl interpreter once the file has been evaluated.

10.46.2.4 What We Have Left Out

We have left out a number of Tcl commands as they are outside of the scope of this tutorial. We list some of them here to show some of what Tcl can do. Please refer to the Tcl manual for more information.

http implements the HTTP protocol for retrieving web pages

namespaces
a modules systems for Tcl

trace commands can be attached to variables that are triggered when the variable changes value (amongst other things)

processes start, stop, and manage processes

sockets UNIX and Internet style socket management

exception handling
3rd party extension packages
load extension packages into Tcl and use their facilities as native Tcl commands

10.46.3 Tk

Tk is an extension to Tcl. It provides Tcl with commands for easily creating and managing graphical objects, or widgets, so providing a way to add graphical user interfaces (GUIs) to Tcl applications.

In this section we will describe the main Tk widgets, the Tcl commands used to manipulate them, how to give them behaviors, and generally how to arrange them into groups to create a GUI.

10.46.3.1 Widgets

A widget is a "window object". It is something that is displayed that has at least two parts: a state and a behavior. An example of a widget is a button. Its state is things like what color is it, what text is written it in, and how big it is. Its behavior is things like what it does when you click on it, or what happens when the cursor is moved over or away from it.

In Tcl/Tk there are three parts to creating a useful widget. The first is creating an instance of the widget with its initial state. The second is giving it a behavior by defining how the widget behaves when certain events happen — event handling. The third is actually displaying the widget possibly in a group of widgets or inside another widget — geometry management. In fact, after creating all the widgets for a GUI, they are not displayed until handled by a geometry manager, which has rules about how to calculate the size of the widgets and how they will appear in relation to each other.

10.46.3.2 Types of Widget

In Tcl/Tk there are currently 15 types of widget. In alphabetical order they are (see also `library('tcltk/examples/widgets.tcl')`):

`button` a simple press button

`canvas` is a container for displaying "drawn" objects such as lines, circles, and polygons.

`checkbutton`
a button that hold a state of either on or off

`entry` a text entry field

`frame` a widget that is a container for other widgets

`label` a simple label

`listbox` a box containing a list of options

`menu` a widget for creating menu bars

`menubutton`
a button, which when pressed offers a selection of choices

`message` a multi-line text display widget

`radiobutton`
a button used to form groups of mutually interacting buttons (When one button is pressed down, the others pop up.)

`scale` is like a slider on a music console. It consists of a trough scale and a slider. Moving the slider to a position on the scale sets the overall value of the widget to that value.

`scollbar` used to add scrollbars to windows or canvases. The scrollbar has a slider, which when moved changes the value of the slider widget.

`text` a sophisticated multi-line text widget that can also display other widgets such as buttons

`toplevel` for creating new standalone toplevel windows. (These windows are containers for other widgets. They are not terminal windows.)

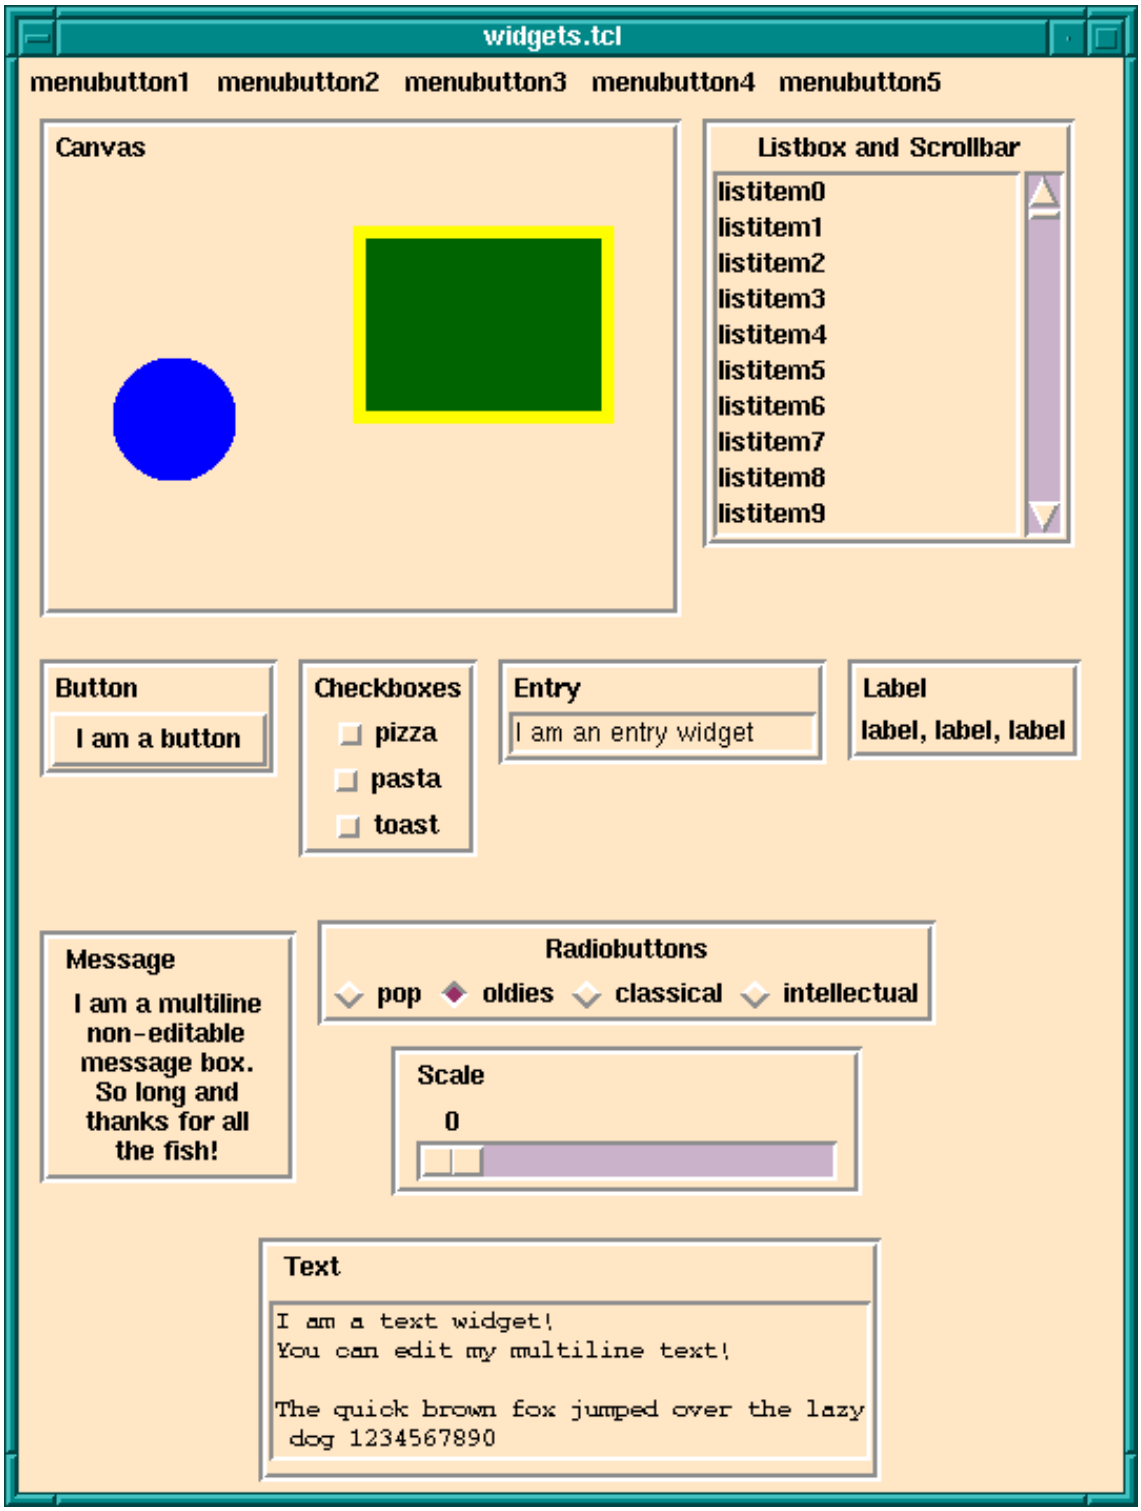

Meet The Main Tk Widgets

10.46.3.3 Widgets Hierarchies

Before going further it is necessary to understand how instances of widgets are named. Widgets are arranged in a hierarchy. The names of widget instances are formed from dot

separated words. The root window is simply `.` on its own. So for, example, a button widget that is displayed in the root window might have the name `.b1`. A button that is displayed inside a frame that is displayed inside the root window may have the name `.frame1.b1`. The frame would have the name `.frame1`.

Following this notation, it is clear that widgets are both formed in hierarchies, with the dot notation giving the path to a widget, and in groups, all widgets with the same leading path are notionally in the same group.

(It is a similar to the way file systems are organized. A file has a path that shows where to find it in the hierarchical file system. But also files with the same leading path are in the same directory/folder and so are notionally grouped together.)

An instance of a widget is created through the a Tcl command for that widget. The widget command my have optional arguments set for specifying various attributes of the widget that it will have when it is created. The result of a successful widget command is the name of the new widget.

For example, a command to create a button widget named `.mybutton` that displays the text "I am a button" would look like this:

```
button .mybutton -text "I am a button"
```

and this will return the name `.mybutton`.

A widget will only be created if all the windows/widgets in the leading path of the new widget also exist, and also that the name of the new widget does not already exist.

For example, the following

```
button .mybutton -text "I am a button"
button .mybutton -text "and so am I"
```

will fail at the second command because there is also a widget named `.mybutton` from the first command.

The following will also fail

```
button .frame.mybutton -text "I am a button"
```

if there is no existing widget with the name `.frame` to be the parent of `.mybutton`.

All this begs the question: why are widgets named and arranged in a hierarchy? Is not a GUI just a bunch of widgets displayed in a window?

This is not generally how GUIs are arranged. For example, they often have a menubar over the top of each window. The menubar contains pulldown menus. The pulldown menus may have cascading menu items that may cascade down several levels. Under the menu bar is the main part of the window that may also be split into several "frames". A left hand frame my have a set of buttons in it, for example. And so on. From this you can see that the

widgets in GUIs are naturally arranged in a hierarchy. To achieve this in Tcl/Tk instances of widgets are placed in a hierarchy, which is reflected in their names.

Now we will go through each of the widget commands in turn. Each widget command has many options most of which will not be described here. Just enough will be touched on for the reader to understand the basic operation of each widget. For a complete description of each widget and its many options refer to the Tk manual.

10.46.3.4 Widget Creation

As has already been said, a widget is a window object that has state and behavior. In terms of Tcl/Tk a widget is created by calling a widget creation command. There is a specific widget creation for each type of widget.

The widget creation command is supplied with arguments. The first argument is always the name you want to give to the resulting widget; the other arguments set the initial state of the widget.

The immediate result of calling a widget creation command is that it returns the name of the new widget. A side effect is that the instance of the widget is created and its name is defined as in the Tcl interpreter as a procedure through which the widget state can be accessed and manipulated.

This needs an example. We will use the widget creator command `button` to make a button widget:

```
button .fred -text 'Fred' -background red
```

which creates an instance of a button widget named `.fred` that will display the text `Fred` on the button and will have a red background color. Evaluating this command returns the string `.fred`, the name of the newly created widget.

As a side effect, a Tcl procedure named `.fred` is created. A call to a widget instance has the following form:

```
widgetName method methodArgs
```

where *widgetName* is the name of the widget to be manipulated, *method* is the action to be performed on the widget, and *methodArgs* are the arguments passed to the method that is performed on the widget.

The two standard methods for widgets are `configure` and `cget`. `configure` - is used to change the state of a widget; for example:

```
.fred configure -background green -text 'Sid'
```

will change the background color of the widget `.fred` to green and the text displayed to `Sid`.

`cget` is used to get part of the state of a widget; for example:

```
.fred cget -text
```

will return `Sid` if the text on the button `.fred` is `Sid`.

In addition to these general methods, there are special methods for each widget type. For example, with button widgets you have the `flash` and `invoke` methods.

For example,

```
.fred invoke
```

can be called somewhere in the Tcl code to invoke button `.fred` as though it had been clicked on.

```
.fred flash
```

can be called somewhere in the Tcl code to cause the button to flash.

We will come across some of these special method when we discuss the widgets in detail. For a comprehensive list of widget methods, refer to entry for the appropriate widget creation command in the Tcl/Tk manual.

We now discuss the widget creation command for each widget type.

A *label* is a simple widget for displaying a single line of text. An example of creating an instance of a label is

```
label .l -text "Hello world!"
```

which simply creates the label named `.l` with the text '`Hello world!`' displayed in it. Most widgets that display text can have a variable associated with them through the option `-textvariable`. When the value of the variable is changed the text changes in the associated label. For example,

```
label .l -text "Hello world!" -textvariable mytext
```

creates a text label called `.l` displaying the initial text '`Hello world!`' and associated text variable `mytext`; `mytext` will start with the value '`Hello world!`'. However, if the following script is executed:

```
set mytext "Goodbye moon!"
```

then the text in the label will magically change to '`Goodbye moon!`'.

A *message widget* is similar to a label widget but for multi-line text. As its name suggests it is mostly used for creating popup message information boxes.

An example of a message widget is

```
message .msg -text "Your data is incorrect.\n\n \
              Please correct it and try again." \
    -justify center
```

which will create a message widget displaying the text shown, center justified. The width of the message box can be given through the `-width` switch. Any lines that exceed the width of the box are wrapped at word boundaries.

Calling the `button` command creates an instance of a *button widget*. An example is:

```
button .mybutton -text "hello" -command {puts "howdie!"}
```

which creates a button with name `.mybutton` that will display the text `"hello"` and will execute the Tcl script `puts "howdie!"` (that is print `howdie!` to the terminal) when clicked on.

Checkbuttons are buttons that have a fixed state that is either on or off. Clicking on the button toggles the state. To store the state, a checkbutton is associated with a variable. When the state of the checkbutton changes, so does that of the variable. An example is:

```
checkbutton .on_or_off -text "I like ice cream" -variable ice
```

which will create a checkbutton with name `.on_or_off` displaying the text '`I like ice cream`' and associated with the variable `ice`. If the checkbutton is checked, then `ice` will have the value 1; if not checked, then it will have the value 0. The state of the checkbutton can also be changed by changing the state of the variable. For example, executing

```
set ice 0
```

will set the state of `.on_or_off` to not checked.

Radiobuttons are buttons that are grouped together to select one value among many. Each button has a value, but only one in the button group is active at any one time. In Tcl/Tk this is achieved by creating a series of radiobutton that share an associated variable. Each button has a value. When a radiobutton is clicked on, the variable has that value and all the other buttons in the group are put into the off state. Similarly, setting the value of the variable is reflected in the state of the button group. An example is:

```
radiobutton .first -value one -text one -variable count
radiobutton .second -value two -text two -variable count
radiobutton .third -value three -text three -variable count
```

which creates three radiobuttons that are linked through the variable `count`. If button `.second` is active, for example, then the other two buttons are in the inactive state and `count` has the value `two`. The following code sets the button group to make the button `.third` active and the rest inactive regardless of the current state:

```
set count three
```

If the value of `count` does not match any of the values of the radiobuttons, then they will all be off. For example executing the script

```
set count four
```

will turn all the radiobuttons off.

An *entry widget* allows input of a one line string. An example of an entry widget:

```
label .l -text "Enter your name"
entry .e -width 40 -textvariable your_name
```

would display a label widget named `.l` showing the string '`Enter your name`' and an entry widget named `.e` of width 40 characters. The value of variable `your_name` will reflect the string in the entry widget: as the entry widget string is updated, so is the value of the variable. Similarly, changing the value of `your_name` in a Tcl script will change the string displayed in the entry field.

A *scale widget* is for displaying an adjustable slider. As the slider is moved its value, which is displayed next to the slider, changes. To specify a scale, it must have `-from` and `-to` attributes, which is the range of the scale. It can have a `-command` option, which is set to a script to evaluate when the value of the slider changes.

An example of a scale widget is:

```
scale .s -from 0 -to 100
```

which creates a scale widget with name `.s` that will slide over a range of integers from 0 to 100.

There are several other options that scales can have. For example it is possible to display tick marks along the length of the scale through the `-tickinterval` attribute, and it is possible to specify both vertically and horizontally displayed scales through the `-orient` attribute.

A *listbox* is a widget that displays a list of single line strings. One or more of the strings may be selected through using the mouse. Initializing and manipulating the contents of a listbox is done through invoking methods on the instance of the listbox. As examples, the `insert` method is used to insert a string into a listbox, `delete` to delete one, and `get` to retrieve a particular entry. Also the currently selected list items can be retrieved through the `selection` command.

Here is an example of a listbox that is filled with entries of the form `entry N`:

```
listbox .l
for { set i 0 } { $i<10 } { incr i } {
    .l insert end "entry $i"
}
```

A listbox may be given a height and/or width attribute, in which case it is likely that not all of the strings in the list are visible at the same time. There are a number of methods for affecting the display of such a listbox.

The `see` method causes the listbox display to change so that a particular list element is in view. For example,

```
.l see 5
```

will make sure that the sixth list item is visible. (List elements are counted from element 0.)

A *scrollbar* widget is intended to be used with any widget that is likely to be able to display only part of its contents at one time. Examples are listboxes, canvases, text widgets, and frames, amongst others.

A scrollbar widget is displayed as a movable slider between two arrows. Clicking on either arrow moves the slider in the direction of the arrow. The slider can be moved by dragging it with the cursor.

The scollbar and the widget it scrolls are connected through Tcl script calls. A scrollable widgets will have a `scrollcommand` attribute that is set to a Tcl script to call when the widget changes its view. When the view changes the command is called, and the command is usually set to change the state of its associated scrollbar.

Similarly, the scrollbar will have a `command` attribute that is another script that is called when an action is performed on the scrollbar, like moving the slider or clicking on one of its arrows. That action will be to update the display of the associated scrollable widget (which redraws itself and then invokes its `scrollcommand`, which causes the scrollbar to be redrawn).

How this is all done is best shown through an example:

```
listbox .l -yscrollcommand ".s set" -height 10
scrollbar .s -command ".l yview"
for { set i 0 } { $i < 50 } { incr i } {
    .l insert end "entry $i"
}
```

creates a listbox named `.l` and a scrollbar named `.s`. Fifty strings of the form `entry N` are inserted into the listbox. The clever part is the way the scrollbar and listbox are linked. The listbox has its `-yscrollcommand` attribute set to the script `".s set"`. What happens is that if the view of `.l` is changed, this script is called with 4 arguments attached: the number of entries in the listbox, the size of the listbox window, the index of the first entry currently visible, and the index of the last entry currently visible. This is exactly enough information for the scrollbar to work out how to redisplay itself. For example, changing the display of the above listbox could result in the following `-yscrollcommand` script being called:

```
.s set 50 10 5 15
```

which says that the listbox contains 50 elements, it can display 10 at one time, the first element displayed has index 5 and the last one on display has index 15. This call invokes the `set` method of the scrollbar widget `.s`, which causes it to redraw itself appropriately.

If, instead, the user interacts with the scrollbar, then the scrollbar will invoke its `-command` script, which in this example is `".l yview"`. Before invoking the script, the scrollbar widget calculates which element should the first displayed in its associated widget and appends its index to the call. For example, if element with index 20 should be the first to be displayed, then the following call will be made:

```
.l yview 20
```

which invokes the `yview` method of the listbox `.l`. This causes `.l` to be updated (which then causes its `-yscrollcommand` to be called, which updates the scrollbar).

A *frame* widget does not do anything by itself except reserve an area of the display. Although this does not seem to have much purpose, it is a very important widget. It is a container widget; that is, it is used to group together collections of other widgets into logical groups. For example, a row of buttons may be grouped into a frame, then as the frame is manipulated so will the widgets displayed inside it. A frame widget can also be used to create large areas of color inside another container widget (such as another frame widget or a toplevel widget).

An example of the use of a frame widget as a container:

```
canvas .c -background red
frame .f
button .b1 -text button1
button .b2 -text button2
button .b3 -text button3
button .b4 -text button4
button .b5 -text button5
pack .b1 .b2 .b3 .b4 .b5 -in .f -side left
pack .c -side top -fill both -expand 1
pack .f -side bottom
```

which specifies that there are two main widgets a canvas named `.c` and a frame named `.f`. There are also 5 buttons, `.b1` through `.b5`. The buttons are displayed inside the frame. Then the canvas is displayed at the top of the main window and the frame is displayed at the bottom. As the frame is displayed at the bottom, then so will the buttons because they are displayed inside the frame.

(The `pack` command causes the widgets to be handled for display by the packer geometry manager. The `-fill` and `-expand 1` options to pack for `.c` tell the display manager that if the window is resized, then the canvas is to expand to fill most of the window. You will learn about geometry managers later in the Geometry Managers section.)

A *toplevel* widget is a new toplevel window. It is a container widget inside which other widgets are displayed. The root toplevel widget has path `.` — i.e. dot on its own. Subsequent toplevel widgets must have a name that is lower down the path tree just like any other widget.

An example of creating a toplevel widget is:

```
toplevel .t
```

All the widgets displayed inside `.t` must also have `.t` as the root of their path. For example, to create a button widget for display inside the `.t` toplevel the following would work:

```
button .t.b -text "Inside 't'"
```

(Attributes, such as size and title, of toplevel widgets can be changed through the `wm` command, which we will not cover in this tutorial. The reader is referred to the Tk manual.)

Yet another kind of container is a *menu widget*. It contains a list of widgets to display inside itself, as a pulldown menu. A simple entry in a menu widget is a `command` widget, displayed as an option in the menu widget, which if chosen executes a Tcl command. Other types of widgets allowed inside a menu widget are radiobuttons and checkboxes. A special kind of menu item is a `separator` that is used to group together menu items within a menu. (It should be noted that the widgets inside a menu widget are special to that menu widget and do not have an independent existence, and so do not have their own Tk name.)

A menu widget is built by first creating an instance of a menu widget (the container) and then invoking the `add` method to make entries into the menu. An example of a menu widget is as follows:

```
menu .m
.m add command -label "Open file" -command "open_file"
.m add command -label "Open directory" -command "open_directory"
.m add command -label "Save buffer" -command "save_buffer"
.m add command -label "Save buffer as..." -command "save_buffer_as"
.m add separator
.m add command -label "Make new frame" -command "new_frame"
.m add command -label "Open new display" -command "new_display"
.m add command -label "Delete frame" -command "delete_frame"
```

which creates a menu widget called `.m`, which contains eight menu items, the first four of which are commands, then comes a separator widget, then the final three command entries. (Some of you will notice that this menu is a small part of the `Files` menu from the menubar of the Emacs text editor.)

An example of a checkbox and some radiobutton widget entries:

```
.m add checkbox -label "Inverse video" -variable inv_vid
.m add radiobutton -label "black" -variable color
.m add radiobutton -label "blue" -variable color
.m add radiobutton -label "red" -variable color
```

which gives a checkbox displaying '`Inverse video`', keeping its state in the variable `inv_vid`, and three radiobuttons linked through the variable `color`.

Another menu item variant is the `cascade` variant, which is used to make cascadable menus, i.e. menus that have submenus. An example of a cascade entry is the following:

```
.m add cascade -label "I cascade" -menu .m.c
```

which adds a cascade entry to the menu `.m` that displays the text '`I cascade`'. If the '`I cascade`' option is chosen from the `.m` menu, then the menu `.m.c` will be displayed.

The cascade option is also used to make menubars at the top of an application window. A menu bar is simply a menu each element of which is a cascade entry, (for example). The menubar menu is attached to the application window through a special configuration option for toplevel widgets, the `-menu` option. Then a menu is defined for each of the cascade entry in the menubar menu.

There are a large number of other variants to menu widgets: menu items can display bitmaps instead of text; menus can be specified as tear-off menus; accelerator keys can be defined for menu items; and so on.

A *menubutton widget* displays like a button, but when activated a menu pops up. The menu of the menubutton is defined through the `menu` command and is attached to the menubutton. An example of a menu button:

```
menubutton .mb -menu .mb.m -text "mymenu"
menu .mb.m
.mb.m add command -label hello
.mb.m add command -label goodbye
```

which crates a menubutton widget named `.mb` with attached menu `.mb.m` and displays the text '`mymenu`'. Menu `.mb.m` is defined as two command options, one labeled `hello` and the other labeled `goodbye`. When the menubutton `.mb` is clicked on, the menu `.mb.m` will popup and its options can be chosen.

A *canvas widget* is a container widget that is used to manage the drawing of complex shapes; for example, squares, circles, ovals, and polygons. (It can also handle bitmaps, text and most of the Tk widgets too.) The shapes may have borders, filled in, be clicked on, moved around, and manipulated.

We will not cover the working of the canvas widget here. It is enough to know that there is a powerful widget in the Tk toolkit that can handle all manner of graphical objects. The interested reader is referred to the Tk manual.

A *text widget* is another powerful container widget that handles multi-line texts. The textwidget can display texts with varying font styles, sizes, and colors in the same text, and can also handle other Tk widgets embedded in the text.

The text widget is a rich and complicated widget and will not be covered here. The interested reader is referred to the Tk manual.

10.46.3.5 Geometry Managers

So far we have described each of the Tk widgets but have not mentioned how they are arranged to be displayed. Tk separates the creating of widgets from the way they are arranged for display. The "geometry" of the display is handled by a "geometry manager". A geometry manager is handed the set of widgets to display with instructions on their layout. The layout instructions are particular to each geometry manager.

Tk comes with three distinct geometry managers: `grid`, `place`, and `pack`. As might be expected the `grid` geometry manager is useful for creating tables of widgets, for example, a table of buttons.

The `place` geometry manager simply gives each widget an X and Y coordinate and places them at that coordinate in their particular parent window.

The `pack` geometry manager places widgets according to constraints, like "these three button widgets should be packed together from the left in their parent widget, and should resize with the parent".

(In practice the `grid` and `pack` geometry managers are the most useful because they can easily handle events such as resizing of the toplevel window, automatically adjusting the display in a sensible manner. `place` is not so useful for this.)

Each container widget (the parent) has a geometry manager associated with it, which tells the container how to display its sub-widgets (children) inside it. A single parent has one and only one kind of geometry manager associated with it, but each parent can have a different kind. For example, a frame widget can use the packer to pack other frames inside it. One of the child frames could use the grid manager to display buttons inside it itself, while another child frame could use the packer to pack labels inside it itself.

The problem is how to display widgets. For example, there is an empty frame widget inside which a bunch of other widgets will be displayed. The `pack` geometry manager's solution to this problem is to successively pack widgets into the empty space left in the container widget. The container widget is the parent widget, and the widgets packed into it are its children. The children are packed in a sequence: the packing order.

What the packer does is to take the next child to be packed. It allocates an area for the child to be packed into from the remaining space in the parent. Which part of the space is allocated depends on instructions to the packer. When the size of the space has been determined, this is sliced off the free space, and allocated to the widget that is displayed in it. Then the remaining space is available to subsequent children.

At any one time the space left for packing is a rectangle. If the widget is too small to use up a whole slice from the length or breadth of the free rectangle, then still a whole slice is allocated so that the free space is always rectangular.

It can be tricky to get the packing instructions right to get the desired finished effect, but a large number of arrangements of widgets is possible using the packer.

Let us take a simple example: three buttons packed into the root window. First we create the buttons; see also `library('tcltk/examples/ex3.tcl')`:

```
button .b1 -text b1
button .b2 -text b2
button .b3 -text b3
```

then we can pack them thus:

```
pack .b1 .b2 .b3
```

which produces a display of the three buttons, one on top of the other, button `.b1` on the top, and button `.b3` on the bottom.

Three Plain Buttons

If we change the size of the text in button `.b2` through the command:

```
.b2 config -text "hello world"
```

then we see that the window grows to fit the middle button, but the other two buttons stay their original size.

Middle Button Widens

The packer defaults to packing widgets in from the top of the parent. Other directions can be specified. For example, the command:

```
pack .b1 .b2 .b3 -side left
```

will pack starting at the left hand side of the window. The result of this is that the buttons are formed in a horizontal row with the wider button, `.b2`, in the middle.

Packing From The Left

It is possible to leave space between widgets through the *padding* options to the packer: `-padx` and `-pady`. What these do is to allocate space to the child that is padded with the padding distances. An example would be:

```
pack .b1 .b2 .b3 -side left -padx 10
```

External Padding

which adds 10 pixels of space to either side of the button widgets. This has the effect of leaving 10 pixels at the left side of button `.b1`, 20 pixels between buttons `.b1` and `.b2`, 20 pixels between buttons `.b2` and `.b3`, and finally 10 pixels on the right side of button `.b3`.

That was external padding for spacing widgets. There is also internal padding for increasing the size of widgets in the X and Y directions by a certain amount, through `-ipadx` and `-ipady` options; i.e. internal padding. For example:

```
pack .b1 .b2 .b3 -side left -ipadx 10 -ipady 10
```

Internal Padding

instead of spacing out the widgets, will increase their dimensions by 10 pixels in each direction.

Remember that space is allocated to a widget from the currently available space left in the parent widget by cutting off a complete slice from that space. It is often the case that the slice is bigger that the widget to be displayed in it.

There are further options for allowing a widget to fill the whole slice allocated to it. This is done through the `-fill` option, which can have one of four values: `none` for no filling (default), `x` to fill horizontally only, `y` to fill vertically only, and `both` to fill both horizontally and vertically at the same time.

Filling is useful, for example, for creating buttons that are the same size even though they display texts of differing lengths. To take our button example again, the following code produces three buttons, one on top of each other, but of the same size:

```
button .b1 -text b1
button .b2 -text "hello world"
button .b3 -text b3
pack .b1 .b2 .b3 -fill x
```

Using `fill` For Evenly Sized Widgets

How does this work? The width of the toplevel windows is dictated by button `.b2` because it has the widest text. Because the three buttons are packed from top to bottom, the slices of space allocated to them are cut progressively straight along the top of the remaining space. i.e. each widget gets a horizontal slice of space the same width cut from the top-level widget. Only the wide button `.b2` would normally fit the whole width of its slice. But by allowing the other two widgets to fill horizontally, they will also take up the whole width of their slices. The result: 3 buttons stacked on top of each other, each with the same width, although the texts they display are not the same length.

A further common example is adding a scrollbar to a listbox. The trick is to get the scrollbar to size itself to the listbox; see also `library('tcltk/examples/ex9a.tcl')`:

```
listbox .l
scrollbar .s
pack .l .s -side left
```

Scrollbar With Listbox, First Try

So far we have a listbox on the left and a tiny scrollbar on the right. To get the scrollbar to fill up the vertical space around it add the following command:

```
pack .s -fill y
```

Now the display looks like a normal listbox with a scrollbar.

Scrollbar With Listbox, Second Try

Why does this work? They are packed from the left, so first a large vertical slice of the parent is given to the listbox, then a thin vertical slice is given to the scrollbar. The scrollbar has a small default width and height and so it does not fill the vertical space of its slice. But filling in the vertical direction (through the `pack .s -fill y` command) allows it to fill its space, and so it adjusts to the height of the listbox.

The `fill` packing option specifies whether the widget should fill space left over in its slice of space. A further option to take into account is what happens when the space allocated to the parent widget is much greater than the that used by its children. This is not usually a problem initially because the parent container widget is sized to shrink-wrap around the space used by its children. If the container is subsequently resized, however, to a much larger size, then there is a question as to what should happen to the child widgets. A common example of resizing a container widget is the resizing of a top-level window widget.

The default behavior of the packer is not to change the size or arrangement of the child widgets. There is an option though through the `expand` option to cause the slices of space allocated to children to expand to fill the newly available space in the parent. `expand` can have one of two values: `0` for no expansion, and `1` for expansion.

Take the listbox-scrollbar example; see also `library('tcltk/examples/ex10.tcl')`:

```
listbox .l
scrollbar .s
pack .l -side left
pack .s -side left -fill y
```

Initially this looks good, but now resize the window to a much bigger size. You will find that the listbox stays the same size and that empty space appears at the top and bottom of it, and that the scrollbar resizes in the vertical. It is now not so nice.

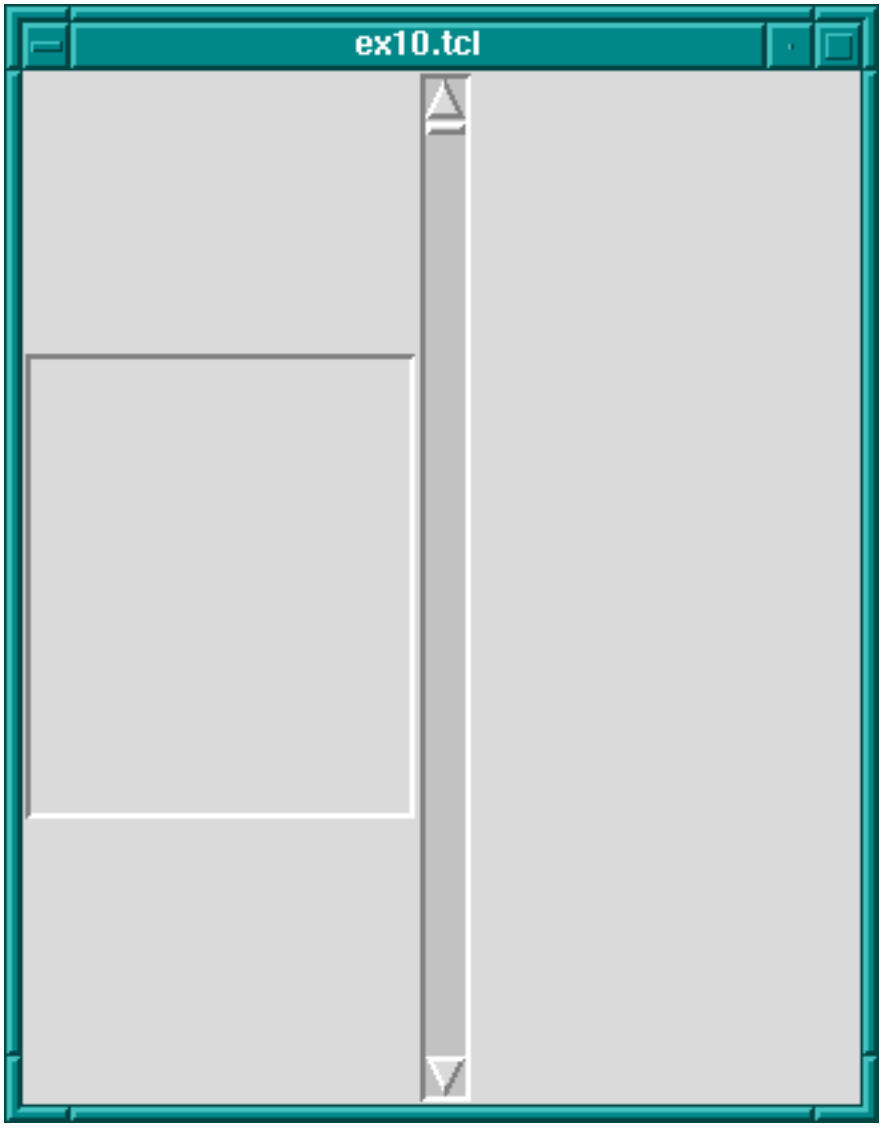

Scrollbar And Listbox, Problems With Resizing

We can fix part of the problem by having the listbox expand to fill the extra space generated by resizing the window.

```
pack .l -side left -expand 1
```

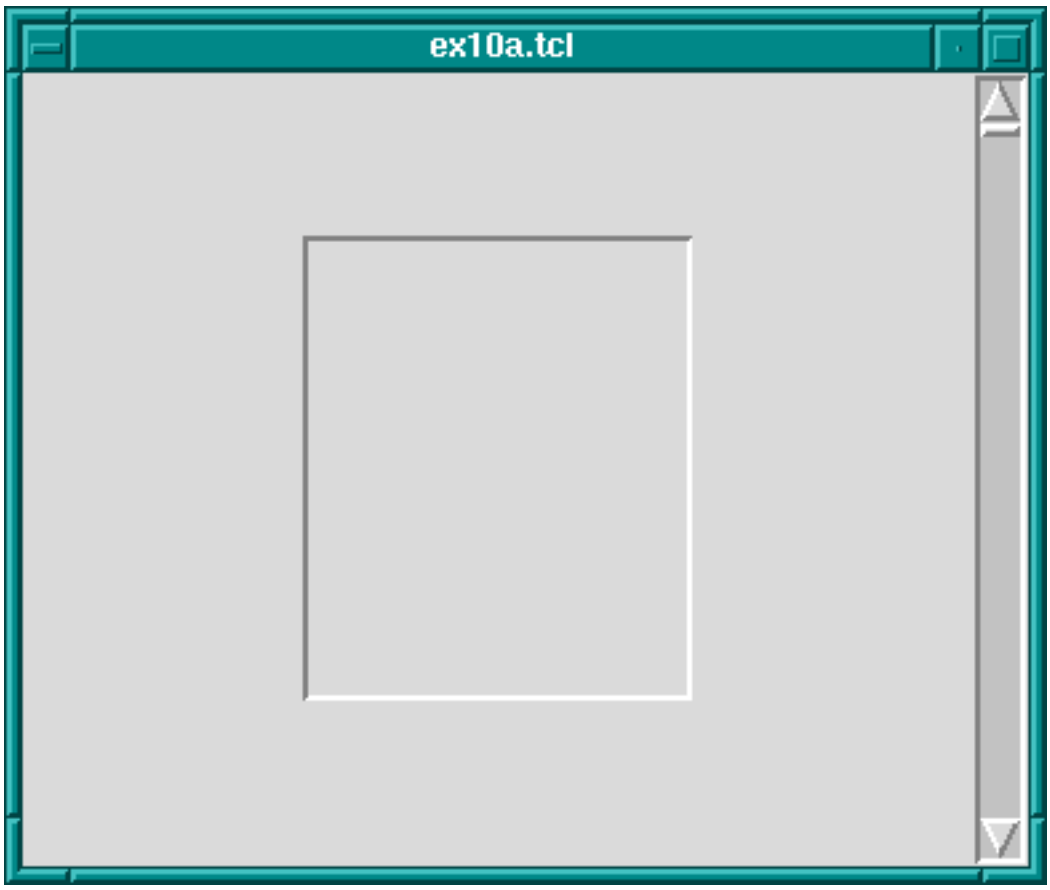

Scrollbar And Listbox, Almost There

The problem now is that `expand` just expands the space allocated to the listbox, it does not stretch the listbox itself. To achieve that we need to apply the `fill` option to the listbox too.

```
pack .l -side left -expand 1 -fill both
```

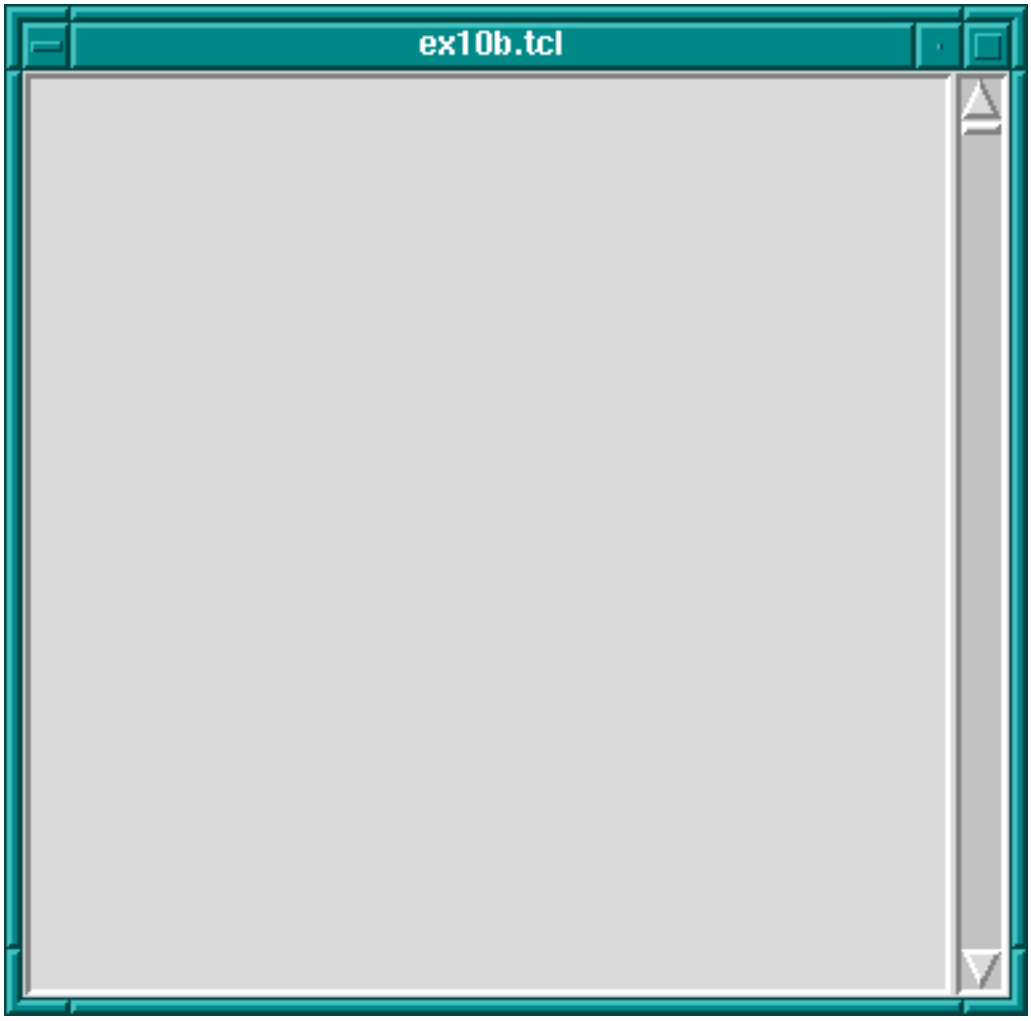

Scrollbar And Listbox, Problem Solved Using `fill`

Now whichever way the top-level window is resized, the listbox-scrollbar combination should look good.

If more than one widget has the expansion bit set, then the space is allocated equally to those widgets. This can be used, for example, to make a row of buttons of equal size that resize to fill the widget of their container. Try the following code; see also `library('tcltk/examples/ex11.tcl')`:

```
button .b1 -text "one"
button .b2 -text "two"
button .b3 -text "three"
pack .b1 .b2 .b3 -side left -fill x -expand 1
```

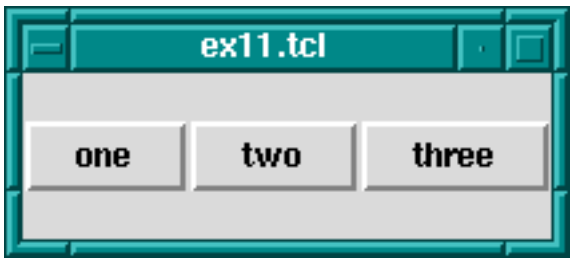

Resizing Evenly Sized Widgets

Now resize the window. You will see that the buttons resize to fill the width of the window, each taking an equal third of the width.

> **Please note**: the best way to get the hang of the packer is to play with it. Often the results are not what you expect, especially when it comes to fill and expand options. When you have created a display that looks pleasing, always try resizing the window to see if it still looks pleasing, or whether some of your fill and expand options need revising.

There is an option to change how a child is displayed if its allocated space is larger than itself. Normally it will be displayed centered. That can be changed by anchoring it with the `-anchor` option. The option takes a compass direction as its argument: `n`, `s`, `e`, `w`, `nw`, `ne`, `sw`, `se`, or `c` (for center).

For example, the previous example with the resizing buttons displays the buttons in the center of the window, the default anchoring point. If we wanted the buttons to be displayed at the top of the window, then we would anchor them there thus; see also `library('tcltk/examples/ex12.tcl')`:

```
button .b1 -text "one"
button .b2 -text "two"
button .b3 -text "three"
pack .b1 .b2 .b3 -side left -fill x -expand 1 -anchor n
```

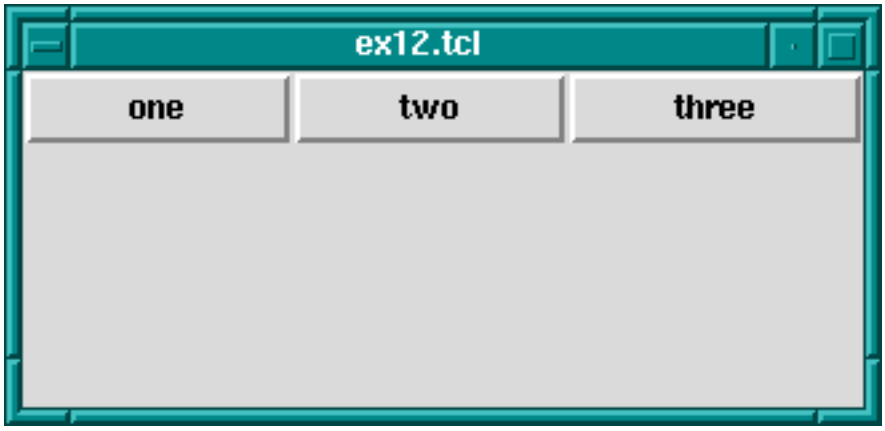

Anchoring Widgets

Each button is anchored at the top of its slice and so in this case is displayed at the top of the window.

The packing order of widget can also be changed. For example,

```
pack .b3 -before .b2
```

will change the positions of `.b2` and `.b3` in our examples.

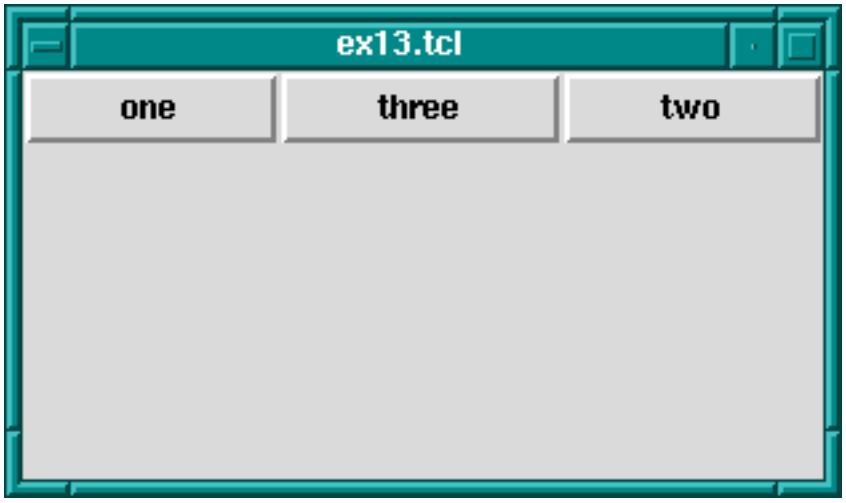

Changing The Packing Order Of Widgets

The *grid geometry manager* is useful for arranging widgets in grids or tables. A grid has a number of rows and columns and a widget can occupy one of more adjacent rows and columns.

A simple example of arranging three buttons; see also `library('tcltk/examples/ex14.tcl')`:

```
button .b1 -text b1
button .b2 -text b2
button .b3 -text b3
grid .b1 -row 0 -column 0
grid .b2 -row 1 -column 0
grid .b3 -row 0 -column 1 -rowspan 2
```

this will display button `.b1` above button `.b2`. Button `.b3` will be displayed in the next column and it will take up two rows.

Using the `grid` Geometry Manager

However, `.b3` will be displayed in the center of the space allocated to it. It is possible to get it to expand to fill the two rows it has using the `-sticky` option. The `-sticky` option says to which edges of its cells a widget "sticks" to, i.e. expands to reach. (This is like the fill and expand options in the pack manager.) So to get `.b3` to expand to fill its space we could use the following:

```
grid .b3 -sticky ns
```

which says stick in the north and south directions (top and bottom). This results in `.b3` taking up two rows and filling them.

`grid` Geometry Manager, Cells With Sticky Edges

There are plenty of other options to the grid geometry manager. For example, it is possible to give some rows/columns more "weight" than others, which gives them more space in the parent. For example, if in the above example you wanted to allocate 1/3 of the width of the parent to column 0 and 2/3 of the width to column 1, then the following commands would achieve that:

```
grid columnconfigure . 0 -weight 1
grid columnconfigure . 1 -weight 2
```

which says that the weight of column 0 for parent `.` (the root window) is 1 and the weight of column 1 is 2. Since column 1 has more weight than column 0 it gets proportionately more space in the parent.

It may not be apparent that this works until you resize the window. You can see even more easily how much space is allocated to each button by making expanding them to fill their space through the sticky option. The whole example looks like this; see also `library('tcltk/examples/ex16.tcl')`:

```
button .b1 -text b1
button .b2 -text b2
button .b3 -text b3
grid .b1 -row 0 -column 0 -sticky nsew
grid .b2 -row 1 -column 0 -sticky nsew
grid .b3 -row 0 -column 1 -rowspan 2 -sticky nsew
grid columnconfigure . 0 -weight 1
grid columnconfigure . 1 -weight 2
```

Now resize the window to various sizes and we will see that button `.b3` has twice the width of buttons `.b1` and `.b2`.

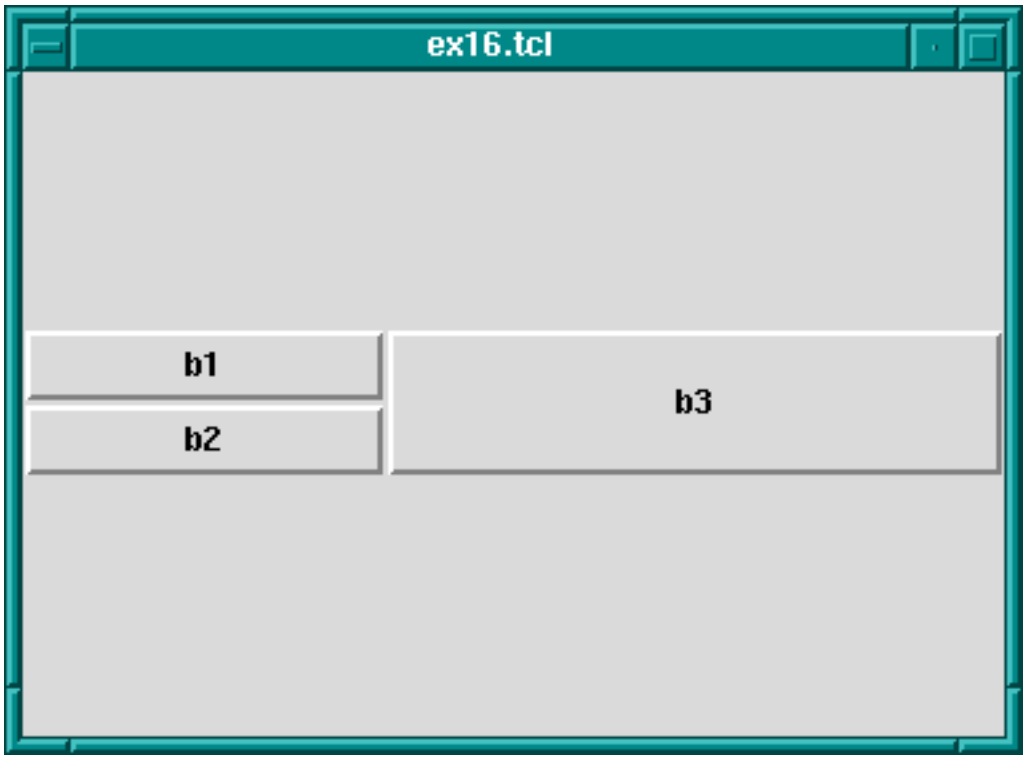

Changing Row/Column Ratios

The same kind of thing can be specified for each row too via the `grid rowconfigure` command.

For other options and a full explanation of the grid manager see the manual.

`place` simply places the child widgets in the parent at the given x and y coordinates. It displays the widgets with the given width and height. For example (see also `library('tcltk/examples/ex17.tcl')`):

```
button .b1 -text b1
button .b2 -text b2
button .b3 -text b3
place .b1 -x 0 -y 0
place .b2 -x 100 -y 100
place .b3 -x 200 -y 200
```

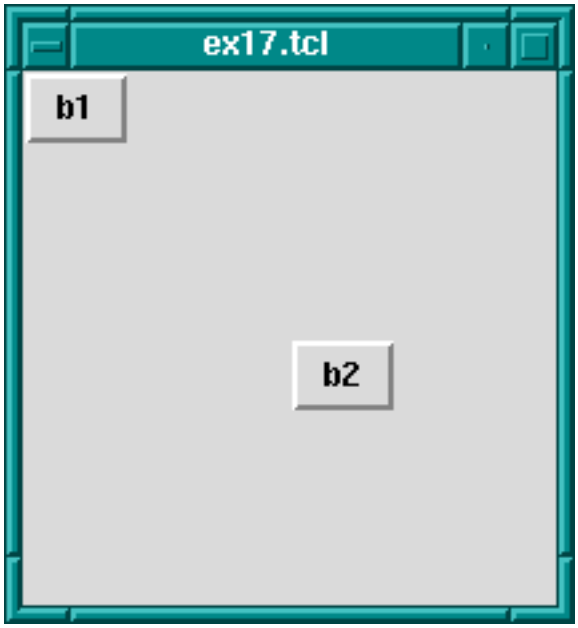

Using The `place` Geometry Manager

will place the buttons `.b1`, `.b2`, and `.b3` along a diagonal 100 pixels apart in both the x and y directions. Heights and widths can be given in absolute sizes, or relative to the size of the parent in which case they are specified as a floating point proportion of the parent; 0.0 being no size and 1.0 being the size of the parent. x and y coordinates can also be specified in a relative way, also as a floating point number. For example, a relative y coordinate of 0.0 refers to the top edge of the parent, while 1.0 refers to the bottom edge. If both relative and absolute x and y values are specified, then they are summed.

Through this system the placer allows widgets to be placed on a kind of rubber sheet. If all the coordinates are specified in relative terms, as the parent is resized, then so will the children move to their new relative positions.

10.46.3.6 Event Handling

So far we have covered the widgets types, how instances of them are created, how their attributes can be set and queried, and how they can be managed for display using geometry managers. What we have not touched on is how to give each widget a behavior.

This is done through event handlers. Each widget instance can be given a window event handler for each kind of window event. A window event is something like the cursor moving into or out of the widget, a key press happening while the widget is active (in focus), or the widget being destroyed.

Event handlers are specified through the `bind` command:

```
bind widgetName eventSequence command
```

where *widgetName* is the name or class of the widget to which the event handler should be attached, *eventSqueuence* is a description of the event that this event handler will handle, and *command* is a script that is invoked when the event happens (i.e. it is the event handler).

Common event types are

`Key`
`KeyPress` when a key was pressed

`KeyRelease`
: when a key was released

`Button`
`ButtonPress`
: when a mouse button was pressed

`ButtonRelease`
: when a mouse button was released

`Enter` when the cursor moves into a widget

`Leave` when the cursor moved our of a widget

`Motion` when the cursor moves within a widget

There are other event types. Please refer to the Tk documentation for a complete list.

The *eventSequence* part of a `bind` command is a list of one or more of these events, each event surrounded by angled brackets. (Mostly, an event sequence consists of handling a single event. Later we will show more complicated event sequences.)

An example is the following:

```
button .b -text "click me"
pack .b
bind .b <Enter> { puts "entering .b" }
```

makes a button `.b` displaying text '`click me`' and displays it in the root window using the packing geometry manager. The `bind` command specifies that when the cursor enters (i.e. goes onto) the widget, then the text `entering .b` is printed at the terminal.

We can make the button change color as the cursor enters or leaves it like this:

```
button .b -text "click me" -background red
pack .b
bind .b <Enter> { .b config -background blue }
bind .b <Leave> { .b config -background red }
```

which causes the background color of the button to change to blue when the cursor enters it and to change back to red when the cursor leaves.

An action can be appended to an event handler by prefixing the action with a `+` sign. An example is:

```
bind .b <Enter> {+puts "entering .b"}
```

which, when added to the example above, would not only change the color of the button to red when the cursor enters it, but would also print `entering .b` to the terminal.

A binding can be revoked simply by binding the empty command to it:

```
bind .b <Enter> {}
```

A list of events that are bound can be found by querying the widget thus:

```
bind .b
```

which will return a list of bound events.

To get the current command(s) bound to an event on a widget, invoke `bind` with the widget name and the event. An example is:

```
bind .b <Enter>
```

which will return a list of the commands bound to the event `<Enter>` on widget `.b`.

Binding can be generalized to sequences of events. For example, we can create an entry widget that prints `spells rob` each time the key sequence `ESC r o b` happens:

```
entry .e
pack .e
bind .e <Escape>rob {puts "spells rob"}
```

(A letter on its own in an event sequence stands for that key being pressed when the corresponding widget is in focus.)

Events can also be bound for entire classes of widgets. For example, if we wanted to perform the same trick for ALL entry widgets, then we could use the following command:

```
bind entry <Escape>rob {puts "spells rob"}
```

In fact, we can bind events over all widgets using `all` as the widget class specifier.

The event script can have substitutions specified in it. Certain textual substitutions are then made at the time the event is processed. For example, `%x` in a script gets the x coordinate of the mouse substituted for it. Similarly, `%y` becomes the y coordinate, `%W` the dot path of the window on which the event happened, `%K` the keysym of the button that was pressed, and so on. For a complete list, see the manual.

In this way it is possible to execute the event script in the context of the event.

A clever example of using the `all` widget specifier and text substitutions is given in John Ousterhout's book on Tcl/Tk (see Section 10.46.7 [Resources], page 900):

```
bind all <Enter> {puts "Entering %W at (%x, %y)"}
bind all <Leave> {puts "Leaving %W at (%x, %y)"}
bind all <Motion> {puts "Pointer at (%x, %y)"}
```

which implements a mouse tracker for all the widgets in a Tcl/Tk application. The widget's name and x and y coordinates are printed at the terminal when the mouse enters or leaves any widget, and also the x and y coordinates are printed when the mouse moves within a widget.

10.46.3.7 Miscellaneous

There are a couple of other Tk commands that we ought to mention: `destroy` and `update`.

The `destroy` command is used to destroy a widget, i.e. remove it from the Tk interpreter entirely and so from the display. Any children that the widget may have are also `destroy`-ed. Anything connected to the destroyed widget, such as bindings, are also cleaned up automatically.

For example, to create a window containing a button that is destroyed when the button is pressed:

```
button .b -text "Die!" -command { destroy . }
pack .b
```

creates a button `.b` displaying the text '`Die!`', which runs the command `destroy .` when it is pressed. Because the widget `.` is the main toplevel widget or window, running that command will kill the entire application associated with that button.

The command `update` is used to process any pending Tk events. An event is not just such things as moving the mouse but also updating the display for newly created and displayed widgets. This may be necessary in that usually Tk draws widgets only when it is idle. Using the `update` command forces Tk to stop and handle any outstanding events including updating the display to its actually current state, i.e. flushing out the pending display of any widgets. (This is analogous to the `fflush` command in C that flushes writes on a stream to disk. In Tk displaying of widgets is "buffered"; calling the `update` command flushes the buffer.)

10.46.3.8 What We Have Left Out

There are a number of Tk features that we have not described but we list some of them here in case the reader is interested. Refer to the Tk manual for more explanation.

`photo` creating full color images through the command

`wm` setting and getting window attributes

selection and focus commands
modal interaction
(not recommended)

`send` sending messages between Tk applications

10.46.3.9 Example pure Tcl/Tk program

To show some of what can be done with Tcl/Tk, we will show an example of part of a GUI for an 8-queens program. Most people will be familiar with the 8-queens problem: how to place 8 queens on a chess board such that they do not attack each other according to the normal rules of chess.

Our example will not be a program to solve the 8-queens problem (that will come later in the tutorial) but just the Tcl/Tk part for displaying a solution. The code can be found in `library('tcltk/examples/ex18.tcl')`.

The way an 8-queens solution is normally presented is as a list of numbers. The position of a number in the list indicates the column the queens is placed at and the number itself indicates the row. For example, the Prolog list `[8, 7, 6, 5, 4, 3, 2, 1]` would indicate 8 queens along the diagonal starting a column 1, row 8 and finishing at column 8 row 1.

The problem then becomes, given this list of numbers as a solution, how to display the solution using Tcl/Tk. This can be divided into two parts: how to display the initial empty chess board, and how to display a queen in one of the squares.

Here is our code for setting up the chess board:

```
                                                                    % ex18.pl
#! /usr/bin/wish

proc setup_board { } {
    # create container for the board
    frame .queens

    # loop of rows and columns
    for {set row 1} {$row <= 8} {incr row} {
        for {set column 1} {$column <= 8} {incr column} {

            # create label with a queen displayed in it
            label .queens.$column-$row -bitmap @bitmaps/q64s.bm -relief flat

            # choose a background color depending on the position of the
            # square; make the queen invisible by setting the foreground
            # to the same color as the background
            if { [expr ($column + $row) % 2] } {
                .queens.$column-$row config -background #ffff99
                .queens.$column-$row config -foreground #ffff99
            } else {
                .queens.$column-$row config -background #66ff99
                .queens.$column-$row config -foreground #66ff99
            }

            # place the square in a chess board grid
            grid .queens.$column-$row -row $row -column $column -padx 1 -pady 1
        }
    }
    pack .queens
}

setup_board
```

The first thing that happens is that a frame widget is created to contain the board. Then there are two nested loops that loop over the rows and columns of the chess board. Inside the loop, the first thing that happens is that a label widget is created. It is named using the row and column variables so that it can be easily referenced later. The label will not be used to display text but to display an image, a bitmap of a queen. The label creation command therefore has the special argument `-bitmap @q64s.bm`, which says that the label will display the bitmap loaded from the file `q64s.bm`.

The label with the queen displayed in it has now been created. The next thing that happens is that the background color of the label (square) is chosen. Depending on the position of the square it becomes either a “black” or a “white” square. At the same time, the foreground color is set to the background color. This is so that the queen (displayed in the foreground color) will be invisible, at least when the board is first displayed.

The final action in the loop is to place the label (square) in relation to all the other squares for display. A chess board is a simple grid of squares, and so this is most easily done through the `grid` geometry manager.

After the board has been set up square-by-square it still needs to be displayed, which is done by `pack`-ing the outermost frame widget.

To create and display a chess board widget, all that is needed is to call the procedure

```
setup_board
```

which creates the chess board widget.

Once the chess board has been displayed, we need to be able to take a solution, a list of rows ordered by column, and place queens in the positions indicated.

Taking a topdown approach, our procedure for taking a solution and displaying is as follows:

```
proc show_solution { solution } {
    clear_board
    set column 1
    foreach row $solution {
        place_queen $column $row
        incr column
    }
}
```

This takes a solution in `solution`, clears the board of all queens, and then places each queen from the solution on the board.

Next we will handle clearing the board:

```
proc clear_board { } {
    for { set column 1 } {$column <= 8} {incr column} {
        reset_column $column
    }
}

proc reset_column { column } {
    for {set row 1 } { $row <= 8 } {incr row} {
        set_queens $column $row off
    }
}

proc set_queens { column row state } {
    if { $state == "on" } {
        .queens.$column-$row config -foreground black
    } else {
        .queens.$column-$row config
        -foreground [.queens.$column-$row cget -background]
    }
}
```

The procedure `clear_board` clears the board of queens by calling the procedure `reset_column` for each of the 8 columns on a board. `reset_column` goes through each square of a column and sets the square to `off` through `set_queens`. In turn, `set_queens` sets the foreground color of a square to black if the square is turned `on`, thus revealing the queen bitmap, or sets the foreground color of a square to its background color, thus making the queens invisible, if it is called with something other than `on`.

That handles clearing the board, clearing a column or turning a queen on or off on a particular square.

The final part is `place_queen`:

```
proc place_queen { column row } {
    reset_column $column
    set_queens $column $row on
}
```

This resets a column so that all queens on it are invisible and then sets the square with coordinates given in `row` and `column` to on.

A typical call would be:

```
show_solution "1 2 3 4 5 6 7 6 8"
```

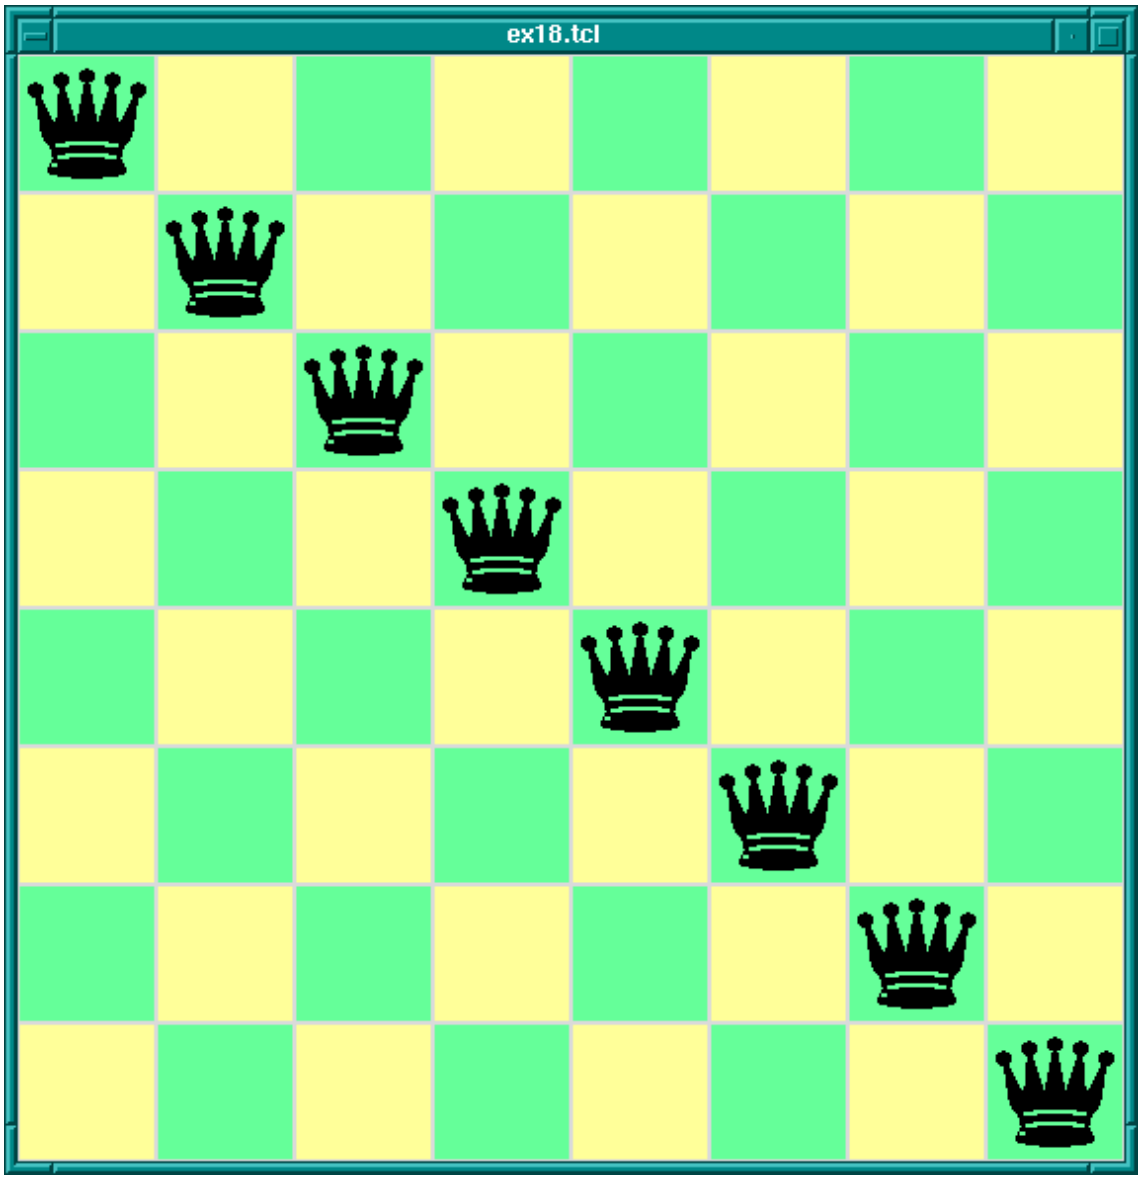

8-Queens Display In Tcl/Tk

which would display queens along a diagonal. (This is of course not a solution to the 8-queens problem. This Tcl/Tk code only displays possible queens solutions; it does not check if the solution is valid. Later we will combine this Tcl/Tk display code with Prolog code for generating solutions to the 8-queens problem.)

10.46.4 The Tcl/Tk Prolog Library

Now we have covered the wonders of Tcl/Tk, we come to the real meat of the tutorial: how to couple the power of Tcl/Tk with the power of SICStus Prolog.

Tcl/Tk is included in SICStus Prolog by loading a special library. The library provides a bidirectional interface between Tcl/Tk and Prolog.

10.46.4.1 How it Works - An Overview

Before describing the details of the Tcl/Tk library we will give an overview of how it works with the Prolog system.

The Tcl/Tk library provides a loosely coupled integration of Prolog and Tcl/Tk. By this we mean that the two systems, Prolog and Tcl/Tk, although joined through the library, are mostly separate; Prolog variables have nothing to do with Tcl variables, Prolog and Tcl program states are separate, and so on.

The Tcl/Tk library extends Prolog so that Prolog can create a number of independent Tcl interpreters with which it can interact. Basically, there is a predicate, which when executed creates a Tcl interpreter and returns a handle with which Prolog can interact with the interpreter.

Prolog and a Tcl interpreter interact, and so communicate and cooperate, through two ways:

1. One system evaluates a code fragment in the other system and retrieves the result. For example, Prolog evaluates a Tcl code fragment in an attached Tcl interpreter and gets the result of the evaluation in a Prolog variable. Similarly, a Tcl interpreter can evaluate a Prolog goal and get the result back through a Tcl variable.

   This is synchronous communication in that the caller waits until the callee has finished their evaluation and reads the result.
2. One system passing a "message" to the other on an "event" queue.

   This is asynchronous communication in that the receiver of the message can read the message whenever it likes, and the sender can send the message without having to wait for a reply.

The Tk part of Tcl/Tk comes in because an attached Tcl interpreter may be extended with the Tk widget set and so be a Tcl/Tk interpreter. This makes it possible to add GUIs to a Prolog application: the application loads the Tcl/Tk Prolog library, creates a Tcl/Tk interpreter, and sends commands to the interpreter to create a Tk GUI. The user interacts with the GUI and therefore with the underlying Prolog system.

There are two main ways to partition the Tcl/Tk library functions: by function, i.e. the task they perform; or by package, i.e. whether they are Tcl, Tk, or Prolog functions. We will describe the library in terms of the former because it fits in with the tutorial style better, but at the end is a summary section that summarizes the library functions both ways.

Taking the functional approach, the library can be split into six function groups:

- basic functions
  - loading the library
  - creating and destroying Tcl and Tcl/Tk interpreters
- evaluation functions
  - evaluating Tcl expressions from Prolog
  - evaluating Prolog expressions from Tcl

- Prolog event functions
  - handling the Prolog/Tcl event queue
- Tk event handling
- passing control to Tk
- housekeeping functions

We go through each group in turn.

10.46.4.2 Basic Functions

The heart of the system is the ability to create an embedded Tcl interpreter with which the Prolog system can interact. A Tcl interpreter is created within Prolog through a call to `tcl_new/1`:

```
tcl_new(-TclInterpreter)
```

which creates a new interpreter, initializes it, and returns a reference to it in the variable *TclInterpreter*. The reference can then be used in subsequent calls to manipulate the interpreter. More than one Tcl interpreter object can be active in the Prolog system at any one time.

To start a Tcl interpreter extended with Tk, the `tk_new/2` predicate is called from Prolog. It has the following form:

```
tk_new(+Options, -TclInterpreter)
```

which returns through the variable *TclInterpreter* a handle to the underlying Tcl interpreter. The usual Tcl/Tk window pops up after this call is made and it is with reference to that window that subsequent widgets are created. As with the `tcl_new/1` predicate, many Tcl/Tk interpreters may be created from Prolog at the same time through calls to `tk_new/2`.

The *Options* part of the call is a list of some (or none) of the following elements:

`top_level_events`
: This allows Tk events to be handled while Prolog is waiting for terminal input; for example, while the Prolog system is waiting for input at the top-level prompt. Without this option, Tk events are not serviced while the Prolog system is waiting for terminal input. (For information on Tk events; see Section 10.46.3.6 [Event Handling], page 857).

`name(+ApplicationName)`
: This gives the main window a title *ApplicationName*. This name is also used for communicating between Tcl/Tk applications via the Tcl `send` command. (`send` is not covered in this document. Please refer to the Tcl/Tk documentation.)

`display(+Display)`
: (This is X windows specific.) Gives the name of the screen on which to create the main window. If this is not given, then the default display is determined by the `DISPLAY` environment variable.

An example of using `tk_new/2`:

```
| ?- tk_new([top_level_events, name('My SICStus/Tk App')], Tcl).
```

which creates a Tcl/Tk interpreter, returns a handle to it in the variable `Tcl` and Tk events are serviced while Prolog is waiting at the top-level prompt. The window that pops up will have the title `My SICStus/Tk App`.

The reference to a Tcl interpreter returned by a call to `tk_new/2` is used in the same way and in the same places as a reference returned by a call to `tcl_new/1`. They are both references to Tcl interpreters.

To remove a Tcl interpreter from the system, use the `tcl_delete/1` predicate:

```
tcl_delete(+TclInterpreter)
```

which given a reference to a Tcl interpreter, closes down the interpreter and removes it. The reference can be for a plain Tcl interpreter or for a Tk enhanced one; `tcl_delete/1` removes both kinds.

10.46.4.3 Evaluation Functions

There are two functions in this category: Prolog extended to be able to evaluate Tcl expressions in a Tcl interpreter; Tcl extended to be able to evaluate a Prolog expression in the Prolog system.

There is a mechanism for describing Tcl commands in Prolog as Prolog terms. This is used in two ways: firstly, to be able to represent Tcl commands in Prolog so that they can be subsequently passed to Tcl for evaluation; and secondly for passing terms back from Tcl to Prolog by doing the reverse transformation.

Why not represent a Tcl command as a simple atom or string? This can indeed be done, but commands are often not static and each time they are called require slightly different parameters. This means constructing different atoms or strings for each command in Prolog, which are expensive operations. A better solution is to represent a Tcl command as a Prolog term, something that can be quickly and efficiently constructed and stored by a Prolog system. Variable parts to a Tcl command (for example command arguments) can be passed in through Prolog variables.

In the special command format, a Tcl command is specified as follows.

Command ::= *Name*
| `codes(`*code list*`)`
| `write(`*term*`)`
| `writeq(`*term*`)`
| `write_canonical(`*term*`)`
| `format(`*Fmt*`,`*Args*`)`
| `dq(`*Command*`)`
| `br(`*Command*`)`
| `sqb(`*Command*`)`

```
                | min(Command)
                | dot(ListOfNames)
                | list(ListOfCommands)
                | ListOfCommands
Fmt             ::= atom
Name            ::= atom                          { other than [] }
                | number
ListOfCommands  ::= []
                | [ Command | ListOfCommands ]
ListOfNames     ::= []
                | [ Name | ListOfNames ]
Args            ::= []
                | [ term | Args ]
```

where

Atom
Number denote their printed representations

`codes(`*PrologString*`)`
: denotes the string represented by *PrologString* (a code list)

`write(`*Term*`)`
`writeq(`*Term*`)`
`write_canonical(`*Term*`)`
: denotes the string that is printed by the corresponding built-in predicate.

  Please note: In general it is not possible to reconstruct *Term* from the string printed by `write/1`. If *Term* will be passed back into Prolog, then it therefore safest to use `write_canonical(`*Term*`)`.

`format(`*Fmt*`, `*Args*`)`
: denotes the string that is printed by the corresponding built-in predicate

`dq(`*Command*`)`
: denotes the string specified by *Command*, enclosed in double quotes

`br(`*Command*`)`
: denotes the string specified by *Command*, enclosed in curly brackets

`sqb(`*Command*`)`
: denotes the string specified by *Command*, enclosed in square brackets

`min(`*Command*`)`
: denotes the string specified by *Command*, immediately preceded by a hyphen

`dot(`*ListOfName*`)`
: denotes the widget path specified by *ListOfName*, preceded by and separated by dots

`list(`*ListOfCommands*`)`
: denotes the TCL list with one element for each element in *ListOfCommands*. This differs from just using *ListOfCommands* or `br(`*ListOfCommands*`)` when

any of the elements contains spaces, braces or other characters treated specially by TCL.

ListOfCommands
: denotes the string denoted by each element, separated by spaces. In many cases `list(`*`ListOfCommands`*`)` is a better choice.

Examples of command specifications and the resulting Tcl code:

```
[set, x, 32]
    ⇒ set x 32

[set, x, br([a, b, c])]
    ⇒ set x {a b c}

[dot([panel,value_info,name]), configure, min(text), br(write('$display'/1))]
     ⇒ .panel.value_info.name configure -text {$display/1

['foo bar',baz]
     ⇒foo bar baz

list(['foo bar',bar])
     ⇒ {foo bar} baz

list(['foo { bar'',bar])
     ⇒ foo\ \{ \bar baz
```

Prolog calls Tcl through the predicate `tcl_eval/3`, which has the following form:

```
tcl_eval(+TclInterpreter, +Command, -Result)
```

which causes the interpreter *TclInterpreter* to evaluate the Tcl command *Command* and return the result *Result*. The result is a string (a code list) that is the usual return string from evaluating a Tcl command. *Command* is not just a simple Tcl command string (although that is a possibility) but a Tcl command represented as a Prolog term in the special Command Format (see Section 10.46.4.3 [Evaluation Functions], page 868).

Through `tcl_eval/3`, Prolog has a method of synchronous communication with an embedded Tcl interpreter and a way of manipulating the state of the interpreter.

An example:

```
| ?- tcl_new(Interp),
     tcl_eval(Interp, 'set x 1', _),
     tcl_eval(Interp, 'incr x', R).
```

which creates a Tcl interpreter the handle of which is stored in the variable `Interp`. Then variable `x` is set to the value `"1"` and then variable `x` is incremented and the result returned in `R` as a string. The result will be `"2"`. By evaluating the Tcl commands in separate

`tcl_eval/3` calls, we show that we are manipulating the state of the Tcl interpreter and that it remembers its state between manipulations.

It is worth mentioning here also that because of the possibility of the Tcl command causing an error to occur in the Tcl interpreter, two new exceptions are added by the `tcltk` library:

```
tcl_error(Goal, Message)
tk_error(Goal, Message)
```

where *Message* is a code list detailing the reason for the exception. Also two new `user:portray_message/2` rules are provided so that any such uncaught exceptions are displayed at the Prolog top level as

```
[TCL ERROR: Goal - Message]
[TK ERROR: Goal - Message]
```

respectively.

These exception conditions can be raised/caught/displayed in the usual way through the built-in predicates `throw/1`, `catch/3`, and `portray_message/2`.

As an example, the following Prolog code will raise such an exception:

```
| ?- tcl_new(X), tcl_eval(X, 'wilbert', R).
```

which causes a `tcl_error/2` exception and prints the following:

```
{TCL ERROR: tcl_eval/3 - invalid command name "wilbert"}
```

assuming that there is no command or procedure defined in Tcl called `wilbert`.

The Tcl interpreters created through the SICStus Prolog Tcl/Tk library have been extended to allow calls to the underlying Prolog system.

To evaluate a Prolog expression in the Prolog system from a Tcl interpreter, the new `prolog` Tcl command is invoked. It has the following form:

```
prolog PrologGoal
```

where *PrologGoal* is the printed form of a Prolog goal. This causes the goal to be executed in Prolog. It will be executed in the `user` module unless it is prefixed by a module name. Execution is always determinate.

The return value of the command either of the following:

`"1"` if execution succeeded,

`"0"` if execution failed.

If succeeded (and `"1"` was returned), then any variable in *PrologGoal* that has become bound to a Prolog term will be returned to Tcl in the Tcl array named `prolog_variables`

with the variable name as index. The term is converted to Tcl using the same conversion as used for Tcl commands (see Section 10.46.4.3 [Evaluation Functions], page 868). As a special case the values of unbound variables and variables with names starting with '_', are not recorded and need not conform to the special command format, this is similar to the treatment of such variables by the Prolog top level.

An example:

```
test_callback(Result) :-
    tcl_new(Interp),
    tcl_eval(Interp,
        'if {[prolog "foo(X,Y,Z)"] == 1} \
            {list $prolog_variables(X)   \
                  $prolog_variables(Y)   \
                  $prolog_variables(Z)}',
            Result),
    tcl_delete(Interp).

foo(1, bar, [a, b, c]).
```

When called with the query:

```
| ?- test_callback(Result).
```

will succeed, binding the variable `Result` to:

```
"1 bar {a b c}"
```

This is because execution of the `tcl_eval/3` predicate causes the execution of the `prolog` command in Tcl, which executes `foo(X, Y, Z)` in Prolog making the following bindings: `X = 1`, `Y = bar`, `Z = [a, b, c]`. The bindings are returned to Tcl in the associative array `prolog_variables` where `prolog_variables(X)` is "1", `prolog_variables(Y)` is "bar", and `prolog_variables(Z)` is "a b c". Then Tcl goes on to execute the `list` command as

```
list "1" "bar" "a b c"
```

which returns the result

```
"1 bar {a b c}"
```

(remember: nested lists magically get represented with curly brackets) which is the string returned in the *Result* part of the Tcl call, and is ultimately returned in the `Result` variable of the top-level call to `test_callback(Result)`.

If an error occurs during execution of the `prolog` Tcl command, then a `tcl_error/2` exception will be raised. The message part of the exception will be formed from the string '`Exception during Prolog execution: `' appended to the Prolog exception message. An example is the following:

```
| ?- tcl_new(T), tcl_eval(T, 'prolog wilbert', R).
```

which will print

```
{TCL ERROR: tcl_eval/3 - Exception during Prolog execution:
  wilbert  existence_error(wilbert,0,procedure,user:wilbert/0,0)}
```

at the Prolog top-level, assuming that the predicate `wilbert/0` is not defined on the Prolog side of the system. (This is a `tcl_error` exception containing information about the underlying exception, an `existence_error` exception, which was caused by trying to execute the non-existent predicate `wilbert`.)

10.46.4.4 Event Functions

Another way for Prolog to communicate with Tcl is through the predicate `tcl_event/3`:

```
tcl_event(+TclInterpreter, +Command, -Events)
```

This is similar to `tcl_eval/3` in that the command *Command* is evaluated in the Tcl interpreter *TclInterpreter*, but the call returns a list of events in *Events* rather than the result of the Tcl evaluation. *Command* is again a Tcl command represented as a Prolog term in the special Command Format described previously (see Section 10.46.4.3 [Evaluation Functions], page 868).

This begs the questions what are these events and where does the event list come from? The Tcl interpreters in the SICStus Prolog Tcl/Tk library have been extended with the notion of a Prolog event queue. (This is not available in plain standalone Tcl interpreters.) The Tcl interpreter can put events on the event queue by executing a `prolog_event` command. Each event is a Prolog term. So a Tcl interpreter has a method of putting Prolog terms onto a queue, which can later be picked up by Prolog as a list as the result of a call to `tcl_event/3`. (It may be helpful to think of this as a way of passing messages as Prolog terms from Tcl to Prolog.)

A call to `tcl_event/3` blocks until there is something on the event queue.

A second way of getting Prolog events from a Prolog event queue is through the `tk_next_event/[2,3]` predicates. These have the form:

```
tk_next_event(+TclInterpreter, -Event)
tk_next_event(+Options, +TclInterpreter, -Event)
```

where *TclInterpreter* reference to a Tcl interpreter and *Event* is the Prolog term at the head of the associated Prolog event queue. (The *Options* feature will be described below in the Housekeeping section when we talk about Tcl and Tk events; see Section 10.46.4.7 [Housekeeping], page 878.).

(We will meet `tk_next_event/[2,3]` again later when we discuss how it can be used to service Tk events; see Section 10.46.4.5 [Servicing Tk Events], page 876).

If the interpreter has been deleted, then the empty list `[]` is returned.

The Tcl interpreters under the SICStus Prolog library are extended with a command, `prolog_event`, for adding events to a Prolog event queue.

The `prolog_event` command has the following form:

```
prolog_event Terms ...
```

where *Terms* are strings that contain the printed representation of Prolog terms. These are stored in a queue and retrieved as Prolog terms by `tcl_event/3` or `tk_next_event/[2,3]` (described above).

An example of using the `prolog_event` command:

```
test_event(Event) :-
    tcl_new(Interp),
    tcl_event(Interp, [prolog_event, dq(write(zap(42)))], Event),
    tcl_delete(Interp).
```

with the query:

```
| ?- test_event(Event).
```

will succeed, binding `Event` to the list `[zap(42)]`.

This is because `tcl_event` converts its argument using the special Command Format conversion (see Section 10.46.4.3 [Evaluation Functions], page 868), which yields the Tcl command `prolog_event "zap(42)"`. This command is evaluated in the Tcl interpreter referenced by the variable `Interp`. The effect of the command is to take the string given as argument to `prolog_event` (in this case `"zap(42)"`) and to place it on the Tcl to Prolog event queue. The final action of a `tcl_event/3` call is to pick up any strings on the Prolog queue from Tcl, add a trailing full stop and space to each string, and parse them as Prolog terms, binding `Event` to the list of values, which in this case is the singleton list `[zap(42)]`. (The queue is a list the elements of which are terms put there through calls to `prolog_event`).

If any of the *Term*-s in the list of arguments to `prolog_event` is not a valid representation of a Prolog term, then an exception is raised in Prolog when it is converted from the Tcl string to the Prolog term using `read`. To ensure that Prolog will be able to read the term correctly it is better to always use `write_canonical` and to ensure that Tcl is not confused by special characters in the printed representation of the Prolog term it is best to wrap the list with `list`.

A safer variant that safely passes any term from Prolog via Tcl and back to Prolog is thus:

```
test_event(Term, Event) :-
    tcl_new(Interp),
    tcl_event(Interp, list([prolog_event, write_canonical(Term)]), Event),
    tcl_delete(Interp).
```

As an example of using the Prolog event system supplied by the `tcltk` library, we will return to our 8-queens example but now approaching from the Prolog side rather than the Tcl/Tk side:

```
:- use_module(library(tcltk)).

setup :-
    tk_new([name('SICStus+Tcl/Tk - Queens')], Tcl),
    tcl_eval(Tcl, 'source queens.tcl', _),
    tk_next_event(Tcl, Event),
    (   Event = next -> go(Tcl),
    ;   closedown(Tcl)
    ).

closedown(Tcl) :-
    tcl_delete(Tcl).

go(Tcl) :-
    tcl_eval(Tcl, 'clear_board', _),
    queens(8, Qs),
    show_solution(Qs, Tcl),
    tk_next_event(Tcl, Event),
    (   Event = next -> fail
    ;   closedown(Tcl)
    ).
go(Tcl) :-
    tcl_eval(Tcl, 'disable_next', _),
    tcl_eval(Tcl, 'clear_board', _),
    tk_next_event(Tcl, _Event),
    closedown(Tcl).
```

This is the top-level fragment of the Prolog side of the 8-queens example. It has three predicates: `setup/0`, `closedown/1`, and `go/1`. `setup/0` simply creates the Tcl interpreter, loads the Tcl code into the interpreter using a call to `tcl_eval/3` (which also initializes the display) but then calls `tk_next_event/2` to wait for a message from the Tk side.

The Tk part that sends `prolog_event`-s to Prolog looks like this:

```
button .next -text next -command {prolog_event  next}
pack .next

button .stop -text stop -command {prolog_event stop}
pack .stop
```

that is two buttons, one that sends the atom `next`, the other that sends the atom `stop`. They are used to get the next solution and to stop the program respectively.

So if the user presses the `next` button in the Tk window, then the Prolog program will receive a `next` atom via a `prolog_event`/`tk_next_event` pair, and the program can proceed to execute `go/1`.

`go/1` is a failure driven loop that generates 8-queens solutions and displays them. First it generates a solution in Prolog and displays it through a `tcl_eval/3` call. Then it waits again for a Prolog events via `tk_next_event/2`. If the term received on the Prolog event queue is `next`, then corresponding to the user pressing the "next solution" button, then fail is executed and the next solution found, thus driving the loop.

If the `stop` button is pressed, then the program does some tidying up (clearing the display and so on) and then executes `closedown/1`, which deletes the Tcl interpreter and the corresponding Tk windows altogether, and the program terminates.

This example fragment show how it is possible for a Prolog program and a Tcl/Tk program to communicate via the Prolog event queue.

10.46.4.5 Servicing Tcl and Tk events

The notion of an event in the Prolog+Tcl/Tk system is overloaded. We have already come across the following kinds of events:

- Tk widget events captured in Tcl/Tk through the `bind` command
- Prolog queue events controlled through the `tcl_event/3`, `tk_next_event(2,3)`, and `prolog_event` functions

It is further about to be overloaded with the notion of Tcl/Tk events. It is possible to create event handlers in Tcl/Tk for reacting to other kinds of events. We will not cover them here but describe them so that the library functions are understandable and in case the user needs these features in an advanced application.

There are the following kinds of Tcl/Tk events:

idle events
: happen when the Tcl/Tk system is idle

file events
: happen when input arrives on a file handle that has a file event handler attached to it

timer events
: happen when a Tcl/Tk timer times out

window events
: when something happens to a Tk window, such as being resized or destroyed

The problem is that in advanced Tcl/Tk applications it is possible to create event handlers for each of these kinds of event, but they are not normally serviced while in Prolog code. This can result in unresponsive behavior in the application; for example, if window events are not serviced regularly, then if the user tries to resize a Tk window, then it will not resize in a timely fashion.

The solution to this is to introduce a Prolog predicate that passes control to Tk for a while so that it can process its events, `tk_do_one_event/[0,1]`. If an application is unresponsive because it is spending a lot of time in Prolog and is not servicing Tk events often enough, then critical sections of the Prolog code can be sprinkled with calls to `tk_do_one_event/[0,1]` to alleviate the problem.

`tk_do_one_event/[0,1]` has the following forms:

```
tk_do_one_event
tk_do_one_event(+Options)
```

which passes control to Tk to handle a single event before passing control back to Prolog. The type of events handled is passed through the *Options* variable, a list of atoms that are event types.

The *Options* list can contain the following atoms:

`tk_dont_wait`
: do not wait for new events, process only those that are ready

`tk_window_events`
: process window events

`tk_file_events`
: process file events

`tk_timer_events`
: process timer events

`tk_idle_events`
: process `Tcl_DoWhenIdle` events

`tk_all_events`
: process any event

Calling `tk_do_one_event/0` is equivalent to a call to `tk_do_one_event/1` with the `tk_all_events` and `tk_dont_wait` flags.

A call to either of these predicates succeeds only if an event of the appropriate type happens in the Tcl/Tk interpreter. If there are no such events, then `tk_do_one_event/1` will fail if the `tk_dont_wait` wait flag is present, as will `tk_do_one_event/0`, which has that flag set implicitly.

If the `tk_dont_wait` flag is not set, then a call to `tk_do_one_event/1` will block until an appropriate Tk event happens (in which case it will succeed).

It is straight forward to define a predicate that handles all Tk events and then returns:

```
tk_do_all_events :-
    tk_do_one_event, !,
    tk_do_all_events.
tk_do_all_events.
```

The predicate `tk_next_event/[2,3]` is similar to `tk_do_one_event/[0,1]` except that it processes Tk events until at least one Prolog event happens. (We came across this predicate before when discussing Prolog event queue predicates. This shows the overloading of the notion event where we have a predicate that handles both Tcl/Tk events and Prolog queue events.)

It has the following forms:

```
tk_next_event(+TclInterpreter, -Event)
tk_next_event(+Options, +TclInterpreter, -Event)
```

The Prolog event is returned in the variable *Event* and is the first term on the Prolog event queue associated with the interpreter *TclInterpreter*. (Prolog events are initiated on the Tcl side through the new Tcl command `prolog_event`, covered earlier; see Section 10.46.4.4 [Event Functions], page 873).

10.46.4.6 Passing Control to Tk

There is a predicate for passing control completely over to Tk, the `tk_main_loop/0` command. This passes control to Tk until all windows in all the Tcl/Tk interpreters in the Prolog have have been destroyed:

```
tk_main_loop
```

10.46.4.7 Housekeeping functions

Here we will described the functions that do not fit into any of the above categories and are essentially housekeeping functions.

There is a predicate that returns a reference to the main window of a Tcl/Tk interpreter:

```
tk_main_window(+TclInterpreter, -TkWindow)
```

which given a reference to a Tcl interpreter *TclInterpreter*, returns a reference to its main window in *TkWindow*.

The window reference can then be used in `tk_destroy_window/1`:

```
tk_destroy_window(+TkWindow)
```

which destroys the window or widget referenced by *TkWindow* and all of its sub-widgets.

The predicate `tk_make_window_exist/1` also takes a window reference:

```
tk_make_window_exist(+TkWindow)
```

which causes the window referenced by *TkWindow* in the Tcl interpreter *TclInterpreter* to be immediately mapped to the display. This is useful because normally Tk delays displaying new information for a long as possible (waiting until the machine is idle, for example), but using this call causes Tk to display the window immediately.

There is a predicate for determining how many main windows, and hence Tcl/Tk interpreters (excluding simple Tcl interpreters), are currently in use:

```
tk_num_main_windows(-NumberOfWindows)
```

which returns an integer in the variable *NumberOfWindows*.

10.46.4.8 Summary

The functions provided by the SICStus Prolog Tcl/Tk library can be grouped in two ways: by function, and by package.

By function, we can group them like this:

- basic functions

  `tcl_new/1`
  : create a Tcl interpreter

  `tcl_delete/1`
  : remove a Tcl interpreter

  `tk_new/2` create a Tcl interpreter with Tk extensions
- evaluation functions

  `tcl_eval/3`
  : evaluate a Tcl expression from Prolog

  `prolog` evaluate a Prolog expression from Tcl
- Prolog event queue functions

  `tcl_event/3`
  : evaluate a Tcl expression and return a Prolog queue event list

  `tk_next_event/[2,3]`
  : pass control to Tk until a Prolog queue event happens and return the head of the queue

  `prolog_event`
  : place a Prolog term on the Prolog event queue from Tcl
- servicing Tcl and Tk events

  `tk_do_one_event/[0,1]`
  : pass control to Tk until one Tk event is serviced

  `tk_next_event/[2,3]`
  : also services Tk events but returns when a Prolog queue event happens and returns the head of the queue
- passing control completely to Tk

  `tk_main_loop/0`
  : control passed to Tk until all windows in all Tcl/Tk interpreters are gone
- housekeeping

  `tk_main_window/2`
  : return reference to main in of a Tcl/Tk interpreter

`tk_destroy_window/1`
: destroy a window or widget

`tk_make_window_exist/1`
: force display of a window or widget

`tk_num_main_windows/1`
: return a count of the total number of Tk main windows existing in the system

By package, we can group them like this:

- predicates for Prolog to interact with Tcl interpreters

  `tcl_new/1`
  : create a Tcl interpreter

  `tcl_delete/1`
  : remove a Tcl interpreter

  `tcl_eval/3`
  : evaluate a Tcl expression from Prolog

  `tcl_event/3`
  : evaluate a Tcl expression and return a Prolog event list

- predicates for Prolog to interact with Tcl interpreters with Tk extensions

  `tk_new/2` create a Tcl interpreter with Tk extensions

  `tk_do_one_event/[0,1]`
  : pass control to Tk until one Tk event is serviced

  `tk_next_event/[2,3]`
  : also services Tk events but returns when a Prolog queue event happens and returns the head of the queue

  `tk_main_loop/0`
  : control passed to Tk until all windows in all Tcl/Tk interpreters are gone

  `tk_main_window/2`
  : return reference to main in of a Tcl/Tk interpreter

  `tk_destroy_window/1`
  : destroy a window or widget

  `tk_make_window_exist/1`
  : force display of a window or widget

  `tk_num_main_windows/1`
  : return a count of the total number of Tk main windows existing in the system

- commands for the Tcl interpreters to interact with the Prolog system

  `prolog` evaluate a Prolog expression from Tcl

`prolog_event`
: place a Prolog term on the Prolog event queue from Tcl

In the next section we will discuss how to use the `tcltk` library to build graphical user interfaces to Prolog applications. More specifically we will discuss the ways in which cooperation between Prolog and Tcl/Tk can be arranged: how to achieve them, and their benefits.

10.46.5 Putting It All Together

At this point we now know Tcl, the Tk extensions, and how they can be integrated into SICStus Prolog through the `tcltk` library module. The next problem is how to get all this to work together to produce a coherent application. Because Tcl can make Prolog calls and Prolog can make Tcl calls it is easy to create programming spaghetti. In this section we will discuss some general principles of organizing the Prolog and Tcl code to make writing applications easier.

The first thing to do is to review the tools that we have. We have two programming systems: Prolog and Tcl/Tk. They can interact in the following ways:

- Prolog evaluates a Tcl expression in a Tcl interpreter, using `tcl_eval`
- Tcl evaluates a Prolog expression in the Prolog interpreter, using `prolog`
- Prolog evaluates a Tcl expression in a Tcl interpreter and waits for a Prolog event, using `tcl_event`
- Prolog waits for a Prolog event from a Tcl interpreter, using `tk_next_event`
- Tcl sends a Prolog predicate to Prolog on a Prolog event queue using `prolog_event`

With these interaction primitives there are three basic ways in which Prolog and Tcl/Tk can be organized:

1. Tcl the coordinator, Prolog the worker: program control is with Tcl, which makes occasional calls to Prolog, through the `prolog` function.
2. Prolog the coordinator, Tcl the worker: program control is with Prolog, which makes occasional call to Tcl through the `tcl_eval` function
3. Prolog and Tcl share control: program control is shared with Tcl and Prolog interacting via the Prolog event queue, through `tcl_event`, `tk_next_event`, and `prolog_event`.

These are three ways of organizing cooperation between Tcl/Tk and Prolog to produce an application. In practice an application my use only one of these methods throughout, or may use a combination of them where appropriate. We describe them here so that the developer can see the different patterns of organization and can pick those relevant to their application.

10.46.5.1 Tcl The Coordinator, Prolog The Worker

This is the classical way that GUIs are bolted onto applications. The worker (in this case Prolog) sits mostly idle while the user interacts with the GUI, for example filling in a form. When some action happens in the GUI that requires information from the worker (a form

submit, for example), the worker is called, performs a calculation, and the GUI retrieves the result and updates its display accordingly.

In our Prolog+Tcl/Tk setting this involves the following steps:

- start Prolog and load the Tcl/Tk library
- load Prolog application code
- start a Tcl/Tk interpreter through `tk_new/2`
- set up the Tk GUI through calls to `tcl_eval/3`
- pass control to Tcl/Tk through `tk_main_loop`

Some of The Tk widgets in the GUI will have "callbacks" to Prolog, i.e. they will call the `prolog` Tcl command. When the Prolog call returns, the values stored in the `prolog_variables` array in the Tcl interpreter can then be used by Tcl to update the display.

Here is a simple example of a callback. The Prolog part is this:

```
:- use_module(library(tcltk)).

hello('world').

go :-
    tk_new([], Tcl),
    tcl_eval(Tcl, 'source simple.tcl', _),
    tk_main_loop.
```

which just loads the `library(tcltk)`, defines a `hello/1` data clause, and `go/0`, which starts a new Tcl/Tk interpreter, loads the code `simple.tcl` into it, and passes control to Tcl/Tk.

The Tcl part, `simple.tcl`, is this:

```
label .l -textvariable tvar
button .b -text "push me" -command { call_and_display }
pack .l .b -side top

proc call_and_display { } {
    global tvar

    prolog "hello(X)"
    set tvar $prolog_variables(X)
}
```

which creates a label, with an associated text variable, and a button, that has a call back procedure, `call_and_display`, attached to it. When the button is pressed, `call_and_display` is executed, which simply evaluates the goal `hello(X)` in Prolog and the text variable of the label `.l` to whatever `X` becomes bound to, which happens to be '`world`'. In short, pressing the button causes the word '`world`' to be displayed in the label.

Having Tcl as the coordinator and Prolog as the worker, although a simple model to understand and implement, does have disadvantages. The Tcl command `prolog` is determinate, i.e. it can return only one result with no backtracking. If more than one result is needed, then it means either performing some kind of all-solutions search and returning a list of results for Tcl to process, or asserting a clause into the Prolog clause store reflecting the state of the computation.

Here is an example of how an all-solutions search can be done. It is a program that calculates the outcome of certain ancestor relationships; i.e. enter the name of a person, click on a button and it will tell you the mother, father, parents or ancestors of that person.

The Prolog portion looks like this (see also `library('tcltk/examples/ancestors.pl')`):

```
:- use_module(library(tcltk)).

go :- tk_new([name('ancestors')], X),
    tcl_eval(X, 'source ancestors.tcl', _),
    tk_main_loop,
    tcl_delete(X).

father(ann, fred).
father(fred, jim).
mother(ann, lynn).
mother(fred, lucy).
father(jim, sam).

parent(X, Y) :- mother(X, Y).
parent(X, Y) :- father(X, Y).

ancestor(X, Y) :- parent(X, Y).
ancestor(X, Y) :- parent(X, Z), ancestor(Z, Y).

all_ancestors(X, Z) :- findall(Y, ancestor(X, Y), Z).

all_parents(X, Z) :-   findall(Y, parent(X, Y), Z).
```

This program consists of three parts. The first part is defined by `go/0`, the now familiar way in which a Prolog program can create a Tcl/Tk interpreter, load a Tcl file into that interpreter, and pass control over to the interpreter.

The second part is a small database of mother/father relationships between certain people through the clauses `mother/2` and `father/2`.

The third part is a set of "rules" for determining certain relationships between people: `parent/2`, `ancestor/2`, `all_ancestors/2` and `all_parents/2`.

The Tcl part looks like this (see also `library('tcltk/examples/ancestors.tcl')`):

```
                                                        % ancestors.pl
#!/usr/bin/wish

# set up the tk display

# construct text filler labels
label .search_for -text "SEARCHING FOR THE" -anchor w
label .of         -text "OF"                -anchor w
label .gives      -text "GIVES"             -anchor w

# construct frame to hold buttons
frame .button_frame

# construct radio button group
radiobutton .mother    -text mother    -variable type -value mother
radiobutton .father    -text father    -variable type -value father
radiobutton .parents   -text parents   -variable type -value parents
radiobutton .ancestors -text ancestors -variable type -value ancestors

# add behaviors to radio buttons
.mother    config -command { one_solution mother $name}
.father    config -command { one_solution father $name}
.parents   config -command { all_solutions all_parents $name}
.ancestors config -command { all_solutions all_ancestors $name}

# create entry box and result display widgets
entry .name -textvariable name
label .result -text ">>> result <<<" -relief sunken -anchor nw -justify left

# pack buttons into button frame
pack .mother .father .parents .ancestors -fill x -side left -in .button_frame

# pack everything together into the main window
pack .search_for .button_frame .of .name .gives .result -side top -fill x

# now everything is set up
```

```
                                                        % ancestors.pl
# defined the callback procedures

# called for one solution results
proc one_solution { type name } {
    if [prolog "${type}('$name', R)"] {
        display_result $prolog_variables(R)
    } else {
        display_result ""
    }
}

# called for all solution results
proc all_solutions { type name } {
    prolog  "${type}('$name', R)"
    display_result $prolog_variables(R)
}

# display the result of the search in the results box
proc display_result { result } {
    if { $result != "" } {
# create a multiline result
        .result config -text $result
    } else {
        .result config -text "*** no result ***"
    }
}
```

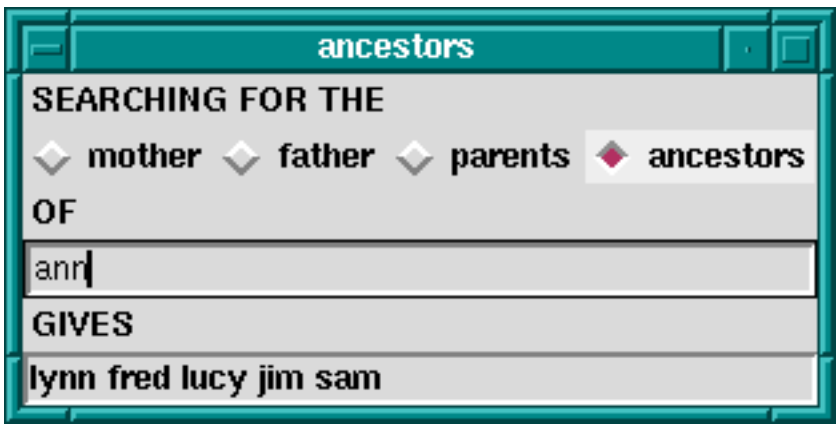

Ancestors Calculator

This program is in two parts. The first part sets up the Tk display, which consists of four radiobuttons to choose the kind of relationship we want to calculate, an entry box to put

the name of the person we want to calculate the relationship over, and a label in which to display the result.

Each radio buttons has an associated callback. Clicking on the radio button will invoke the appropriate callback, apply the appropriate relationship to the name entered in the text entry box, and display the result in the results label.

The second part consists of the callback procedures themselves. There are actually just two of them: one for a single solution calculation, and one for an all-solutions calculation. The single solution callback is used when we want to know the mother or father as we know that a person can have only one of each. The all-solutions callback is used when we want to know the parents or ancestors as we know that these can return more than one results. (We could have used the all-solutions callback for the single solutions cases too, but we would like to illustrate the difference in the two approaches.) There is little difference between the two approaches, except that in the single solution callback, it is possible that the call to Prolog will fail, so we wrap it in an `if ... else` construct to catch this case. An all-solutions search, however, cannot fail, and so the `if ... else` is not needed.

But there are some technical problems too with this approach. During a callback Tk events are not serviced until the callback returns. For Prolog callbacks that take a very short time to complete this is not a problem, but in other cases, for example during a long search call when the callback takes a significant time to complete, this can cause problems. Imagine that, in our example, we had a vast database describing the parent relationships of millions of people. Performing an all-solutions ancestors search could take a long time. The classic problem is that the GUI no longer reacts to the user until the callback completes.

The solution to this is to sprinkle `tk_do_one_event/[0,1]` calls throughout the critical parts of the Prolog code, to keep various kinds of Tk events serviced.

If this method is used in its purest form, then it is recommended that after initialization and passing of control to Tcl, Prolog do not make calls to Tcl through `tcl_eval/3`. This is to avoid programming spaghetti. In the pure coordinator/worker relationship it is a general principle that the coordinator only call the worker, and not the other way around.

10.46.5.2 Prolog The Coordinator, Tk The Worker

The second approach is to have Prolog be the coordinator and Tk the worker. This is suitable when heavy processing is done in the Prolog code and Tk is used mostly to display the state of the computation in some way rather than as a traditional GUI; i.e. during computation Prolog often makes calls to Tk to show some state, but the user rarely interacts with the application.

In our Prolog+Tcl/Tk setting this involves the following steps:

- start Prolog and load the Tcl/Tk library
- load Prolog application code
- start a Tcl/Tk interpreter through `tk_new/2`
- set up the Tk GUI through calls to `tcl_eval/3`
- Prolog calls `tcl_eval` to update the Tk display

- values are passed to Prolog through the Result string of `tcl_eval`

Again it its purest form, Prolog makes calls to Tcl, but Tcl does not make calls to Prolog. The result of a call to Tcl is either passed back through the `Result` variable of a `tcl_eval/3` call.

A good example of this is the Tcl/Tk display for our 8-queens problem, that we saw earlier; see Section 10.46.3.9 [Queens Display], page 861.

We will now fill out the example by presenting the Prolog coordinator part. The Prolog program calculates a solution to the 8-queens problem and then makes calls Tcl/Tk to display the solution. In this way Tcl/Tk is the worker, just being used as a simple display.

We have already seen the Tcl/Tk part, but here is the Prolog part for generating a solution and displaying it:

```
:- use_module(library(tcltk)).
:- use_module(library(lists)).

go :-
    tk_new([name('SICStus+Tcl/Tk - Queens')], Tcl),
    tcl_eval(Tcl, 'source queens.tcl', _),
    tk_next_event(Tcl, Event),
    queens(8, Qs),
    reverse(L, LR),
    tcl_eval(Tcl, [show_solution, br(LR)], _),
    fail.
go.

queens(N, Qs) :-
    range(1, N, Ns),
    queens(Ns, [], Qs).

queens(UnplacedQs, SafeQs, Qs) :-
    select(Q, UnplacedQs, UnplacedQs1),
    \+ attack(Q, SafeQs),
    queens(UnplacedQs1, [Q|SafeQs], Qs).
    queens([], Qs, Qs).

attack(X, Xs) :- attack(X, 1, Xs).

attack(X, N, [Y|_Ys]) :- X is Y + N.
attack(X, N, [Y|_Ys]) :- X is Y - N.
attack(X, N, [_Y|Ys]) :-
    N1 is N + 1,
attack(X, N1, Ys).

range(M, N, [M|Ns]) :-
    M < N,
    M1 is M + 1,
    range(M1, N, Ns).
range(N, N, [N]).

:- go.
```

All this simply does it to create a Tcl/Tk interpreter, load the Tcl code for displaying queens into it, generate a solution to the 8-queens problem as a list of integers, and then calls `show_solution/2` in the Tcl interpreter to display the solution. At the end of first clause for `go/0` is a fail clause that turns `go/0` into a failure driven loop. The result of this is that the program will calculate all the solutions to the 8-queens problem, displaying them rapidly one after the other, until there are none left.

10.46.5.3 Prolog And Tcl Interact through Prolog Event Queue

In the previous two methods, one of the language systems was the coordinator and the other worker, the coordinator called the worker to perform some action or calculation, the worker sits waiting until the coordinator calls it. We have seen that this has disadvantages when Prolog is the worker in that the state of the Prolog call is lost. Each Prolog call starts from the beginning unless we save the state using message database manipulation through calls to `assert` and `retract`.

Using the Prolog event queue, however, it is possible to get a more balanced model where the two language systems cooperate without either really being the coordinator or the worker.

One way to do this is the following:

- Prolog is started
- load Tcl/Tk library
- load and set up the Tcl side of the program
- Prolog starts a processing loop
- it periodically checks for a Prolog event and processes it
- Prolog updates the Tcl display through `tcl_eval` calls

What can processing a Prolog event mean? Well, for example, a button press from Tk could tell the Prolog program to finish or to start processing something else. The Tcl program is not making an explicit call to the Prolog system but sending a message to Prolog. The Prolog system can pick up the message and process it when it chooses, in the meantime keeping its run state and variables intact.

To illustrate this, we return to the 8-queens example. If Tcl/Tk is the coordinator and Prolog the worker, then we have shown that using a callback to Prolog, we can imagine that we hit a button, call Prolog to get a solution and then display it. But how do we get the next solution? We could get all the solutions, and then use Tcl/Tk code to step through them, but that does not seem satisfactory. If we use the Prolog is the coordinator and Tcl/Tk is the worker model, then we have shown how we can use Tcl/Tk to display the solutions generate from the Prolog side: Prolog just make a call to the Tcl side when it has a solution. But in this model Tcl/Tk widgets do not interact with the Prolog side; Tcl/Tk is merely an add-on display to Prolog.

But using the Prolog event queue we can get the best of both worlds: Prolog can generate each solution in turn as Tcl/Tk asks for it.

Here is the code on the Prolog side that does this. (We have left out parts of the code that have not changed from our previous example, see Section 10.46.3.9 [Queens Display], page 861).

```
:- use_module(library(tcltk)).
:- use_module(library(lists)).

setup :-
    tk_new([name('SICStus+Tcl/Tk - Queens')], Tcl),
    tcl_eval(Tcl, 'source queens2.tcl', _),
    tk_next_event(Tcl, Event),
    (   Event = next -> go(Tcl)
    ;   closedown(Tcl)
    ).

closedown(Tcl) :-
    tcl_delete(Tcl).

go(Tcl) :-
    tcl_eval(Tcl, 'clear_board', _),
    queens(8, Qs),
    show_solution(Qs),
    tk_next_event(Tcl, Event),
    (   Event = next -> fail
    ;   closedown(Tcl)
    ).
go(Tcl) :-
    tcl_eval(Tcl, 'disable_next', _),
    tcl_eval(Tcl, 'clear_board', _),
    tk_next_event(Tcl, _Event),
    closedown(Tcl).

show_solution(Tcl, L) :-
    tcl(Tcl),
    reverse(L, LR),
    tcl_eval(Tcl, [show_solution, br(LR)], _),
    tk_do_all_events.
```

Notice here that we have used `tk_next_event/2` in several places. The code is executed by calling `setup/0`. As usual, this loads in the Tcl part of the program, but then Prolog waits for a message from the Tcl side. This message can either be `next`, indicating that we want to show the next solution, or `stop`, indicating that we want to stop the program.

If `next` is received, then the program goes on to execute `go/1`. What this does it to first calculate a solution to the 8-queens problem, displays the solution through `show_solution/2`, and then waits for another message from Tcl/Tk. Again this can be either `next` or `stop`. If `next`, then the program goes into the failure part of a failure driven loop and generates and displays the next solution.

If at any time `stop` is received, then the program terminates gracefully, cleaning up the Tcl interpreter.

On the Tcl/Tk side all we need are a couple of buttons: one for sending the `next` message, and the other for sending the `stop` message.

```
button .next -text next -command {prolog_event next}
pack .next

button .stop -text stop -command {prolog_event stop}
pack .stop
```

(We could get more sophisticated. We might want it so that when the button it is depressed until Prolog has finished processing the last message, when the button is allowed to pop back up. This would avoid the problem of the user pressing the button many times while the program is still processing the last request. We leave this as an exercise for the reader.)

10.46.5.4 The Whole 8-Queens Example

To finish off, we our complete 8-queens program.

Here is the Prolog part, which we have covered in previous sections. The code is in `library('tcltk/examples/8-queens.pl')`:

```
                                                        % 8-queens.pl
:- use_module(library(tcltk)).
:- use_module(library(lists)).

setup :-
    tk_new([name('SICStus+Tcl/Tk - Queens')], Tcl),
    tcl_eval(Tcl, 'source 8-queens.tcl', _),
    tk_next_event(Tcl, Event),
    (   Event = next -> go(Tcl)
    ;   closedown(Tcl)
    ).

closedown(Tcl) :-
    tcl_delete(Tcl).

go(Tcl) :-
    tcl_eval(Tcl, 'clear_board', _),
    queens(8, Qs),
    show_solution(Tcl,Qs),
    tk_next_event(Tcl, Event),
    (   Event = next -> fail
    ;   closedown(Tcl)
    ).
go(Tcl) :-
    tcl_eval(Tcl, 'disable_next', _),
    tcl_eval(Tcl, 'clear_board', _),
    tk_next_event(Tcl, _Event),
    closedown(Tcl).
```

```
                                                        % 8-queens.pl
queens(N, Qs) :-
    range(1, N, Ns),
    queens(Ns, [], Qs).

queens(UnplacedQs, SafeQs, Qs) :-
    select(Q, UnplacedQs, UnplacedQs1),
    \+ attack(Q, SafeQs),
    queens(UnplacedQs1, [Q|SafeQs], Qs).
    queens([], Qs, Qs).

attack(X, Xs) :- attack(X, 1, Xs).

attack(X, N, [Y|_Ys]) :- X is Y + N.
attack(X, N, [Y|_Ys]) :- X is Y - N.
attack(X, N, [_Y|Ys]) :-
    N1 is N + 1,
    attack(X, N1, Ys).

range(M, N, [M|Ns]) :-
    M < N,
    M1 is M + 1,
    range(M1, N, Ns).
range(N, N, [N]).

show_solution(Tcl, L) :-
    reverse(L, LR),
    tcl_eval(Tcl, [show_solution, br(LR)], _),
    tk_do_all_events.

tk_do_all_events :-
    tk_do_one_event, !,
    tk_do_all_events.
tk_do_all_events.

:- setup.
```

And here is the Tcl/Tk part, which we have covered in bits and pieces but here is the whole thing. We have added an enhancement where when the mouse is moved over one of the queens, the squares that the queen attacks are highlighted. Move the mouse away and the board reverts to normal. This is an illustration of how the Tcl/Tk `bind` feature can be used. The code is in `library('tcltk/examples/8-queens.tcl')`:

```
                                                        # 8-queens.tcl
#! /usr/bin/wish
# create an 8x8 grid of labels
proc setup_display { } {
    frame .queens -background black
    pack .queens

    for {set y 1} {$y <= 8} {incr y} {
        for {set x 1} {$x <= 8} {incr x} {

            # create a label and display a queen in it
            label .queens.$x-$y -bitmap @bitmaps/q64s.bm -relief flat

            # color alternate squares with different colors
            # to create the chessboard pattern
            if { [expr ($x + $y) % 2] } {
                .queens.$x-$y config -background #ffff99
            } else {
                .queens.$x-$y config -background #66ff99
            }

            # set foreground to the background color to
            # make queen image invisible
            .queens.$x-$y config -foreground [.queens.$x-$y cget -background]

            # bind the mouse to highlight the squares attacked by a
            # queen on this square
            bind .queens.$x-$y <Enter> "highlight_attack on $x $y"
            bind .queens.$x-$y <Leave> "highlight_attack off $x $y"

            # arrange the queens in a grid
            grid .queens.$x-$y -row $y -column $x -padx 1 -pady 1

            }
       }
}
```

```
                                                        # 8-queens.tcl
# clear a whole column
proc reset_column { column } {
    for {set y 1 } { $y <= 8 } {incr y} {
        set_queens $column $y ""
    }
}

# place or unplace a queen
proc set_queens { x y v } {
    if { $v == "Q" } {
        .queens.$x-$y config -foreground black
    } else {
        .queens.$x-$y config -foreground [.queens.$x-$y cget -background]
    }
}

# place a queen on a column
proc place_queen { x y } {
    reset_column $x
    set_queens $x $y Q
}

# clear the whole board by clearing each column in turn
proc clear_board { } {
    for { set x 1 } {$x <= 8} {incr x} {
        reset_column $x
    }
}

# given a solution as a list of queens in column positions
# place each queen on the board
proc show_solution { solution } {
    clear_board
    set x 1
    foreach y $solution {
        place_queen $x $y
        incr x
    }
}
```

```
                                                        # 8-queens.tcl
proc highlight_square { mode x y } {
    # check if the square we want to highlight is on the board
    if { $x < 1 || $y < 1 || $x > 8 || $y > 8 } { return };

    # if turning the square on make it red,
    # otherwise determine what color it should be and set it to that
    if { $mode == "on" } { set color red } else {
        if { [expr ($x + $y) % 2] } { set color "#ffff99" } else {
            set color "#66ff99" }
        }

        # get the current settings
        set bg [ .queens.$x-$y cget -bg ]
        set fg [ .queens.$x-$y cget -fg ]

        # if the current foreground and background are the same
        # there is no queen there
        if { $bg == $fg } {
            # no queens
            .queens.$x-$y config -bg $color -fg $color
         } else {
             .queens.$x-$y config -bg $color
    }
}

proc highlight_attack { mode x y } {
    # get current colors of square at x y
    set bg [ .queens.$x-$y cget -bg ]
    set fg [ .queens.$x-$y cget -fg ]

    # no queen there, give up
    if { $bg == $fg } { return };

    # highlight the sqaure the queen is on
    highlight_square $mode $x $y

    # highlight vertical and horizontal
    for { set i 1 } {$i <= 8} {incr i} {
        highlight_square $mode $x $i
        highlight_square $mode $i $y
    }

    # highlight diagonals
    for { set i 1} { $i <= 8} {incr i} {
        highlight_square $mode [expr $x+$i] [expr $y+$i]
        highlight_square $mode [expr $x-$i] [expr $y-$i]
        highlight_square $mode [expr $x+$i] [expr $y-$i]
        highlight_square $mode [expr $x-$i] [expr $y+$i]
    }
}
```

```
                                                        # 8-queens.tcl
proc disable_next {} {
    .next config -state disabled
}

setup_display

# button for sending a 'next' message
button .next -text next -command {prolog_event next}
pack .next

# button for sending a 'stop' message
button .stop -text stop -command {prolog_event stop}
pack .stop
```

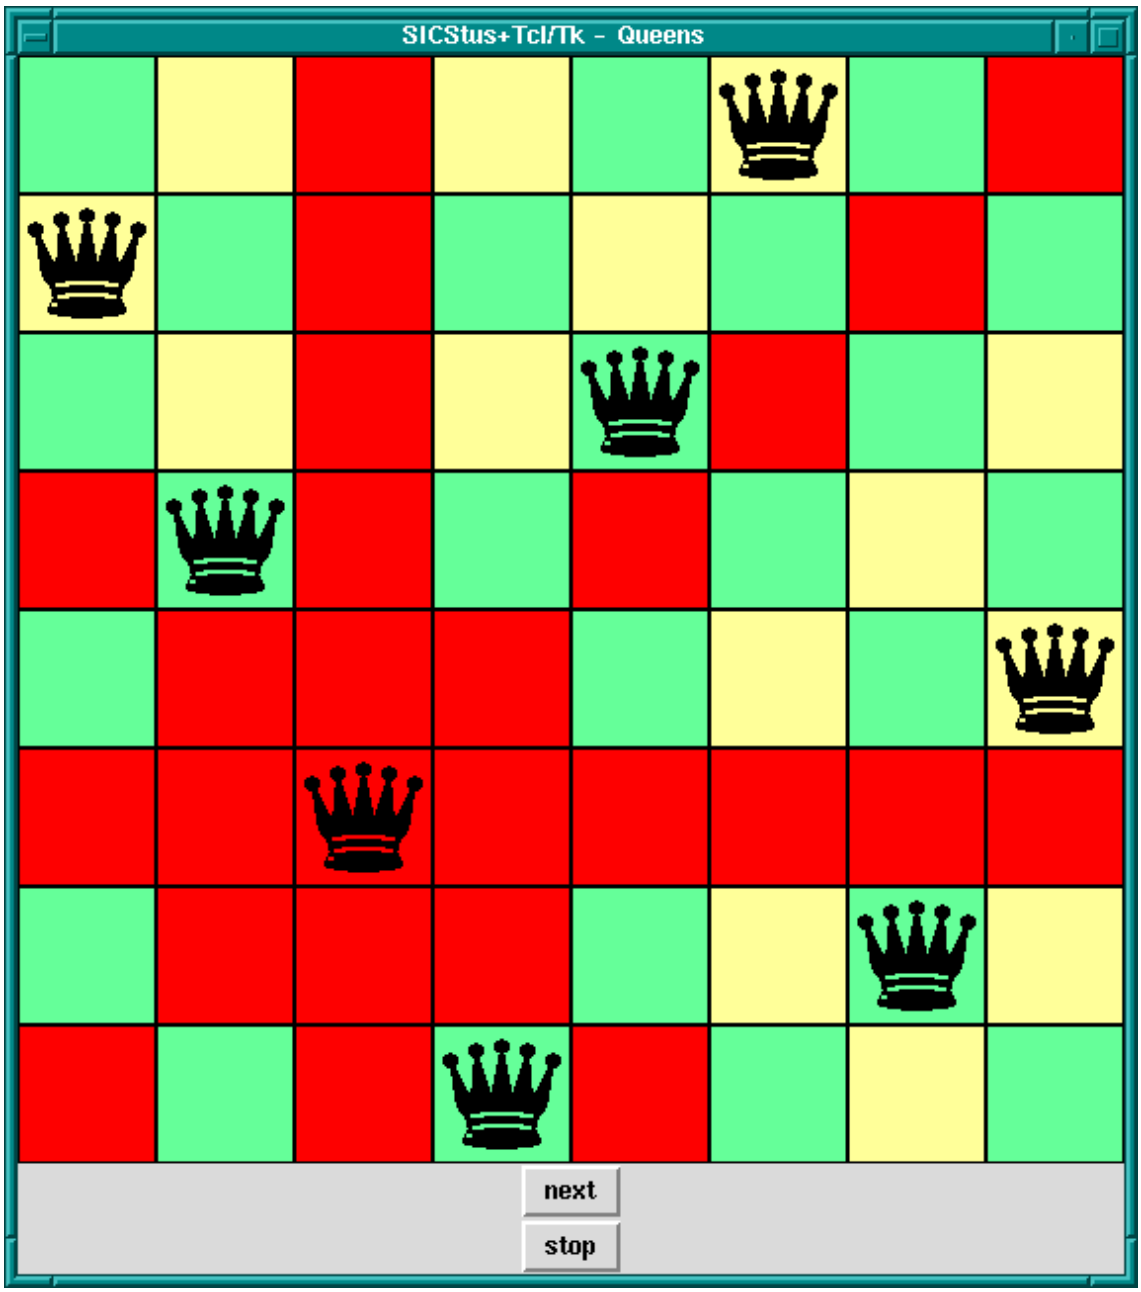

8-Queens Solution, Attacked Squares Highlighted

10.46.6 Quick Reference

10.46.6.1 Command Format Summary

Command ::= *Name*
| `codes(`*code list*`)`
| `write(`*term*`)`
| `writeq(`*term*`)`
| `write_canonical(`*term*`)`
| `format(`*Fmt*`,`*Args*`)`
| `dq(`*Command*`)`

```
                  | br(Command)
                  | sqb(Command)
                  | min(Command)
                  | dot(ListOfNames)
                  | list(ListOfCommands)
                  | ListOfCommands
Fmt               ::= atom
Name              ::= atom                          { other than [] }
                  | number
ListOfCommands    ::= []
                  | [ Command | ListOfCommands ]
ListOfNames       ::= []
                  | [ Name | ListOfNames ]
Args              ::= []
                  | [ term | Args ]
```

where

Atom
Number denote their printed representations

`codes(`*PrologString*`)`
: denotes the string represented by *PrologString* (a code list)

`write(`*Term*`)`
`writeq(`*Term*`)`
`write_canonical(`*Term*`)`
: denotes the string that is printed by the corresponding built-in predicate

`format(`*Fmt*`, `*Args*`)`
: denotes the string that is printed by the corresponding built-in predicate

`dq(`*Command*`)`
: denotes the string specified by *Command*, enclosed in double quotes

`br(`*Command*`)`
: denotes the string specified by *Command*, enclosed in curly brackets

`sqb(`*Command*`)`
: denotes the string specified by *Command*, enclosed in square brackets

`min(`*Command*`)`
: denotes the string specified by *Command*, immediately preceded by a hyphen

`dot(`*ListOfName*`)`
: denotes the widget path specified by *ListOfName*, preceded by and separated by dots

`list(`*ListOfCommands*`)`
: denotes the TCL list with one element for each element in *ListOfCommands*.

ListOfCommands
: denotes the string denoted by each element, separated by spaces

10.46.6.2 Predicates for Prolog to Interact with Tcl Interpreters

`tcl_new(-`*`TclInterpreter`*`)`
: Create a Tcl interpreter and return a handle to it in the variable *Interpreter*.

`tcl_delete(+`*`TclInterpreter`*`)`
: Given a handle to a Tcl interpreter in variable *TclInterpreter*, it deletes the interpreter from the system.

`tcl_eval(+`*`TclInterp`*`, +`*`Command`*`, -`*`Result`*`)`
: Evaluates the Tcl command term given in *Command* in the Tcl interpreter handle provided in *TclInterpreter*. The result of the evaluation is returned as a string in *Result*.

`tcl_event(+`*`TclInterp`*`, +`*`Command`*`, -`*`Events`*`)`
: Evaluates the Tcl command term given in *Command* in the Tcl interpreter handle provided in *TclInterpreter*. The first Prolog events arising from the evaluation is returned as a list in *Events*. Blocks until there is something on the event queue.

10.46.6.3 Predicates for Prolog to Interact with Tcl Interpreters with Tk Extensions

`tk_new(+`*`Options`*`, -`*`Interp`*`)`
: Create a Tcl interpreter with Tk extensions.

  Options should be a list of options described following:

  `top_level_events`
  : This allows Tk events to be handled while Prolog is waiting for terminal input; for example, while the Prolog system is waiting for input at the top-level prompt. Without this option, Tk events are not serviced while the Prolog system is waiting for terminal input.

  `name(+`*`ApplicationName`*`)`
  : This gives the main window a title *ApplicationName*. This name is also used for communicating between Tcl/Tk applications via the Tcl `send` command.

  `display(+`*`Display`*`)`
  : (This is X windows specific.) Gives the name of the screen on which to create the main window. If this is not given, then the default display is determined by the `DISPLAY` environment variable.

`tk_do_one_event`
`tk_do_one_event(+`*`Options`*`)`
: Passes control to Tk to handle a single event before passing control back to Prolog. The type of events handled is passed through the *Options* variable, a list of event types and options.

  The *Options* list can contain the following atoms:

  `tk_dont_wait`
  : do not wait for new events, process only those that are ready

`tk_window_events`
: process window events

`tk_file_events`
: process file events

`tk_timer_events`
: process timer events

`tk_idle_events`
: process `Tcl_DoWhenIdle` events

`tk_all_events`
: process any event

Calling `tk_do_one_event/0` is equivalent to a call to `tk_do_one_event/1` with all flags set. If the `tk_dont_wait` flag is set and there is no event to handle, then the call will fail.

`tk_next_event(+`*`Options`*`, -`*`Event`*`)`
`tk_next_event(+`*`Options`*`, +`*`TclInterpreter`*`, -`*`Event`*`)`
: These predicates are similar to `tk_do_one_event/[0,1]` except that they processes Tk events until is at least one Prolog event happens, when they succeed binding *Event* to the first term on the Prolog event queue associated with the interpreter *TclInterpreter*.

`tk_main_loop`
: Pass control to Tk until all windows in all Tcl/Tk interpreters are gone.

`tk_main_window(+`*`TclInterpreter`*`, -`*`TkWindow`*`)`
: Return in *TkWindow* a reference to the main window of a Tcl/Tk interpreter with handle passed in *TclInterpreter*.

`tk_destroy_window(+`*`TkWindow`*`)`
: Destroy a window or widget.

`tk_make_window_exist(+`*`TkWindow`*`)`
: Force display of a window or widget.

`tk_num_main_windows(-`*`NumberOfWindows`*`)`
: Return in *NumberOfWindows* the total number of Tk main windows existing in the system.

10.46.6.4 Commands for Tcl Interpreters to Interact with The Prolog System

`prolog` Evaluate a Prolog expression from Tcl.

`prolog_event`
: Place a Prolog term on the Prolog event queue from inside Tcl.

10.46.7 Resources

We do not know of any resources out there specifically for helping with creating Prolog applications with Tcl/Tk interfaces. Instead we list here some resources for Tcl/Tk, which may help readers to build the Tcl/Tk side of the application.

10.46.7.1 Web Sites

The home of Tcl/Tk is at:

```
http://www.tcl.tk
```

Also visit the Tcl/Tk wiki:

```
https://wiki.tcl-lang.org/
```

10.46.7.2 Manual Pages

Complete manual pages in various formats and for various versions of the Tcl/Tk library can be found at the Tcl/Tk web site:

```
http://www.tcl.tk/
```

10.47 Term Utilities—`library(terms)`

This library module provides miscellaneous operations on terms. Exported predicates:

`subsumeschk(+`*General*`, +`*Specific*`)`
: is true when *Specific* is an instance of *General*. It does not bind any variables.

  This predicate is identical to the built-in `subsumes_term/2` and it is only present for backwards compatibility.

`subsumes(+`*General*`, +`*Specific*`)`
: is true when *Specific* is an instance of *General*. It will bind variables in *General* (but not those in *Specific*, except when `+`*General* and `+`*Specific* share variables) so that *General* becomes identical to *Specific*.

  In many cases, binding variable is not really desirable, in which case `subsumes_term/2` should be used instead. If unification is in fact wanted, it may be better to make this explicit in your code by using `subsumes_term/2` followed by an explicit unification, e.g. `subsumes_term(G,S), G=S`.

`variant(+`*Term*`, +`*Variant*`)`
: is true when *Term* and *Variant* are identical modulo renaming of variables, provided *Term* and *Variant* have no variables in common.

`term_subsumer(+`*Term1*`, +`*Term2*`, -`*Term*`)`
: binds *Term* to a most specific generalization of *Term1* and *Term2*. Using Plotkin's algorithm [Machine Intelligence 5, 1970], extended by Dan Sahlin to handle cyclic structures.

`term_hash(+`*Term*`, -`*Hash*`)`
: Equivalent to `term_hash(Term, [], Hash)`.

`term_hash(+`*Term*`, +`*Options*`, -`*Hash*`)`
: `term_hash/[2,3,4]` is provided primarily as a tool for the construction of sophisticated Prolog clause access schemes. Its intended use is to generate hash values for terms that will be used with first argument clause indexing, yielding compact and efficient multi-argument or deep argument indexing. *Options* is a list of options,

  `algorithm(`*Algorithm*`)`
  : *Algorithm* specifies which hash function to use. An atom, one of,

    `default`
    : This is currently the same as `jenkins`. This is the default. If we ever see a need to change the default hash algorithm again then the algorithm denoted by `default` may change but the algorithm denoted by the other names, like `'sicstus-4.0.5'`, will not change.

    `jenkins`
    : Based on the algorithm "lookup3" by Bob Jenkins, see `http://burtleburtle.net/bob/hash/doobs.html`.

`hsieh`

Based on the algorithm "SuperFastHash" by Paul Hsieh, see `http://www.azillionmonkeys.com/qed/hash.html`. Despite the name neither this nor any other choice of algorithm significantly affects the speed of `term_hash/3`.

`sdbm`

Based on the well known algorithm "sdbm".

`'sicstus-4.0.4'`

This is the algorithm used up to SICStus Prolog 4.0.4 (inclusive). It is only present to provide backwards compatibility. It is not as good as any of the above algorithms. Note that this atom needs to be quoted.

This algorithm produces hash values that may differ between platforms.

`'sicstus-4.0.5'`

This is the same as `jenkins`. I.e. the default since SICStus Prolog 4.0.5. Note that this atom needs to be quoted.

there are some other (not as good) algorithms available for the curious, see the source for detail.

Unless otherwise noted, the hash value will be identical across runs and platforms.

`range(`*Range*`)`

The resulting hash value will be non-negative and less than the upper bound specified by *Range*. *Range* should be either a positive integer, or an atom, one of,

`infinite`

Do not constrain the hash value. Currently all hash algorithms produce an unsigned 32-bit integer.

`smallint`

Ensure the resulting hash value is a small integer. This is the same as specifying a range of `2^28` on 32-bit platforms and `2^60` on 64-bit platforms.

`smallint32`

Ensure the resulting hash value is in the 32-bit platform range of small integers, i.e. the same as a range of `2^28`.

`default`

The same as `smallint32`. This is the default. This ensures that, by default, the same hash value is computed for the same term on both 32-bit and 64-bit platforms.

`depth(`*Depth*`)`

Specifies how deep to descend into the term when calculating the hash value. If `Depth` is a non-negative integer the subterms up to depth *Depth* of *Term* are used in the computation. Alternatively, if `Depth` is the atom `infinite`, all subterms of *Term* are relevant in computing *Hash*. In the latter case *Term* must be acyclic. In this context the *depth* of a term is defined as follows: the (principal functor of) the term itself has depth 1, and an argument of a term with depth *i* has depth *i+1*. Note that this is similar to, but not the same as, the value computed by `term_depth/2`. For legacy reasons a *Depth* of -1 is treated the same a `infinite`.

`if_var(`*IfVar*`)`

Specifies what to do if a variable is encountered in the term (i.e. to the specified depth). *IfVar* should be an atom, one of,

`error`

An instantiation error is thrown.

`ignore`

The variable is ignored and the hash algorithm continues with the other parts of the term.

`value(Value)`

The hash algorithm stops, the intermediate hash result is discarded and `Hash` is bound to `Value`. There is no restrictions on `Value`, it need not be an integer or even be ground.

`default` This is the same as `value(_)`, i.e. `term_hash/3` just succeeds without binding `Hash`. This is the default. This is useful when the hash value us used for first-argument indexing. This ensures that if the (possibly variable-valued) hash values for *Term1* and *Term2* are *Hash1* and *Hash2*, respectively, then if *Term1* and *Term2* are unifiable (to the specified depth) then so are *Hash1* and *Hash2*. For other use cases it is probably more appropriate to specify `if_var(error)`.

`term_hash(+`*Term*`, +`*Depth*`, +`*Range*`, -`*Hash*`)`

Equivalent to `term_hash(Term, [depth(`*Depth*`), range(`*Range*`)], Hash)`.

`term_variables_set(+`*Term*`, -`*Variables*`)` *since release 4.3*

True if *Variables* is the (ordered) set of variables occurring in *Term*.

This was called `term_variables/2` prior to SICStus Prolog 4.3 but now `term_variables/2` is a built-in with different meaning, due to alignment with the ISO Prolog standard.

`term_variables_bag(+`*Term*`, -`*Variables*`)`

True if *Variables* is the list of variables occurring in *Term*, in first occurrence order.

This predicate has been superseded by the built-in `term_variables/2` and it is only present for backwards compatibility.

The name is an historical accident, the result is not really a bag (i.e. multiset).

`cyclic_term(+X)`
: True if X is infinite (cyclic). Runs in linear time.

`term_order(+X, +Y, -R)`
: is true when X and Y are arbitrary terms, and R is `<`, `=`, or `>` according as X `@<` Y, $X == Y$, or X `@>` Y. This is the same as `compare/3`, except for the argument order.

`contains_term(+Kernel, +Expression)`
: is true when the given *Kernel* occurs somewhere in the *Expression*. It can only be used as a test; to generate sub-terms use `sub_term/2`.

`free_of_term(+Kernel, +Expression)`
: is true when the given *Kernel* does not occur anywhere in the *Expression*. NB: if the *Expression* contains an unbound variable, this must fail, as the *Kernel* might occur there. Since there are infinitely many *Kernels* not contained in any *Expression*, and also infinitely many *Expressions* not containing any *Kernel*, it doesn't make sense to use this except as a test.

`occurrences_of_term(+Kernel, +Expression, -Tally)`
: is true when the given *Kernel* occurs exactly *Tally* times in *Expression*. It can only be used to calculate or test *Tally*; to enumerate *Kernels* you'll have to use `sub_term/2` and then test them with this routine. If you just want to find out whether *Kernel* occurs in *Expression* or not, use `contains_term/2` or `free_of_term/2`.

`contains_var(+Variable, +Term)`
: is true when the given *Term* contains at least one sub-term which is identical to the given *Variable*. We use `==` to check for the variable (`contains_term/2` uses `=`) so it can be used to check for arbitrary terms, not just variables.

`free_of_var(+Variable, +Term)`
: is true when the given *Term* contains no sub-term identical to the given *Variable* (which may actually be any term, not just a var). For variables, this is precisely the "occurs check" which is needed for sound unification.

`occurrences_of_var(+Variable, +Term, -Tally)`
: is true when the given *Variable* occurs exactly *Tally* times in *Term*. It can only be used to calculate or test *Tally*; to enumerate Variables you'll have to use `sub_term/2` and then test them with this routine. If you just want to find out whether *Variable* occurs in *Term* or not, use `contains_var/2` or `free_of_var/2`.

`sub_term(?Kernel, +Term)`
: is true when *Kernel* is a sub-term of *Term*. It enumerates the sub-terms of *Term* in an arbitrary order. Well, it is defined that a sub-term of *Term* will be enumerated before its own sub-terms are (but of course some of those sub-terms might be elsewhere in *Term* as well).

`depth_bound(+Term, +Bound)`
: is true when the term depth of *Term* is no greater than *Bound*, that is, when constructor functions are nested no more than *Bound* deep. Later variable bindings may invalidate this bound. To find the (current) depth, use `term_depth/2`.

`length_bound(?List, +Bound)`
: is true when the length of *List* is no greater than *Bound*. It can be used to enumerate Lists up to the bound.

`size_bound(+Term, +Bound)`
: is true when the number of constant and function symbols in *Term* is (currently) at most *Bound*. If *Term* is non-ground, later variable bindings may invalidate this bound. To find the (current) size, use `term_size/2`.

`term_depth(+Term, -Depth)`
: calculates the Depth of a Term, using the definition

```
term_depth(Var) = 0
term_depth(Const) = 0
term_depth(F(T1,...,Tn)) = 1+max(term_depth(T1),...,term_depth(Tn))
```

Could be defined as:

```
term_depth(X, Depth) :-
    simple(X), !, Depth = 0.
term_depth(X, Depth) :-
    (   foreacharg(A,X),
        fromto(0,D0,D,Depth0)
    do  term_depth(A, D1),
        D is max(D0,D1)
    ),
    Depth is Depth0+1.
```

`term_size(+Term, -Size)`
: calculates the *Size* of a *Term*, defined to be the number of constant and function symbol occurrences in it. Could be defined as:

```
term_size(X, Size) :-
    var(X), !, Size = 0.
term_size(X, Size) :-
    simple(X), !, Size = 1.
term_size(X, Size) :-
    (   foreacharg(A,X),
        fromto(1,S0,S,Size)
    do  term_size(A, S1),
        S is S0+S1
    ).
```

`same_functor(?T1, ?T2)`
: is true when *T1* and *T2* have the same principal functor. If one of the terms is a variable, it will be instantiated to a new term with the same principal functor

as the other term (which should be instantiated) and with arguments being new distinct variables. If both terms are variables, an error is reported.

`same_functor(?T1, ?T2, ?N)`
: is true when *T1* and *T2* have the same principal functor, and their common arity is *N*. Like `same_functor/3`, at least one of *T1* and *T2* must be bound, or an error will be reported.

`same_functor(?T1, ?T2, ?F, ?N)`
: is true when *T1* and *T2* have the same principal functor, and their common functor is *F/N*. Given *T1* (or *T2*) the remaining arguments can be computed. Given *F* and *N*, the remaining arguments can be computed. If too many arguments are unbound, an error is reported.

10.48 Meta-Call with Limit on Execution Time—`library(timeout)`

This module contains utilities for computing a goal with limit on execution time.

As of release 4.4, this library no longer uses a foreign resource, and it can be used by more than one SICStus instance in the same process.

Exported predicates:

`time_out(:`*Goal*`, +`*Time*`, -`*Result*`)`

The *Goal* is executed as if by `call/1`. If computing any solution takes more than *Time* milliseconds, the goal will be aborted, as if by `throw/1`, and *Result* unified with the atom `time_out`. If the goal succeeds within the specified time, *Result* is unified with the atom `success`. *Time* must be a positive integer, less than 2147483647.

Currently, time is measured in runtime (as opposed to walltime), i.e. the time does not increment while the program is waiting, e.g. during a blocking read.

Ideally, the measured runtime should be thread-specific, i.e. it should not be affected by computations done in other threads in the process (of course, thread-specific time is the same as process runtime for a single-threaded process). Thread-specific runtime measurement is only implemented on Windows.

The precision of the timeout interval is usually not better than several tens of milliseconds. This is due to limitations in the timing mechanisms used to implement `library(timeout)`.

10.49 Dense Arrays as Binary Trees—`library(trees)`

This library module provides updatable binary trees with logarithmic access time. Exported predicates:

`gen_label(?Index, +Tree, ?Value)`
: assumes that Tree is a proper binary tree, and is true when *Value* is the *Index-th* element in *Tree*. Can be used to enumerate all *Values* by ascending *Index*.

`get_label(+Index, +Tree, -Label)`
: treats the tree as an array of *N* elements and returns the *Index-th*. If *Index* `<` *1* or `>` *N* it simply fails, there is no such element. As Tree need not be fully instantiated, and is potentially unbounded, we cannot enumerate *Indices*.

`list_to_tree(+List, -Tree)`
: takes a given proper *List* of *N* elements and constructs a binary *Tree* where `get_label(K, Tree, Lab)` `<=>` *Lab* is the *Kth* element of *List*.

`map_tree(:Pred, +OldTree, ?NewTree)`
: is true when *OldTree* and *NewTree* are binary trees of the same shape and *Pred(Old,New)* is true for corresponding elements of the two trees.

`put_label(+Index, +OldTree, -Label, -NewTree)`
: constructs a new tree the same shape as the old which moreover has the same elements except that the *Index-th* one is *Label*. Unlike the "arrays" of `library(arrays)`, *OldTree* is not modified and you can hang on to it as long as you please. Note that *O(lg N)* new space is needed.

`put_label(+Index, +OldTree, -OldLabel, -NewTree, +NewLabel)`
: is true when *OldTree* and *NewTree* are trees of the same shape having the same elements except that the *Index-th* element of *OldTree* is *OldLabel* and the *Index-th* element of *NewTree* is *NewLabel*. You can swap the `<`*Tree,Label*`>` argument pairs if you like, it makes no difference.

`tree_size(+Tree, -Size)`
: calculates the number of elements in the *Tree*. All trees made by `list_to_tree/2` that are the same size have the same shape.

`tree_to_list(+Tree, -List)`
: is the converse operation to `list_to_tree/2`. Any mapping or checking operation can be done by converting the tree to a list, mapping or checking the list, and converting the result, if any, back to a tree. It is also easier for a human to read a list than a tree, as the order in the tree goes all over the place.

10.50 Type Checking—`library(types)`

This library module provides more and better type tests. For the purposes of this library, we first define an abstract type *typeterm*, as follows:

typeterm ::= `atom`
| `atomic`
| `boolean`
| `callable`
| `character`
| `character_code`
| `compound`
| `db_reference`
| `float`
| `float(`*rangeterm*`)`
| `ground`
| `integer`
| `integer(`*rangeterm*`)`
| `list`
| `list(`*Type*`)`
| `mutable`
| `nonvar`
| `number`
| `number(`*rangeterm*`)`
| `oneof(`*L*`)`
| `order`
| `pair`
| `pred_spec`
| `pred_spec_tree`
| `proper_list`
| `proper_list(`*Type*`)`
| `simple`
| `term`
| `var`
| `var_or(`*Type*`)`

rangeterm ::= `between(L,U)`
| `>=(L)`
| `>(L)`
| `<(L)`
| `=<(L)`
| `=:=(L)`
| `=\=(L)`

Culprit information:

These predicates takes arguments that are used when reporting the reason and location of errors. The arguments are:

Goal must be a callable term, without `(:)/2` module wrapping, with arity at least *ArgNo*.

ArgNo must be a non-negative integer, where zero means no specific argument position.

Culprit the term that has the offending value.

Exported predicates:

`must_be(+`*Term*`, +`*Type*`, +`*Goal*`, +`*ArgNo*`)`
checks whether the *Term* belongs to the indicated *Type*, which should be a *typeterm*. If it doesn't, several different error exceptions can be thrown: the *Term* may not be instantiated enough to tell yet (Instantiation Error); it may be instantiated when an unbound variable was expected (Uninstantiation Error); it may be definitely not of the right type (Type Error); it may be of the right type but not representable (Representation Error); or it may be of the right type but in the wrong domain (Domain Error). If an error exception is thrown, it will include *Goal* and *ArgNo* and, if possible, the line of code in the scope of which the error occurred. See Section 4.15.4 [ref-ere-err], page 204.

`illarg(+`*ErrorTerm*`, +`*Goal*`, +`*ArgNo*`)`
`illarg(+`*ErrorTerm*`, +`*Goal*`, +`*ArgNo*`, +`*Culprit*`)`
is the way to raise an error exception, if you would like the exception to pinpoint the line of code in the scope of which the error occurs. This is especially useful in the context of source-linked debugging. *Culprit* defaults to argument number *ArgNo* of *Goal*. These three arguments are passed to the exception being raised, if appropriate. *ErrorTerm* should be one of the following. See Section 4.15.4 [ref-ere-err], page 204.

`var` An Instantiation error is raised.

`type(`*ErrorType*`)`
Same as `must_be(`*Culprit*`, `*ErrorType*`, `*Goal*`, `*ArgNo*`)`.

`domain(`*ErrorType*`,`*ErrorDomain*`)`
First, the type is checked by `must_be(`*Culprit*`, `*ErrorType*`, `*Goal*`, `*ArgNo*`)`. If the type is valid, a Domain Error is raised with the expected domain being *ErrorDomain*.

`force_type(`*ExpType*`)`
A Type Error is raised.

`context(`*ContextType*`,`*CommandType*`)`
A Context Error is raised.

`existence(`*ObjType*`,`*Culprit*`,`*Message*`)`
An Existence Error is raised.

`permission(`*Operation*`,`*ObjType*`,`*Message*`)`
A Permission Error is raised.

`representation(`*ErrorType*`)`
A Representation Error is raised.

`evaluation(`*`ErrorType`*`)`
: An Evaluation Error is raised.

`consistency(`*`Culprit1`*`,`*`Culprit2`*`,`*`Message`*`)`
: A Consistency Error is raised.

`syntax(`*`Pos`*`,`*`Msg`*`,`*`Tokens`*`,`*`AfterError`*`)`
: A Syntax Error is raised.

`resource(`*`Resource`*`)`
: A Resource Error is raised.

`system(`*`Message`*`)`
: A System Error is raised.

10.51 Unweighted Graph Operations—`library(ugraphs)`

This library module provides operations on directed graphs. An unweighted directed graph (ugraph) is represented as a list of *(vertex-neighbors)* pairs, where the pairs are in standard order (as produced by `keysort/2` with unique keys) and the neighbors of each vertex are also in standard order (as produced by `sort/2`), and every neighbor appears as a vertex even if it has no neighbors itself.

An undirected graph is represented as a directed graph where for each edge *(U,V)* there is a symmetric edge *(V,U)*.

An edge *(U,V)* is represented as the term *U-V*.

A vertex can be any term. Two vertices are distinct iff they are not identical (`==`).

A path is represented as a list of vertices. No vertex can appear twice in a path.

Exported predicates:

`vertices_edges_to_ugraph(+`*Vertices*`, +`*Edges*`, -`*Graph*`)`
: is true if *Vertices* is a proper list of vertices, *Edges* is a proper list of edges, and *Graph* is a graph built from *Vertices* and *Edges*. *Vertices* and *Edges* may be in any order. The vertices mentioned in *Edges* do not have to occur explicitly in *Vertices*. *Vertices* may be used to specify vertices that are not connected to any edges.

`vertices(+`*Graph*`, -`*Vertices*`)`
: unifies *Vertices* with the vertices in *Graph*. Could be defined as:

```
vertices(Graph, Vertices) :-
    (   foreach(V-_,Graph),
        foreach(V,Vertices)
    do  true
    ).
```

`edges(+`*Graph*`, -`*Edges*`)`
: unifies *Edges* with the edges in *Graph*. Could be defined as:

```
edges(Graph, Edges) :-
    (   foreach(V1-Neibs,Graph),
        fromto(Edges,S0,S,[])
    do  (   foreach(V2,Neibs),
            param(V1),
            fromto(S0,[V1-V2|S1],S1,S)
        do  true
        )
    ).
```

`add_vertices(+`*Graph1*`, +`*Vertices*`, -`*Graph2*`)`
: is true if *Graph2* is *Graph1* with *Vertices* added to it.

`del_vertices(+Graph1, +Vertices, -Graph2)`
: is true if *Graph2* is *Graph1* with *Vertices* and all edges to and from *Vertices* removed from it.

`add_edges(+Graph1, +Edges, -Graph2)`
: is true if *Graph2* is *Graph1* with *Edges* and their "to" and "from" vertices added to it.

`del_edges(+Graph1, +Edges, -Graph2)`
: is true if *Graph2* is *Graph1* with *Edges* removed from it.

`transpose_ugraph(+Graph, -Transpose)`
: is true if *Transpose* is the graph computed by replacing each edge *(u,v)* in *Graph* by its symmetric edge *(v,u)*. It can only be used one way around. The cost is *O(N log N)*.

`neighbors(+Vertex, +Graph, -Neighbors)`
`neighbours(+Vertex, +Graph, -Neighbors)`
: is true if *Vertex* is a vertex in *Graph* and *Neighbors* are its neighbors.

`complement(+Graph, -Complement)`
: *Complement* is the complement graph of *Graph*, i.e. the graph that has the same vertices as *Graph* but only the edges that are not in *Graph*.

`compose(+G1, +G2, -Composition)`
: computes *Composition* as the composition of two graphs, which need not have the same set of vertices.

`transitive_closure(+Graph, -Closure)`
: computes *Closure* as the transitive closure of *Graph* in *O(N^3)* time.

`transitive_reduction(+Graph, -Reduction)` *since release 4.3.3*
: computes *Reduction* as the transitive reduction of *Graph*.

  Aho et al. let *GraphT* be the transitive closure of *Graph*. Then an edge *uv* belongs to the transitive reduction iff *uv* belongs to *Graph* but not to the composition of *Graph* and *GraphT*. In this construction, the edges of the composition represent pairs of vertices connected by paths of length two or more.

`symmetric_closure(+Graph, -Closure)`
: computes *Closure* as the symmetric closure of *Graph*, i.e. for each edge *(u,v)* in *Graph*, add its symmetric edge *(v,u)*. Approx. *O(N log N)* time. This is useful for making a directed graph undirected. Could be defined as:

```
symmetric_closure(Graph, Closure) :-
    transpose_ugraph(Graph, Transpose),
    (   foreach(V-Neibs1,Graph),
        foreach(V-Neibs2,Transpose),
        foreach(V-Neibs,Closure)
    do  ord_union(Neibs1, Neibs2, Neibs)
    ).
```

`top_sort(+Graph, -Sorted)`
: finds a topological ordering of *Graph* and returns the ordering as a list of *Sorted* vertices. Fails iff no ordering exists, i.e. iff the graph contains cycles. Approx. *O(N log N)* time.

`max_path(+V1, +V2, +Graph, -Path, -Cost)`
: is true if *Path* is a list of vertices constituting a longest path of cost *Cost* from *V1* to *V2* in *Graph*, there being no cyclic paths from *V1* to *V2*. Takes *O(N^2)* time.

`min_path(+V1, +V2, +Graph, -Path, -Length)`
: is true if *Path* is a list of vertices constituting a shortest path of length *Length* from *V1* to *V2* in *Graph*. Takes *O(N^2)* time.

`min_paths(+Vertex, +Graph, -Tree)`
: is true if *Tree* is a tree of all the shortest paths from *Vertex* to every other vertex in *Graph*. This is the single-source shortest paths problem. The algorithm is straightforward.

`path(+Vertex, +Graph, -Path)`
: is given a *Graph* and a *Vertex* of that *Graph*, and returns a maximal *Path* rooted at *Vertex*, enumerating more *Paths* on backtracking.

`reduce(+Graph, -Reduced)`
: is true if *Reduced* is the reduced graph for *Graph*. The vertices of the reduced graph are the strongly connected components of *Graph*. There is an edge in *Reduced* from *u* to *v* iff there is an edge in *Graph* from one of the vertices in *u* to one of the vertices in *v*. A strongly connected component is a maximal set of vertices where each vertex has a path to every other vertex. Algorithm from "Algorithms" by Sedgewick, page 482, Tarjan's algorithm.

`reachable(+Vertex, +Graph, -Reachable)`
: is given a Graph and a *Vertex* of that *Graph*, and returns the set of vertices that are *Reachable* from that *Vertex*. Takes *O(N^2)* time.

`random_ugraph(+P, +N, -Graph)`
: where *P* is a probability, unifies *Graph* with a random graph of *N* vertices where each possible edge is included with probability *P*.

`min_tree(+Graph, -Tree, -Cost)`
: is true if *Tree* is a spanning tree of an *undirected* *Graph* with cost *Cost*, if it exists. Using a version of Prim's algorithm.

`max_cliques(+Graph, -Cliques)` *since release 4.3.3*
: is true if *Cliques* is the set of the maximal cliques of the *undirected* graph *Graph*. That is, all subsets of vertices such that (i) each pair of vertices in any listed subset is connected by an edge, and (ii) no listed subset can have any additional vertex added to it. Using a version of the Bron-Kerbosch algorithm.

10.52 An Inverse of numbervars/3—library(varnumbers)

The built-in predicate `numbervars/3` makes a term ground by binding the variables in it to subterms of the form `'$VAR'(`*N*`)` where *N* is an integer. Most of the calls to `numbervars/3` look like

```
numbervars(Term, 0, _)
```

which can be abbreviated to

```
numbervars(Term)
```

if you use this package.

`varnumbers/3` is a partial inverse to `numbervars/3`:

```
varnumbers(Term, N0, Copy)
```

unifies *Copy* with a copy of *Term* in which subterms of the form `'$VAR'(`*N*`)` where *N* is an integer not less than *N0* (that is, subterms which might have been introduced by `numbervars/3` with second argument *N0*) have been consistently replaced by new variables. Since 0 is the usual second argument of `numbervars/3`, there is also

```
varnumbers(Term, Copy)
```

This provides a facility whereby a Prolog-like data base can be kept as a term. For example, we might represent `append/3` thus:

```
Clauses = [
    (append([], '$VAR'(0), '$VAR'(0)) :- true),
    (append(['$VAR'(0)|'$VAR'(1), '$VAR'(2), ['$VAR'(0)|'$VAR(3)]) :-
        append('$VAR'(1), '$VAR'(2), '$VAR'(3)))
]
```

and we might access clauses from it by doing

```
prove(Goal, Clauses) :-
        member(Clause, Clauses),
        varnumbers(Clause, (Goal:-Body)),
        prove(Goal).
```

Exported predicates:

`numbervars(+`*Term*`)`
: makes *Term* ground by binding variables to subterms `'$VAR'(`*N*`)` with values of *N* ranging from 0 up.

`varnumbers(+`*Term*`, -`*Copy*`)`
: succeeds when *Term* was a term producing by calling `numbervars(`*Term*`)` and *Copy* is a copy of *Term* with such subterms replaced by variables.

`varnumbers(+`*Term*`, +`*NO*`, -`*Copy*`)`
: succeeds when *Term* was a term produced by calling `numbervars(`*Term*`, `*NO*`, `*N*`)` (so that all subterms `'$VAR'(`*X*`)` have `integer(`*X*`)`, *X* `>=` *NO*) and *Copy* is a copy of *Term* with such subterms replaced by variables.

10.53 Weighted Graph Operations—`library(wgraphs)`

This library module provides operations on weighted directed graphs. A weighted directed graph (wgraph) is represented as a list of *(vertex-edgelist)* pairs, where the pairs are in standard order (as produced by `keysort/2` with unique keys), the edgelist is a list of *(neighbor-weight)* pair also in standard order (as produced by `keysort/2` with unique keys), every weight is a nonnegative integer, and every neighbor appears as a vertex even if it has no neighbors itself.

An undirected graph is represented as a directed graph where for each edge *(U,V)* there is a symmetric edge *(V,U)*.

An edge *(U,V)* is represented as the term *U-V*.

A vertex can be any term. Two vertices are distinct iff they are not identical (`==`).

A path is represented as a list of vertices. No vertex can appear twice in a path.

Exported predicates:

`vertices/2`
`edges/2`
`add_vertices/3`
`neighbors/3`
`neighbours/3`
: Re-exported from `library(wgraphs)`.

`wgraph_to_ugraph(+`*WeightedGraph*`, -`*Graph*`)`
: is true if *Graph* has the same vertices and edges as *WeightedGraph*, except the edges of *Graph* are unweighted. Could be defined as:

```
wgraph_to_ugraph(WGraph, Graph) :-
    (   foreach(V-WNeibs,WGraph),
        foreach(V-Neibs,Graph)
    do  (   foreach(V1-_,WNeibs),
            foreach(V1,Neibs)
        do  true
        )
    ).
```

`ugraph_to_wgraph(+`*Graph*`, -`*WeightedGraph*`)`
: is true if *WeightedGraph* has the same vertices and edges as *Graph*, except the edges of *WeightedGraph* all have weight 1. Could be defined as:

```
ugraph_to_wgraph(Graph, WGraph) :-
    (   foreach(V-Neibs,Graph),
        foreach(V-WNeibs,WGraph)
    do  (   foreach(V1,Neibs),
            foreach(V1-1,WNeibs)
        do  true
        )
    ).
```

`ugraph_to_wgraph(+SubGraph, +WeightedGraph, -WeightedSubGraph)`
: is true if WeightedSubGraph has the same vertices and edges as SubGraph and the same weights as the corresponding edges in WeightedGraph.

`vertices_edges_to_wgraph(+`*Vertices*`, +`*Edges*`, -`*WeightedGraph*`)`
: is true if *Vertices* is a proper list of vertices, *Edges* is a proper list of edges, and *WeightedGraph* is a graph built from *Vertices* and *Edges*. *Vertices* and *Edges* may be in any order. The vertices mentioned in *Edges* do not have to occur explicitly in *Vertices*. *Vertices* may be used to specify vertices that are not connected to any edges.

`del_vertices(+`*WeightedGraph1*`, +`*Vertices*`, -`*WeightedGraph2*`)`
: is true if *WeightedGraph2* is *WeightedGraph1* with *Vertices* and all edges to and from *Vertices* removed from it.

`add_edges(+`*WeightedGraph1*`, +`*Edges*`, -`*WeightedGraph2*`)`
: is true if *WeightedGraph2* is *WeightedGraph1* with *Edges* and their "to" and "from" vertices added to it.

`del_edges(+`*WeightedGraph1*`, +`*Edges*`, -`*WeightedGraph2*`)`
: is true if *WeightedGraph2* is *WeightedGraph1* with *Edges* removed from it.

`transpose_wgraph(+`*WeightedGraph*`, -`*Transpose*`)`
: is true if *Transpose* is the graph computed by replacing each edge *(u,v)* in *WeightedGraph* by its symmetric edge *(v,u)*. It can only be used one way around. The cost is *O(N log N)*.

`transitive_closure(+`*WeightedGraph*`, -`*Closure*`)`
: computes Closure as the transitive closure of *WeightedGraph* in *O(N^3)* time. Uses Floyd's algorithm and fragments of Barney Pell's code.

`symmetric_closure(+`*WeightedGraph*`, -`*Closure*`)`
: computes *Closure* as the symmetric closure of *WeightedGraph*, i.e. for each edge *(u,v)* in *WeightedGraph*, add its symmetric edge *(v,u)*. Approx *O(N log N)* time. This is useful for making a directed graph undirected.

`top_sort(+`*Graph*`, -`*Sorted*`)`
: finds a topological ordering of a *Graph* and returns the ordering as a list of *Sorted* vertices. Fails iff no ordering exists, i.e. iff the graph contains cycles. Takes *O(N log N)* time.

`max_path(+`*V1*`, +`*V2*`, +`*WeightedGraph*`, -`*Path*`, -`*Cost*`)`
: is true if *Path* is a list of vertices constituting a longest path of cost Cost from *V1* to *V2* in *WeightedGraph*, there being no cyclic paths from *V1* to *V2*. Takes *O(N^2)* time.

`min_path(+`*V1*`, +`*V2*`, +`*WeightedGraph*`, -`*Path*`, -`*Cost*`)`
: is true if *Path* is a list of vertices constituting a shortest path with total cost *Cost* from *V1* to *V2* in *WeightedGraph*. Takes *O(N^2)* time.

`min_paths(+`*Vertex*`, +`*WeightedGraph*`, -`*Tree*`)`
: is true if *Tree* is a tree of all the shortest paths from *Vertex* to every other vertex in *WeightedGraph*. This is the single-source shortest paths problem. Using Dijkstra's algorithm.

`path(+`*Vertex*`, +`*WeightedGraph*`, -`*Path*`)`
: is given a *WeightedGraph* and a *Vertex* of that *WeightedGraph*, and returns a maximal *Path* rooted at *Vertex*, enumerating more *Paths* on backtracking.

`reduce(+`*WeightedGraph*`, -`*Reduced*`)`
: is true if *Reduced* is the reduced graph for *WeightedGraph*. The vertices of the reduced graph are the strongly connected components of *WeightedGraph*. There is an edge in *Reduced* from *u* to *v* iff there is an edge in *WeightedGraph* from one of the vertices in *u* to one of the vertices in *v*. A strongly connected component is a maximal set of vertices where each vertex has a path to every other vertex. Algorithm from "Algorithms" by Sedgewick, page 482, Tarjan's algorithm.

`reachable(+`*Vertex*`, +`*WeightedGraph*`, -`*Reachable*`)`
: is given a *WeightedGraph* and a *Vertex* of that *WeightedGraph*, and returns the set of vertices that are *Reachable* from that *Vertex*. Takes *O(N^2)* time.

`random_wgraph(+`*P*`, +`*N*`, +`*W*`, -`*WeightedGraph*`)`
: where *P* is a probability, unifies *WeightedGraph* with a random graph with vertices *1..N* where each possible edge is included with probability *P* and random weight in *1..W*.

`min_tree(+`*WeightedGraph*`, -`*Tree*`, -`*Cost*`)`
: is true if *Tree* is a minimum-*Cost* spanning tree of an *undirected* *WeightedGraph* with cost *Cost*, if it exists. Using Kruskal's algorithm.

10.54 Parsing and Generating XML—`library(xml)`

This is a package for parsing XML with Prolog, which provides Prolog applications with a simple "Document Value Model" interface to XML documents. A description of the subset of XML that it supports can be found at: `http://www.binding-time.co.uk/xmlpl.html`

The package, originally written by Binding Time Ltd., is in the public domain and unsupported. To use the package, enter the query:

```
| ?- use_module(library(xml)).
```

The package represents XML documents by the abstract data type *document*, which is defined by the following grammar:

document	::=	{ well-formed document }
	`xml(`*attributes*`,`*content*`)`	
	|	{ malformed document }
	`malformed(`*attributes*`,`*content*`)`	
attributes	::= `[]`	
	| `[`*name*`=`*char-data*`|`*attributes*`]`	
content	::= `[]`	
	| `[`*cterm*`|`*content*`]`	
cterm	::= `pcdata(`*char-data*`)`	{ text }
	| `comment(`*char-data*`)`	{ an XML comment }
	|	{ a Namespace }
	`namespace(`*URI*`,`*prefix*`,`*element*`)`	
	|	{ <*tag*>..</*tag*> encloses *content* or <*tag* /> if *content* is empty }
	`element(`*tag*`,`*attributes*`,`*content*`)`	
	|	{ A PI <? *name char-data* ?> }
	`instructions(`*name*`,`*char-data*`)`	
	| `cdata(`*char-data*`)`	{ <![CDATA[*char-data*]]> }
	|	{ DTD <!DOCTYPE .. > }
	`doctype(`*tag*`,`*doctype-id*`)`	
	| `unparsed(`*char-data*`)`	{ text that hasn't been parsed }
	| `out_of_context(`*tag*`)`	{ *tag* is not closed }
tag	::= *atom*	{ naming an element }
name	::= *atom*	{ not naming an element }
URI	::= *atom*	{ giving the URI of a namespace }
char-data	::= *code list*	
doctype-id	::= `public(`*char-data*`,`*char-data*`)`	
	| `public(`*char-data*`,`*dtd-literals*`)`	
	| `system(`*char-data*`)`	

```
                | system(char-
                data,dtd-literals)
                | local
                | local,dtd-literals
dtd-literals    ::= []
                |  [dtd_literal(char-
                data)|dtd-literals]
```

The following predicates are exported by the package:

`xml_parse(`*?Chars*`, `*?Document*`)`
`xml_parse(`*?Chars*`, `*?Document*`, `*+Options*`)`
: Either parses *Chars*, a *code list*, to *Document*, a *document*. *Chars* is not required to represent strictly well-formed XML. Or generates *Chars*, a *code list*, from *Document*, a *document*. If *Document* is not a valid *document* term representing well-formed XML, an exception is raised. In the second usage of the predicate, the only option available is `format/1`.

  Options is a list of zero or more of the following, where *Boolean* must be `true` or `false`:

  `format(`*Boolean*`)`
  : Indent the element content (default `true`).

  `extended_characters(`*Boolean*`)`
  : Use the extended character entities for XHTML (default `true`).

  `remove_attribute_prefixes(`*Boolean*`)`
  : Remove namespace prefixes from attributes when it's the same as the prefix of the parent element (default `false`).

`xml_subterm(`*+Term*`, `*?Subterm*`)`
: Unifies *Subterm* with a sub-term of *Term*, a *document*. This can be especially useful when trying to test or retrieve a deeply-nested subterm from a document.

`xml_pp(`*+Document*`)`
: "Pretty prints" *Document*, a *document*, on the current output stream.

10.55 Zinc Interface—`library(zinc)`

MiniZinc is a free and open-source constraint modeling language, developed at Monash University withsupport from OPTIMA. Models are compiled into *FlatZinc*, a solver input language that is understood by a wide range of solvers, including SICStus Prolog. See `https://www.minizinc.org/` for more information.

This library provides an interpreter for FlatZinc programs (see Section 10.55.2 [FlatZinc], page 923), and also for MiniZinc programs (see Section 10.55.3 [MiniZinc], page 929). The library interface was inspired by the MiniZinc and FlatZinc libraries of *The ECLiPSe Constraint Programming System*. It is compatible with MiniZinc 2.9.3 distribution and supports all variable types.

10.55.1 Prerequisites

Let `$MINIZINC_DIR` denote the directory containing the MiniZinc distribution.

To ensure the SICStus tools can find the MiniZinc tools they need, make sure that `$MINIZINC_DIR/bin` is included in the environment variable `PATH`.

To tell the MiniZinc command-line tool `minizinc` to use SICStus, add the `library/zinc/` folder to the "Extra solver search paths" setting in the MiniZincIDE GUI application preferences, and then just use the name '`sicstus`' as the `--solver` argument. This is what is used in most of the examples below. For example

```
minizinc --solver sicstus ...
```

10.55.2 FlatZinc

The FlatZinc interpreter described here is based on *"Specification of FlatZinc"*, available at `https://www.minizinc.org/doc-latest/en/fzn-spec.html`.

A FlatZinc program can be run directly using `fzn_run_file/[1,2]` and `fzn_run_stream/[1,2]`, as well as with `spfz`, a simple command-line tool interface to `fzn_run_file/[1,2]` (for details, see Section 13.3 [too-spfz], page 1433). For example, a program for solving the 4 Queens problem, located in `library('zinc/examples/queen4.fzn')`, can be run by the following goal:

```
| ?- fzn_run_file(library('zinc/examples/queen4')).
```

or command:

```
% spfz '$SP_LIBRARY_DIR/zinc/examples/queen4'
```

The following solution is then written on the current output stream:

```
q = array1d(1..4, [2,4,1,3]);
----------
```

Note the ten consecutive dashes after the solution.

The following goal can be used to find all solutions:

```
| ?- fzn_run_file(library('zinc/examples/queen4'), [solutions(all)]).
```

or command:

```
% spfz '$SP_LIBRARY_DIR/zinc/examples/queen4' -a
```

The following solutions are then written on the current output stream:

```
q = array1d(1..4, [2,4,1,3]);
----------
q = array1d(1..4, [3,1,4,2]);
----------
==========
```

Note the ten consecutive equal signs after all solutions have been found.

FlatZinc programs are not intended to be written (or read) by humans, but can be generated by the `minizinc` command-line tool with the `-c` option, for example (`queen.mzn` and `queen4.dzn` can be found in `library('zinc/examples')`):

```
minizinc --solver sicstus -c queen.mzn queen4.dzn
```

The resulting FlatZinc program `queen4.fzn` can then be run as described above. `minizinc` without the `-c` option first generates a temporary FlatZinc file, then runs it, then deletes it:

```
minizinc --solver sicstus queen.mzn queen4.dzn
```

or, simplest of all:

```
minizinc --solver sicstus -D n=4 queen.mzn
```

It is also possible to just load a FlatZinc program into SICStus by `fzn_load_file/2` and `fzn_load_stream/2`. The loaded FlatZinc program can then be processed further from within SICStus, e.g. by retrieving some FlatZinc variables using `fzn_identifier/3` and posting additional `library(clpfd)` constraints or applying a Prolog labeling predicate on those variables.

Finally, it is possible to load and run MiniZinc programs directly from within SICStus by using the predicates described in Section 10.55.3 [MiniZinc], page 929.

10.55.2.1 Exported Predicates

The predicates described here operate on a data structure *FznState* representing a FlatZinc program. The details of *FznState* is reserved (subject to change). It can be constructed from a FlatZinc program by the predicates `fzn_load_stream/2` and `fzn_load_file/2` described next, or directly from a MiniZinc program (see Section 10.55.3 [MiniZinc], page 929).

`fzn_load_stream(+`*FznStream*`, -`*FznState*`)`

FznStream is a FlatZinc input stream. *FznState* is a FlatZinc state that is initialized with respect to *FznStream*.

`fzn_load_file(+FznFile, -FznState)`

FznFile is a FlatZinc file (extension defaults to `.fzn`). *FznState* is a FlatZinc state that is initialized with respect to *FznFile*. This predicate is just a wrapper around `fzn_load_stream/2` handling stream opening and closing.

Consider the following FlatZinc program for solving the 4 Queens problem located in `library('zinc/examples/queen4.fzn')`.

```
                                                                % queen4.fzn
int: n = 4;
array[1 .. 4] of var 1 .. 4: q::output_array([ 1 .. 4 ]);
constraint int_lin_ne([ 1, -1 ], [ q[1], q[2] ], 1);
constraint int_ne(q[1], q[2]);
constraint int_lin_ne([ 1, -1 ], [ q[1], q[2] ], -1);
constraint int_lin_ne([ 1, -1 ], [ q[1], q[3] ], 2);
constraint int_ne(q[1], q[3]);
constraint int_lin_ne([ 1, -1 ], [ q[1], q[3] ], -2);
constraint int_lin_ne([ 1, -1 ], [ q[1], q[4] ], 3);
constraint int_ne(q[1], q[4]);
constraint int_lin_ne([ 1, -1 ], [ q[1], q[4] ], -3);
constraint int_lin_ne([ 1, -1 ], [ q[2], q[3] ], 1);
constraint int_ne(q[2], q[3]);
constraint int_lin_ne([ 1, -1 ], [ q[2], q[3] ], -1);
constraint int_lin_ne([ 1, -1 ], [ q[2], q[4] ], 2);
constraint int_ne(q[2], q[4]);
constraint int_lin_ne([ 1, -1 ], [ q[2], q[4] ], -2);
constraint int_lin_ne([ 1, -1 ], [ q[3], q[4] ], 1);
constraint int_ne(q[3], q[4]);
constraint int_lin_ne([ 1, -1 ], [ q[3], q[4] ], -1);
solve satisfy;
```

A FlatZinc state `Queen4State` representing the program above can be constructed by typing:

```
| ?- fzn_load_file(library('zinc/examples/queen4'), Queen4State).
```

The predicates presented next are used to query an already initialized FlatZinc state.

`fzn_post(+FznState)`

Posts the constraints of the FlatZinc program represented by *FznState*. May fail if the constraints are inconsistent.

`fzn_solve(+FznState)`

Runs the solve and output parts of the FlatZinc program represented by *FznState* to find and display an (optimal) solution. Fails if the constraints of the FlatZinc program are inconsistent. Generates the next solution upon backtracking.

`fzn_output(+FznState)`
: Outputs the values of the variables in *FznState* that have been annotated with `output_var/0` or `output_array/1`.

Consider again the FlatZinc program `queen4.fzn` described above and the following goal at the Prolog top level:

```
| ?- fzn_load_file(library('zinc/examples/queen4'), Queen4State),
     fzn_post(Queen4State),
     fzn_solve(Queen4State).
```

The first line initializes `Queen4State` with respect to `queen4.fzn`. The second and third line posts the constraints of `queen4.fzn` and runs the solve and output parts of `queen4.fzn`, respectively. The following is written on the current output stream:

```
q = array1d(1..4, [2,4,1,3]);
----------
```

Upon backtracking the solve and output parts of `Queen4State` are rerun, which means that the following is written on the current output stream:

```
q = array1d(1..4, [3,1,4,2]);
----------
```

`fzn_identifier(+FznState, +Id, -Value)`
: *FznState* is a FlatZinc state initialized with respect to some FlatZinc program and *Id* is an identifier of the FlatZinc program. Unifies the FlatZinc value of *Id* with *Value* according to the following translation scheme:

  - A `bool` is translated into a Prolog integer: `false` is translated into `0` and `true` is translated into `1`.
  - An `int` is translated into a Prolog integer.
  - A `float` is translated into a Prolog float.
  - An range or set is translated into a `library(clpfd)` range expression (see Section 10.9.16.2 [Syntax of Range Expressions], page 509).
  - An array is translated into a Prolog list containing the (translated) elements of the array. Ordering is preserved such that the nth element of the array is the nth element of the list.
  - A `var` is translated into a `library(clpfd)` domain variable (see Section 10.9.6 [CLPFD Interface], page 434).

`fzn_objective(+FznState, -Objective)`
: *FznState* is a FlatZinc state initialized with respect to some FlatZinc program. Unifies *Objective* with a domain variable representing the FlatZinc objective.

A possible use of `fzn_identifier/3` is to post additional `library(clpfd)` constraints or to apply a Prolog labeling predicate on the FlatZinc variables. For example, given the 4 Queens problem in `queen4.fzn` described above, the following goal labels the variables to find all solutions:

```
| ?- use_module(library(clfpd)).
| ?- fzn_load_file(library('zinc/examples/queen4'), Queen4State),
     fzn_post(Queen4State),
     fzn_identifier(Queen4State, q, Q),
     findall(_, (labeling([], Q), fzn_output(Queen4State)), _).
```

Given this goal, the following is written on the current output stream:

```
q = array1d(1..4, [2,4,1,3]);
----------
q = array1d(1..4, [3,1,4,2]);
----------
```

To avoid symmetric solutions where the chess board is rotated 180 degrees, the following goal posts an additional symmetry breaking constraint on the first two queens:

```
| ?- fzn_load_file(library('zinc/examples/queen4'), Queen4State),
     fzn_post(Queen4State),
     fzn_identifier(Queen4State, q, Q),
     Q = [Q1, Q2|_], Q1 #< Q2,
     findall(_, (labeling([], Q), fzn_output(Queen4State)), _).
```

Given this goal, the following is written on the current output stream:

```
q = array1d(1..4, [2,4,1,3]);
----------
```

Note that, now, only the first one of the previous two solutions is displayed.

The following two predicates can be used to run a FlatZinc program in one go.

`fzn_run_stream(+`*FznStream*`)`
`fzn_run_stream(+`*FznStream*`, +`*Options*`)`

FznStream is a FlatZinc input stream and *Options* is a list of options; see Section 10.55.4 [Zinc Options], page 932. Performs the following steps:

1. Loads the FlatZinc program (`fzn_load_stream/2`), initializing a FlatZinc state.
2. Posts the constraints of the FlatZinc program (`fzn_post/1`).
3. Runs the solve part of the FlatZinc program (`fzn_solve/1`).
4. Outputs the values of the variables that have been annotated with `output_var/0` or `output_array/1`.

The two final steps are repeated until the number of solutions as specified in *Options* have been found or until no more solutions can be found. At this point, if the whole search space have been explored, then ten consecutive equal signs are output on a separate line.

`fzn_run_file(+`*`FznFile`*`)`
`fzn_run_file(+`*`FznFile`*`, +`*`Options`*`)`
: *FznFile* is a FlatZinc program file (extension defaults to `.fzn`) and *Options* is a list of options; see see Section 10.55.4 [Zinc Options], page 932. This predicate is just a wrapper around `fzn_run_stream/[1,2]` handling stream opening and closing.

The next predicate can be used to write the constraints of a FlatZinc program to a file, in the format of `library(clpfd)`.

`fzn_dump(+`*`FznState`*`, +`*`File`*`)`
`fzn_dump(+`*`FznState`*`, +`*`Options`*`, +`*`File`*`)`
: *FznState* is a FlatZinc state initialized with respect to some FlatZinc program and *File* is a writable file (extension defaults to `.pl`). Writes the constraints of *FznState* to *File* in the format of `library(clpfd)`.

Options is a list of options; see see Section 10.55.4 [Zinc Options], page 932.

Consider again the FlatZinc program `queen4.fzn` described above and the following goal at the Prolog top level:

```
| ?- fzn_load_file(library('zinc/examples/queen4'), Queen4State),
     fzn_dump(Queen4State, [variables([q=Q])], queen4).
```

The file `queen4.pl` then contains the following:

queen4.pl

```
:- use_module(library(clpfd)).

query([q=[A,B,C,D]]) :-
        domain([A,B,C,D], 1, 4),
        C#\=D,
        B#\=D,
        B#\=C,
        A#\=D,
        A#\=C,
        A#\=B,
        scalar_product([1,-1], [C,D], #\=, 1),
        scalar_product([1,-1], [C,D], #\=, -1),
        scalar_product([1,-1], [B,D], #\=, 2),
        scalar_product([1,-1], [B,D], #\=, -2),
        scalar_product([1,-1], [B,C], #\=, 1),
        scalar_product([1,-1], [B,C], #\=, -1),
        scalar_product([1,-1], [A,D], #\=, 3),
        scalar_product([1,-1], [A,D], #\=, -3),
        scalar_product([1,-1], [A,C], #\=, 2),
        scalar_product([1,-1], [A,C], #\=, -2),
        scalar_product([1,-1], [A,B], #\=, 1),
        scalar_product([1,-1], [A,B], #\=, -1).
```

10.55.3 MiniZinc

The predicates described here make it possible to load and run MiniZinc programs directly from within SICStus. In this way, the predicates described here are essentially wrappers for the predicates described in Section 10.55.2 [FlatZinc], page 923, providing a more high-level interface.

10.55.3.1 Exported Predicates

The first two predicates can be used to run a MiniZinc program in one go.

`mzn_run_file(+`*MznFile*`)`
`mzn_run_file(+`*MznFile*`, +`*Options*`)`

MznFile is a MiniZinc program file and *Options* is a list of options; see see Section 10.55.4 [Zinc Options], page 932. Runs the MiniZinc program on *MznFile*, and writes the result onto the file given in the `option/1` option if given, or onto the current output stream otherwise. This is done by first calling `minizinc -c`, and then interpreting its output with `fzn_run_stream/[1,2]` (see Section 10.55.2.1 [FlatZinc Exported Predicates], page 924). Fails if the constraints of the MiniZinc program are inconsistent.

`mzn_run_model(+`*MznModel*`)`
`mzn_run_model(+`*MznModel*`, +`*Options*`)`

MznModel is a MiniZinc program specified by a list of strings as explained below and *Options* is a list of options; see see Section 10.55.4 [Zinc Options],

page 932. Runs the MiniZinc program *MznModel*, and writes the result onto the file given in the `option/1` option if given, or onto the current output stream otherwise. This is done by first calling `minizinc -c` and interpreting its output with `fzn_run_stream/[1,2]` (see Section 10.55.2.1 [FlatZinc Exported Predicates], page 924). The MiniZinc program specification *MznModel* must be a list of strings (list of character codes) where each element must specify one line of the MiniZinc program. For example, a MiniZinc program for the N Queens problem can be specified as follows:

```
NQueens = ["int: n;",
           "array [1..n] of var 1..n: q;",
           "constraint forall (i in 1..n, j in i+1..n)",
               "(q[i] != q[j] /\\",
                "q[i] + i != q[j] + j /\\",
                "q[i] - i != q[j] - j);",
           "solve satisfy;",
           "output [\"A solution to the \", show(n),",
           "\" Queens problem: \", show(q), \"\\n\"];"]
```

Note that backslashes and double quotes must be escaped with an additional backslash.

Consider the following MiniZinc program for solving the N Queens problem located in `library('zinc/examples/queen.mzn')`:

queen.mzn

```
int: n;

array [1..n] of var 1..n: q;

constraint
    forall (i in 1..n, j in i+1..n) (
        q[i] != q[j] /\
        q[i] + i != q[j] + j /\
        q[i] - i != q[j] - j
    );

solve satisfy;

output ["A solution to the ", show(n), " Queens problem: ", show(q), "\n"];
```

Consider now the following goal at the Prolog top level:

```
| ?- mzn_run_file(library('zinc/examples/queen'),
                  [data_file(library('zinc/examples/queen4.dzn'))]).
```

Since `library('zinc/examples/queen4.dzn')` contains the single line

```
n = 4;
```

the following is written on the current output stream:

```
A solution to the 4 Queens problem: [2,4,1,3]
----------
```

The initialization `n = 4` can also be passed using the `parameter/1` option. So the following goal is equivalent to the one above:

```
| ?- mzn_run_file(library('zinc/examples/queen'), [parameters([n=4])]).
```

Finally, the following goal finds all solutions to the 4 Queens problem:

```
| ?- mzn_run_file(library('zinc/examples/queen'),
                  [parameters([n=4]), solutions(all)]).
```

Given this goal, the following is written on the current output stream:

```
A solution to the 4 Queens problem: [2,4,1,3]
----------
A solution to the 4 Queens problem: [3,1,4,2]
----------
==========
```

The next two predicates can be used to construct a FlatZinc state (see Section 10.55.2.1 [FlatZinc Exported Predicates], page 924).

`mzn_load_file(+`*`MznFile`*`, -`*`FznState`*`)`
`mzn_load_file(+`*`MznFile`*`, +`*`Options`*`, -`*`FznState`*`)`
: *MznFile* is a MiniZinc program file and *Options* is a list of options; see see Section 10.55.4 [Zinc Options], page 932. Initializes a FlatZinc state *FznState* with respect to *MznFile*. May fail if `post(true)` and the constraints are inconsistent.

`mzn_load_model(+`*`MznModel`*`, -`*`FznState`*`)`
`mzn_load_model(+`*`MznModel`*`, +`*`Options`*`, -`*`FznState`*`)`
: *MznModel* is a MiniZinc program specified by a list of strings as explained for `mzn_run_model/[1,2]` above and *Options* is a list of options; see see Section 10.55.4 [Zinc Options], page 932. Initializes a FlatZinc state *FznState* with respect to *MznModel*. May fail if `post(true)` and the constraints are inconsistent.

The following Prolog goal constructs a FlatZinc state representing the 4 Queens problem:

```
| ?- mzn_load_file(library('zinc/examples/queen'),
                   [parameters([n=4])], Queen4State).
```

See Section 10.55.2.1 [FlatZinc Exported Predicates], page 924, for more information on FlatZinc states and how they can be queried. A very useful option to `mzn_load_file/3` and `mzn_load_model/3` is the `variables/1` option, which can be used to unify values of MiniZinc identifiers with Prolog variables (this option can be used in place of several calls

to `fzn_identifier/3`). For example, the following goal posts an additional symmetry breaking constraint and labels the variables using a Prolog goal that finds all remaining solutions to the 4 Queens problem:

```
| ?- mzn_load_file(library('zinc/examples/queen'),
                   [parameters([n=4]), variables([q=Q])],
                   Queen4State),
     Q = [Q1, Q2|_], Q1 #< Q2,
     findall(_, (labeling([], Q), fzn_output(Queen4State)), _).
```

Given this goal, the following is written on the current output stream:

```
q = array1d(1..4, [2,4,1,3]);
----------
```

Finally, the following predicate can be used to translate a MiniZinc file to a FlatZinc by a direct call to `minizinc -c`.

`mzn_to_fzn(+`*MznFile*`, +`*FznFile*`)`
`mzn_to_fzn(+`*MznFile*`, +`*Options*`, +`*FznFile*`)`
: *MznFile* is a MiniZinc program file and *Options* is a list of options; see see Section 10.55.4 [Zinc Options], page 932. Calls `minizinc -c`, the result of which is written to *FznFile*.

10.55.4 Options

Following is a list of options that can be passed to MiniZinc and FlatZinc predicates. Not all options are universally useful.

`search(`*Method*`)` *since release 4.3*
: where *Method* must be one of the atoms `bab` and `restart`. Tells the solver which optimization algorithm to use: branch-and-bound (the default), or to restart the search each time a new solution is found. The corresponding `spfz` option is `-search` *Method*.

`free_search(`*Boolean*`)` *since release 4.7.0*
: where *Boolean* must be `true` or `false` (default). If *true*, tells the solver to ignore any search annotation. The corresponding `spfz` option is `-f`.

`solutions(`*NumberOfSolutions*`)`
: where *NumberOfSolutions* must be an integer greater than zero or the atom `all`. Describes the number of solutions to search for; the default is 1. The corresponding `spfz` options are `-n` *N* and `-a`.

`output(`*File*`)`
: where *File* must be the name of a writable file. Causes any output written on the current output stream to be directed to *File*. The corresponding `spfz` option is `-o` *File*.

`ozn_file(File)` *since release 4.2.3*

where *File* must be the name of an existing file, containing the MiniZinc output commands that `minizinc` should use. If not given, then the solutions will be printed unformatted.

`statistics(Boolean)`

where *Boolean* must be `true` or `false` (default). The corresponding `spfz` option is `-s`. If `true`, a block of statistics is written on the current output stream at the end of execution. Each line of the block has the format:

```
%%%mzn-stat: name=value
```

The block is terminated by a line:

```
%%%mzn-stat-end
```

The *name* and its meaning is one of the keywords explained in Section 10.9.9 [Statistics Predicates], page 486, or one of:

`initTime` Initialization time (in seconds).

`solveTime`
: Solving time (in seconds).

`timeout(Time)`

where *Time* should be an integer greater than zero. Stops the computation if it has not finished before *Time* milliseconds has elapsed. In any event, the best solution found so far is reported. The corresponding `spfz` option is `-t Time`.

`precision(P)` *since release 4.10.0*

where *P* should be a float greater than zero. This option is used in the search of any real variables not mentioned in a `float_search` annotation (see Section 10.9.8 [Enumeration Predicates], page 477).

`variables(ListOfVarDef)`

where *ListOfVarDef* is a list of elements of the form *Id*=*Var* where *Id* is a FlatZinc identifier and *Var* is a Prolog variable. Means that *Var* is unified with the value of *Id* after the FlatZinc program is loaded and that *Id*=*Var* is included in a list of arguments to `query/1` that is written to *File*. Default is *ListOfVarDef*=`[vars=Vars]`, with the meaning that *Vars* is a list containing all variables of the FlatZinc state, in the order they were introduced.

`data_file(MznDatFile)`

where *MznDatFile* must be a MiniZinc data file. Means that *MznDatFile* is passed to `minizinc -c`.

`parameters(ListOfParDef)`

where *ListOfParDef* is a list of elements of the form *Id*=*Value* where *Id* is a MiniZinc identifier and *Value* is a MiniZinc value. Means that all elements are written to a temporary file, which is passed to `minizinc -c`.

`post(Boolean)`

where *Boolean* must be `true` or `false`. If `true` (the default), then the constraints of the MiniZinc program are posted directly and a separate call to `fzn_post/1` (see Section 10.55.2.1 [FlatZinc Exported Predicates], page 924) is not necessary.

`fzn_file(File)` *since release 4.2.3*
: where *File* must be the name of a writable file. The translated FlatZinc program will be written to the given file. Otherwise, a temporary file will be used and erased afterwards.

`optimise(Boolean)` *since release 4.2.3*
`optimize(Boolean)` *since release 4.2.3*
: where *Boolean* must be `true` (the default) or `false`. If `false`, then `--no-optimize` is passed to `minizinc -c`.

`option(Value)` *since release 4.5*
: Causes an extra option *Value* to be passed to the MiniZinc driver.

10.55.5 Annotations

10.55.5.1 Solve Annotations

Following are the currently supported solve annotations:

`bool_search(array[int] of var bool: x, ann: select, ann: choice, ann: explore)`
`int_search(array[int] of var int: x, ann: select, ann: choice, ann: explore)`
`float_search(array[int] of var float: x, float: prec, ann: select, ann: choice, ann: explore)`
`seq_search(array[int] of ann: s)`
`restart_constant(int: scale)` *since release 4.10.0*
`restart_geometric(float: base, int: scale)` *since release 4.10.0*
`restart_linear(int: scale)` *since release 4.10.0*
`restart_luby(int: scale)` *since release 4.10.0*
`relax_and_reconstruct(array[int] of var int: x, int: p)` *since release 4.10.0*
: Described in the MiniZinc documentation.

`lex_minimize(array[int] of var int: x)` *since release 4.10.0*
`lex_maximize(array[int] of var int: x)` *since release 4.10.0*
: An annotation of this form *supersedes* any solve objective (`satisfy`, `minimize` *`expr`*, or `maximize` *`expr`*) with a lexicographic minimize or maximize objective, as described in Section 10.9.8 [Enumeration Predicates], page 477.

`pareto_minimize(array[int] of var int: x)` *since release 4.10.0*
`pareto_maximize(array[int] of var int: x)` *since release 4.10.0*
: An annotation of this form *supersedes* any solve objective (`satisfy`, `minimize` *`expr`*, or `maximize` *`expr`*) with a Pareto minimize or maximize objective, as described in Section 10.9.8 [Enumeration Predicates], page 477.

To illustrate how lexicographic and Pareto objectives work, suppose you have a model with variables `x` to minimize and `y` to maximize. One way to express that is with the objective `minimize x - y`:

```
include "globals.mzn";

var 0..10: x;
var 0..10: y;

constraint y <= x+5;
constraint y <= 15-x;

solve minimize x-y;
```

Let's run it:

```
$ minizinc --solver sicstus demo.mzn
x = 0;
y = 5;
----------
==========
```

Another way to express it is to minimize `x`, breaking ties by maximizing `y`, i.e., by lexicographic minimization. Let's change the `solve` statement to:

```
solve :: lex_minimize([x,-y]) satisfy;
```

and rerun:

```
$ minizinc --solver sicstus demo.mzn
x = 0;
y = 5;
----------
==========
```

The solution was the same, but that is not generally the case for less trivial models. Let's investigate what happens if we swap the priorities, i.e., maximize `y`, breaking ties by minimizing `x`:

```
solve :: lex_maximize([y,-x]) satisfy;
```

where `satisfy` is superseded but required for syntax correctness, and rerun:

```
$ minizinc --solver sicstus demo.mzn
x = 5;
y = 10;
----------
==========
```

Finally, let's investigate the relation between the two objectives by collecting the set of solutions where no solution is dominated (`x` is not smaller and `y` is not greater) by another solution. Such a set of solutions is known as a Pareto front.

```
solve :: pareto_minimize([x,-y]) satisfy;
```

where `satisfy` is superseded but required for syntax correctness, and rerun:

```
$ minizinc --solver sicstus demo.mzn
x = 5;
y = 10;
----------
x = 4;
y = 9;
----------
x = 3;
y = 8;
----------
x = 2;
y = 7;
----------
x = 1;
y = 6;
----------
x = 0;
y = 5;
----------
==========
```

Variables not included in any solve or `is_defined_var` annotation are labeled with a default heuristic.

Heuristics that involve randomization depend on a random seed. The seed is the same in each run, meaning that the same sequence of values will be tried in each run. This behavior can be changed by setting a specific random seed using `clpfd:fd_setrand/1`.

10.55.5.2 Constraint Annotations

Constraint annotations of the form `domain`, `bounds`, and `value` are recognized by the FlatZinc interpreter. Any other constraint annotation is ignored.

10.55.5.3 Variable Annotations

The following variable annotations are recognized. Any other variable annotation is ignored:

`output_var` *since release 4.2*
: the variable may be written on the current output stream.

`output_array` *since release 4.2*
: the variable array may be written on the current output stream.

`is_defined_var`
: the variable will not be considered in any default labeling (such as when the search annotations do not include all variables)

11 Prolog Reference Pages

11.1 Reading the Reference Pages

11.1.1 Overview

The reference pages for SICStus Prolog built-in predicates conform to certain conventions concerning

- mode annotations
- predicate annotations
- argument types

These are particularly important in utilizing the Synopsis and Arguments fields of each reference page. The **Synopsis** field consists of the goal template(s) with mode annotations and a brief description of the purpose of the predicate. For example, consider this excerpt from the reference page for `assert/[1,2]`:

Synopsis

These predicates add a dynamic clause, *Clause*, to the Prolog database. They optionally return a database reference in *Ref*:

```
assert(+Clause)

assert(+Clause, -Ref)
```

It is undefined whether *Clause* will precede or follow the clauses already in the database.

The **Arguments** field lists, for each meta-variable name in the template, its argument type, (e.g. *callable*), a brief description (sometimes omitted), and an indication (‘`:`’) if it does module name expansion. For example,

Arguments

:Clause	*callable* A valid dynamic Prolog clause.
Ref	*db_reference* a database reference, which uniquely identifies the newly asserted *Clause*.

11.1.2 Mode Annotations

The mode annotations are useful to tell whether an argument is input or output or both. They also describe formally the instantiation pattern to the call that makes the call to the built-ins determinate.

The mode annotations in the above example are ‘`+`’ and ‘`-`’. Following is a complete description of the mode annotations you will find in the reference pages:

‘`+`’	Input argument. This argument will be inspected by the predicate, and affects the behavior of the predicate. An exception is raised if the argument is not of

the expected type. Note that an input argument can be an unbound variable in some cases.

'-' Output argument. This argument is unified with the output value of the predicate. An output argument is only tested to be of the same type as the possible output value if this is prescribed by the ISO standard, or if such testing is deemed helpful to the user.

'?' An argument that could be either input or output. This mode annotation is normally only used for predicates that behave as pure relations and do not type test their arguments.

If the synopsis of a predicate has more than one mode declaration, then the first (the topmost) that satisfies the types (of a goal instance) is the one to be applied (to that goal instance).

All built-in predicates of arity zero are determinate (with the exception of `repeat/0`).

For *input* arguments, an exception *will* be raised if the argument is not of the specified type.

For *output* arguments, an exception *might* be raised if the argument is *nonvar*, and not of the specified type. The generated *value* of the argument *will* be of the specified type.

11.1.3 Predicate Annotation

This section describes the annotations of predicates and how they are indicated in the reference pages for predicates of each given annotation. The annotations appear to the right of the title of the reference page.

hookable The behavior of the predicate can be customized/redefined by defining one or more hooks. The mode and type annotations of a hookable predicate might not be absolute, since hooks added by the user can change the behavior.

hook The predicate is user defined, and is called by a *hookable* builtin. Typically, it is undefined initially, belongs to the `user` module, and if defined by the user, it is best defined as multifile, so that new clauses can be added by different software modules. For a hook, the mode and type annotations should be seen as guidelines to the user who wants to add his own hook; they describe how the predicate is used by the system.

declaration
You cannot call these directly but they can appear in files as '`:- declaration`' and give information to the compiler. The goal template is preceded by '`:-`' in the **Synopsis**.

development
A predicate that is defined in the development system only, i.e. not in runtime systems.

ISO A function that may be called before `SP_initialize` in the boot sequence.

ISO A predicate that is part of the ISO Prolog Standard.

deprecated
obsolescent
: A predicate that is not recommended in new code and that could be withdrawn in a future release.

unsupported
: A predicate or library package that is unsupported.

since release
: A predicate or feature that was introduced in *release*.

Meta-predicates and *operators* are recognizable by the implicit conventions described below.

- *Meta-predicates* are predicates that need to assume some module. The reference pages of these predicates indicate which arguments are in a module expansion position by prefixing such arguments by '`:`' in the **Arguments** field. That is, the argument can be preceded by a module prefix (an *atom* followed by a colon). For example:

  ```
  assert(mod:a(1), Ref)
  ```

  If no module prefix is supplied, then it will implicitly be set to the calling module. If the module prefix is a variable, then an instantiation error will be raised. If it is not an atom, then a type error will be raised. So in any meta-predicate reference page the following exceptions are implicit:

  ### Exceptions

  `instantiation_error`
  : A module prefix is written as a variable.

  `type_error`
  : A module prefix is not an atom.

- Whenever the name of a built-in predicate is defined as *operator*, the name is presented in the **Synopsis** as an operator, for example

  ```
  :- initialization +Goal                    (A)
  +Term1 @> +Term2                           (B)
  ```

  It is thus always possible to see if a name is an operator or not. The predicate can, of course, be written using the canonical representation, even when the name is an operator. Thus (A) and (B) can be written as (C) and (D), respectively:

  ```
  :- initialization(+Goal)                   (C)
  @>(+Term1,  +Term2)                        (D)
  ```

11.1.4 Argument Types

The argument section describes the type/domain of each argument of a *solution* to the given predicate. That is, for a predicate to succeed, it must be possible to instantiate the given argument to a term of the described type/domain.

If it is a '`+`' argument, then the predicate always tests if the argument is of the right type/domain. Usually, input arguments must also be instantiated to some extent. Such details are documented for each input argument.

Many built-in and library predicates take an *+Options* argument, which must be given as a proper list of terms specifying what the predicate should do, typically as the last argument. As a general rule for such option lists, if the same option occurs more than once, then the last occurrence overrides previous ones.

11.1.4.1 Simple Types

The simple argument types are those for which type tests are provided. They are summarized in Section 11.2.23 [mpg-top-typ], page 960.

If an output argument is given the type *var*, then it means that that argument is not used by the predicate in the given instantiation pattern.

11.1.4.2 Extended Types

Following is a list of argument types that are defined in terms of the simple argument types. This is a formal description of the types/domains used in the Arguments sections of the reference pages for the built-ins. The rules are given in BNF (Backus-Naur form).

bbkey ::= `atom | integer` {where the integer is small}
stream_object ::= *term* {as defined in Section 4.6.7.1 [ref-iou-sfh-sob], page 113,}
term ::= {any Prolog term}
list of Type ::= `[] | [`*Type*`|`*list of Type*`]`
var or Type ::= *var* | *Type*
one of [Element|Rest] ::= *Element* | *one of Rest*
arity ::= {an *integer* *X* in the range 0..255}
byte ::= {an *integer* *X* in the range 0..255}
char ::= {an *atom* consisting of a single character}
chars ::= *list of char*
code ::= {an *integer* *X* >= 0}
codes ::= *list of code*
order ::= {an *atom*, one of `[<,=,>]`}
pair ::= *term*`-`*term*
simple_pred_spec ::= *atom*`/`*arity*
pred_spec ::= *simple_pred_spec* | *atom*`:`*pred_spec*
pred_spec_forest ::= `[]` | *pred_spec*
| `[`*pred_spec_forest*`|`*pred_spec_forest*`]`
| *pred_spec_forest*`,`*pred_spec_forest*
pred_spec_tree ::= *pred_spec* | *list of pred_spec*
foreign_spec ::= *callable* {all arguments being *foreign_arg*}
foreign_arg ::= `+`*interf_arg_type* | `-`*interf_arg_type* | `[-`*interf_arg_type*`]`
interf_arg_type ::= `integer | float | atom`
`| term | codes | string | address | address(`*atom*`)`
{see the description in Section 6.2.3 [Conversions between Prolog Arguments and C Types], page 297,}
file_spec ::= *atom* | *atom*`(`*file_spec*`)`
expr ::= {everything that is accepted as second argument to `is/2`;

see the description of arithmetic expressions in Section 4.7.5 [ref-ari-aex], page 124.}

11.1.5 Exceptions

The **Exceptions** field of the reference page consists of a list of exception type names, each followed by a brief description of the situation that causes that type of exception to be raised. The following example comes from the reference page for `assert/[1,2]`:

Exceptions

`instantiation_error`
: If *Head* (in *Clause*) or *M* is uninstantiated.

`type_error`
: If *Head* is not of type callable, or if *M* is not an atom, or if *Body* is not a valid clause body.

For *input* arguments, an exception *will* be raised if the argument is not of the specified type.

For *output* arguments, an exception *might* be raised if the argument is *nonvar*, and not of the specified type. The generated *value* of the argument *will* be of the specified type.

11.1.6 Other Fields

The **Backtracking** field, if included, describes how the predicate behaves on backtracking. If this field is omitted, then the predicate is determinate (succeeds at most once).

The **See Also** field contains cross references to related predicates and/or manual sections.

Reference pages may also include **Comments**, **Examples**, and **Tips** fields, when appropriate.

11.2 Topical List of Prolog Built-Ins

Following is a complete list of SICStus Prolog built-in predicates, arranged by topic. A predicate may be included in more than one list.

11.2.1 All Solutions

`?X ^ :P` there exists an *X* such that *P* is provable (used in `setof/3` and `bagof/3`)

`bagof(?X,:P,-B)` *ISO*
: *B* is the bag of instances of *X* such that *P* is provable

`findall(?T,:G,-L)` *ISO*
`findall(?T,:G,?L,?R)`
: *L* is the list of all solutions *T* for the goal *G*, concatenated with *R* or with the empty list

`setof(?X,:P,-S)` *ISO*
: *S* is the set of instances of *X* such that *P* is provable

11.2.2 Arithmetic

`-`*Y* `is` `+`*X* *ISO*

Y is the value of arithmetic expression *X*

`+`*X* `=:=` `+`*Y* *ISO*

the results of evaluating terms *X* and *Y* as arithmetic expressions are equal.

`+`*X* `=\=` `+`*Y* *ISO*

the results of evaluating terms *X* and *Y* as arithmetic expressions are not equal.

`+`*X* `<` `+`*Y* *ISO*

the result of evaluating *X* as an arithmetic expression is less than the result of evaluating *Y* as an arithmetic expression.

`+`*X* `>=` `+`*Y* *ISO*

the result of evaluating *X* as an arithmetic expression is not less than the result of evaluating *Y* as an arithmetic expression.

`+`*X* `>` `+`*Y* *ISO*

the result of evaluating *X* as an arithmetic expression *X* is greater than the result of evaluating *Y* as an arithmetic expression.

`+`*X* `=<` `+`*Y* *ISO*

the result of evaluating *X* as an arithmetic expression is not greater than the result of evaluating *Y* as an arithmetic expression.

11.2.3 Character I/O

`at_end_of_line`
`at_end_of_line(+`*S*`)`

testing whether at end of line on input stream *S*

`at_end_of_stream` *ISO*
`at_end_of_stream(+`*S*`)` *ISO*

testing whether end of file is reached for the input stream *S*

`flush_output` *ISO*
`flush_output(+`*S*`)` *ISO*

flush the output buffer for stream *S*

`get_byte(-`*C*`)` *ISO*
`get_byte(+`*S*`,-`*C*`)` *ISO*

C is the next byte on binary input stream *S*

`get_char(-`*C*`)` *ISO*
`get_char(+`*S*`,-`*C*`)` *ISO*

C is the next character atom on text input stream *S*

`get_code(-`*C*`)` *ISO*
`get_code(+`*S*`,-`*C*`)` *ISO*

C is the next character code on text input stream *S*

`nl` *ISO*
`nl(+`*S*`)` *ISO*

send a newline to stream *S*

`peek_byte(+C)` *ISO*
`peek_byte(+S,+C)` *ISO*
looks ahead for next input byte on the binary input stream S

`peek_char(+C)` *ISO*
`peek_char(+S,+C)` *ISO*
looks ahead for next input character atom on the text input stream S

`peek_code(+C)` *ISO*
`peek_code(+S,+C)` *ISO*
looks ahead for next input character code on the text input stream S

`put_byte(+C)` *ISO*
`put_byte(+S,+C)` *ISO*
write byte C to binary stream S

`put_char(+C)` *ISO*
`put_char(+S,+C)` *ISO*
write character atom C to text stream S

`put_code(+C)` *ISO*
`put_code(+S,+C)` *ISO*
write character code C to text stream S

`skip_byte(+C)`
`skip_byte(+S,+C)`
skip input on binary stream S until after byte C

`skip_char(+C)`
`skip_char(+S,+C)`
skip input on text stream S until after char C

`skip_code(+C)`
`skip_code(+S,+C)`
skip input on text stream S until after code C

`skip_line`
`skip_line(+S)`
skip the rest input characters of the current line on the input stream S

11.2.4 Control

`:P,:Q` *ISO*
prove P and Q

`:P;:Q` *ISO*
prove P or Q

`+M::P` *ISO*
call P in module M

`:P->:Q;:R` *ISO*
if P succeeds, prove Q; if not, prove R

`:P->:Q` *ISO*
: if P succeeds, prove Q; if not, fail

`!` *ISO*
: cut any choices taken in the current procedure

`\+ :P` *ISO*
: goal P is not provable

`?X ^ :P`
: there exists an X such that P is provable (used in `setof/3` and `bagof/3`)

`block :P` *declaration*
: declaration that predicates specified by P should block until sufficiently instantiated

`call(:P)` *ISO*
`call(:P,...)` *ISO*
: execute P or `P(...)`

`call_cleanup(:Goal,:Cleanup)`
: Executes the procedure call *Goal*. When *Goal* succeeds determinately, is cut, fails, or raises an exception, *Cleanup* is executed.

`call_residue_vars(:Goal,?Vars)`
: Executes the procedure call *Goal*. *Vars* is unified with the list of new variables created during the call that remain unbound and have blocked goals or attributes attached to them.

`+Iterators do :Body`
: executes *Body* iteratively according to *Iterators*

`fail` *ISO*
: fail (start backtracking)

`false` *ISO*
: same as `fail`

`freeze(+Var,:Goal)`
: Blocks *Goal* until `nonvar(Var)` holds.

`if(:P,:Q,:R)`
: for each solution of P that succeeds, prove Q; if none, prove R

`once(:P)` *ISO*
: Find the first solution, if any, of goal P.

`otherwise`
: same as true

`repeat` *ISO*
: succeed repeatedly on backtracking

`true` *ISO*
: succeed

`when(+Cond,:Goal)`
: block *Goal* until *Cond* holds

11.2.5 Database

`abolish(:F)` *ISO*
abolish the predicate(s) specified by F

`abolish(:F,+O)`
abolish the predicate(s) specified by F with options O

`assert(:C)`
`assert(:C,-R)`
clause C is asserted; reference R is returned

`asserta(:C)` *ISO*
`asserta(:C,-R)`
clause C is asserted before existing clauses; reference R is returned

`assertz(:C)` *ISO*
`assertz(:C,-R)`
clause C is asserted after existing clauses; reference R is returned

`bb_delete(:Key,-Term)`
Delete from the blackboard *Term* stored under *Key*.

`bb_get(:Key,-Term)`
Get from the blackboard *Term* stored under *Key*.

`bb_put(:Key,+Term)`
Store *Term* under *Key* on the blackboard.

`bb_update(:Key, -OldTerm, +NewTerm)`
Replace *OldTerm* by *NewTerm* under *Key* on the blackboard.

`clause(:P,?Q)` *ISO*
`clause(:P,?Q,?R)`
there is a clause for a dynamic predicate with head P, body Q, and reference R

`current_key(?N, ?K)`
N is the name and K is the key of a recorded term

`dynamic :P` *declaration,ISO*
predicates specified by P are dynamic

`erase(+R)`
erase the clause or record with reference R

`instance(+R,-T)`
T is an instance of the clause or term referenced by R

`recorda(+K,+T,-R)`
make term T the first record under key K; reference R is returned

`recorded(?K,?T,?R)`
term T is recorded under key K with reference R

`recordz(+K,+T,-R)`
make term T the last record under key K; reference R is returned

`retract(:C)` *ISO*
erase the first dynamic clause that matches C

`retractall(:H)` *ISO*
erase every clause whose head matches H

11.2.6 Debugging

`add_breakpoint(+Conditions, -BID)` *development*
Creates a breakpoint with *Conditions* and with identifier *BID*.

`user:breakpoint_expansion(+Macro, -Body)` *hook,development*
defines debugger condition macros

`coverage_data(?Data)` *since release 4.2,development*
Data is the coverage data accumulated so far

`current_breakpoint(?Conditions, ?BID, ?Status, ?Kind, ?Type)` *development*
There is a breakpoint with conditions *Conditions*, identifier *BID*, enabledness *Status*, kind *Kind*, and type *Type*.

`debug` *development*
switch on debugging

`user:debugger_command_hook(+DCommand,-Actions)` *hook,development*
Allows the interactive debugger to be extended with user-defined commands.

`debugging` *development*
display debugging status information

`disable_breakpoints(+BIDs)` *development*
Disables the breakpoints specified by *BIDs*.

`enable_breakpoints(+BIDs)` *development*
Enables the breakpoints specified by *BIDs*.

`user:error_exception(+Exception)` *hook*
Exception is an exception that traps to the debugger if it is switched on.

`execution_state(+Tests)` *development*
Tests are satisfied in the current state of the execution.

`execution_state(+FocusConditions, +Tests)` *development*
Tests are satisfied in the state of the execution pointed to by *FocusConditions*.

`leash(+M)` *development*
set the debugger's leashing mode to M

`nodebug` *development*
switch off debugging

`nospy(:P)` *development*
remove spypoints from the procedure(s) specified by P

`nospyall` *development*
remove all spypoints

`notrace` *development*
: switch off debugging (same as `nodebug/0`)

`nozip` *development*
: switch off debugging (same as `nodebug/0`)

`print_coverage` *since release 4.2,development*
`print_coverage(?Data)` *since release 4.2,development*
: The coverage data *Data* is displayed in a hierarchical format. *Data* defaults to the coverage data accumulated so far.

`print_profile` *since release 4.2,development*
`print_profile(?Data)` *since release 4.2,development*
: The profiling data *Data* is displayed in a format similar to `gprof(1)`. *Data* defaults to the profiling data accumulated so far.

`profile_data(?Data)` *since release 4.2,development*
: *Data* is the profiling data accumulated so far

`profile_reset` *since release 4.2,development*
: All profiling data is reset.

`remove_breakpoints(+BIDs)` *development*
: Removes the breakpoints specified by *BIDs*.

`spy(:P)` *development*
`spy(:P,:C)`
: set spypoints on the procedure(s) specified by P with conditions C

`trace` *development*
: switch on debugging and start tracing immediately

`unknown(-O,+N)` *development*
: Changes action on undefined predicates from O to N.

`user:unknown_predicate_handler(+G,+M,-N)` *hook*
: handle for unknown predicates.

`zip` *development*
: switch on debugging in zip mode

11.2.7 Errors and Exceptions

`abort` abort execution of the program; return to current break level

`break` start a new break level to interpret commands from the user

`catch(:P,?E,:H)` *ISO*
: specify a handler H for any exception E arising in the execution of the goal P

`user:error_exception(+Exception)` *hook,development*
: *Exception* is an exception that traps to the debugger if it is switched on.

`goal_source_info(+AGoal, -Goal, -SourceInfo)`
: Decomposes the annotated goal *AGoal* into a *Goal* proper and the *SourceInfo* descriptor term, indicating the source position of the goal.

`halt` *ISO*
`halt(C)` *ISO*
exit from Prolog with exit code C

`on_exception(?E,:P,:H)`
specify a handler H for any exception E arising in the execution of the goal P

`raise_exception(+E)`
raise exception E

`throw(+E)` *ISO*
raise exception E

`unknown(?OldValue, ?NewValue)` *development*
access the `unknown` Prolog flag and print a message

`user:unknown_predicate_handler(+Goal, +Module, -NewGoal)` *hook*
tell Prolog to call `Module:NewGoal` if `Module:Goal` is undefined

11.2.8 Filename Manipulation

`absolute_file_name(+R,-A)` *hookable*
`absolute_file_name(+R,-A,+O)` *hookable*
expand relative filename R to absolute file name A using options specified in O

`user:file_search_path(+F,-D)` *hook*
directory D is included in file search path F

`user:library_directory(-D)` *hook*
D is a library directory that will be searched

11.2.9 File and Stream Handling

`byte_count(+S,-N)`
N is the number of bytes read/written on binary stream S

`character_count(+S,-N)`
N is the number of characters read/written on text stream S

`close(+F)` *ISO*
`close(+F,+O)` *ISO*
close file or stream F with options O

`current_input(-S)` *ISO*
S is the current input stream

`current_output(-S)` *ISO*
S is the current output stream

`current_stream(?F,?M,?S)`
S is a stream open on file F in mode M

`line_count(+S,-N)`
N is the number of lines read/written on text stream S

`line_position(+S,-N)`
: N is the number of characters read/written on the current line of text stream S

`open(+F,+M,-S)` *ISO*
`open(+F,+M,-S,+O)` *ISO*
: file F is opened in mode M, options O, returning stream S

`open_null_stream(+S)`
: new output to text stream S goes nowhere

`prompt(-O,+N)`
: queries or changes the prompt string of the current input stream

`see(+F)` make file F the current input stream

`seeing(-N)`
: the current input stream is named N

`seek(+S,+O,+M,+N)`
: seek to an arbitrary byte position on the stream S

`seen` close the current input stream

`set_input(+S)` *ISO*
: select S as the current input stream

`set_output(+S)` *ISO*
: select S as the current output stream

`set_stream_position(+S,+P)` *ISO*
: P is the new position of stream S

`stream_code(?S,?C)`
: Converts between Prolog and C representations of a stream

`stream_position(+S,-P)`
: P is the current position of stream S

`stream_position_data(?Field,?Position,?Data)`
: The *Field* field of the stream position term *Position* is *Data*.

`stream_property(?Stream, ?Property)` *ISO*
: Stream *Stream* has property *Property*.

`tell(+F)` make file F the current output stream

`telling(-N)`
: to file N

`told` close the current output stream

11.2.10 Foreign Interface

`foreign(+F,-P)` *hook*
`foreign(+F,-L,-P)` *hook*
: function F in language L is attached to P

`foreign_resource(+R,-L)` *hook*
: resource R defines foreign functions in list L

`load_foreign_resource(+R)` *hookable*
: load foreign resource R

`stream_code(?S,?C)`
: Converts between Prolog and C representations of a stream

`unload_foreign_resource(+R)`
: unload foreign resource R

11.2.11 Grammar Rules

:Head `-->` *:Body*
: A possible form for *Head* is *Body*

`expand_term(+T,-X)` *hookable*
: term T expands to term X using `user:term_expansion/6` or grammar rule expansion

`phrase(:P, -L)`
`phrase(:P, ?L, ?R)`
: R or the empty list is what remains of list L after phrase P has been found

`user:term_expansion(+Term1, +Layout1, +Tokens1, -Term2, -Layout2, -Tokens2)`
hook
: Overrides or complements the standard transformations to be done by `expand_term/2`.

11.2.12 Hook Predicates

`user:breakpoint_expansion(+Macro, -Body)` *hook,development*
: defines debugger condition macros

`user:debugger_command_hook(+DCommand,-Actions)` *hook,development*
: Allows the interactive debugger to be extended with user-defined commands.

`user:error_exception(=Exception)` *hook*
: *Exception* is an exception that traps to the debugger if it is switched on.

`user:file_search_path(+F,-D)` *hook*
: directory D is included in file search path F

`foreign(+F,-P)`
`foreign(+F,-L,-P)`
: Describes the interface between Prolog and the foreign *Routine*

`foreign_resource(+R,-L)`
: resource R defines foreign functions in list L

`user:generate_message_hook(+M,?S0,?S)` *hook*
: A way for the user to override the call to `'SU_messages':generate_message/3` in `print_message/2`.

`goal_expansion(+Term1, +Layout1, +Module, -Term2, -Layout2)` *hook*

Defines transformations on goals while clauses are being compiled or asserted, and during meta-calls.

`user:library_directory(-D)` *hook*

D is a library directory that will be searched

`user:message_hook(+S,+M,+L)` *hook*

Overrides the call to `print_message_lines/3` in `print_message/2`.

`user:portray(+T)`

A way for the user to override the default behavior of `print/1`.

`user:portray_message(+S,+M)` *hook*

Tells `print_message/2` what to do.

`user:query_hook(+QueryClass, +Query, +QueryLines, +Help, +HelpLines, -Answer)` *hook*

Called by `ask_query/4` before processing the query. If this predicate succeeds, then it is assumed that the query has been processed and nothing further is done.

`user:query_class_hook(+QueryClass, -Prompt, -InputMethod, -MapMethod, -FailureMode)` *hook*

Provides the user with a method of overriding the call to `'SU_messages':query_class/5` in the preparation phase of query processing. This way the default query class characteristics can be changed.

`user:query_input_hook(+InputMethod, +Prompt, -RawInput)` *hook*

Provides the user with a method of overriding the call to `'SU_messages':query_input/3` in the input phase of query processing. This way the implementation of the default input methods can be changed.

`user:query_map_hook(+MapMethod, +RawInput, -Result, -Answer)` *hook*

Provides the user with a method of overriding the call to `'SU_messages':query_map/4` in the mapping phase of query processing. This way the implementation of the default map methods can be changed.

`user:runtime_entry(+M)` *hook*

This predicate is called upon start-up and exit of stand alone applications.

`user:term_expansion(+Term1, +Layout1, +Tokens1, -Term2, -Layout2, -Tokens2)` *hook*

Overrides or complements the standard transformations to be done by `expand_term/2`.

`user:unknown_predicate_handler(+G,+M,-N)` *hook*

hook to trap calls to unknown predicates

11.2.13 List Processing

`?T =.. ?L` *ISO*

the functor and arguments of term T comprise the list L

`append(?A,?B,?C)`
the list C is the concatenation of lists A and B

`keysort(+L,-S)` *ISO*
the list L sorted by key yields S

`length(?L,?N)`
the length of list L is N

`member(?X,?L)`
X is a member of L

`memberchk(+X,+L)`
X is a member of L

`nonmember(+X,+L)`
X is not a member of L

`sort(+L,-S)` *ISO*
sorting the list L into order yields S

11.2.14 Loading Programs

`[]`
`[:F|+Fs]` same as `load_files([F|Fs])`

`block :P` *declaration*
predicates specified by P should block until sufficiently instantiated

`compile(:F)`
load compiled clauses from files F

`consult(:F)`
`reconsult(:F)`
load interpreted clauses from files F

`expand_term(+T,-X)` *hookable*
term T expands to term X using `user:term_expansion/6` or grammar rule expansion

`goal_expansion(+Term1, +Layout1, +Module, -Term2, -Layout2)` *hook*
Defines transformations on goals while clauses are being compiled or asserted, and during meta-calls.

`discontiguous :P` *declaration, ISO*
clauses of predicates P do not have to appear contiguously

`dynamic :P` *declaration, ISO*
predicates specified by P are dynamic

`elif(:Goal)` *declaration*
Provides an alternative branch in a sequence of conditional compilation directives.

`else` *declaration*
Provides an alternative branch in a sequence of conditional compilation directives.

`endif` *declaration*
: Terminates a sequence of conditional compilation directives.

`ensure_loaded(:F)` *ISO*
: load F if not already loaded

`if(:Goal)` *declaration*
: Starts a sequence of conditional compilation directives for conditionally including parts of a source file.

`include(+F)` *declaration, ISO*
: include the source file(s) F verbatim

`initialization :G` *declaration, ISO*
: declares G to be run when program is started

`load_files(:F)`
`load_files(:F,+O)`
: load files according to options O

`meta_predicate :P` *declaration*
: declares predicates P that are dependent on the module from which they are called

`mode :P` *declaration*
: NO-OP: document calling modes for predicates specified by P

`module(+M,+L)` *declaration*
`module(+M,+L,+O)` *declaration*
: module M exports predicates in L, options O

`multifile :P` *declaration, ISO*
: the clauses for P are in more than one file

`public :P` *declaration*
: NO-OP: declare predicates specified by P public

`restore(+F)`
: restore the state saved in file F

`user:term_expansion(+Term1, +Layout1, +Tokens1, -Term2, -Layout2, -Tokens2)`
hook
: Overrides or complements the standard transformations to be done by `expand_term/2`.

`use_module(:F)`
`use_module(:F,+I)`
: import the procedure(s) I from the module file F

`use_module(?M,:F,+I)`
: import I from module M, loading module file F if necessary

`volatile :P` *declaration*
: predicates specified by P are not to be included in saves

11.2.15 Memory

`garbage_collect`
: force an immediate garbage collection

`garbage_collect_atoms`
: garbage collect atom space

`statistics`
: display various execution statistics

`statistics(?K,?V)`
: the execution statistic with key K has value V

`trimcore` reduce free stack space to a minimum

11.2.16 Messages and Queries

`ask_query(+QueryClass, +Query, +Help, -Answer)` *hookable*
: Prints the question *Query*, then reads and processes user input according to *QueryClass*, and returns the result of the processing, the abstract answer term *Answer*. The *Help* message is printed in case of invalid input.

`user:message_hook(+M,+S,+L)` *hook*
: intercept the printing of a message

`'SU_messages':generate_message(+M,?SO,?S)` *hook*
: determines the mapping from a message term into a sequence of lines of text to be printed

`user:generate_message_hook(+M,?SO,?S)` *hook*
: intercept message before it is given to `'SU_messages':generate_message/3`

`goal_source_info(+AGoal, -Goal, -SourceInfo)`
: Decomposes the annotated goal *AGoal* into a *Goal* proper and the *SourceInfo* descriptor term, indicating the source position of the goal.

`user:portray_message(+Severity,+Message)` *hook*
: Tells `print_message/2` what to do.

`print_message(+S,+M)` *hookable*
: print a message M of severity S

`print_message_lines(+S,+P,+L)`
: print the message lines L to stream S with prefix P

`'SU_messages':query_abbreviation(+T,-P)` *hook*
: specifies one letter abbreviations for responses to queries from the Prolog system

`user:query_hook(+QueryClass, +Query, +QueryLines, +Help, +HelpLines, -Answer)` *hook*
: Called by `ask_query/4` before processing the query. If this predicate succeeds, then it is assumed that the query has been processed and nothing further is done.

`'SU_messages':query_class(+QueryClass, -Prompt, -InputMethod, -MapMethod, -FailureMode)` *hook*

Access the parameters of a given *QueryClass*.

`user:query_class_hook(+QueryClass, -Prompt, -InputMethod, -MapMethod, -FailureMode)` *hook*

Provides the user with a method of overriding the call to `'SU_messages':query_class/5` in the preparation phase of query processing. This way the default query class characteristics can be changed.

`'SU_messages':query_input(+InputMethod, +Prompt, -RawInput)` *hook*

Implements the input phase of query processing.

`user:query_input_hook(+InputMethod, +Prompt, -RawInput)` *hook*

Provides the user with a method of overriding the call to `'SU_messages':query_input/3` in the input phase of query processing. This way the implementation of the default input methods can be changed.

`'SU_messages':query_map(+MapMethod, +RawInput, -Result, -Answer)` *hook*

Implements the mapping phase of query processing.

`user:query_map_hook(+MapMethod, +RawInput, -Result, -Answer)` *hook*

Provides the user with a method of overriding the call to `'SU_messages':query_map/4` in the mapping phase of query processing. This way the implementation of the default map methods can be changed.

11.2.17 Modules

`current_module(?M)`

M is the name of a current module

`current_module(?M,?F)`

F is the name of the file in which M's module declaration appears

`meta_predicate :P` *declaration*

declares predicates P that are dependent on the module from which they are called

`module(+M,+L)` *declaration*
`module(+M,+L,+O)` *declaration*

declaration that module M exports predicates in L, options O

`save_modules(+L,+F)`

save the modules specifed in L into file F

`set_module(+M)`

make M the type-in module

`use_module(:F)`

import the module file(s) F, loading them if necessary

`use_module(:F,+I)`

import the procedure(s) I from the module file F

`use_module(?M,:F,+I)`

import I from module M, loading module file F if necessary

11.2.18 Program State

`current_atom(?A)`
: backtrack through all atoms

`current_module(?M)`
: M is the name of a current module

`current_module(?M,?F)`
: F is the name of the file in which M's module declaration appears

`current_predicate(:A/?N)` *ISO*
`current_predicate(?A,:P)`
: A is the name of a predicate with most general goal P and arity N

`current_prolog_flag(?F,?V)` *ISO*
: V is the current value of Prolog flag F

`listing` list all dynamic procedures in the type-in module

`listing(:P)`
: list the dynamic procedure(s) specified by P

`predicate_property(:P,?Prop)`
: *Prop* is a property of the loaded predicate P

`prolog_flag(?F,?V)`
: V is the current value of Prolog flag F

`prolog_flag(+F,=O,+N)`
: O is the old value of Prolog flag F; N is the new value

`prolog_load_context(?K,?V)`
: find out the context of the current load

`set_module(+M)`
: make M the type-in module

`set_prolog_flag(+F,+N)` *ISO*
: N is the new value of Prolog flag F

`source_file(?F)`
: F is a source file that has been loaded into the database

`source_file(:P,?F)`
: P is a predicate defined in the loaded file F

`unknown(-O,+N)` *development*
: Changes action on undefined predicates from O to N.

11.2.19 Saving Programs

`initialization :G` *declaration,ISO*
: declares G to be run when program is started

`load_files(:F)`
`load_files(:F,+O)`
: load files according to options O

`user:runtime_entry(+S)` *hook*
: entry point for a runtime system

`save_files(+L,+F)`
: saves the modules, predicates, clauses and directives in the given files L into file F

`save_modules(+L,+F)`
: save the modules specifed in L into file F

`save_predicates(:L,+F)`
: save the predicates specified in L into file F

`save_program(+F)`
`save_program(+F,:G)`
: save all Prolog data into file F with startup goal G

`volatile :P` *declaration*
: declares predicates specified by P to not be included in saves.

11.2.20 Term Comparison

`compare(-C,+X,+Y)` *ISO*
: C is the result of comparing terms X and Y

`+X == +Y` *ISO*
: terms X and Y are strictly identical

`+X \== +Y` *ISO*
: terms X and Y are not strictly identical

`+X @< +Y` *ISO*
: term X precedes term Y in standard order for terms

`+X @>= +Y` *ISO*
: term X follows or is identical to term Y in standard order for terms

`+X @> +Y` *ISO*
: term X follows term Y in standard order for terms

`+X @=< +Y` *ISO*
: term X precedes or is identical to term Y in standard order for terms

11.2.21 Term Handling

`?T =.. ?L` *ISO*
: the functor and arguments of term T comprise the list L.

`?X = ?Y` *ISO*
: terms X and Y are unified.

`+X \= +Y` *ISO*
: terms X and Y no not unify.

`?=(+X,+Y)`
: X and Y are either strictly identical or do not unify.

`acyclic_term(+T)` *since release 4.3, ISO*
: term T is a finite (acyclic) term.

`arg(+N,+T,-A)` *ISO*
: the Nth argument of term T is A.

`atom_chars(?A,?L)` *ISO*
: A is the atom containing the character atoms in list L.

`atom_codes(?A,?L)` *ISO*
: A is the atom containing the characters in code list L.

`atom_concat(?Atom1,?Atom2,?Atom12)` *ISO*
: Atom *Atom1* concatenated with *Atom2* gives *Atom12*.

`atom_length(+Atom,-Length)` *ISO*
: *Length* is the number of characters of the atom *Atom*.

`char_code(?Char,?Code)` *ISO*
: *Code* is the character code of the one-char atom *Char*.

`copy_term(+T,-C)` *ISO*
: C is a copy of T in which all variables have been replaced by new variables.

`copy_term(+T,-C,-G)`
: C is a copy of T in which all variables have been replaced by new variables, and G is a goal for reinstating any attributes in C.

`create_mutable(+Datum,-Mutable)`
: *Mutable* is a new mutable term with current value *Datum*.

`dif(+X,+Y)`
: X and Y are constrained to be different.

`frozen(+Term,-Goal)`
: *Goal* is the conjunction of all goals blocked on some variable in *Term*.

`functor(?T,?F,?N)` *ISO*
: the principal functor of term T has name F and arity N.

`get_mutable(-Datum,+Mutable)`
: The current value of the mutable term *Mutable* is *Datum*.

`name(?A,?L)` *deprecated*
: the code list of atom or number A is L.

`number_chars(?N,?L)` *ISO*
: N is the numeric representation of list of character atoms L.

`number_codes(?N,?L)` *ISO*
: N is the numeric representation of code list L.

`numbervars(+T,+M,-N)`
: number the variables in term T from M to N-1.

`sub_atom(+Atom,?Before,?Length,?After,?SubAtom)` *ISO*
: The characters of *SubAtom* form a sublist of the characters of *Atom*, such that the number of characters preceding *SubAtom* is *Before*, the number of characters after *SubAtom* is *After*, and the length of *SubAtom* is *Length*.

`subsumes_term(General,Specific)` *since release 4.3, ISO*
: *Specific* is an instance of *General*.

`term_variables(+Term,-Variables)` *since release 4.3, ISO*
: *Variables* is the set of variables that occur in *Term*, in first occurrence order.

`unify_with_occurs_check(?X,?Y)` *ISO*
: True if X and Y unify to a finite (acyclic) term.

11.2.22 Term I/O

`char_conversion(+InChar, +OutChar)` *ISO*
: The mapping of *InChar* to *OutChar* is added to the character-conversion mapping.

`current_char_conversion(?InChar, ?OutChar)` *ISO*
: *InChar* is mapped to *OutChar* in the current character-conversion mapping.

`current_op(?P,?T,?A)` *ISO*
: atom A is an operator of type T with precedence P

`display(+T)`
: write term T to the user output stream in functional notation

`format(+C,:A)`
`format(+S,+C,:A)`
: write arguments A on stream S according to control string C

`op(+P,+T,+A)` *ISO*
: make atom A an operator of type T with precedence P

`user:portray(+T)` *hook*
: tell `print/[1,2]` and `write_term/[2,3]` what to do

`portray_clause(+C)`
`portray_clause(+S,+C)`
: write clause C to the stream S

`print(+T)` *hookable*
`print(+S,+T)` *hookable*
: display the term T on stream S using `user:portray/1` or `write/2`

`read(-T)` *ISO*
`read(+S,-T)` *ISO*
: read term T from stream S

`read_term(-T,+O)` *ISO*
`read_term(+S,-T,+O)` *ISO*
: read T from stream S according to options O

`write(+T)` *ISO*
`write(+S,+T)` *ISO*
: write term T on stream S

`write_canonical(+T)` *ISO*
`write_canonical(+S,+T)` *ISO*
: write term T on stream S so that it can be read back by `read/[1,2]`

`writeq(+T)` *ISO*
`writeq(+S,+T)` *ISO*
: write term T on stream S, quoting atoms where necessary

`write_term(+T,+O)` *hookable,ISO*
`write_term(+S,+T,+O)` *hookable,ISO*
: writes T to S according to options O

11.2.23 Type Tests

`atom(+T)` *ISO*
: term T is an atom

`atomic(+T)` *ISO*
: term T is an atom or a number

`callable(+T)` *ISO*
: T is an atom or a compound term

`compound(+T)` *ISO*
: T is a compound term

`db_reference(+X)` *since release 4.1*
: X is a db_reference

`float(+N)` *ISO*
: N is a floating-point number

`ground(+T)` *ISO*
: term T is a nonvar, and all substructures are nonvar

`integer(+T)` *ISO*
: term T is an integer

`mutable(+X)`
: X is a mutable term

`nonvar(+T)` *ISO*
: term T is one of atom, number, compound (that is, T is instantiated)

`number(+N)` *ISO*
: N is an integer or a float

`simple(+T)`
: T is not a compound term; it is either atomic or a var

`var(+T)` *ISO*
: term T is a variable (that is, T is uninstantiated)

11.3 Built-In Predicates

The following reference pages, alphabetically arranged, describe the SICStus Prolog built-in predicates.

For a functional grouping of these predicates including brief descriptions, see Section 11.2 [mpg-top], page 941.

In many cases, the heading of a reference page, as well as an entry in a list of built-in predicates, will be annotated with keywords. These annotations are defined in Section 11.1.3 [mpg-ref-cat], page 938.

Further information about categories of predicates and arguments, mode annotations, and the conventions observed in the reference pages is found in Section 11.1 [mpg-ref], page 937.

11.3.1 `abolish/[1,2]` *ISO*

Synopsis

`abolish(+`*Predicates*`)`

`abolish(+`*Predicates*`, +`*Options*`)`

Removes procedures from the Prolog database.

Arguments

:Predicates

pred_spec or *pred_spec_tree*

A predicate specification, or a list of such.

Note that the default is to only allow a single predicate specification, see `tree/1` option below.

Options *list of term*, must be ground

A list of zero or more of the following:

`force(`*Boolean*`)`

Specifies whether SICStus Prolog is to abolish the predicate even if it is static (`true`), or only if it is dynamic (`false`). The latter is the default.

`tree(`*Boolean*`)`

Specifies whether the first argument should be a *pred_spec_tree* (`true`), or a *pred_spec* (`false`). The latter is the default.

Description

Removes all procedures specified. After this command is executed the current program functions as if the named procedures had never existed. That is, in addition to removing all the clauses for each specified procedure, `abolish/[1,2]` removes any properties that the procedure might have had, such as being dynamic or multifile. You cannot abolish built-in procedures.

It is important to note that `retract/1`, `retractall/1`, and `erase/1` only remove clauses, and only of dynamic procedures. They don't remove the procedures themselves or their properties properties (such as being dynamic or multifile). `abolish/[1,2]`, on the other hand, remove entire procedures along with any clauses and properties.

The procedures that are abolished do not become invisible to a currently running procedure.

Space occupied by abolished procedures is reclaimed. The space occupied by the procedures is reclaimed.

Procedures must be defined in the source module before they can be abolished. An attempt to abolish a procedure that is imported into the source module will cause a permission error. Using a module prefix, '`M:`', procedures in any module may be abolished.

Abolishing a foreign procedure destroys only the link between that Prolog procedure and the associated foreign code. The foreign code that was loaded remains in memory. This is necessary because Prolog cannot tell which subsequently-loaded foreign files may have links to the foreign code. The Prolog part of the foreign procedure is destroyed and reclaimed.

Specifying an undefined procedure is not an error.

Exceptions

`instantiation_error`
: if one of the arguments is not instantiated enough.

`type_error`
: *Predicates* is not a valid tree of predicate specifications, or a *Name* is not an atom or an *Arity* not an integer.

`domain_error`
: if an *Arity* is specified as an integer outside the range 0-255.

`permission_error`
: if a specified procedure is built-in, or imported into the source module, or static when `force(true)` is not in effect.

Examples

```
| ?- [user].
% compiling user...
| foo(1,2).
| ^D
% compiled user in module user, 10 msec -80 bytes
yes
| ?- abolish(foo).
! Type error in argument 1 of abolish/1
! expected pred_spec, but found foo
! goal:  abolish(user:foo)
| ?- abolish(foo,[tree(true)]).
! Permission error: cannot abolish static user:foo/2
! goal:  abolish(user:foo,[tree(true)])
| ?- abolish(foo/2).
! Permission error: cannot abolish static user:foo/2
! goal:  abolish(user:foo/2)
| ?- abolish(foo/2,[force(true)]).
yes
% source_info
```

Comments

`abolish/1` is part of the ISO Prolog standard; `abolish/2` is not.

See Also

`dynamic/1`, `erase/1`, `retract/1`, `retractall/1`.

11.3.2 `abort/0`

Synopsis

```
abort
```

Abandons the current execution and returns to the beginning of the current break level or terminates the enclosing query, whichever is closest.

Description

Fairly drastic predicate that is normally only used when some error condition has occurred and there is no way of carrying on, or when debugging.

Often used via the debugging option `a` or the `^C` interrupt option `a`.

`abort/0` is implemented by raising a reserved exception, which has handler at the top level; see Section 4.15.7 [ref-ere-int], page 215.

Tips

Does not close any files that you may have opened. When using `see/1` and `tell/1`, (rather than `open/3`, `set_input/1`, and `set_output/1`), close files yourself to avoid strange behavior after your program is aborted and restarted.

Exceptions

Does not throw errors, but is implemented by throwing a reserved exception.

See Also

`halt/[0,1]`, `break/0`, `runtime_entry/1`, Section 4.15.7 [ref-ere-int], page 215.

11.3.3 `absolute_file_name/[2,3]` ***hookable***

Synopsis

`absolute_file_name`(+*RelFileSpec*, -*AbsFileName*)

`absolute_file_name`(+*RelFileSpec*, -*AbsFileName*, +*Options*)

Unifies *AbsFileName* with the absolute filename that corresponds to the relative file specification *RelFileSpec*.

Arguments

RelFileSpec

file_spec, must be ground

A valid file specification. See below for details.

AbsFileName

atom

Corresponding absolute filename.

Options *list of term*, must be ground

A list of zero or more of the following. The default is the empty list:

`extensions(`*Ext*`)`

Has no effect if *FileSpec* contains a file extension. *Ext* is an atom or a list of atoms, each atom representing an extension (e.g. `'.pl'`) that should be tried when constructing the absolute file name. The extensions are tried in the order they appear in the list. Default value is *Ext* = ['], i.e. only the given *FileSpec* is tried, no extension is added. To specify `extensions('')` or `extensions([])` is equal to not giving any extensions option at all.

When case-normalization is applied to the *FileSpec*, e.g. on Windows, each atom in *Ext* will also be case-normalized before use. That is, on Windows, specifying `extensions(['.pl'])` will typically give the same result as `extensions(['.PL'])`. Prior to release 4.3 the `extensions/1` option was always case sensitive, also on Windows.

`file_type(`*Type*`)`

Picks an adequate extension for the operating system currently running, which means that programs using this option instead of `extensions(Ext)` will be more portable between operating systems. This extension mechanism has no effect if *FileSpec* contains a file extension. *Type* must be one of the following atoms:

`any`
`text` implies `extensions([''])`. *FileSpec* is a file without any extension. (Default)

`source` implies `extensions(['.pro','.pl',''])`. *FileSpec* is a Prolog source file, maybe with a '`.pro`' or '`.pl`' extension.

`object` implies `extensions(['.po'])`. *FileSpec* is a Prolog object file.

`saved_state`
: implies `extensions(['.sav',''])`. *FileSpec* is a saved state, maybe with a '`.sav`' extension.

`foreign_resource`
: *FileSpec* is a foreign language shared object file, maybe with a system dependent extension.

`executable` *since release 4.0.2*
: *FileSpec* is an executable file, maybe with a system dependent extension.

`directory`
: implies `extensions([''])`. This option has two effects. First, for an access option other than `access(none)` the file must exist and be a directory. Second, the returned file name will end in slash (`/`).

  Only when this option is present can `absolute_file_name/3` return the name of an existing directory with an access option other than `access(none)` without raising an exception.

`glob(`*Glob*`)`
: Match file names against a pattern. *RelFileSpec* will be expanded to a directory and *AbsFileName* will be the absolute path to each child that matches both the *Glob* pattern and any other filtering option, like `access/1`, `extensions/1`, `file_type/1`, ... The special children `.` and `..` will never be returned.

  The *Glob* should be an atom specifying a *glob pattern* consisting of characters interpreted as follows:

  - A '`*`' matches any sequence of zero or more characters.
  - A '`?`' matches exactly one character.
  - A '`{`', '`}`', '`[`', '`]`' currently matches themselves but are reserved for future expansion of the allowable patterns.
  - Any other character matches itself.

  With the options `solutions(all)` and `file_errors(fail)` this can be used to enumerate the contents of a directory.

`access(`*Mode*`)`
: *Mode* must be an atom or a list of atoms. If a list is given, then *AbsFileName* must obey every specified option in the list. This makes it possible to combine a read and write, or write and exist check, into one call. If *AbsFileName* specifies a directory and an access option other than `access(none)` is specified, then a permission error is signaled unless `file_type(directory)` is also specified.

Each atom must be one of the following:

`read` *AbsFileName* must be readable and exist.

`write`
`append` If *AbsFileName* exists, then it must be writable. If it doesn't exist, then it must be possible to create.

`exist` The file represented by *AbsFileName* must exist.

`execute`
`executable`
The file represented by *AbsFileName* must be executable and exist. This is ignored if `file_type(directory)` is also specified.

`search`
`searchable`
The directory represented by *AbsFileName* must be searchable and exist. This is ignored unless `file_type(directory)` is also specified.

`none` The file system is not accessed to determine existence or access properties of *AbsFileName*. The first absolute file name that is derived from *FileSpec* is returned. Note that if this option is specified, then no existence exceptions can be raised. (Default)

Please note: Most current file systems have complex access control mechanisms, such as access control lists (ACLs). These mechanisms makes it hard to determine the effective access permissions, short of actually attempting the file operations in question. With networked file systems it may in fact be impossible to determine the effective access rights.

Therefore, a simplified access control model is used by `absolute_file_name/3` and elsewhere in SICStus.

On UNIX systems only the "classical" access control information is used, i.e. the read/write/execute "bits" for owner/group/other.

Under Windows only the "FAT" access control information is used, i.e. a file may be marked as read-only. A file is deemed executable if its extension is one of `.cmd`, `.bat` or if it is classified as an executable by the Win32 API `GetBinaryType`.

This may change to more faithfully reflect the effective permissions in a future release.

`file_errors(`*Val*`)`
`fileerrors(`*Val*`)`
Val is one of the following, where the default is determined by the current value of the `fileerrors` Prolog flag:

`error` Raise an exception if a file derived from *FileSpec* has the wrong permissions, that is, can't be accessed at all,

or doesn't satisfy the access modes specified with the `access` option. This is the default if the Prolog flag `fileerrors` is set to its default value, `on`.

`fail` Fail if a file derived from *FileSpec* has the wrong permissions. Normally an exception is raised, which might not always be a desirable behavior, since files that do obey the access options might be found later on in the search. When this option is given, the search space is guaranteed to be exhausted. This is the default if the Prolog flag `fileerrors` is set to `off`.

`solutions(`*Val*`)`
Val is one of the following:

`first` As soon as a file derived from *FileSpec* is found, commit to that file. Makes `absolute_file_name/3` determinate. (Default)

`all` Return each file derived from *FileSpec* that is found. The files are returned through backtracking. This option is probably most useful in combination with the option `file_errors(fail)`.

`relative_to(`*FileOrDirectory*`)`
FileOrDirectory should be an atom, and controls how to resolve relative filenames. If it is `''`, then file names will be treated as relative to the current working directory. If a regular, existing file is given, then file names will be treated as relative to the directory containing *FileOrDirectory*. Otherwise, file names will be treated as relative to *FileOrDirectory*.

If `absolute_file_name/3` is called from a goal in a file being loaded, then the default is the directory containing that file, accessible from the load context (`prolog_load_context/2`). Otherwise, the default is the current working directory.

You can use `file_systems:current_directory/1` to obtain the current working directory from a goal in a file being loaded.

`if_user(`*Val*`)` *since release 4.3*
controls how to resolve the special file name `user`. *Val* is one of the following:

`file` Treat the name `user` like any other name, e.g. like `open/3` does. This is the default.

`user` Unifies *AbsFileName* with the atom `user` and ignores the other options. This corresponds to the behavior prior to SICStus Prolog 4.3.

`error` Treat the name `user` as a non-existing file, subject to the `file_errors/1` option.

Description

If *FileSpec* is `user`, and the option `if_user(file)` is not in effect, then special processing takes place, see the description of the `if_user/1` option, above. Otherwise (the default), unifies *AbsFileName* with the first absolute file name that corresponds to the relative file specification *FileSpec* and that satisfies the access modes given by *Options*.

The functionality of `absolute_file_name/3` is most easily described as multi-phase process, in which each phase gets an infile from the preceding phase, and constructs one or more outfiles to be consumed by the succeeding phases. The phases are:

1. Syntactic rewriting
2. Pattern expansion
3. Extension expansion
4. Access checking

The first phase and each of the expansion phases modifies the infile and produces variants that will be fed into the succeeding phases. The functionality of all phases but the first are decided with the option list. The last phase checks if the generated file exists, and if not asks for a new variant from the preceding phases. If the file exists, but doesn't obey the access mode option, then a permission exception is raised. If the file obeys the access mode option, then `absolute_file_name/3` commits to that solution, subject to the `solutions` option, and unifies *AbsFileName* with the file name. For a thorough description, see below.

Note that the relative file specification *FileSpec* may also be of the form *Path(FileSpec)*, in which case the absolute file name of the file *FileSpec* in one of the directories designated by *Path* is returned (see the description of each phase below).

Syntactic rewriting

This phase translates the relative file specification given by *FileSpec* into the corresponding absolute file name. The rewrite is done wrt. the value of the `relative_to` option. There can be more than one solution, in which case the outfile becomes the solutions in the order they are generated. If the following phases fails, and there are no more solutions, then an existence exception is raised.

FileSpec can be a file search path, e.g. `library('lists.pl')`. It can also refer to system properties, environment variables and the home directory of users. See Section 4.5.2 [ref-fdi-syn], page 103, for a description of syntactic rewriting.

Pattern expansion

If the `glob/1` option was specified all matching children of the directory will be enumerated. See the `glob` option.

Extension expansion

See the `extensions` and `file_type` options.

Access checking

See the `access` option.

Final stage

As a final stage, if `file_type(directory)` is specified, then the file is suffixed with slash. Otherwise, trailing slash will be removed except for root directories, such as '`/`' under UNIX or '`c:/`' under Windows.

Backtracking

Can find multiple solutions only if the `solutions(all)` option is used.

Exceptions

`instantiation_error`
: Any of the *Options* arguments or *RelFileSpec* is not ground.

`type_error`
: In *Options* or in *RelFileSpec*.

`domain_error`
: *Options* contains an undefined option.

`existence_error`
: *RelFileSpec* is syntactically valid but does not correspond to any file and an access option other than `access(none)` was given.

`permission_error`
: *RelFileSpec* names an existing file but the file does not obey the given access mode.

Comments

If an option is specified more than once, then the rightmost option takes precedence. This provides for a convenient way of adding default values by putting these defaults at the front of the list of options. If `absolute_file_name/3` succeeds, and the file access option was one of {`read`, `write`, `append`}, then it is guaranteed[1] that the file can be opened with `open/[3,4]`. If the access option was `exist`, then the file does exist, but might be both read and write protected.

If `file_type(directory)` is not given, then the file access option is other than `none`, and a specified file refers to a directory, then `absolute_file_name/3` signals a permission error.

`absolute_file_name/[2,3]` is sensitive to the `fileerrors` Prolog flag, which determines whether the predicate should fail or raise permission errors when encountering files with the wrong permission. Failing has the effect that the search space always is exhausted.

If *RelFileSpec* contains '`..`' components, then these are resolved by removing directory components from the pathname, not by accessing the file system. This can give unexpected results, e.g. when soft links or mount points are involved.

This predicate is used for resolving file specification by built-in predicates that open files.

[1] To the extent that the access permissions can be precisely determined. See the `access/1` option above.

Examples

To check whether the file `my_text` exists in the home directory, with one of the extensions '`.text`' or '`.txt`', and is both writable and readable:

```
| ?- absolute_file_name('~/my_text', File,
                        [extensions(['.text','.txt']),
                        access([read,write])]).
```

To check whether the directory `bin` exists in the home directory:

```
| ?- absolute_file_name('~/bin', Dir,
                        [file_type(directory),
                        access(exist)]).
```

Here *Dir* would get a slash terminated value, such as `/home/joe/`.

To list all files in the current directory:

```
| ?- findall(File, absolute_file_name('.', File,
                        [glob('*'),
                        solutions(all), file_errors(fail)]), Files).
```

To list all directories in the parent of the current directory containing the string "sicstus":

```
| ?- findall(File, absolute_file_name('..', File,
                        [glob('*sicstus*'),file_type(directory),
                        solutions(all), file_errors(fail)]), Files).
```

To find a file `cmd.exe` in any of the "usual places" where executables are found, i.e. by looking through the `PATH` environment variable:

```
| ?- absolute_file_name(path('cmd.exe'), File,
                        [access(exist)]).
```

This uses the predefined file search path `path/1`, Section 4.5 [ref-fdi], page 99.

See Also

`file_search_path/2`, `prolog_load_context/2`, Section 4.5 [ref-fdi], page 99, Section 4.9.4 [ref-lps-flg], page 140.

11.3.4 acyclic_term/1 *ISO*

Synopsis

`acyclic_term(+`*Term*`)` *since release 4.3*

Term is currently instantiated to a finite (acyclic) term.

Arguments

Term *term*

Description

True if X is finite (acyclic). Runs in linear time.

Examples

```
| ?- X = g(Y), acyclic_term(f(X,X)).
X = g(Y) ?
yes
| ?- X = g(X), acyclic_term(X).

no
| ?- X = g(X), acyclic_term(f(X)).

no
```

Exceptions

None.

See Also

Section 4.8.2 [ref-lte-act], page 131.

11.3.5 `add_breakpoint/2` *development*

Synopsis

`add_breakpoint(+`*`Conditions`*`, -`*`BID`*`)`

Creates a breakpoint with *Conditions* and with identifier *BID*.

Arguments

:Conditions
: *term.*
: Breakpoint conditions.

BID *integer*
: Breakpoint identifier.

Exceptions

`instantiation_error`
: *Conditions* not instantiated enough.

`type_error`
: *Conditions* not a proper list of callable term.

`domain_error`
: *Conditions* not a proper list of valid breakpoint conditions

`context_error`
: Attempt to put a breakpoint on `true/0` or `fail/0`.

See Also

Section 5.6.1 [Creating Breakpoints], page 247, Section 5.7 [Breakpoint Predicates], page 276.

11.3.6 ,/2 *ISO*

Synopsis

`+`*P* `,` `+`*Q*

Arguments

:P	*callable*, must be nonvar
:Q	*callable*, must be nonvar

Description

This is not normally regarded as a built-in predicate, since it is part of the syntax of the language. However, it is like a built-in predicate in that you can say `call((`*P* `,` *Q*`))` to execute *P* and then *Q*, with identical effect if it does not contain any cuts.

The scope of cuts in *P* and *Q* extends to the containing clause.

Backtracking

Depends on *P* and *Q*.

Exceptions

Call errors (see Section 4.2.6 [ref-sem-exc], page 81).

See Also

Section 4.2 [ref-sem], page 65.

11.3.7 append/3

Synopsis

append(*?List1*, *?List2*, *?List3*)

Arguments

List1 *list of term*

List2 *list of term*

List3 *list of term*
A list consisting of *List1* followed by *List2*.

Description

Appends lists *List1* and *List2* to form *List3*:

```
| ?- append([a,b], [a,d], X).

X = [a,b,a,d]

| ?- append([a], [a], [a]).

no
| ?- append(2, [a], X).

no
```

Takes *List3* apart:

```
| ?- append(X, [e], [b,e,e]).

X = [b,e]

| ?- append([b|X], [e,r], [b,o,r,e,r]).

X = [o,r]

| ?- append(X, Y, [h,i]).

X = [],
Y = [h,i] ;

X = [h],
Y = [i] ;

X = [h,i],
Y = [] ;

no
```

Backtracking

Suppose L is bound to a proper list. That is, it has the form [*T1*,...,*Tn*] for some *n*. In that instance, the following things apply:

1. `append(L, X, Y)` has at most one solution, whatever *X* and *Y* are, and cannot backtrack at all.
2. `append(X, Y, L)` has at most *n+1* solutions, whatever *X* and *Y* are, and though it can backtrack over these it cannot run away without finding a solution.
3. `append(X, L, Y)`, however, can backtrack indefinitely if *X* and *Y* are variables.

Examples

The following examples are perfectly ordinary uses of `append/3`:

To enumerate adjacent pairs of elements from a list:

```
next_to(X, Y, /*in*/ List3) :-
        append(_, [X,Y|_], List3).
```

To check whether Word1 and Word2 are the same except for a single transposition. (`append/5` in `library(lists)` would be better for this task.)

```
one_transposition(Word1, Word2) :-
        append(Prefix, [X,Y|Suffix], Word1),
        append(Prefix, [Y,X|Suffix], Word2).

| ?- one_transposition("fred", X).
X = "rfed" ;
X = "ferd" ;
X = "frde" ;
no
```

Given a list of words and commas, to backtrack through the phrases delimited by commas:

```
comma_phrase(List3, Phrase) :-
        append(F, [','|Rest], List3),
        !,
        (   Phrase = F
        ;   comma_phrase(Rest, Phrase)
        ).
comma_phrase(List3, List3).

| ?- comma_phrase([this,is,',',um,',',an, example], X).
X = [this,is] ;
X = [um] ;
X = [an,example] ;
no
```

Exceptions

None.

See Also

Section 4.8.3 [ref-lte-acl], page 132, `library(lists)`.

11.3.8 arg/3 *ISO*

Synopsis

`arg(+`*`ArgNum`*`, +`*`Term`*`, -`*`Arg`*`)`

unifies *Arg* with the *ArgNum*th argument of term *Term*.

Arguments

ArgNum	*integer*, must be nonvar and non-negative.
Term	*compound*, must be nonvar
Arg	*term*

Description

The arguments are numbered from 1 upwards.

Exceptions

`instantiation_error`
: if *ArgNum* or *Term* is unbound.

`type_error`
: if *ArgNum* is not an integer, or *Term* is not compound.

`domain_error`
: if *ArgNum* is an integer less than zero.

Examples

```
| ?- arg(2, foo(a,b,c), X).

X = b
```

See Also

`functor/3`, `=../2`, Section 4.8.2 [ref-lte-act], page 131.

11.3.9 ask_query/4 *hookable*

Synopsis

`ask_query(+QueryClass, +Query, +Help, -Answer)`

Prints the question *Query*, then reads and processes user input according to *QueryClass*, and returns the result of the processing, the abstract answer term *Answer*. The *Help* message may be printed in case of invalid input.

Arguments

QueryClass
: *term*, must be nonvar
: Determines the allowed values for the atom *Answer*.

Query
: *term*
: A message term.

Help
: *term*
: A message term.

Answer
: *term*
: See *QueryClass*

Description

All queries made by the system are handled by calling this predicate.

First `ask_query/4` calls `query_hook/6` with the same arguments plus the *Query* and *Help* arguments converted to format-command lines. If this call succeeds, then it overrides all further processing done by `ask_query/4`. Otherwise, the query is processed in the following way:

- Preparation phase: The parameters of the query processing, defined by *QueryClass* (*Prompt*, *InputMethod*, *MapMethod* and *FailureMode*) are retrieved using the four step procedure described above. That is, the following alternatives are tried:
  - `user:query_class_hook/5`;
  - `'SU_messages':query_class/5`;
  - the built-in copy of `query_class/5`.
- Input phase: The user is prompted with *Prompt*, input is read according to *InputMethod*, and the result is returned in *RawInput*.

  The four step procedure is used for performing this phase, the predicates tried are the following:
  - `user:query_input_hook/3`;
  - `'SU_messages':query_input/3`;
  - the built-in copy of `query_input/3`.
- Mapping phase: The *RawInput* returned by the input phase is mapped to the *Answer* of the query. This mapping is defined by the *MapMethod* parameter, and the result of the conversion is returned in *Result*, which can be:

  - `success`—the mapping was successful, *Answer* is valid;
  - `failure`—the mapping was unsuccessful, the query has to be repeated;
  - `failure(`*`Warning`*`)`—same as `failure`, but first the given warning message has to be printed.

  The four step procedure is used for performing this phase, the predicates tried are the following:

  - `user:query_map_hook/4`;
  - `'SU_messages':query_map/4`;
  - the built-in copy of `query_map/4`.

  If the mapping phase succeeds, then `ask_query/4` returns with the *Answer* delivered by this phase.

- If the mapping does not succeed, then the query has to be repeated. If the *Result* returned by the mapping contains a warning message, then it is printed using `print_message/2`. *FailureMode* specifies whether to print the help message and whether to re-print the query text. Subsequently, the input and mapping phases are called again, and this is repeated until the mapping is successful.

Exceptions

`instantiation_error`
: *QueryClass*, *Query*, or *Help* uninstantiated.

`type_error`
: *QueryClass* not an atom.

`domain_error`
: *QueryClass* not a valid query class.

See Also

Section 4.16.3 [Query Processing], page 220.

11.3.10 `assert/[1,2]`

Synopsis

These predicates add a dynamic clause, *Clause*, to the Prolog database. They optionally return a database reference in *Ref*:

`assert(+Clause)`

`assert(+Clause, -Ref)`

It is undefined whether *Clause* will precede or follow the clauses already in the database.

Arguments

:Clause *callable*, must be nonvar

A valid dynamic Prolog clause.

Ref *db_reference*, must be var

A database reference, which uniquely identifies the newly asserted *Clause*.

Description

Clause must be of the form:

```
        Head
or      Head :- Body
or      M:Clause
```

where *Head* is of type callable and *Body* is a valid clause body. If specified, then *M* must be an atom.

`assert(Head)` means assert the unit-clause *Head*. The exact same effect can be achieved by `assert((Head :- true))`.

If *Body* is uninstantiated, then it is taken to mean `call(Body)`. For example, (A) is equivalent to (B):

```
| ?- assert((p(X) :- X)).                                    (A)
| ?- assert((p(X) :- call(X))).                              (B)
```

Ref should be uninstantiated; a range exception is signaled if *Ref* does not unify with its return value. This exception is signaled after the assert has been completed.

The procedure for *Clause* must be dynamic or undefined. If it is undefined, then it is set to be dynamic.

When an assert takes place, the new clause is immediately seen by any subsequent call to the procedure. However, if there is a currently active call of the procedure at the time the clause is asserted, then the new clause is not encountered on backtracking by that call. See Section 4.12.1 [ref-mdb-bas], page 180, for further explanation of what happens when currently running code is modified.

Any uninstantiated variables in the *Term* will be replaced by brand new, unattributed variables (see Section 4.2.4 [ref-sem-sec], page 78).

Exceptions

`instantiation_error`
: *Head* (in *Clause*) or *M* is uninstantiated.

`type_error`
: *Head* is not a callable, or *M* is not an atom, or *Body* is not a valid clause body.

`permission_error`
: the procedure corresponding to *Head* is not dynamic

`uninstantiation_error`
: *Ref* is not a variable

See Also

Section 4.12.4 [ref-mdb-acd], page 183.

11.3.11 asserta/[1,2] *ISO*

Synopsis

These predicates add a dynamic clause, *Clause*, to the Prolog database. They optionally return a database reference in *Ref*:

```
asserta(+Clause)

asserta(+Clause, -Ref)
```

Clause will precede all existing clauses in the database.

Arguments

:Clause	*callable*, must be nonvar	
	A valid dynamic Prolog clause.	
Ref	*db_reference*, must be var	
	A database reference, which uniquely identifies the newly asserted *Clause*.	

Description

Clause must be of the form:

```
        Head
or      Head :- Body
or      M:Clause
```

where *Head* is of type callable and *Body* is a valid clause body. If specified, then *M* must be an atom.

`asserta(Head)` means assert the unit-clause *Head*. The exact same effect can be achieved by `asserta((Head :- true))`.

If *Body* is uninstantiated, then it is taken to mean `call(Body)`. For example, (A) is equivalent to (B):

```
| ?- asserta((p(X) :- X)).                    (A)
| ?- asserta((p(X) :- call(X))).              (B)
```

Ref should be uninstantiated; a range exception is signaled if *Ref* does not unify with its return value. This exception is signaled after the assert has been completed.

The procedure for *Clause* must be dynamic or undefined. If it is undefined, then it is set to be dynamic.

When an assert takes place, the new clause is immediately seen by any subsequent call to the procedure. However, if there is a currently active call of the procedure at the time the clause is asserted, then the new clause is not encountered on backtracking by that call. See Section 4.12.1 [ref-mdb-bas], page 180, for further explanation of what happens when currently running code is modified.

Any uninstantiated variables in the *Term* will be replaced by brand new, unattributed variables (see Section 4.2.4 [ref-sem-sec], page 78).

Exceptions

`instantiation_error`
: *Head* (in *Clause*) or *M* is uninstantiated.

`type_error`
: *Head* is not a callable, or *M* is not an atom, or *Body* is not a valid clause body.

`permission_error`
: the procedure corresponding to *Head* is not dynamic

`uninstantiation_error`
: *Ref* is not a variable

See Also

Section 4.12.4 [ref-mdb-acd], page 183.

11.3.12 `assertz/[1,2]` *ISO*

Synopsis

These predicates add a dynamic clause, *Clause*, to the Prolog database. They optionally return a database reference in *Ref*:

```
assertz(+Clause)
```

```
assertz(+Clause, -Ref)
```

Clause will follow all existing clauses in the database.

Arguments

:Clause *callable*, must be nonvar

A valid dynamic Prolog clause.

Ref *db_reference*, must be var

A database reference, which uniquely identifies the newly asserted *Clause*.

Description

Clause must be of the form:

```
        Head
or      Head :- Body
or      M:Clause
```

where *Head* is of type callable and *Body* is a valid clause body. If specified, then *M* must be an atom.

`assertz(Head)` means assert the unit-clause *Head*. The exact same effect can be achieved by `assertz((Head :- true))`.

If *Body* is uninstantiated, then it is taken to mean `call(Body)`. For example, (A) is equivalent to (B):

```
| ?- assertz((p(X) :- X)).                    (A)
| ?- assertz((p(X) :- call(X))).              (B)
```

Ref should be uninstantiated; a range exception is signaled if *Ref* does not unify with its return value. This exception is signaled after the assert has been completed.

The procedure for *Clause* must be dynamic or undefined. If it is undefined, then it is set to be dynamic.

When an assert takes place, the new clause is immediately seen by any subsequent call to the procedure. However, if there is a currently active call of the procedure at the time the clause is asserted, then the new clause is not encountered on backtracking by that call. See Section 4.12.1 [ref-mdb-bas], page 180, for further explanation of what happens when currently running code is modified.

Any uninstantiated variables in the *Term* will be replaced by brand new, unattributed variables (see Section 4.2.4 [ref-sem-sec], page 78).

Exceptions

`instantiation_error`
: *Head* (in *Clause*) or *M* is uninstantiated.

`type_error`
: *Head* is not a callable, or *M* is not an atom, or *Body* is not a valid clause body.

`permission_error`
: the procedure corresponding to *Head* is not dynamic

`uninstantiation_error`
: *Ref* is not a variable

Examples

```
| ?- assertz(mammal(kangaroo)).
yes
| ?- assertz(mammal(whale), Ref).
Ref = '$ref'(1258504,210) ? RET
yes
| ?- listing(mammal).
mammal(kangaroo).
mammal(whale).
yes
```

See Also

Section 4.12.4 [ref-mdb-acd], page 183.

11.3.13 `at_end_of_line/[0,1]`

Synopsis

`at_end_of_line`

`at_end_of_line(+`*`Stream`*`)`

Test whether end of line has been reached for the current input stream or for the input stream *Stream*.

Arguments

Stream *stream_object*, must be ground
A valid Prolog input stream, defaults to the current input stream.

Description

Succeeds when end of line is reached for the specified input stream. An input stream reaches end of line when all the characters except `LFD` of the current line have been read, or when the end of the stream has been reached (or passed). This predicate will peek ahead to determine the result, and will block if necessary until a character becomes available.

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113).

See Also

`at_end_of_stream/[0,1]`, `skip_line/[0,1]`, `set_input/1`.

11.3.14 `at_end_of_stream/[0,1]` *ISO*

Synopsis

```
at_end_of_stream

at_end_of_stream(+Stream)
```

Tests whether the end has been reached for the current input stream or for the input stream *Stream*.

Arguments

Stream *stream_object*, must be ground
A valid Prolog input stream, defaults to the current input stream.

Description

Checks whether the end has been reached for the specified input stream. An input stream reaches the end when all items (characters or bytes) except '`EOF`' (-1) of the stream have been read. It remains at the end after '`EOF`' has been read.

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113).

Comments

Note that `at_end_of_stream/[0,1]` never blocks. If reading ahead would block, then `at_end_of_stream/[0,1]` will fail, even if the stream is actually at its end. If you want to ensure that the end-of-stream condition is always properly detected, even if that entails blocking until further input is possible, then you can use `peek_code/[1,2]` or `peek_byte/[1,2]`, e.g. something like the following:

```
blocking_at_end_of_stream(Alias) :-
        atom(Alias),
        stream_property(S, alias(Alias)),
        !,
        blocking_at_end_of_stream(S).
blocking_at_end_of_stream(S) :-
        at_end_of_stream(S), !.
blocking_at_end_of_stream(S) :-
        stream_property(S, type(text)), !,
        peek_code(S, -1).
blocking_at_end_of_stream(S) :-
        stream_property(S, type(binary)), !,
        peek_byte(S, -1).
```

This is similar to what SICStus 3 and some other Prolog implementations do.

> **Please note**: The design of `at_end_of_stream/[0,1]` makes it inherently unreliable. It is present only for ISO standards compliance. It is better to read or peek until one of the end of file indications is returned.

See Also

`at_end_of_line/[0,1]`.

11.3.15 atom/1 *ISO*

Synopsis

`atom(+Term)`

Succeeds if *Term* is currently instantiated to an atom.

Arguments

Term *term*

Examples

```
| ?- atom(pastor).

yes
| ?- atom(Term).

no
| ?- atom(1).

no
| ?- atom('Time').

yes
```

Exceptions

None.

See Also

Section 4.8.1.1 [ref-lte-met-typ], page 130.

11.3.16 `atom_chars/2` *ISO*

Synopsis

`atom_chars(+`*Atom*`, -`*Chars*`)`

`atom_chars(-`*Atom*`, +`*Chars*`)`

Chars is the *chars* comprising the printed representation of *Atom*.

Arguments

Chars *chars*

The *chars* comprising the printed representation of *Atom*.

Atom *atom*

The atom containing exactly those characters, even if the characters look like the printed representation of a number.

Description

Initially, either *Atom* must be instantiated to an atom, or *Chars* must be instantiated to a proper *chars*.

Any atom that can be read or written by Prolog can be constructed or decomposed by `atom_chars/2`.

Exceptions

`instantiation_error`
: *Atom* is uninstantiated and *Chars* is not instantiated enough.

`type_error`
: *Atom* is not an atom or *Chars* cannot be unified with a *chars*.

`representation_error`
: *Chars* is a list corresponding to an atom that can't be represented

The check of *Chars* when *Atom* is instantiated was added in release 4.3 for alignment with the ISO Prolog standard. Previous releases simply failed in this case instead of reporting an error for malformed *Chars*.

See Also

`atom_codes/2`.

11.3.17 `atom_codes/2` *ISO*

Synopsis

`atom_codes(+`*Atom*`, -`*Codes*`)`

`atom_codes(-`*Atom*`, +`*Codes*`)`

Codes is the *codes* comprising the printed representation of *Atom*.

Arguments

Codes *codes*

The *codes* comprising the printed representation of *Atom*.

Atom *atom*

The atom containing exactly those characters, even if the characters look like the printed representation of a number.

Description

Initially, either *Atom* must be instantiated to an atom, or *Codes* must be instantiated to a proper *codes*.

Any atom that can be read or written by Prolog can be constructed or decomposed by `atom_codes/2`.

Exceptions

`instantiation_error`
: *Atom* is uninstantiated and *Codes* is not instantiated enough

`type_error`
: *Atom* is not an atom or *Codes* cannot be unified with a list of integers

`representation_error`
: An element of *Codes* is an invalid character code, or *Codes* is a list corresponding to an atom that can't be represented

The check of *Codes* when *Atom* is instantiated was added in release 4.3 for alignment with the ISO Prolog standard. Previous releases simply failed in this case instead of reporting an error for malformed *Codes*.

See Also

`atom_chars/2`.

11.3.18 atom_concat/3 *ISO*

Synopsis

`atom_concat(+Atom1,+Atom2,-Atom12)`

`atom_concat(-Atom1,-Atom2,+Atom12)`

The characters of the atom *Atom1* concatenated with those of *Atom2* are the same as the characters of atom *Atom12*.

Arguments

Atom1 *atom*

Atom2 *atom*

Atom12 *atom*

Description

Initially, either both *Atom1* and *Atom2*, or *Atom12*, must be instantiated to atoms. If only *Atom12* is instantiated, then nondeterminately enumerates all possible atom-pairs that concatenate to the given atom, e.g.:

```
| ?- atom_concat(A, B, 'ab').

A = '',
B = ab ? ;

A = a,
B = b ? ;

A = ab,
B = ''  ;

no
```

Exceptions

`instantiation_error`
: The last argument is uninstantiated and at the same time either (or both) of the first two arguments are uninstantiated.

`type_error`
: An instantiated argument is not an atom.

`representation_error`
: *Atom12* is too long to be represented.

See Also

`atom_length/2`, `sub_atom/5`.

11.3.19 `atom_length/2` ***ISO***

Synopsis

`atom_length(+`*Atom*`, -`*Length*`)`

Length is the number of characters of the atom *Atom*.

Arguments

Atom	*atom*, must be nonvar
Length	*integer*

Exceptions

`instantiation_error`
: *Atom* is uninstantiated

`type_error`
: *Atom* is not an atom, or *Length* cannot be unified with an integer

`domain_error`
: *Length* < 0

See Also

`atom_length/2`, `atom_concat/3`, `sub_atom/5`.

11.3.20 atomic/1 *ISO*

Synopsis

`atomic(+Term)`

Succeeds if *Term* is currently instantiated to an atom or a number.

Arguments

Term *term*

Examples

```
| ?- atomic(9).

yes
| ?- atomic(a).

yes
| ?- atomic("a").

no
| ?- assert(foo(1), Ref), atomic(Ref).

no
```

Exceptions

None.

See Also

Section 4.8.1.1 [ref-lte-met-typ], page 130.

11.3.21 `bagof/3` ***ISO***

Synopsis

`bagof(+`*`Template`*`, +`*`Generator`*`, -`*`Set`*`)`

Like `setof/3` except that the list (or alternative lists) returned will not be ordered, and may contain duplicates. This relaxation saves time and space in execution.

Arguments

Template *term*

:Generator
callable, must be nonvar
A goal to be proved as if by `call/1`.

Set *list of term*, non-empty set

Backtracking

`bagof/3` can succeed nondeterminately, generating alternative values for *Set* corresponding to different instantiations of the free variables of *Generator*.

Exceptions

Call errors (see Section 4.2.6 [ref-sem-exc], page 81).

Examples

See `findall/3` for examples that illustrate the differences among `findall/3`, `setof/3`, and `bagof/3`.

See Also

`findall/3`, `setof/3`, `^/2`, Section 4.13 [ref-all], page 190.

11.3.22 `bb_delete/2`

Synopsis

`bb_delete(:Key, -Term)`

If a term is currently stored under *Key*, then the term is deleted, and a copy of it is unified with *Term*. Otherwise, `bb_delete/2` silently fails.

Arguments

:Key	*bbkey*
Term	*term*

Exceptions

`instantiation_error`
: *Key* is not instantiated

`type_error`
: *Key* is not an atom or a small integer.

See Also

Section 4.12.9 [ref-mdb-bbd], page 188.

11.3.23 `bb_get/2`

Synopsis

`bb_get(:Key, -Term)`

If a term is currently stored under *Key*, then a copy of it is unified with *Term*. Otherwise, `bb_get/2` silently fails.

Arguments

:Key	*bbkey*
Term	*term*

Exceptions

`instantiation_error`
: *Key* is not instantiated

`type_error`
: *Key* is not an atom or a small integer.

See Also

Section 4.12.9 [ref-mdb-bbd], page 188.

11.3.24 `bb_put/2`

Synopsis

`bb_put(:Key, +Term)`

A copy of *Term* is stored under *Key* in the source module blackboard. Any previous term stored under the same *Key* is simply deleted.

Arguments

:Key	*bbkey*
Term	*term*

Description

Any uninstantiated variables in the *Term* will be replaced by brand new, unattributed variables (see Section 4.2.4 [ref-sem-sec], page 78).

Exceptions

`instantiation_error`
: *Key* is not instantiated

`type_error`
: *Key* is not an atom or a small integer.

See Also

Section 4.12.9 [ref-mdb-bbd], page 188.

11.3.25 `bb_update/3`

Synopsis

`bb_update(:Key, -OldTerm, +NewTerm)`

If a term is currently stored under *Key* and unifies with *OldTerm*, then the term is replaced by a copy of *NewTerm*. Otherwise, `bb_update/3` silently fails. This predicate provides an atomic swap operation.

Arguments

:Key	*bbkey*
OldTerm	*term*
NewTerm	*term*

Description

Any uninstantiated variables in the *Term* will be replaced by brand new, unattributed variables (see Section 4.2.4 [ref-sem-sec], page 78).

Exceptions

`instantiation_error`
: *Key* is not instantiated

`type_error`
: *Key* is not an atom or a small integer.

See Also

Section 4.12.9 [ref-mdb-bbd], page 188.

11.3.26 `block/1` *declaration*

Synopsis

`:- block` `+`*`BlockSpec`*

Specifies conditions for blocking goals of the predicates referred to by *BlockSpec*.

Arguments

:BlockSpec

callable, must be ground

Goal template or list of goal templates, of the form `f(Arg1, Arg2,...)`. Each *Argn* is one of:

'`-`' part of a block condition

'`?`' otherwise

Description

When a goal for a block declared predicate is to be executed, the block specs are interpreted as conditions for blocking the goal, and if at least one condition evaluates to `true`, then the goal is blocked.

A block condition evaluates to `true` iff all arguments specified as '`-`' are uninstantiated, in which case the goal is blocked until at least one of those variables is instantiated. If several conditions evaluate to `true`, then the implementation picks one of them and blocks the goal accordingly.

The recommended style is to write the block declarations in front of the source code of the predicate they refer to. Indeed, they are part of the source code of the predicate, and must precede the first clause. For example, with the definition:

```
:- block merge(-,?,-), merge(?,-,-).

merge([], Y, Y).
merge(X, [], X).
merge([H|X], [E|Y], [H|Z]) :- H @< E,  merge(X, [E|Y], Z).
merge([H|X], [E|Y], [E|Z]) :- H @>= E, merge([H|X], Y, Z).
```

calls to `merge/3` having uninstantiated arguments in the first *and* third position *or* in the second *and* third position will suspend.

The behavior of blocking goals for a given predicate on uninstantiated arguments cannot be switched off, except by abolishing or redefining the predicate.

Exceptions

Exceptions in the context of loading code are printed as error messages.

`instantiation_error`

BlockSpec not ground.

`type_error`
: *BlockSpec* not a valid specification.

`context_error`
: Declaration appeared in a goal.

`permission_error`
: Declaration appeared as a clause.

See Also

Section 4.3.4.5 [Block Declarations], page 88.

11.3.27 `break/0` *development*

Synopsis

`break`

causes the current execution to be interrupted; enters next break level.

Description

The first time `break/0` is called, it displays the message

```
% Break level 1
% 1
| ?-
```

The system is then ready to accept input as though it were at top level. If another call to `break/0` is encountered, then it moves up to level 2, and so on. The break level is displayed on a separate line before each top-level prompt.

To close a break level and resume the execution that was suspended, type `^D`. `break/0` then succeeds, and execution of the interrupted program is resumed.

Changes can be made to a running program while in a break level. Any change made to a procedure will take effect the next time that procedure is called. See Section 4.12.5 [ref-mdb-rcd], page 183, for details of what happens if a procedure that is currently being executed is redefined. When a break level is entered, the debugger is turned off (although leashing and spypoints are retained). When a break level is exited, the debugging state is restored to what it was before the break level was entered.

Often used via the debugging option `b`.

Exceptions

Catches otherwise uncaught exceptions and issues an error message.

See Also

`abort/0`, `halt/[0,1]`, Section 3.9 [Nested], page 30.

11.3.28 `breakpoint_expansion/2` *hook, development*

Synopsis

```
:- multifile user:breakpoint_expansion/2.

user:breakpoint_expansion(+Macro, -Body)
```

Defines debugger condition macros.

Arguments

Macro *term*
Breakpoint test or action.

Body *term*
Expanded breakpoint test or action, may be composite.

Exceptions

Exceptions are treated as failures, except an error message is printed as well.

See Also

Section 5.9 [Breakpoint Conditions], page 281.

11.3.29 `byte_count/2`

Synopsis

`byte_count(+`*`Stream`*`, -`*`Count`*`)`

Obtains the total number of bytes either input from or output to the open binary stream *Stream* and unifies it with *Count*.

Arguments

Stream	*stream_object*, must be ground
	A valid open *binary* stream.
Count	*integer*
	The resulting byte count of the stream.

Description

A freshly opened stream has a byte count of 0. When a byte is input from or output to a Prolog stream, the byte count of the Prolog stream is increased by one.

The count is reset by `set_stream_position/2`.

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113).

See Also

`byte_count/2`, `line_count/2`, `line_position/2`, `stream_position/2`, `set_stream_position/2`, Section 4.6.7 [ref-iou-sfh], page 113.

11.3.30 `call/[1,2,...,255]` *ISO*

Synopsis

`call(+P)`

Proves (executes) *P*.

`call(+P,?Q,...)`

Executes the goal obtained by augmenting *P* by the remaining arguments.

Arguments

:P	*callable*, must be nonvar
Q	term ...

Description

If *P* is instantiated to an atom or compound term, then the goal `call(P)` is executed exactly as if that term appeared textually in its place, except that any cut (‘`!`’) occurring in *P* only cuts alternatives in the execution of *P*. Only `call/1..8` are required by ISO.

Backtracking

Depends on *P*.

Exceptions

Call errors (see Section 4.2.6 [ref-sem-exc], page 81).

Examples

`maplist/2` in `library(lists)` is defined as:

```
maplist(Pred, Xs) :-
        (   foreach(X,Xs),
            param(Pred)
        do  call(Pred, X)
        ).
```

See Also

Section 4.2.5 [ref-sem-cal], page 81.

11.3.31 `call_cleanup/2`

`call_cleanup(+Goal, +Cleanup)`

Synopsis

Executes the procedure call *Goal*. When *Goal* succeeds determinately, is cut, fails, or raises an exception, *Cleanup* is executed.

Arguments

:Goal *callable*, must be nonvar

:Cleanup *callable*, must be nonvar

Description

This construction can be used to ensure that *Cleanup* is executed as soon as *Goal* has completed execution, no matter how it finishes. In more detail:

When `call_cleanup/2` with a continuation *C* is called or backtracked into, first *Goal* is called or backtracked into. Then there are four possibilities:

1. *Goal* succeeds determinately, possibly leaving some blocked subgoals. *Cleanup* is executed with continuation *C*.
2. *Goal* succeeds with some alternatives outstanding. Execution proceeds to *C*. If a cut that removes the outstanding alternatives is encountered, then *Cleanup* is executed with continuation to proceed at the cut. Also, if an exception *E* that will be caught by an ancestor of the `call_cleanup/2` *Goal* is raised, then *Cleanup* is executed with continuation `raise_exception(E)`.
3. *Goal* fails. *Cleanup* is executed with continuation `fail`.
4. *Goal* raises an exception *E*. *Cleanup* is executed with continuation `raise_exception(E)`.

In the above, *Goal* is executed as if by `call/1`, whereas *Cleanup* is executed as if by `once/1`.

In a typical use of `call_cleanup/2`, *Cleanup* succeeds after performing some side effect; otherwise, unexpected behavior may result.

Note that the Prolog top-level operates as a read-execute-fail loop, which backtracks into or cuts the query when the user types `;` or `RET` respectively. Also, some predicates, such as `halt/[0,1]` and `abort/0`, are implemented in terms of exceptions. All of these circumstances can trigger the execution of *Cleanup*.

Backtracking

Depends on the arguments.

Exceptions

Call errors (see Section 4.2.6 [ref-sem-exc], page 81).

See Also

Section 4.2 [ref-sem], page 65.

11.3.32 call_residue_vars/2

`call_residue_vars(+Goal, -Vars)`

Synopsis

Executes the procedure call *Goal*, unifying *Vars* with the list of residual variables that have blocked goals or attributes attached to them.

Arguments

:Goal	*callable*, must be nonvar
Vars	*list of var*

Description

Goal is executed as if by `call/1`. *Vars* is unified with the list of new variables created during the call that remain unbound and have blocked goals or attributes attached to them. For example:

```
| ?- call_residue_vars((dif(X,f(Y)), X=f(Z)), Vars).

X = f(Z),
Vars = [Z,Y],
prolog:dif(f(Z),f(Y)) ?
```

Backtracking

Depends on *Goal*.

Exceptions

Call errors (see Section 4.2.6 [ref-sem-exc], page 81).

See Also

Section 4.2.4 [ref-sem-sec], page 78.

11.3.33 `callable/1` *ISO*

Synopsis

`callable(+`*Term*`)`

Succeeds if *Term* is currently instantiated to an atom or a compound term.

Arguments

Term *term*

Examples

```
| ?- callable(a).

yes
| ?- callable(a(1,2,3)).

yes
| ?- callable([1,2,3]).

yes
| ?- callable(1.1).

no
```

Exceptions

None.

See Also

Section 4.8.1.1 [ref-lte-met-typ], page 130.

11.3.34 `catch/3` *ISO*

Synopsis

`catch(+ProtectedGoal, -Exception, +Handler)`

Specify an exception handler for *ProtectedGoal*, and call *ProtectedGoal*, as described in Section 4.15 [ref-ere], page 201.

Arguments

:ProtectedGoal
: *callable*, must be nonvar

Exception *term*

:Handler *callable*, must be nonvar

Examples

Fail on exception:

```
:- meta_predicate fail_on_exception(0).
fail_on_exception(C):-
    catch(C, E, print_exception_then_fail(C, E)).

print_exception_then_fail(C, E) :-
    format(user_error, 'Exception occurred while calling ~q:~n', [C]),
    print_message(warning, E),
    fail.
```

Backtracking

Depends on *ProtectedGoal* and *Handler*.

Exceptions

None.

See Also

Section 4.15 [ref-ere], page 201.

11.3.35 `char_code/2` ***ISO***

Synopsis

`char_code(+`*`Char`*`, -`*`Code`*`)`

`char_code(-`*`Char`*`, +`*`Code`*`)`

Code is the character code comprising the printed representation of *Char*.

Arguments

Char *char*
The *char* whose code is *Code*.

Code *code*
The *code* corresponding to *Char*.

Description

Initially, at least one argument must be instantiated.

Exceptions

`instantiation_error`
Char and *Code* are both uninstantiated

`type_error`
Char is not a *char* or *Code* is not an integer.

`representation_error`
Code is not a *code*.

See Also

`atom_codes/2`, `number_codes/2`.

11.3.36 `char_conversion/2` *ISO*

Synopsis

`char_conversion(+InChar, +OutChar)`

The mapping of *InChar* to *OutChar* is added to the character-conversion mapping.

Arguments

InChar *char*, must be nonvar

OutChar *char*, must be nonvar

Description

The mapping of *InChar* to *OutChar* is added to the character-conversion mapping. This means that in all subsequent term and program input operations any *unquoted* occurrence of *InChar* will be replaced by *OutChar*. The rationale for providing this facility is that in some extended character sets (such as Japanese JIS character sets) the same character can appear several times and thus have several codes, which the users normally expect to be equivalent. It is advisable to always quote the arguments of `char_conversion/2`.

Any previous mapping of *InChar* is replaced by the new one.

Please note: the mapping is *global*, as opposed to being local to the current module, Prolog text, or otherwise.

Exceptions

`instantiation_error`
: An argument is uninstantiated

`type_error`
: An argument is not a *char*

See Also

Chapter 2 [Glossary], page 7.

11.3.37 `character_count/2`

Synopsis

`character_count(+`*`Stream`*`, -`*`Count`*`)`

Obtains the total number of characters either input from or output to the open text stream *Stream* and unifies it with *Count*.

Arguments

Stream	*stream_object*, must be ground
	A valid open *text* stream
Count	*integer*
	The resulting character count of the stream

Description

A freshly opened text stream has a character count of 0. When a character is input from or output to a non-interactive Prolog stream, the character count of the Prolog stream is increased by one. Character count for an interactive stream reflects the total character input from or output to any interactive stream, i.e. all interactive streams share the same counter.

A `nl/[0,1]` operation also increases the character count of a stream by one.

The count is reset by `set_stream_position/2`.

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113).

See Also

`byte_count/2`, `line_count/2`, `line_position/2`, `stream_position/2`, `set_stream_position/2`, Section 4.6.7 [ref-iou-sfh], page 113.

11.3.38 clause/[2,3] *ISO*

Synopsis

```
clause(+Head, -Body)

clause(+Head, -Body, -Ref)

clause(-Head, -Body, +Ref)
```

Searches the database for a clause whose head matches *Head* and whose body matches *Body*.

Arguments

:Head	*callable*
	A term whose functor names a dynamic procedure.
Body	*callable*
Ref	*db_reference*

Description

Initially, at least one of *Head* and *Ref* must be instantiated.

In the case of unit-clauses, *Body* is unified with `true`.

If a procedure consists entirely of unit-clauses, then there is no point in calling `clause/2` on it. It is simpler and faster to call the procedure.

In `clause/3`, either *Head* or *Ref* must be instantiated. If *Ref* is instantiated, then `(Head :- Body)` is unified with the clause identified by *Ref*. (If this clause is a unit-clause, then *Body* is unified with `true`.)

If the predicate did not previously exist, then it is created as a dynamic predicate and `clause/2` fails. If *Ref* is not instantiated, then `clause/3` behaves exactly like `clause/2` except that the database reference is returned.

By default, clauses are accessed with respect to the source module.

Backtracking

Can be used to backtrack through all the clauses matching a given *Head* and *Body*. It fails when there are no (or no further) matching clauses in the database.

Exceptions

`instantiation_error`
: Neither *Head* nor *Ref* is instantiated.

`type_error`
: *Head* is not a callable, or *Ref* is not a well-formed db_reference

`permission_error`
: Procedure is not dynamic.

`existence_error`
: *Ref* is a well-formed db_reference but does not correspond to an existing clause or record.

Comments

If `clause/[2,3]` is called on an undefined procedure, then it fails, but before failing it makes the procedure dynamic. This can be useful if you wish to prevent unknown procedure catching from happening on a call to that procedure.

It is not a limitation that *Head* is required to be instantiated in `clause(`*Head*`, `*Body*`)`, because if you want to backtrack through all clauses for all dynamic procedures, then this can be achieved by:

```
| ?- predicate_property(P,dynamic), clause(P,B).
```

If there are clauses with a given name and arity in several different modules, or if the module for some clauses is not known, then the clauses can be accessed by first finding the module(s) by means of `current_predicate/2`. For example, if the procedure is `f/1`:

```
| ?- current_predicate(_,M:f(_)), clause(M:f(X),B).
```

`clause/3` will only access clauses that are defined in, or imported into, the source module, except that the source module can be overridden by explicitly naming the appropriate module. For example:

```
| ?- assert(foo:bar,R).

R = '$ref'(771292,1)

| ?- clause(H,B,'$ref'(771292,1)).

no
| ?- clause(foo:H,B,'$ref'(771292,1)).

H = bar,
B = true
```

Accessing a clause using `clause/2` uses first argument indexing when possible, in just the same way that calling a procedure uses first argument indexing. See Section 9.5 [Indexing], page 364.

`clause/2` is part of the ISO Prolog standard; `clause/3` is not.

See Also

`instance/2`, `assert/[1,2]`, `dynamic/1`, `retract/1`, Section 4.12.6 [ref-mdb-acl], page 185.

11.3.39 `close/[1,2]` *ISO*

Synopsis

`close(+`*Stream*`)`

`close(+`*Stream*`, +`*Options*`)`

closes the stream corresponding to *Stream*.

Arguments

Stream *stream_object*, must be ground

Stream or file specification.

Options *list of term*, must be ground

A list of zero or more of the following:

`force(`*Boolean*`)`

Specifies whether SICStus Prolog is to close the stream forcefully, even in the presence of errors (`true`), or not (`false`). The latter is the default. Currently this option has no effect.

`direction(+`*Direction*`)`

Direction is an atom specifying the direction or directions to close.

One of:

`input` Close only the input direction, if open.

`output` Close only the output direction, if open.

`all` Close all directions. This is the default.

if stream is not open in the specified direction then the call to `open/4` does nothing.

Closing a single direction is mainly useful when dealing with bidirectional streams, such as sockets.

Description

If *Stream* is a stream object, then if the corresponding stream is open, then it will be closed in the specified directions; otherwise, an error exception is raised.

If *Stream* is a file specification, then the corresponding stream will be closed in the specified directions, provided that the file was opened by `see/1` or `tell/1`.

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113), plus:

`instantiation_error`

Options is not instantiated enough.

`type_error`

Options is not a proper list.

`domain_error`
: *Options* contains an invalid option.

`permission_error`
: File not opened by `see/1` or `tell/1`.

`domain_error`
: *Stream* is neither a filename nor a stream.

Examples

In this example, `foo` will be closed:

```
see(foo),
...
close(foo)
```

However, in this example, a permission error will be raised and `foo` will not be closed:

```
open(foo, read, S),
...
close(foo)
```

Here, `close(S)` should have been used.

See Also

`see/1`, `tell/1`, `open/[3,4]`, Section 4.6.7 [ref-iou-sfh], page 113, Section 10.42 [lib-sockets], page 792.

11.3.40 compare/3 *ISO*

Synopsis

`compare(-Order, +Term1, +Term2)`

succeeds if the result of comparing terms *Term1* and *Term2* is *Order*

Arguments

Order	*order*	
	`=`	if *Term1* is identical to *Term2*,
	`<`	if *Term1* is before *Term2* in the standard order,
	`>`	if *Term1* is after *Term2* in the standard order.
Term1	*term*	
Term2	*term*	

Description

The standard order is described in Section 4.8.8 [ref-lte-cte], page 134. Note that the standard order is not, in general, well defined for cyclic terms.

The goal (A) is equivalent to (B):

```
| ?- compare(=, Term1, Term2).                    (A)

|?- (Term1 == Term2).                             (B)
```

The following query succeeds, binding R to `<`, because 1 comes before 2 in the standard order.

```
 | ?- compare(R, 1, 2).

R = <
```

If *Order* is supplied, and is not one of `<`, `>`, or `=`, then an error is thrown, as follows.

Exceptions

`type_error(atom, Order)`
: if *Order* is neither a variable nor an atom.

`domain_error(order, Order)`
: if *Order* is an atom but not `<`, `=`, or `>`.

These errors were added in SICStus Prolog 4.3 for alignment with the ISO Prolog standard. Previous versions of SICStus Prolog simply failed instead of reporting an error.

See Also

`@</2`, `@=</2`, `@>/2`, `@>=/2`, `SP_compare()`, Section 4.8.8 [ref-lte-cte], page 134.

11.3.41 `compile/1`

Synopsis

`compile(+Files)`

Compiles the specified Prolog source file(s) into memory.

Arguments

:Files *file_spec* or *list of file_spec*, must be ground
A file specification or a list of file specifications; extensions optional.

Description

This predicate is defined as if by:

```
compile(Files) :-
        load_files(Files, [load_type(source),compilation_mode(compile)]).
```

Exceptions

See `load_files/[2,3]`.

See Also

Section 4.3.2 [ref-lod-lod], page 84.

11.3.42 compound/1 *ISO*

Synopsis

`compound(+Term)`

Term is currently instantiated to a compound term.

Arguments

Term *term*

Examples

```
| ?- compound(9).

no
| ?- compound(a(1,2,3)).

yes
| ?- compound("a").

yes
| ?- compound([1,2]).

yes
```

Exceptions

None.

See Also

Section 4.8.1.1 [ref-lte-met-typ], page 130.

11.3.43 `consult/1`

Synopsis

`consult(+`*`Files`*`)`

Consults the specified Prolog source file(s) into memory.

Arguments

:Files	*file_spec* or *list of file_spec*, must be ground	
	A file specification or a list of file specifications; extensions optional.	

Description

This predicate is defined as if by:

```
consult(Files) :-
        load_files(Files, [load_type(source),compilation_mode(consult)]).
```

Exceptions

See `load_files/[2,3]`.

See Also

Section 4.3.2 [ref-lod-lod], page 84.

11.3.44 copy_term/[2,3] *ISO*

Synopsis

`copy_term(+Term, -Copy)`

Unifies *Copy* with a copy of *Term* in which all variables have been replaced by brand new variables, and all mutables by brand new mutables.

`copy_term(+Term, -Copy, -Body)`

Furthermore, if *Term* contains variables with goals blocked on them, or variables with attributes that can be interpreted as a goal (see Section 10.3 [lib-atts], page 397), then *Body* is unified with the conjunction of such goals. If no such goals are present, then *Body* is unified with the atom `true`. The idea is that executing *Body* will reinstate blocked goals and attributes on the variables in *Copy* equivalent to those on the variables in *Term*.

Arguments

Term	*term*
Copy	*term*
Body	*callable*

Description

Independent copies are substituted for any mutable terms in *term*. It behaves as if defined by:

```
copy_term(X, Y) :-
        assert('copy of'(X)),
        retract('copy of'(Y)).
```

The implementation of `copy_term/2` endeavors to conserve space by not copying ground subterms.

When you call `clause/[2,3]` or `instance/2`, you get a new copy of the term stored in the database, in precisely the same sense that `copy_term/2` gives you a new copy.

Examples

- A naive way to attempt to find out whether one term is a copy of another:

```
identical_but_for_variables(X, Y) :-
   \+ \+ (
      numbervars(X, 0, N),
      numbervars(Y, 0, N),
      X = Y
   ).
```

  This solution is sometimes sufficient, but will not work if the two terms have any variables in common.

- If you want the test to succeed even when the two terms do have some variables in common, then you need to copy one of them; for example,

```
identical_but_for_variables(X, Y) :-
   \+ \+ (
      copy_term(X, Z),
      numbervars(Z, 0, N),
      numbervars(Y, 0, N),
      Z = Y
   ).
```

- An example of `copy_term/3`. Suppose that you want to make `copy_term/3` aware of the attribute `tfs/1` in some module. Then with the module file:

```
:- module(foo, []).

:- use_module(library(atts)).
:- attribute tfs/1.

attribute_goal(X, put_atts(X,tfs(Y))) :-
    get_atts(X, tfs(Y)).
```

  the following query works:

```
| ?- foo:put_atts(X, tfs(ind)), copy_term(f(X), Copy, Body).
Body = foo:put_atts(_A,tfs(ind)),
Copy = f(_A),
put_atts(X,tfs(ind)) ? RET
yes
```

Comments

`copy_term/2` is part of the ISO Prolog standard; `copy_term/3` is not.

Exceptions

None.

See Also

Section 4.8.7 [ref-lte-cpt], page 133.

11.3.45 `coverage_data/1` *development*

Synopsis

`coverage_data(-Data)` *since release 4.2*

Data is the coverage data accumulated so far.

Arguments

Data	*list of coverage_pair*	
	where:	
	coverage_pair	::= `counter(`*`filename`*`,`*`pred_spec`*`,`*`clauseno`*`,`*`lineno`*`)-`*`tagged_hits`*
	filename	::= *atom* {file containing coverage site}
	clauseno	::= *integer* {file relative clause number containing coverage site}
	lineno	::= *integer* {line of code containing coverage site}
	tagged_hits	::= `det(`*`hits`*`)` {no nondet calls made from site} `| nondet(`*`hits`*`)` {some nondet calls made from site}
	hits	::= *integer* {number of times that coverage site was hit}

Description

The coverage data accumulated so far is collected into a term of type *list of coverage_pair* and unified with *Data*.

Please note: A given line of code can contain more than one coverage site.

Exceptions

None.

See Also

Section 9.3 [Coverage Analysis], page 360.

11.3.46 `create_mutable/2`

Synopsis

`create_mutable(+`*`Datum`*`, -`*`Mutable`*`)`

Mutable is a new mutable term with initial value *Datum*.

Arguments

Datum	*term*, must be nonvar
Mutable	*mutable*

Exceptions

`instantiation_error`
: *Datum* is uninstantiated

See Also

Section 4.8.9 [ref-lte-mut], page 135.

11.3.47 `current_atom/1`

Synopsis

`current_atom(?`*`Atom`*`)`

Atom is a currently existing atom.

Arguments

Atom *atom*

Backtracking

If *Atom* is uninstantiated, then `current_atom/1` can be used to enumerate all known atoms. The order in which atoms are bound to *Atom* on backtracking corresponds to the times of their creation.

Comments

Note that the predicate `atom/1` is recommended for determining whether a term is an atom, as `current_atom/1` will succeed if *Atom* is uninstantiated as well.

Exceptions

None.

See Also

Section 4.12.8 [ref-mdb-idb], page 187.

11.3.48 `current_breakpoint/5` *development*

Synopsis

`current_breakpoint(-`*`Conditions`*`, -`*`BID`*`, -`*`Status`*`, -`*`Kind`*`, -`*`Type`*`)`

There is a breakpoint with conditions *Conditions*, identifier *BID*, enabledness *Status*, kind *Kind*, and type *Type*.

Arguments

:Conditions
: *term*
Breakpoint conditions.

BID
: *integer*
Breakpoint identifier.

Status
: *one of* `[on,off]`
`on` for enabled breakpoints and `off` for disabled ones

Kind
: *one of* `[plain(`*`MFunc`*`),conditional(`*`MFunc`*`),generic]`
MFunc is the module qualified functor of the specific breakpoint.

Type
: *one of* `[debugger,advice]`

Exceptions

`instantiation_error`
: *Conditions* not instantiated enough.

`type_error`
: *Conditions* not a proper list of callable term.

`domain_error`
: *Conditions* not a proper list of valid breakpoint conditions

See Also

Section 5.6.7 [Built-in Predicates for Breakpoint Handling], page 264, Section 5.7 [Breakpoint Predicates], page 276.

11.3.49 `current_char_conversion/2` *ISO*

Synopsis

`current_char_conversion(?InChar, ?OutChar)`

InChar is currently mapped to *OutChar* in the character-conversion mapping, where the two are distinct.

Arguments

InChar *char*

OutChar *char*

Exceptions

`type_error`
: An argument is instantiated not to a *char*.

See Also

Chapter 2 [Glossary], page 7.

11.3.50 `current_input/1` ***ISO***

Synopsis

`current_input(-`*Stream*`)`

unifies *Stream* with the current input stream.

Arguments

Stream *stream_object*

Description

Stream is the current input stream. The current input stream is also accessed by the C variable `SP_curin`.

Exceptions

`domain_error`
: *Stream* is instantiated not to a valid stream.

See Also

`open/[3,4]`, Section 4.6.7 [ref-iou-sfh], page 113.

11.3.51 `current_key/2`

Synopsis

`current_key(?KeyName, ?KeyTerm)`

Succeeds when *KeyName* is the name of *KeyTerm*, and *KeyTerm* is a recorded key.

Arguments

KeyName *atomic*

One of:

- *KeyTerm*, if *KeyTerm* is atomic; or
- the principal functor of *KeyTerm*, if *KeyTerm* is a compound term.

KeyTerm *term*

The most general form of the key for a currently recorded term.

Description

This predicate can be used to enumerate in undefined order all keys for currently recorded terms through backtracking.

Backtracking

Enumerates all keys through backtracking.

Exceptions

None.

See Also

Section 4.12.8 [ref-mdb-idb], page 187.

11.3.52 current_module/[1,2]

Synopsis

`current_module(?ModuleName)`

Queries whether a module is "current" or backtracks through all of the current modules.

`current_module(?ModuleName, ?AbsFile)`

Associates modules with their module files.

Arguments

ModuleName *atom*

AbsFile *atom*
Absolute filename in which the module is defined.

Description

A loaded module becomes "current" as soon as some predicate is defined in it, and a module can never lose the property of being current.

It is possible for a current module to have no associated file, in which case `current_module/1` will succeed on it but `current_module/2` will fail. This arises for the special module `user` and for dynamically-created modules (see Section 4.11 [ref-mod], page 165).

If its arguments are not correct, or if *Module* has no associated file, then `current_module/2` simply fails.

Backtracking

`current_module/1` backtracks through all of the current modules. The following command will print out all current modules:

```
| ?- current_module(Module), writeq(Module), nl, fail.
```

`current_module/2` backtracks through all of the current modules and their associated files.

Exceptions

`type_error`

Examples

```
| ?- findall(M,current_module(M),Ms).
Ms = [chr,user,prolog,'SU_messages',clpfd] ? RET
yes
| ?- findall(M-F,current_module(M,F),MFs).
MFs = ['SU_messages'-'/src/sicstus/matsc/sicstus4/Utils/x86-linux-
glibc2.3/bin/sp-4.1.0/sicstus-4.1.0/library/SU_messages.pl'] ?
yes
```

See Also

Section 4.11.13 [ref-mod-ilm], page 173.

11.3.53 `current_op/3` ***ISO***

Synopsis

`current_op(?Precedence, ?Type, ?Name)`

Succeeds when the atom *Name* is currently an operator of type *Type* and precedence *Precedence*.

Arguments

Precedence
: *integer*, in the range 1-1200

Type
: *one of* `[xfx, xfy, yfx, fx, fy, xf, yf]`

Name
: *atom*

Description

None of the arguments need be instantiated at the time of the call; that is, this predicate can be used to find the precedence or type of an operator or to backtrack through all operators.

To add or remove an operator, use `op/3`.

Exceptions

`type_error`
: *Name* not an atom or *Type* not an atom or *Precedence* not an integer.

`domain_error`
: *Precedence* not between 1-1200, or *Type* not one of listed atoms.

Examples

See Also

`op/3`, Section 4.1.5 [ref-syn-ops], page 51.

11.3.54 current_output/1 *ISO*

Synopsis

`current_output(-Stream)`

unifies *Stream* with the current output stream.

Arguments

Stream *stream_object*

Description

Stream is the current output stream. The current output stream is also accessed by the C variable `SP_curout`.

Exceptions

`domain_error`
: *Stream* is instantiated not to a valid stream.

See Also

`open/[3,4]`, Section 4.6.7 [ref-iou-sfh], page 113.

11.3.55 current_predicate/[1,2] *ISO*

Synopsis

`current_predicate(?PredSpec)`

Unifies *PredSpec* with a predicate specifications of the form *Name/Arity*.

`current_predicate(?Name, ?Term)`

Unifies *Name* with the name of a user-defined predicate, and *Term* with the most general term corresponding to that predicate.

Arguments

:PredSpec *pred_spec*

Name *atom*

:Term *callable*

Description

If you have loaded the predicates `foo/1` and `foo/3` into Prolog, then `current_predicate/2` would return the following:

```
 | ?- current_predicate(foo, T).

T = foo(_A) ;

T = foo(_A,_B,_C) ;

no
```

Examples

- The following goals can be used to backtrack through every predicate in your program.

```
| ?- current_predicate(Name, Module:Term).

| ?- current_predicate(Module:PredSpec).
```

- If a module is specified, then `current_predicate/[1,2]` only succeeds for those predicates that are *defined* in the module. It fails for those predicates that are imported into a module.

```
| ?- current_predicate(m:P).
```

  will backtrack through all predicates `P` that are defined in module `m`. To backtrack through all predicates imported by a module use `predicate_property/2` (see Section 4.9.1 [ref-lps-ove], page 139).

To find out whether a predicate is built-in, use `predicate_property/2`.

```
% Is there a callable predicate named gc?

| ?- current_predicate(gc, Term).

no
| ?- predicate_property(gc, Prop)

Prop = built_in
```

Exceptions

`instantiation_error`
`type_error`
in *PredSpec*

Comments

`current_predicate/1` is part of the ISO Prolog standard; `current_predicate/2` is not.

See Also

`predicate_property/2`, Section 4.9.1 [ref-lps-ove], page 139.

11.3.56 `current_prolog_flag/2` ***ISO***

Synopsis

`current_prolog_flag(?FlagName, ?Value)`

same as `prolog_flag(FlagName, Value)`, except that `current_prolog_flag(FlagName, Value)` type checks *FlagName*.

Arguments

FlagName *atom*

Value *term*

Exceptions

`type_error`
: *FlagName* is not an atom.

`domain_error`
: *FlagName* is not a valid flag name.

See Also

`prolog_flag/[2,3]`, `set_prolog_flag/2`, Section 4.9.4 [ref-lps-flg], page 140.

11.3.57 current_stream/3

Synopsis

`current_stream(?AbsFile, ?Mode, ?Stream)`

Stream is a stream, which is currently open on file *AbsFile* in mode *Mode*.

Arguments

AbsFile	*atom* Absolute filename.
Mode	for streams opened with `open/[3,4]` this is *one of* `[read, write, append]`. For other streams *Mode* may have other values.
Stream	*stream_object*

Description

- None of the arguments need be initially instantiated.
- Ignores certain pre-defined streams, e.g. the streams initially associated with `user_input`, `user_output` and `user_error` will not be recognized or generated by `current_stream/3`.

  This is unlike `stream_property/2`, which can backtrack over all streams, including the pre-defined ones.

Backtracking

Can be used to backtrack through all open streams.

Exceptions

None.

See Also

`open/[3,4]`, Section 4.6.7 [ref-iou-sfh], page 113.

11.3.58 `!/0` *ISO*

Synopsis

```
!
```

Cut.

Description

When first encountered as a goal, cut succeeds immediately. If backtracking should later return to the cut, then the parent goal will fail (the parent goal is the one that matched the head of the clause containing the cut).

Exceptions

None.

See Also

Section 4.2.3.1 [ref-sem-ctr-cut], page 68.

11.3.59 db_reference/1

Synopsis

`db_reference(+Term)` *since release 4.1*

Term is currently instantiated to a compound term with principal functor `'$ref'/2` denoting a unique reference to a dynamic clause.

Arguments

Term *term*

Examples

```
| ?- db_reference(9).

no

| ?- db_reference(_X).

no

| ?- assertz(foo(a), R), db_reference(R).

R = '$ref'(1816730,128)
```

Exceptions

None.

See Also

Section 4.8.1.1 [ref-lte-met-typ], page 130.

11.3.60 `debug/0` *development*

Synopsis

```
debug
```

Turns on the debugger in debug mode.

Description

`debug/0` turns the debugger on and sets it to debug mode. Turning the debugger on in debug mode means that it will stop at the next spypoint encountered in the current execution.

The effect of this predicate can also be achieved by typing the letter `d` after a `^C` interrupt (see Section 3.7 [Execution], page 29).

Exceptions

None.

See Also

Section 5.2 [Basic Debug], page 237.

11.3.61 debugger_command_hook/2 *hook, development*

Synopsis

```
:- multifile user:debugger_command_hook/2.

user:debugger_command_hook(+DCommand, -Actions)
```

Allows the interactive debugger to be extended with user-defined commands. See Section 5.5 [Debug Commands], page 241.

Arguments

DCommand *term*

Actions *term*

Exceptions

All error handling is done by the predicates extended by this hook.

See Also

Section 5.7 [Breakpoint Predicates], page 276.

11.3.62 `debugging/0` *development*

Synopsis

```
debugging
```

Prints out current debugging state

Description

`debugging/0` displays information on the terminal about the current debugging state. It shows

- The top-level state of the debugger, which is one of

  `debug` The debugger is on but will not show anything or stop for user interaction until a spypoint is reached.

  `trace` The debugger is on and will show everything. As soon as you type a goal, you will start seeing a debugging trace. After printing each trace message, the debugger may or may not stop for user interaction: this depends on the type of leashing in force (see below).

  `zip` The debugger is on but will not show anything or stop for user interaction until a spypoint is reached. The debugger does not even keep any information of the execution of the goal till the spypoint is reached and hence you will not be able to see the ancestors of the goal when you reach the spypoint.

  `off` The debugger is off.

  The top-level state can be controlled by the predicates `debug/0`, `nodebug/0`, `trace/0`, `notrace/0` `zip/0`, `nozip/0`, and `prolog_flag/3`.
- The type of leashing in force. When the debugger prints a message saying that it is passing through a particular port (one of Call, Exit, Redo, Fail, or Exception) of a particular procedure, it stops for user interaction only if that port is leashed. The predicate `leash/1` can be used to select which of the seven ports you want to be leashed.
- All the current spypoints. Spypoints are controlled by the predicates `spy/[1,2]`, `nospy/1`, `nospyall/0`, `add_breakpoint/2`, `disable_breakpoints/1`, `enable_breakpoints/1`, and `remove_breakpoints/1`.

Exceptions

None.

See Also

Section 5.2 [Basic Debug], page 237.

11.3.63 `dif/2`

Synopsis

`dif(+X,+Y)`

Constrains X and Y to represent different terms i.e. to be non-unifiable.

Arguments

X	*term*
Y	*term*

Description

Calls to `dif/2` either succeed, fail, or are blocked depending on whether X and Y are sufficiently instantiated. It is defined as if by:

```
dif(X, Y) :- when(?=(X,Y), X\==Y).
```

Exceptions

None.

See Also

Section 4.2.4 [ref-sem-sec], page 78.

11.3.64 `disable_breakpoints/1` *development*

Synopsis

```
disable_breakpoints(+BIDs)
```

Disables the breakpoints specified by *BIDs*.

Arguments

BIDs *list of integer*, must be ground
Breakpoint identifiers.

Exceptions

`instantiation_error`
`type_error`
in *BIDs*

See Also

Section 5.6.7 [Built-in Predicates for Breakpoint Handling], page 264, Section 5.7 [Breakpoint Predicates], page 276.

11.3.65 `discontiguous/1` *declaration*, *ISO*

Synopsis

`:- discontiguous +`*`PredSpecs`*

Declares the clauses of the predicates defined by *PredSpecs* to be discontiguous in the source file (suppresses compile-time warnings).

Arguments

:PredSpecs
: *pred_spec_forest*, must be ground

  A predicate specification, or a list of such, or a sequence of such separated by commas.

Comments

`discontiguous` is not an ISO predefined prefix operator.

Exceptions

Exceptions in the context of loading code are printed as error messages.

`instantiation_error`
: *PredSpecs* not ground.

`type_error`
: *PredSpecs* not a valid *pred_spec_forest*.

`domain_error`
: Some arity is an integer `<` 0.

`representation_error`
: Some arity is an integer `>` 255.

`context_error`
: Declaration appeared in a goal.

`permission_error`
: Declaration appeared as a clause.

See Also

Section 4.3.4.4 [Discontiguous Declarations], page 88.

11.3.66 `display/1`

Synopsis

`display(+`*Term*`)`

Writes *Term* on the standard output stream, without quoting atoms, in functional notation, without treating `'$VAR'/1` terms specially.

Since quoting is never used, even when needed for reading the term back in, the standard predicate `write_canonical/1` is often preferable.

Arguments

Term *term*

Description

`display(Term)` is equivalent to:

```
write_term(Term, [ignore_ops(true)])
```

Examples

```
| ?- display(a+b).
+(a,b)
yes

| ?- read(X), display(X), nl.
|: a + b * c.
+(a,*(b,c))

X = a+b*c

| ?-
```

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113).

See Also

Section 4.6.4 [ref-iou-tou], page 108.

11.3.67 do/2

Synopsis

(+*Iterator* do +*Body*)

Arguments

+*Iterator* *iterator*, must be nonvar

:*Body* *callable*, must be nonvar

Description

This control structure reduces the need to write auxiliary predicates performing simple iterations. It iterates *Body* until *Iterator*'s termination condition is true.

A *iterator* is a term of one of the following forms:

fromto(*First*,*In*,*Out*,*Last*)
: In the first iteration, *In*=*First*. In the *n*:th iteration, *In* is the value that *Out* had at the end of the *(n-1)*:th iteration. *In* and *Out* are local variables in *Body*. The termination condition is *Out*=*Last*.

foreach(*X*,*List*)
: Iterate *Body* with *X* ranging over all elements of *List*. *X* is a local variable in *Body*. Can also be used for constructing a list. The termination condition is *Tail* = [], where *Tail* is the suffix of *List* that follows the elements that have been iterated over.

foreacharg(*X*,*Struct*)
foreacharg(*X*,*Struct*,*I*)
: Iterate *Body* with *X* ranging over all arguments of *Struct* and *I* ranging over the argument number, 1-based. *X* and *I* are local variables in *Body*. Cannot be used for constructing a term. So the termination condition is true iff all arguments have been iterated over.

count(*I*,*MinExpr*,*Max*)
: This is normally used for counting the number of iterations. Let *Min* take the value integer(*MinExpr*). Iterate *Body* with *I* ranging over integers from *Min*. *I* is a local variable in *Body*. The termination condition is *I* = *Max*, i.e. *Max* can be and typically is a variable.

for(*I*,*MinExpr*,*MaxExpr*)
: This is used when the number of iterations is known. Let *Min* take the value integer(*MinExpr*), let *Max* take the value integer(*MaxExpr*), and let *Past* take the value max(*Min*,*Max*+1). Iterate *Body* with *I* ranging over integers from *Min* to max(*Min*,*Max*) inclusive. *I* is a local variable in *Body*. The termination condition is *I* = *Past*.

param(*X*) For declaring variables in *Body* global, i.e. shared with the context. *X* can be a single variable, or a list of them. The termination condition is true. **Please note**: By default, variables in *Body* have local scope.

iterator,*iterator*
: The iterators are iterated synchronously; that is, they all take their first value for the first execution of *Body*, their second value for the second execution of *Body*, etc. The order in which they are written does not matter, and the set of local variables in *Body* is the union of those of the iterators. The termination condition is the conjunction of those of the iterators.

Exceptions

Call errors (see Section 4.2.6 [ref-sem-exc], page 81).

See Also

Section 4.2.3.5 [ref-sem-ctr-dol], page 72.

11.3.68 `dynamic/1` *declaration*, *ISO*

Synopsis

`:- dynamic` *+PredSpecs*

Declares the clauses of the predicates defined by *PredSpecs* to be dynamic.

Arguments

:PredSpecs

pred_spec_forest, must be ground

A predicate specification, or a list of such, or a sequence of such separated by commas.

Comments

`dynamic` is not an ISO predefined prefix operator.

To declare a grammar rule *gram/n* dynamic, the arity of *PredSpecs* must be *n*+2.

Exceptions in the context of loading code are printed as error messages.

Exceptions

Exceptions in the context of loading code are printed as error messages.

`instantiation_error`
: *PredSpecs* not ground.

`type_error`
: *PredSpecs* not a valid *pred_spec_forest*.

`domain_error`
: Some arity is an integer < 0.

`representation_error`
: Some arity is an integer > 255.

`context_error`
: Declaration appeared in a goal.

`permission_error`
: Declaration appeared as a clause.

See Also

Section 4.3.4.2 [Dynamic Declarations], page 88.

11.3.69 `enable_breakpoints/1` *development*

Synopsis

`enable_breakpoints(+`*BIDs*`)`

Enables the breakpoints specified by *BIDs*.

Arguments

BIDs *list of integer*, must be ground
Breakpoint identifiers.

Exceptions

`instantiation_error`
`type_error`
in *BIDs*

See Also

Section 5.6.7 [Built-in Predicates for Breakpoint Handling], page 264, Section 5.7 [Breakpoint Predicates], page 276.

11.3.70 `ensure_loaded/1` *ISO*

Synopsis

`ensure_loaded(+Files)`

Loads the specified Prolog source and/or object file(s) into memory, if not already loaded and up to date.

Arguments

:Files — *file_spec* or *list of file_spec*, must be ground

A file specification or a list of file specifications; extension optional.

Description

The recommended style is to use this predicate for non-module files only, but if any module files are encountered, then their public predicates are imported.

This predicate is defined as if by:

```
ensure_loaded(Files) :-
        load_files(Files, [if(changed)]).
```

Exceptions

See `load_files/[2,3]`.

See Also

Section 4.3.2 [ref-lod-lod], page 84.

11.3.71 =:=/2 *ISO*

Synopsis

+*Expr1* =:= +*Expr2*

Succeeds if the results of evaluating *Expr1* and *Expr2 are equal*.

Arguments

Expr1 *expr*, must be ground

Expr2 *expr*, must be ground

Description

Evaluates *Expr1* and *Expr2* as arithmetic expressions and compares the results.

Exceptions

Arithmetic errors (see Section 4.7.3 [ref-ari-exc], page 123).

Examples

```
| ?- 1.0 + 1.0 =:= 2.

yes
| ?- "a" =:= 97.

yes
```

See Also

Section 4.7 [ref-ari], page 123,

11.3.72 `erase/1`

Synopsis

`erase(+Ref)`

Erases from the database the dynamic clause or recorded term referenced by *Ref*.

Arguments

Ref *db_reference*, must be nonvar

Description

Erases from the database the dynamic clause or recorded term referenced by *Ref*.

Ref must be a database reference to an existing clause or recorded term.

`erase/1` is not sensitive to the source module; that is, it can erase a clause even if that clause is neither defined in nor imported into the source module.

Exceptions

`instantiation_error`
: If *Ref* is not instantiated.

`type_error`
: If *Ref* is not a database reference.

`existence_error`
: if *Ref* is not a database reference to an existing clause or recorded term.

Examples

See Also

Section 4.12.5 [ref-mdb-rcd], page 183.

11.3.73 `error_exception/1` *hook, development*

Synopsis

```
:- multifile user:error_exception/1.

user:error_exception(+Exception)
```

Tells the debugger to enter trace mode on exceptions matching *Exception*.

Arguments

Exception *term*

Exceptions

None.

See Also

Section 5.11 [Exceptions Debug], page 289.

11.3.74 `execution_state/[1,2]` *development*

Synopsis

`execution_state(+`*Tests*`)`

Tests are satisfied in the current state of the execution.

`execution_state(+`*FocusConditions*`, +`*Tests*`)`

Tests are satisfied in the state of the execution pointed to by *FocusConditions*.

Arguments

FocusConditions
: *term*

:Tests *term*

Exceptions

`instantiation_error`
: An argument not instantiated enough.

`type_error`
: An argument not a proper list of callable term.

`domain_error`
: An argument not a proper list of valid conditions and tests.

See Also

Section 5.6.7 [Built-in Predicates for Breakpoint Handling], page 264, Section 5.7 [Breakpoint Predicates], page 276.

11.3.75 ^/2

Synopsis

+*X* ^ +*P*

Equivalent to "there exists an *X* such that *P* is true", thus *X* is normally an unbound variable. The use of the explicit existential quantifier outside `setof/3` and `bagof/3` is superfluous.

Arguments

X	*term*
:P	*callable*, must be nonvar

Description

Equivalent to simply calling *P*.

Backtracking

Depends on *P*.

Exceptions

Call errors (see Section 4.2.6 [ref-sem-exc], page 81).

Examples

Using `bagof/3` without and with the existential quantifier:

```
| ?- bagof(X, foo(X,Y), L).

X = _3342,
Y = 2,
L = [1,1] ;

X = _3342,
Y = 3,
L = [2] ;

no

| ?- bagof(X, Y^foo(X,Y), L).

X = _3342,
Y = _3361,
L = [1,1,2] ;

no
```

See Also

`setof/3`, `bagof/3`, Section 4.13 [ref-all], page 190.

11.3.76 `expand_term/2` *hookable*

Synopsis

`expand_term(+Term1, -Term2)`

Transforms source file terms into Prolog clauses before they are compiled. Normally called by the compiler, but can be called directly. The transform can be customized by defining `user:term_expansion/6`.

When a source file is loaded, except by `:- include`, `expand_term/2` is called with the virtual clauses `beginning_of_file` before and `end_of_file` after the real Prolog clauses, to give `user:term_expansion/6` an opportunity to perform some action at the beginning and end of a source file. **Please note**: the virtual clause `beginning_of_file` is "seen" *before* any module declaration, i.e. before the source module has been updated.

Arguments

Term1 *term*

Term2 *term*

Description

Usually called by the built-in predicates that read code and not directly by user programs.

in particular used to translate grammar rules, written with `-->/2`, into ordinary Prolog clauses, written with `:-/2`. If *Term1* is a grammar rule, then *Term2* is the corresponding clause. Otherwise *Term2* is simply *Term1* unchanged.

Calls `user:term_expansion/6`.

Exceptions

Prints messages for exceptions raised by `user:term_expansion/6`.

See Also

`phrase/[2,3]`, `-->/2`, Section 4.3.5 [ref-lod-exp], page 91.

11.3.77 `fail/0` *ISO*

Synopsis

```
fail
```

Always fails.

Exceptions

None.

See Also

Section 4.2 [ref-sem], page 65.

11.3.78 `false/0` *ISO*

Synopsis

```
false
```

Always fails (same as `fail/0`).

Exceptions

None.

See Also

Section 4.2 [ref-sem], page 65.

11.3.79 `file_search_path/2` ***hook***

Synopsis

```
:- multifile user:file_search_path/2.

user:file_search_path(+PathAlias, +DirSpec)
```

Defines a symbolic name for a directory or a path. Used by predicates taking *file_spec* as input argument.

Arguments

PathAlias *atom*

An atom that represents the path given by *DirSpec*.

DirSpec *file_spec*

Either an atom giving the path to a file or directory, or *PathAlias(DirSpec)*, where *PathAlias* is defined by another `file_search_path/2` rule.

Description

The `file_search_path` mechanism provides an extensible way of specifying a sequence of directories to search to locate a file. For instance, if a filename is given as a structure term, `library(between)`. The principle functor of the term, `library`, is taken to be another `file_search_path/2` definition of the form

```
file_search_path(library, LibPath)
```

and file `between` is assumed to be relative to the path given by *LibPath*. *LibPath* may also be another structure term, in which case another `file_search_path/2` fact gives its definition. The search continues until the path is resolved to an atom.

There may also be several definitions for the same *PathAlias*. Certain predicates, such as `load_files/[1,2]` and `absolute_file_name/[2,3]`, search all these definitions until the path resolves to an existing file.

There are several predefined search paths, such as `application`, `runtime`, `library`, `system`. These are tried before the user-defined ones.

The predicate is undefined at startup, but behaves as if it were a multifile predicate with the following clauses. The system properties `SP_APP_DIR` and `SP_RT_DIR` expand respectively to the absolute path of the directory that contains the executable and the directory that contains the SICStus runtime (see Section 4.17.1 [System Properties and Environment Variables], page 228), `SP_TEMP_DIR` expand to a directory suitable for storing temporary files.

```
file_search_path(library, Path) :-
        library_directory(Path).
file_search_path(system, Platform) :-
        prolog_flag(host_type, Platform).
file_search_path(application, '$SP_APP_DIR').
file_search_path(runtime, '$SP_RT_DIR').
file_search_path(temp, '$SP_TEMP_DIR').
file_search_path(path, Dir) :-
        ... backtracks through the $PATH environment variable ...
```

Examples

```
| ?- [user].
% compiling user...
| :- multifile user:file_search_path/2.
| user:file_search_path(home, '/usr/joe_bob').
| user:file_search_path(review, home('movie/review')).
| end_of_file.
% compiled user in module user, 0 msec 768 bytes
yes
| ?- compile(review(blob)).
% compiling /usr/joe_bob/movie/review/blob.pl
```

Exceptions

All error handling is done by the predicates extended by this hook.

See Also

`absolute_file_name/[2,3]`, `library_directory/1`, `load_files/[1,2]`, Section 4.5 [ref-fdi], page 99, Section 4.9.4 [ref-lps-flg], page 140, Section 4.17.1 [System Properties and Environment Variables], page 228.

11.3.80 `findall/[3,4]` ***ISO***

Synopsis

`findall(+`*Template*`, +`*Generator*`, -`*List*`)`

`findall(+`*Template*`, +`*Generator*`, -`*List*`, +`*Remainder*`)`

List is the list of all the instances of *Template* for which the goal *Generator* succeeds, appended to *Remainder*. *Remainder* defaults to the empty list.

Arguments

Template *term*

:Generator
callable, must be nonvar

A goal to be proved as if by `call/1`.

List *list of term*

Remainder
list of term

Description

A special case of `bagof/3`, where all free variables in the generator are taken to be existentially quantified, as if by means of the '`^`' operator. Contrary to `bagof/3` and `setof/3`, if there are no instances of *Template* such that *Generator* succeeds, then *List* = *Remainder*.

Because `findall/[3,4]` avoids the relatively expensive variable analysis done by `bagof/3`, using `findall/[3,4]` where appropriate rather than `bagof/3` can be considerably more efficient.

Please note: If the instances being gathered contain attributed variables (see Section 10.3 [lib-atts], page 397) or suspended goals (see Section 4.2.4 [ref-sem-sec], page 78), then those variables are replaced by brand new variables, without attributes, in *List*. To retain the attributes, you can use `copy_term/3` (see Section 4.8.7 [ref-lte-cpt], page 133).

Exceptions

Call errors (see Section 4.2.6 [ref-sem-exc], page 81).

Examples

To illustrate the differences among `findall/3`, `setof/3`, and `bagof/3`:

```
| ?- [user].
| foo(1,2).
| foo(1,2).
| foo(2,3).
|
% user compiled in module user, 0.100 sec 352 bytes

yes
| ?- bagof(X, foo(X,Y), L).

Y = 2,
L = [1,1] ? ;

Y = 3,
L = [2] ? ;

no

| ?- bagof(X, Y^foo(X,Y), L).

L = [1,1,2] ? ;

no

| ?- findall(X, foo(X,Y), L).

L = [1,1,2] ? ;

no
| ?- findall(X, foo(X,Y), L, S).

L = [1,1,2|S] ? ;

no

| ?- setof(X, foo(X,Y), L).

X = _3342,
Y = 2,
L = [1] ;

X = _3342,
Y = 3,
L = [2] ;

no
```

Comments

`findall/3` is part of the ISO Prolog standard; `findall/4` is not.

See Also

`bagof/3`, `setof/3`, `^/2`, Section 4.13 [ref-all], page 190.

11.3.81 `float/1` *ISO*

Synopsis

`float(+Term)`

Term is currently instantiated to a float.

Arguments

Term *term*

Examples

```
| ?- float(Term1).

no
| ?- float(5.2).

yes
```

Exceptions

None.

See Also

Section 4.8.1.1 [ref-lte-met-typ], page 130.

11.3.82 `flush_output/[0,1]` *ISO*

Synopsis

`flush_output`

`flush_output(+`*`Stream`*`)`

Forces the buffered output of the stream *Stream* (defaults to the current output stream) to be sent to the associated device.

Arguments

Stream *stream_object*, must be ground
A valid Prolog stream, defaults to the current output stream.

Description

Sends the current buffered output of an output stream *Stream* to the actual output device, which is usually a disk or a tty device.

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113), plus:

`permission_error`
An error occurred in flushing out the buffered output.

Examples

See Also

Section 4.6.7 [ref-iou-sfh], page 113.

11.3.83 `foreign/[2,3]` *hook*

Synopsis

```
:- discontiguous foreign/2, foreign/3.

foreign(+Routine, +ForeignSpec)

foreign(+Routine, +Language, +ForeignSpec)
```

Describes the interface between Prolog and the foreign *Routine*. Used by `load_foreign_resource/1`.

Arguments

Routine *atom*, must be nonvar

An atom that names a foreign code *Routine*.

Language *atom*, must be nonvar

An atom that names the *Language* in which *Routine* is written. Can only be `c`.

ForeignSpec

foreign_spec, must be ground

A ground term of the form *PredName*(*Argspec*, ..., *Argspec*) as described in Section 6.2.3 [Conversions between Prolog Arguments and C Types], page 297. Each *Argspec* should be a *foreign_arg*.

Description

The user has to define a `foreign/[2,3]` fact for every foreign function that is to be called from Prolog. Note that *Routine* does not have to be the same as *PredicateName*. Arguments are passed to the foreign function as specified in *ForeignSpec*.

+*type* specifies that an argument is to be passed to the foreign function.

-*type* specifies that an argument is to be received from the foreign function.

[-type] argument is used to obtain the return value of a foreign function call. At most one "return value" argument can be specified.

The `foreign/[2,3]` facts are used only in the context of a `load_foreign_resource/1` command and can be removed once the foreign files are loaded.

Contrary to most hook predicates which reside in the `user` module, `foreign/[2,3]` facts will only be looked up in the source module of the loading command.

Exceptions

Error handling is performed by `load_foreign_resource/1`.

See Also

`load_foreign_resource/1`, Section 6.2 [Calling C from Prolog], page 295.

11.3.84 `foreign_resource/2` *hook*

Synopsis

```
:- discontiguous foreign_resource/2.

foreign_resource(+ResourceName, +ForeignFunctions)
```

Describes the foreign functions in *ResourceName* to interface to.

Arguments

ResourceName
: *atom*, must be nonvar

ForeignFunctions
: *list of atom*, must be ground

  A list of foreign function symbols that will be obtained from *ResourceName*.

Description

The user has to define a `foreign_resource/2` fact for every foreign resource that is to be loaded into Prolog. The *ForeignFunctions* gives the list of foreign symbols that are to be found in the given foreign resource. When a foreign resource is loaded using `load_foreign_resource/1`, Prolog looks for a `foreign_resource/2` fact for that foreign resource and finds the address of each symbol listed in that fact. Prolog also expects a `foreign/[2,3]` definition for each symbol in the second argument of that fact.

The `foreign_resource/2` facts are used only in the context of a `load_foreign_resource/1` command and can be removed once the foreign resource has been loaded.

Contrary to most hook predicates which reside in the `user` module, `load_foreign_resource/1` will look for `foreign_resource/2` facts defined in its source module.

Exceptions

Error handling is performed by `load_foreign_resource/1`.

See Also

`load_foreign_resource/1`, `foreign/[2,3]`, Section 6.2 [Calling C from Prolog], page 295.

11.3.85 format/[2,3]

Synopsis

`format(+Control, +Arguments)`

`format(+Stream, +Control, +Arguments)`

Interprets the *Arguments* according to the *Control* string and prints the result on *Stream*.

Arguments

Stream *stream_object*, must be ground

Defaults to the current output stream.

Control *chars* or *codes* or *atom*, must be ground

A string, which can contain control sequences of the form '~*N*<*c*>':

<*c*> a format control option

N optional; if given, must be '*' or an integer.

Any characters that are not part of a control sequence are written to the specified output stream.

:Arguments

list of term, must be proper list

List of arguments, which will be interpreted and possibly printed by format control options.

Description

If a parameter *N* can be specified, then it can be either an integer, specified as an optional minus sign followed by a sequence of decimal digits, or the character '*'.

If the parameter is specified as '*', then the value used will be the truncated integer value of the next element from *Arguments* interpreted as a numerical expression.

The following control options cause formatted printing of the next element from *Arguments* to the current output stream.

'~a' The argument is an atom. The atom is printed without quoting.

'~*N*c' (Print character.) The argument is a number that will be interpreted as a *code*. *N* defaults to one and is interpreted as the number of times to print the character. If *N* is zero, or negative, then the character is not printed.

'~*N*e'

'~*N*E' (Print float in exponential notation.) The argument is a float, which will be printed in exponential notation with one digit before the decimal point and *N* digits after it. If *N* is zero, or negative, then one digit appears after the decimal point. A sign and at least two digits appear in the exponent, which is introduced by the letter used in the control sequence. *N* defaults to 6.

The magnitude of *N* must be less than 100000, but useful values are much smaller than that.

'~*N*f'
'~*N*F' (Print float in fixed-point notation.) The argument is a float, which will be printed in fixed-point notation with N digits after the decimal point. N may be zero, or negative, in which case a single zero appears after the decimal point. At least one digit appears before the decimal point and at least one after it. N defaults to 6.

The magnitude of N must be less than 100000, but useful values are much smaller than that.

'~*N*g'
'~*N*G' (Print float in generic notation.) The argument is a float, which will be printed in 'f' or 'e' (or 'E' if 'G' is used) notation with N significant digits. If N is zero, then one significant digit is printed. 'E' notation is used if the exponent from its conversion is less than -4 or greater than or equal to N, otherwise 'f' notation. Trailing zeroes are removed from the fractional part of the result. A decimal point and at least one digit after it always appear. N defaults to 6.

The magnitude of N must be less than 100000, but useful values are much smaller than that.

'~*N*h'
'~*N*H' (Print float precisely.) The argument is a float, which will be printed in 'f' or 'e' (or 'E' if 'H' is used) notation with d significant digits, where d is the smallest number of digits that will yield the same float when read in. 'E' notation is used if $N<0$ or if the exponent is less than $-N-1$ or greater than or equal to $N+d$, otherwise 'f' notation. N defaults to 3.

The intuition is that for numbers like 123000000.0, at most N consecutive zeroes before the decimal point are allowed in 'f' notation. Similarly for numbers like 0.000000123.

'E' notation is forced by using '~-1H'. 'F' is forced by using '~999H'.

The magnitude of N must be less than 100000, but useful values are much smaller than that.

'~*N*d' (Print decimal.) The argument is an integer. N is interpreted as the number of digits after the decimal point. If N is 0 or missing, then no decimal point will be printed.

N must be non-negative.

'~*N*D' (Print decimal.) The argument is an integer. Identical to '~*N*d' except that ',' will separate groups of three digits to the left of the decimal point.

'~*N*r' (Print radix.) The argument is an integer. N is interpreted as a radix, $2 \leq N \leq 36$. If N is missing, then the radix defaults to 8. The letters 'a-z' will denote digits larger than 9.

'~*N*R' (Print radix.) The argument is an integer. Identical to '~*N*r' except that the letters 'A-Z' will denote digits larger than 9.

'~*N*s' (Print string.) The argument is a code list. If N is zero, or negative, then no characters are output.

If *N* is positive, then the first *N* characters of the code list will be written, and if the code list is exhausted, then extra `SPC` characters will be written, for a total of *N* characters output.

'`~i`' (Ignore.) The argument, which may be of any type, is ignored.

'`~k`' (Print canonical.) The argument may be of any type. The argument will be passed to `write_canonical/1` (see Section 4.6.4 [ref-iou-tou], page 108).

'`~p`' (Print.) The argument may be of any type. The argument will be passed to `print/1` (see Section 4.6.4 [ref-iou-tou], page 108).

'`~q`' (Print quoted.) The argument may be of any type. The argument will be passed to `writeq/1` (see Section 4.6.4 [ref-iou-tou], page 108).

'`~w`' (Write.) The argument may be of any type. The argument will be passed to `write/1` (see Section 4.6.4 [ref-iou-tou], page 108).

'`~@`' (Call.) The argument *Arg* is a goal, which will be called as if by `\+ \+ Arg` and is expected to print on the current output stream. If the goal performs other side effects, then the behavior is undefined.

'`~~`' (Print tilde.) Takes no argument. Prints '`~`'.

'`~Nn`' (Print newline.) Takes no argument. Prints *N* newlines. *N* defaults to 1.

If *N* is negative or zero, then no newlines are output.

'`~N`' (Print Newline.) Prints a newline if not at the beginning of a line.

The following control sequences set column boundaries and specify padding. A column is defined as the available space between two consecutive column boundaries on the same line. A boundary is initially assumed at line position 0. The specifications only apply to the line currently being written.

When a column boundary is set ('`~|`' or '`~+`') and there are fewer characters written in the column than its specified width, the remaining space is divided equally amongst the pad sequences ('`~t`') in the column. If there are no pad sequences, then the column is space padded at the end.

If '`~|`' or '`~+`' specifies a position preceding the current position, then the boundary is set at the current position.

'`~N|`' Set a column boundary at line position *N*. *N* defaults to the current position.

The control sequence '`~N|`' (with explicit *N*) will not work correctly on bi-directional streams[1], e.g. those created by `library(sockets)`. A workaround for bi-directional streams may be to use '`~|`' (without explicit *N*) and '`~N+`', see below.

'`~N+`' Set a column boundary at *N* positions past the previous column boundary. *N* defaults to 8.

[1] This is because streams only have one counter for line position, and for bidirectional streams that counter tracks the input direction (see Section 12.3.40 [cpg-ref-SP_get_stream_counts], page 1350).

‘~*N*t’ Specify padding in a column. *N* is the fill character code. *N* may also be specified as ‘*C* where *C* is the fill character. The default fill character is `SPC`. Any (‘`~t`’) after the last column boundary on a line is ignored.

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113), plus:

`consistency_error`
: Wrong number of *Arguments*.

`type_error`
`domain_error`
: Argument of the wrong type or domain.

Examples

```
| ?- Pi=3.14159265, format('~e ~2E ~0E\n', [Pi,Pi,Pi]).
3.141593e+00 3.14E+00 3.0E+00

| ?- Pi=3.14159265, format('~f, ~2F, ~0F\n', [Pi,Pi,Pi]).
3.141593, 3.14, 3.0

| ?- format('~g ~2G ~0G\n', [1.23456789e+10, 3.14159265, 0.0123]).
1.23457e+10 3.1 0.01

| ?- F = 123000.0, G = 0.000123,
     format('~h ~h ~2h ~2H ~-1H\n', [F,G,F,G,3.14]).
123000.0 0.000123 1.23e+05 1.23E-04 3.14E+00

| ?- format('Hello ~1d world!\n', [42]).
Hello 4.2 world!

| ?- format('Hello ~d world!\n', [42]).
Hello 42 world!

| ?- format('Hello ~1D world!\n', [12345]).
Hello 1,234.5 world!

| ?- format('Hello ~2r world!\n', [15]).
Hello 1111 world!

| ?- format('Hello ~16r world!\n', [15]).
Hello f world!

| ?- format('Hello ~16R world!\n', [15]).
Hello F world!
```

```
| ?- format('Hello ~4s ~4s!\n', ["new","world"]).
Hello new  worl!

| ?- format('Hello ~s world!\n', ["new"]).
Hello new world!

| ?- format('Hello ~i~s world!\n', ["old","new"]).
Hello new world!

| ?- format('Hello ~k world!\n', [[a,b,c]]).
Hello '.'(a,'.'(b,'.'(c,[]))) world!

| ?- assert((portray([X|Y]) :- print(cons(X,Y)))).
| ?- format('Hello ~p world!\n', [[a,b,c]]).
Hello cons(a,cons(b,cons(c,[]))) world!

| ?- format('Hello ~q world!\n', [['A','B']]).
Hello ['A','B'] world!

| ?- format('Hello ~w world!\n', [['A','B']]).
Hello [A,B] world!

| ?- format('Hello ~@ world!\n', [write(new)]).
Hello new world!

| ?- format('Hello ~~ world!\n', []).
Hello ~ world!

| ?- format('Hello ~n world!\n', []).
Hello
 world!

| ?-    format('~`*t NICE TABLE ~`*t~61|~n', []),
        format('*~t*~61|~n', []),
        format('*~t~a~20|~t~a~t~20+~a~t~20+~t*~61|~n',
               ['Right aligned','Centered','Left aligned']),
        format('*~t~d~20|~t~d~t~20+~d~t~20+~t*~61|~n',
               [123,45,678]),
        format('*~t~d~20|~t~d~t~20+~d~t~20+~t*~61|~n',
               [1,2345,6789]),
        format('~`*t~61|~n', []).

********************** NICE TABLE ************************
*                                                        *
*      Right aligned      Centered      Left aligned      *
*                123         45         678              *
*                  1        2345        6789             *
**********************************************************
```

```
| ?-
    format('Table of Contents ~t ~a~72|~*n', [i,3]),
    format('~tTable of Contents~t~72|~*n', 2),
    format("1. Documentation supple-
ment for ~s~1f ~‘.t ~d~72|~*n", ["Quintus Prolog Release ",1.5,2,2]),
    format("~t~*+~w Defini-
tion of the term \"loaded\" ~‘.t ~d~72|~n", [3,1-1,2]),
    format("~t~*+~w Finding all solutions ~‘.t ~d~72|~n", [3,1-2,3]),
    format("~t~*+~w Searching for a file in a li-
brary ~‘.t ~d~72|~n", [3,1-3,4]),
    format("~t~*+~w New Built-in Predicates ~‘.t ~d~72|~n", [3,1-
4,5]),
    format("~t~*+~w write_canonical (?Term) ~‘.t ~d~72|~n", [7,1-4-
1,5]),
    format("~*+.~n~*+.~n~*+.~n", [20,20,20]),
    format("~t~*+~w File Specifications ~‘.t ~d~72|~n", [3,1-7,17]),
    format("~t~*+~w multifile(+PredSpec) ~‘.t ~d~72|~n", [7,1-7-
1,18]).

                          Table of Contents

1. Documentation supplement for Quintus Prolog Re-
lease 1.5 ........... 2

   1-1 Defini-
tion of the term "loaded" ............................... 2
   1-2 Finding all solu-
tions ..................................... 3
   1-3 Searching for a file in a li-
brary ............................ 4
   1-4 New Built-in Predi-
cates ..................................... 5
       1-4-
1 write_canonical (?Term) ............................... 5
                     .
                     .
                     .
   1-7 File Specifica-
tions ..................................... 17
       1-7-1 multi-
file(+PredSpec) ................................ 18
```

See Also

Section 4.6.4 [ref-iou-tou], page 108.

11.3.86 `freeze/2`

Synopsis

`freeze(+Flag, +Goal)`

Blocks *Goal* until *Flag* is bound.

Arguments

Flag	*term*
:Goal	*callable*, must be nonvar

Description

Defined as if by:

```
freeze(X, Goal) :- when(nonvar(X), Goal).
```

or

```
:- block freeze(-, ?).
freeze(_, Goal) :- Goal.
```

Backtracking

Depends on *Goal*.

Exceptions

Call errors (see Section 4.2.6 [ref-sem-exc], page 81).

See Also

Section 4.2.4 [ref-sem-sec], page 78.

11.3.87 `frozen/2`

Synopsis

`frozen(+`*Term*`,-`*Goal*`)`

Goal is unified with the conjunction of all goals blocked on some variable that occurs in *Term*.

Arguments

Term	*term*
Goal	*callable*

Description

If no variable in *Term* blocks any goal or has attributes that can be interpreted as a goal (see Section 10.3 [lib-atts], page 397), then *Goal* is unified with the atom `true`. Otherwise, *Goal* is unified with the conjunction of all such goals.

Exceptions

None.

See Also

Section 4.2.4 [ref-sem-sec], page 78.

11.3.88 `functor/3` ***ISO***

Synopsis

```
functor(+Term, -Name, -Arity)

functor(-Term, +Name, +Arity)
```

Succeeds if the principal functor of term *Term* has name *Name* and arity *Arity*.

Arguments

Term *term*

Name *atom*

Arity *arity*

Description

There are two ways of using this predicate:

1. If *Term* is initially instantiated, then
   - if *Term* is a compound term, then *Name* and *Arity* are unified with the name and arity of its principal functor.
   - otherwise, *Name* is unified with *Term*, and *Arity* is unified with 0.
2. If *Term* is initially uninstantiated, then *Name* and *Arity* must both be instantiated, and
   - if *Arity* is an integer in the range 1..255, then *Name* must be an atom, and *Term* becomes instantiated to the most general term having the specified *Name* and *Arity*; that is, a term with distinct variables for all of its arguments.
   - if *Arity* is 0, then *Name* must be atomic, and it is unified with *Term*.

Exceptions

`instantiation_error`
: *Term* and either *Name* or *Arity* are uninstantiated.

`type_error`
: *Name* is not atomic, or *Arity* is not an integer, or *Name* is not an atom when *Arity* > 0.

`domain_error`
: *Arity* is an integer < 0.

`representation_error`
: *Term* is uninstantiated and *Arity* > 255.

Examples

```
| ?- functor(foo(a,b), N, A).

N = foo,
A = 2

| ?- functor(X, foo, 2).

X = foo(_A,_B)

| ?- functor(X, 2, 0).

X = 2
```

See Also

`arg/3`, `name/2`, `=../2`, Section 4.8.2 [ref-lte-act], page 131.

11.3.89 `garbage_collect/0`

Synopsis

`garbage_collect`

Invokes the garbage collector.

Description

This predicate invokes the garbage collector to reclaim data structures on the Prolog stack that are no longer accessible to the computation.

Examples

In the code fragment:

```
cycle(X) :- big_goal(X, X1), cycle(X1).
```

if `cycle/1` is to run for a long time, and if `big_goal/2` generates a lot of garbage, then rewrite the code like this:

```
cycle(X) :- big_goal(X, X1), !, garbage_collect, cycle(X1).
```

Tips

Use of the '`!, garbage_collect`' idiom is only desirable when you notice that your code does frequent garbage collections. It will allow the garbage collector to collect garbage more effectively, and the cycle will run without demanding increasing amounts of memory.

Exceptions

None.

See Also

Section 4.10 [ref-mgc], page 148.

11.3.90 `garbage_collect_atoms/0`

Synopsis

```
garbage_collect_atoms
```

Invokes the atom garbage collector.

Description

This predicate invokes the atom garbage collector to discard atoms that are no longer accessible to the computation, reclaiming their space.

Tips

A program can use the `atoms` keyword to `statistics/2` to determine if a call to `garbage_collect_atoms/0` would be appropriate.

Exceptions

None.

See Also

Section 4.10 [ref-mgc], page 148.

11.3.91 generate_message/3 *hook*

Synopsis

```
:- multifile 'SU_messages':generate_message/3.

'SU_messages':generate_message(+MessageTerm, -S0, -S)
```

For a given *MessageTerm*, generates a list composed of *Control-Arg* pairs and the atom `nl`. This can be translated into a nested list of *Control-Arg* pairs, which can be used as input to `print_message_lines/3`.

Arguments

MessageTerm
: *term*
: May be any term.

S0
: *list of pair*
: The resulting list of *Control-Args* pairs.

S
: *list of pair*
: The remaining list.

Description

Clauses for `'SU_messages':generate_message/3` underlie all messages from Prolog. They may be examined and altered. They are found in `library('SU_messages')`.

The purpose of this predicate is to allow you to redefine how Prolog's messages are displayed. For example, to translate all the messages from English into some other language.

This predicate should *not* be modified if all you want to do is modify or add a few messages: `user:generate_message_hook/3` is provided for that purpose.

The Prolog system uses the built-in predicate `print_message/2` to print all its messages. When `print_message/2` is called, it calls `user:generate_message_hook(Message,L,[])` to generate the message. If that fails, then `'SU_messages':generate_message(Message,L,[])` is called instead. If that succeeds, then *L* is assumed to have been bound to a list whose elements are either *Control-Args* pairs or the atom `nl`. Each *Control-Arg* pair should be such that the call

```
format(user_error, Control, Args)
```

is valid. The atom `nl` is used for breaking the message into lines. Using the format specification '`~n`' (new-line) is discouraged, since the routine that actually prints the message (see `user:message_hook/3` and `print_message_lines/3`) may need to have control over newlines.

`'SU_messages':generate_message/3` is not included by default in runtime systems, since end-users of application programs should probably not be seeing any messages from the Prolog system.

If there is a call to `print_message/2` when when `'SU_messages':generate_message/3` does not succeed for some reason, then the message term itself is printed, for example:

```
| ?- print_message(error,unexpected_error(37)).
! unexpected_error(37)
```

`'SU_messages':generate_message/3` failed because the message term was not recognized. In the following example `print_message/2` is being called by the default exception handler:

```
| ?- writeq(A,B).
! Instantiation error in argument 1 of writeq/2
! goal:  writeq(_2107,_2108)
```

Examples

```
:- multifile user:generate_message_hook/3.
user:generate_message_hook(hello_world) -->
        ['hello world'-[],nl].
```

Note that the terminating `nl` is required.

Exceptions

`print_message/2` checks that the generated list is a valid parse.

See Also

Section 4.16 [ref-msg], page 216.

11.3.92 generate_message_hook/3 *hook*

Synopsis

```
:- multifile user:generate_message_hook/3.

user:generate_message_hook(+MessageTerm, -S0, -S)
```

A way for the user to override the call to `'SU_messages':generate_message/3` in `print_message/2`.

Arguments

MessageTerm
: *term*

  May be any term.

S0
: *list of pair*

  The resulting list of *Control-Args* pairs.

S
: *list of pair*

  The remaining list.

Description

For a given *MessageTerm*, generates the list of *Control-Args* pairs required for `print_message_lines/3` to format the message for display.

This is the same as `'SU_messages':generate_message/3` except that it is a hook. It is intended to be used when you want to override particular messages from the Prolog system, or when you want to add some messages. If you are using your own exception classes (see `raise_exception/1`), then it may be useful to provide generate_message_hook clauses for those exceptions so that the `print_message/2` (and thus the default exception handler that calls `print_message/2`) can print them out nicely.

The Prolog system uses the built-in predicate `print_message/2` to print all its messages. When `print_message/2` is called, it calls `user:generate_message_hook(Message,L,[])` to generate the message. If that fails, then `'SU_messages':generate_message(Message,L,[])` is called instead. If that succeeds, then L is assumed to have been bound to a list whose elements are either *Control-Args* pairs or the atom `nl`. Each *Control-Arg* pair should be such that the call

```
format(user_error, Control, Args)
```

is valid. The atom `nl` is used for breaking the message into lines. Using the format specification '`~n`' (new-line) is discouraged, since the routine that actually prints the message (see `user:message_hook/3` and `print_message_lines/3`) may need to have control over newlines.

Examples

```
:- multifile user:generate_message_hook/3.
user:generate_message_hook(hello_world) -->
        ['hello world'-[],nl].
```

Note that the terminating `nl` is required.

Exceptions

All error handling is done by the predicates extended by this hook.

See Also

Section 4.16 [ref-msg], page 216.

11.3.93 `get_byte/[1,2]` *ISO*

Synopsis

`get_byte(-Byte)`

`get_byte(+Stream, -Byte)`

Unifies *Byte* with the next *byte* from *Stream* or with -1 if there are no more bytes.

Arguments

Stream *stream_object*, must be ground
valid input *binary* stream, defaults to the current input stream.

Byte *byte* or -1

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113), plus:

`type_error`
Byte is an invalid byte.

`permission_error`
Trying to read beyond end of *Stream*

See Also

Section 4.6.5 [ref-iou-cin], page 111.

11.3.94 `get_char/[1,2]` ***ISO***

Synopsis

`get_char(-`*Char*`)`

`get_char(+`*Stream*`, -`*Char*`)`

Unifies *Char* with the next *char* from *Stream* or with `end_of_file` if there are no more characters.

Arguments

Stream	*stream_object*, must be ground. Valid input *text* stream, defaults to the current input stream.
Char	*char* or *one of [*`end_of_file`*]*

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113), plus:

`permission_error`
: Trying to read beyond end of *Stream*

See Also

Section 4.6.5 [ref-iou-cin], page 111.

11.3.95 `get_code/[1,2]` *ISO*

Synopsis

`get_code(-Code)`

`get_code(+Stream, -Code)`

Unifies *Code* with the next *code* from *Stream* or with -1 if there are no more characters.

Arguments

Stream *stream_object*, must be ground
Valid input *text* stream, defaults to the current input stream.

Code *code* or -1

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113), plus:

`permission_error`
Trying to read beyond end of *Stream*

See Also

Section 4.6.5 [ref-iou-cin], page 111.

11.3.96 `get_mutable/2`

Synopsis

`get_mutable(-`*`Datum`*`, +`*`Mutable`*`)`

Datum is the current value of the mutable term *Mutable*.

Arguments

Datum	*term*, must be nonvar
Mutable	*mutable*, must be nonvar

Exceptions

`instantiation_error`
: *Mutable* is uninstantiated.

`type_error`
: *Mutable* is not a mutable.

See Also

Section 4.8.9 [ref-lte-mut], page 135.

11.3.97 goal_expansion/5 *hook*

Synopsis

`M:goal_expansion(+Goal1, +Layout1, +Module, -Goal2, -Layout2)`

Defines transformations on goals while clauses are being compiled or asserted, and during meta-calls at runtime.

Arguments

Goal1	*callable*
	Goal to transform.
Layout1	*term*
	Layout of goal to transform.
Module	*atom*
	Source module of goal to transform.
Goal2	*callable*
	Transformed goal.
Layout2	*term*
	Layout of transformed goal.

Description

Defines transformations on goals while clauses are being consulted, compiled or asserted, *after* any processing by `user:term_expansion/6` of the terms being read in. It is called for every simple *Goal1*, defined in *M*, in the source module *Module* found while traversing the clause bodies. Typically, *Module* has imported the predicate *Goal1* from module *M* but it happens also if *Module* uses an explicit module prefix, i.e. `M:Goal1`.

If it succeeds, then *Goal1* is replaced by *Goal2*; otherwise, *Goal1* = *Goal2*. *Goal2* may be an arbitrarily complex goal, and `M:goal_expansion/5` is recursively applied to the expansion and its subgoals.

> **Please note**: the arguments of meta-predicates such as `call/1`, `setof/3` and `catch/3` are *not* subject to such compile-time processing. Instead the expansion is performed at runtime, see below.

The above description holds even if `Goal1` is exported but not defined in the module *M*, i.e. it is possible to define a goal expansion for an exported, but otherwise undefined, predicate. However, in general, it is better to provide an ordinary predicate definition as a fallback, e.g. to be able to handle meta calls if the goal expansion is not defined at runtime.

This predicate is also used to resolve any meta-calls to *Goal1* at runtime via the same mechanism. If the transformation succeeds, then *Goal2* is simply called instead of *Goal1*. Otherwise, if *Goal1* is a goal of an existing predicate, then that predicate is invoked. Otherwise, error recovery is attempted by `user:unknown_predicate_handler/3`.

`M:goal_expansion/5` can be regarded as a macro expansion facility. It is used for this purpose to support the interface to attributed variables in `library(atts)`, which defines the predicates `M:get_atts/2` and `M:put_atts/2` to access module-specific variable attributes. These "predicates" are actually implemented via the `M:goal_expansion/5` mechanism. This has the effect that calls to the interface predicates are expanded at compile time to efficient code.

For accessing aspects of the load context, e.g. the name of the file being compiled, the predicate `prolog_load_context/2` (see Section 4.9.5 [ref-lps-lco], page 147) can be used. Note that `prolog_load_context/2` only gives meaningful results during compile (or consult) time. This means that when a meta call is goal expanded, at runtime, the load context will not be available, and there is no reliable way for a goal expansion to distinguish between these cases.

The goal expansion may happen both at compile time (the normal case) at runtime (for meta calls). In some cases the compiler may try to avoid meta calls by calling goal expansion also for meta calls. This all means that the code implementing goal expansion should be present at both compile time and runtime. It also implies that goal expansion should not misbehave if it is called more times than expected.

Layout1 and *Layout2* are for supporting source-linked debugging in the context of goal expansion. The predicate should construct a suitable *Layout2* compatible with *Term2* that contains the line number information from *Layout1*. If source-linked debugging of *Term2* is not important, then *Layout2* should be `[]`. The recording of source info is affected by the `source_info` prolog flag (see Section 4.9.4 [ref-lps-flg], page 140).

Exceptions

Exceptions are treated as failures, except an error message is printed as well.

See Also

Section 4.3.5 [ref-lod-exp], page 91, Chapter 2 [Glossary], page 7.

11.3.98 goal_source_info/3

Synopsis

`goal_source_info(+AGoal, -Goal, -SourceInfo)`

Decompose the *AGoal* annotated goal into a *Goal* proper and the *SourceInfo* descriptor term, indicating the source position of the goal.

Arguments

AGoal *callable*, must be nonvar

Goal *callable*

SourceInfo
term

Description

Annotated goals occur in most of error message terms, and carry information on the *Goal* causing the error and its source position. The *SourceInfo* term, retrieved by `goal_source_info/3` will be one of the following:

`[]` The goal has no source information associated with it.

`fileref(File,Line)`
The goal occurs in file *File*, line *Line*.

`clauseref(File,MFunc,ClauseNo,CallNo,Line)`
The goal occurs in file *File*, within predicate *MFunc*, clause number *ClauseNo*, call number *CallNo* and virtual line number *Line*. Here, *MFunc* is of form `Module:Name/Arity`, calls are numbered textually and the virtual line number shows the position of the goal within the listing of the predicate *MFunc*, as produced by `listing/1`. Such a term is returned for goals occurring in interpreted predicates, which do not have "real" line number information, e.g. because they were entered from the terminal, or created dynamically.

Exceptions

`instantiation_error`
Goal is uninstantiated

`type_error`
Goal is not a callable

See Also

Section 4.16 [ref-msg], page 216.

11.3.99 >/2 *ISO*

Synopsis

+*Expr1* > +*Expr2*

Succeeds if the result of evaluating *Expr1* is strictly *greater than* the result of evaluating *Expr2*.

Arguments

Expr1 *expr*, must be ground

Expr2 *expr*, must be ground

Description

Evaluates *Expr1* and *Expr2* as arithmetic expressions and compares the results.

Exceptions

Arithmetic errors (see Section 4.7.3 [ref-ari-exc], page 123).

Examples

```
| ?- "g" > "g".

no

| ?- 4*2 > 15/2.

yes
```

See Also

Section 4.7 [ref-ari], page 123,

11.3.100 `ground/1` *ISO*

Synopsis

`ground(+Term)`

Term is currently instantiated to a ground term.

Arguments

Term *term*

Description

Tests whether X is completely instantiated, i.e. free of unbound variables. In this context, mutable terms are treated as nonground, so as to make `ground/1` a monotone predicate.

Examples

```
| ?- ground(9).

yes
| ?- ground(major(tom)).

yes
| ?- ground(a(1,Term,3)).

no
| ?- ground("a").

yes
| ?- ground([1,foo(Term)]).

no
```

Exceptions

None.

See Also

Section 4.8.1.1 [ref-lte-met-typ], page 130.

11.3.101 `halt/[0,1]` ***ISO***

Synopsis

```
halt
```

```
halt(+ExitCode)
```

Causes an exit from the running process.

Arguments

ExitCode *integer*, must be nonvar
: Exit status code. Only the lower 8 bits of this value is used.

Description

Causes an exit from the running process with exit code *ExitCode*. *ExitCode* defaults to zero which, by convention, signifies a successful exit from the process.

`halt/[0,1]` is implemented by raising a reserved exception, which is handled at the top level; see Section 4.15.7 [ref-ere-int], page 215.

Exceptions

`instantiation_error`
: *ExitCode* is uninstantiated.

`type_error`
: *ExitCode* is not an integer.

See Also

`abort/0`, `break/0`, `runtime_entry/1`, Section 4.15.7 [ref-ere-int], page 215.

11.3.102 `if/3`

Synopsis

`if(+P,+Q,+R)`

If P then Q else R, for all solution of *P*.

Arguments

:P	*callable*, must be nonvar
:Q	*callable*, must be nonvar
:R	*callable*, must be nonvar

Description

Analogous to

if P then Q else R

but differs from `P -> Q ; R` in that `if(P, Q, R)` explores *all* solutions to the goal *P*. There is a small time penalty for this—if *P* is known to have only one solution of interest, then the form `P -> Q ; R` should be preferred.

This is normally regarded as part of the syntax of the language, but it is like a built-in predicate in that you can write `call(if(P,Q,R))`, with identical effect if it does not contain any cuts.

Cuts in *P* do not make sense, but are allowed, their scope being the goal *P*. The scope of cuts in *Q* and *R* extends to the containing clause.

Backtracking

Depends on the arguments.

Exceptions

Call errors (see Section 4.2.6 [ref-sem-exc], page 81).

See Also

Section 4.2 [ref-sem], page 65.

11.3.103 `->/2` *ISO*

Synopsis

`+`*P* `->` `+`*Q*

When occurring other than as the first argument of a disjunction operator (`;/2`), this is equivalent to:

```
P -> Q ; fail.
```

Arguments

:P	*callable*, must be nonvar
:Q	*callable*, must be nonvar

Description

This is not normally regarded as a built-in predicate, since it is part of the syntax of the language. However, it is like a built-in predicate in that you can say `call((`*P* `->` *Q*`))`, with identical effect if it does not contain any cuts.

'`->`' cuts away any choice points in the execution of *P*

Note that the operator precedence of '`->`' is greater than 1000, so it dominates commas. Thus, in:

```
f :- p, q -> r, s.
f.
```

'`->`' cuts away any choices in `p` or in `q`, but unlike cut (`!`) it does not cut away the alternative choice for `f`.

Cuts in *P* do not make sense, but are allowed, their scope being the goal *P*. The scope of cuts in *Q* extends to the containing clause.

Backtracking

Depends on *Q*.

Exceptions

Call errors (see Section 4.2.6 [ref-sem-exc], page 81).

See Also

Section 4.2 [ref-sem], page 65.

11.3.104 `include/1` *declaration, ISO*

Synopsis

`:- include` *+Files*

Literally embed the Prolog clauses and directives in *Files* into the file being loaded. The file or files will be opened with default options.

Arguments

:Files *file_spec* or *list of file_spec*, must be ground

A file specification or a list of file specifications; extension optional.

Description

The effect is such as if the declaration itself was replaced by the text in the *Files*. Including some files is thus different from loading them in several respects:

- The embedding file counts as the source file of the predicates loaded, e.g. with respect to the built-in predicate `source_file/2`; see Section 4.9.3 [ref-lps-apf], page 140.
- Some clauses of a predicate can come from the embedding file, and some from included files.
- When including a file twice, all the clauses in it will be entered twice into the program (although this is not very meaningful).

Comments

`include` is not an ISO predefined prefix operator.

Exceptions

Exceptions in the context of loading code are printed as error messages. See also `load_files/[2,3]`.

`context_error`
: Declaration appeared in a goal.

`permission_error`
: Declaration appeared as a clause.

See Also

Section 4.3.4.11 [Include Declarations], page 90.

11.3.105 `initialization/1` *declaration*, *ISO*

Synopsis

```
:- initialization +Goal
```

Declares that *Goal* is to be run when the file in which the declaration appears is loaded into a running system, or when a stand-alone program or runtime system that contains the file is started up.

Arguments

:Goal *callable*, must be nonvar

Description

Callable at any point during loading of a file. That is, it can be used as a directive, or as part of a goal called at load time. The initialization goal will be run as soon as the loading of the file is completed. That is at the end of the load, and notably after all other directives appearing in the file have been run.

`save_program/[1,2]` saves initialization goals in the saved state, so that they will run when the saved state is restored. When they run, they have access to the load context (`prolog_load_context/2`), just like other goals appearing in directives.

Goal is associated with the file loaded and a module. When a file, or module, is going to be reloaded, all goals earlier installed by that file or in that module, are removed. This is done before the actual load, thus allowing a new initialization *Goal* to be specified, without creating duplicates.

Comments

`initialization` is not an ISO predefined prefix operator.

Exceptions

`instantiation_error`
: The argument *Goal* is not instantiated.

`context_error`
: Initialization appeared in a goal.

`permission_error`
: Initialization appeared as a clause.

See Also

Section 4.3.4.12 [Initializations], page 91.

11.3.106 instance/2

Synopsis

`instance(+Ref, -Term)`

Unifies *Term* with the most general instance of the dynamic clause or recorded term indicated by the database reference *Ref*.

Arguments

Ref *db_reference*, must be nonvar

Term *term*

Description

Ref must be instantiated to a database reference to an existing clause or recorded term. `instance/2` is not sensitive to the source module and can be used to access any clause, regardless of its module.

Exceptions

`instantiation_error`
: if *Ref* is not instantiated

`type_error`
: if *Ref* is not a syntactically valid database reference

`existence_error`
: if *Ref* is a syntactically valid database reference but does not refer to an existing clause or recorded term.

Examples

```
| ?- assert(foo:bar,R).

R = '$ref'(771292,1)

| ?- instance('$ref'(771292,1),T).

T = (bar:-true)

| ?- clause(H,B,'$ref'(771292,1)).

no
| ?- clause(foo:H,B,'$ref'(771292,1)).

H = bar,
B = true
```

See Also

Section 4.12.6 [ref-mdb-acl], page 185.

11.3.107 integer/1 *ISO*

Synopsis

`integer(+`*Term*`)`

Term is currently instantiated to an integer.

Arguments

Term *term*

Examples

```
| ?- integer(5).

yes
| ?- integer(5.0).

no
```

Exceptions

None.

See Also

Section 4.8.1.1 [ref-lte-met-typ], page 130.

11.3.108 is/2 *ISO*

Synopsis

`-Term is +Expression`

Evaluates *Expression* as an arithmetic expression, and unifies the resulting number with *Term*.

Arguments

Expression
: *expr*, must be ground.

  An expression made up of:

  - functors representing arithmetic operations
  - numbers
  - variables bound to numbers or arithmetic expressions

Term *number*

Exceptions

Arithmetic errors (see Section 4.7.3 [ref-ari-exc], page 123).

Examples

```
| ?- X is 2 * 3 + 4.

X = 10

| ?- Y = 32.1, X is Y * Y.

X = 1030.41
Y = 32.1

| ?- Arity is 3 * 8, X is 4 + Arity + (3 * Arity * Arity).

Arity = 24
X = 1756

| ?- X is 6/0.
! Domain error in argument 2 of is/2
! expected an integer not equal to 0, but found 0
! goal:  _98 is 6/0
```

```
| ?- X is "a".

X = 97

| ?- X is 4 * 5, Y is X * 4.

X = 20,
Y = 80
```

Comments

If a variable in an arithmetic expression is bound to another arithmetic expression (as opposed to a number) at runtime, then the cost of evaluating that expression is much greater. It is approximately equal to the cost of `call/1` of an arithmetic goal.

See Also

Section 4.7 [ref-ari], page 123.

11.3.109 `keysort/2` *ISO*

Synopsis

`keysort(+Pairs, -Sorted)`

Sorts the elements of the list *Pairs* into ascending standard order (see Section 4.8.8.2 [ref-lte-cte-sot], page 134) with respect to the key of the pair structure.

Arguments

Pairs	*list of pair*, must be a proper list of proper pairs
Sorted	*list of pair*

Description

The list *Pairs* must consist of terms of the form *Key-Value*. Multiple occurrences of pairs with the same key are not removed.

(The time taken to do this is at worst order (N log N) where N is the length of the list.)

Note that the elements of *Pairs* are sorted *only* according to the value of *Key*, *not* according to the value of *Value*.

`keysort/2` is stable in the sense that the relative position of elements with the same key is maintained.

Sorted is type checked since release 4.3 for alignment with the ISO Prolog standard. Previous releases simply failed instead of reporting an error for malformed *Sorted*.

Exceptions

`instantiation_error`
: If *Pairs* is not properly instantiated

`type_error`
: If *Pairs* is not a proper *list of pair*.

`type_error`
: If *Sorted* cannot be unified with a *list of pair*.

Examples

```
| ?- keysort([3-a,1-b,2-c,1-a,1-b], X).

X = [1-b,1-a,1-b,2-c,3-a]

|?- keysort([2-1, 1-2], [1-2, 2-1]).

yes
```

See Also

Section 4.8.8.3 [ref-lte-cte-sor], page 135.

11.3.110 `leash/1` *development*

Synopsis

`leash(+`*Mode*`)`

Starts leashing on the ports given by *Mode*.

Arguments

Mode

list
of one of `[call,exit,redo,fail,exception,all,half,loose,tight,off]`, must be ground

A list of the ports to be leashed. A single keyword can be given without enclosing it in a list.

Description

Some of the keywords denote a set of ports:

`all`	Stands for all five port.
`half`	Stands for the Exception, Call and Redo ports.
`loose`	Stands for the Exception and Call ports.
`tight`	Stands for all ports but Exit.
`off`	Stands for no ports.

The leashing mode only applies to procedures that do not have spypoints on them, and it determines which ports of such procedures are leashed. By default, all five ports are leashed. On arrival at a leashed port, the debugger will stop to allow you to look at the execution state and decide what to do next. At unleashed ports, the goal is displayed but program execution does not stop to allow user interaction.

Exceptions

`instantiation_error`
: *Mode* is not ground

`domain_error`
: *Mode* is not a valid leash specification

Examples

```
| ?- leash(off).
```

turns off all leashing; now when you creep you will get an exhaustive trace but no opportunity to interact with the debugger. You can get back to the debugger to interact with it by pressing `^c t`.

```
| ?- leash([call,redo]).
```

leashes on the Call and Redo ports. When creeping, the debugger will now stop at every Call and Redo port to allow you to interact.

See Also

Section 5.2 [Basic Debug], page 237.

11.3.111 `length/2`

Synopsis

`length(?List, ?Integer)`

Integer is the length of *List*. If *List* is instantiated to a proper *list of term*, or *Integer* to an integer, then the predicate is determinate.

Arguments

List	*list of term*
Integer	*integer*, non-negative

Description

If *List* is a list of indefinite length (that is, either a variable or of the form `[...|X]`, where `X` is a variable) and if *Integer* is bound to an integer, then *List* is made to be a list of length *Integer* with unique variables used to "pad" the list. If *List* cannot be made into a list of length *Integer*, then the call fails.

```
| ?-  List = [a,b|X], length(List, 4).

List = [a,b,_A,_B],
X = [_A,_B] ;

| ?-
```

If *List* is bound, and is not a list, then `length/2` simply fails.

If *List* is a cyclic list, and *Integer* is bound to a non-negative integer, then `length/2` simply fails.

If *List* is a cyclic list, and *Integer* is a variable, then the behavior is unspecified and may change in the some future version.

Backtracking

If *Integer* is unbound, then it is unified with all possible lengths for the list *List*.

Exceptions

`type_error`
: *Integer* is not an integer

`domain_error`
: *Integer* < 0

Examples

```
| ?- length([1,2], 2).

yes
| ?- length([1,2], 0).

no
| ?- length([1,2], X).

X = 2 ;

no
```

See Also

Section 4.8.3 [ref-lte-acl], page 132, `library(lists)`.

11.3.112 </2 *ISO*

Synopsis

+*Expr1* < +*Expr2*

Evaluates *Expr1* and *Expr2* as arithmetic expressions. The goal succeeds if the result of evaluating *Expr1* is strictly *less than* the result of evaluating *Expr2*.

Arguments

Expr1 *expr*, must be ground

Expr2 *expr*, must be ground

Description

Evaluates *Expr1* and *Expr2* as arithmetic expressions and compares the results.

Exceptions

Arithmetic errors (see Section 4.7.3 [ref-ari-exc], page 123).

Examples

```
| ?- 23 + 2.2  <  23 - 2.2.

yes
| ?- X = 31, Y = 25, X + Y  <  X - Y

no
```

See Also

Section 4.7 [ref-ari], page 123,

11.3.113 library_directory/1 *hook*

Synopsis

```
:- multifile user:library_directory/1.

user:library_directory(+DirSpec)
```

Defines a library directory. Used by predicates taking *file_spec* as input argument.

Arguments

DirSpec *file_spec*

Either an atom giving the path to a file or directory, or *PathAlias(DirSpec)*, where *PathAlias* is defined by a `file_search_path/2` rule.

Description

These facts define directories to search when a file specification `library(File)` is expanded to the full path, in addition to the predefined library path, which is tried first.

The `file_search_path` mechanism is an extension of the `library_directory` scheme and is preferred.

Examples

```
| ?- [user].
% compiling user...
| :- multifile user:library_directory/1.
| library_directory('/usr/joe_bob/prolog/libs').
| end_of_file.
% compiled user in module user, 0 msec 384 bytes
yes
| ?- ensure_loaded(library(flying)).
% loading file /usr/joe_bob/prolog/libs/flying.qof
...
```

Exceptions

All error handling is done by the predicates extended by this hook.

See Also

`absolute_file_name/[2,3]`, `file_search_path/2`, `load_files/[1,2]`,

11.3.114 `line_count/2`

Synopsis

`line_count(+`*Stream*`, -`*Count*`)`

Obtains the total number of lines either input from or output to the open text stream *Stream* and unifies it with *Count*.

Arguments

Stream *stream_object*, must be ground

A valid open *text* stream.

Count *integer*

The resulting line count of the stream.

Description

A freshly opened stream has a line count of 0, i.e. this predicate counts the number of newlines seen. When a line is input from or output to a non-interactive Prolog stream, the line count of the Prolog stream is increased by one. Line count for an interactive stream reflects the total line input from or output to any interactive stream, i.e. all interactive streams share the same counter.

The count is reset by `set_stream_position/2`.

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113).

See Also

`byte_count/2`, `character_count/2`, `line_position/2`, `stream_position/2`, `set_stream_position/2`, Section 4.6.7 [ref-iou-sfh], page 113.

11.3.115 `line_position/2`

Synopsis

`line_position(+`*`Stream`*`, -`*`Count`*`)`

Obtains the total number of characters either input from or output to the current line of the open text stream *Stream* and unifies it with *Count*.

Arguments

Stream	*stream_object*, must be ground A valid open *text* stream.
Count	*integer* The resulting line count of the stream.

Description

A fresh line has a line position of 0, i.e. this predicate counts the length of the current line. Line count for an interactive stream reflects the total line input from or output to any interactive stream, i.e. all interactive streams share the same counter.

The count is reset by `set_stream_position/2`.

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113).

See Also

`byte_count/2`, `character_count/2`, `line_count/2`, `stream_position/2`, `set_stream_position/2`, Section 4.6.7 [ref-iou-sfh], page 113.

11.3.116 `listing/[0,1]`

Synopsis

`listing`

`listing(+`*PredSpecs*`)`

Prints the clauses of all the interpreted procedures currently in the type-in module of the Prolog database, or of *PredSpecs*, to the current output stream, using `portray_clause/1`.

Arguments

:PredSpecs
: *pred_spec_tree*

  A predicate specification, or a list of such.

Exceptions

`type_error`
: *PredSpecs* of the wrong type.

Examples

You could list the entire program to a file using the command

```
| ?- tell(file), listing, told.
```

Note that `listing/[0,1]` does not work on compiled procedures.

`listing/1` is dependent on the source module. As a special case,

```
| ?- listing(mod:_).
```

will list all the dynamic predicates in module mod. However, `listing/0` is not dependent on the source module; it refers instead to the type-in module.

Variables may be included in predicate specifications given to `listing/1`. For example, you can list clauses for `f` in any current module with:

```
| ?- listing(_:f).
```

See Also

Section 4.11 [ref-mod], page 165.

11.3.117 `load_files/[1,2]`

Synopsis

`load_files(+Files)`

`load_files(+Files, +Options)`

`[+Files]`

Loads the specified Prolog source and/or object file(s) into memory. Subsumes all other load predicates.

Arguments

:Files *file_spec* or *list of file_spec*, must be ground

A file specification or a list of file specifications; extensions optional.

Options *list of term*, must be ground

A list of zero or more options of the form:

`if(X)` `true` (the default) to always load, or `changed` to load only if the file has not yet been loaded or if it has been modified since it was last loaded. A non-module file is not considered to have been previously loaded if it was loaded into a different module. The file specification `user` is never considered to have been previously loaded.

`when(When)`
`always` (the default) to always load, or `compile_time` to load only if the goal is not in the scope of another `load_files/[1,2]` directive occurring in a PO file.

The latter is intended for use when the file only defines predicates that are needed for proper term or goal expansion during compilation of other files.

`load_type(LoadType)`
`source` to load source files only, `object` to load object (PO) files only, or `latest` (the default) to load any type of file, whichever is newest. If the file specification is `user`, then `source` is forced.

`imports(Imports)`
`all` (the default) to import all exported predicates if the file is a module file, or a list of predicates to import.

`compilation_mode(Mode)`
`compile` to translate into compiled code, `consult` to translate into static, interpreted code, or `assert_all` to translate into dynamic, interpreted code.

The default is the compilation mode of any ancestor `load_files/[1,2]` goal, or `compile` otherwise. Note that *Mode* has no effect when a PO file is loaded, and that it is recommended to

use `assert_all` in conjunction with `load_type(source)`, to ensure that the source file will be loaded even in the presence of a PO file.

In addition the `open/4` options `encoding/1`, `encoding_signature/1` and `eol/1` can be specified. These will be used if the Prolog code is loaded from a source file. See Section 11.3.148 [mpg-ref-open], page 1154, for details.

Description

`load_files/[1,2]` reads Prolog clauses, in source or precompiled form, and adds them to the Prolog database, after first deleting any previous versions of the predicates they define. Clauses for a single predicate must all be in the same file unless that predicate is declared to be `multifile`.

If a source file contains directives, that is, terms with principal functor `:-/1` or `?-/1`, then these are executed as they are encountered. Initialization goals specified with `initialization/1` are executed after the load.

A non-module source file can be loaded into any module by `load_files/[1,2]`, but the module of the predicates in a precompiled file is fixed at the time it is created.

Exceptions

`instantiation_error`
: *Files* or *Options* is not ground.

`type_error`
: In *Files* or *Options*.

`domain_error`
: Illegal option in *Options*.

`existence_error`
: A specified file does not exist. If the `fileerrors` flag is `off`, then the predicate fails instead of raising this exception.

`permission_error`
: A specified file not readable. If the `fileerrors` flag is `off`, then the predicate fails instead of raising this exception.

  While loading clauses from a PO file, clauses for an existing multifile predicate were encountered, but were compiled in a way different from the existing clauses. In this case, the existing clauses remain untouched, the multifile clauses from the PO file are simply ignored, the load continues, and an exception is raised at the end.

Examples

Several of the other built-in predicates of this category could be defined in terms of `load_files/2`:

```
[File|Files] :-
    load_files([File|Files]).

consult(Files) :-
    load_files(Files, [load_type(source),compilation_mode(consult)]).

ensure_loaded(Files) :-
        load_files(Files, [if(changed)]).

use_module(File) :-
    load_files(File, [if(changed)]).

use_module(File, Imports) :-
    load_files(File, [if(changed),imports(Imports)]).
```

Code that is only needed at compile-time, e.g. for operator declarations or compile-time expansion, is conveniently loaded with the following idiom:

```
:- load_files(library(obj_decl), [when(compile_time), if(changed)]).
```

See Also

Section 4.3.2 [ref-lod-lod], page 84.

11.3.118 `load_foreign_resource/1` *hookable*

Synopsis

`load_foreign_resource(`*:Resource*`)`

Load the foreign resource *Resource* into Prolog. Relies on the hook predicates `foreign_resource/2` and `foreign/[2,3]`.

Arguments

:Resource *file_spec*, must be ground
The foreign resource to be loaded. The file extension can be omitted.

Description

`load_foreign_resource/1` takes a foreign resource and loads it into Prolog.

The extension can be omitted from the filename given in the *Resource* argument.

Uses the `foreign/[2,3]` and `foreign_resource/2` facts defined by the user to make the connection between a Prolog procedure and the foreign function. In this context, the *resource name* is derived from *Resource* name by deleting any leading path and extension from the absolute file name of *Resource*.

When loading the foreign resource, it looks for a `foreign_resource/2` fact for the resource name. For each symbol in that fact, it looks for a `foreign/[2,3]` fact that gives the name of the Prolog procedure associated with the foreign symbol and the argument specification.

Contrary to most hook predicates which reside in the `user` module, `load_foreign_resource/1` will look for `foreign_resource/2` and `foreign/[2,3]` facts defined in its source module.

Foreign resources are created with the `splfr` tool (see Section 6.2.5 [The Foreign Resource Linker], page 300).

Exceptions

Errors in the specification of `foreign/[2,3]` and `foreign_resource/2` will all be reported when `load_foreign_resource/1` is called.

`instantiation_error`
Resource not ground.

`type_error`
Resource not an atom, or argument of a declared fact of the wrong type.

`domain_error`
Invalid argument of `foreign/[2,3]` fact.

`existence_error`
Resource does not exist as a foreign resource, or *Resource* does not have a `foreign_resource/2` fact, or declared function does not exist, or declared function does not have a `foreign/[2,3]` fact.

`domain_error`
: Invalid option to `foreign_resource/2`.

`consistency_error`
: Function declared twice with clashing declarations.

`permission_error`
: Attempt to redefine built-in predicate.

Examples

`library(codesio)` contains a foreign resource consisting of three foreign functions, one init function, and one deinit function. The Prolog source file contains the following lines of code:

```
:- dynamic foreign/2, foreign_resource/2.

foreign(codes_to_stream, '$codes_to_stream'(+codes,-address('SP_stream'))).
foreign(open_buf_stream, '$open_buf_stream'(-address('SP_stream'))).
foreign(stream_to_codes, '$stream_to_codes'(+address('SP_stream'),-term,-term)).

foreign_resource(codesio, [
        init(codesio_init),
        deinit(codesio_deinit),
        codes_to_stream,
        open_buf_stream,
        stream_to_codes
                        ]).

:- load_foreign_resource(library(system(codesio))).
```

Comments

Note that the foreign declarations are needed by other operations as well and should **not** be abolished after loading the foreign resource.

See Also

`unload_foreign_resource/1`, `foreign_resource/2`, `foreign/[2,3]`, Section 6.2.1 [Foreign Resources], page 295, Section 6.2 [Calling C from Prolog], page 295.

11.3.119 `member/2`

Synopsis

`member(?Element, ?List)`

is true if *Element* occurs in the *List*. It may be used to test for an element or to enumerate all the elements by backtracking. Indeed, it may be used to generate the *List*!

Arguments

Element *term*

List *list of term*

Description

In the context of this predicate, a term occurs in a list if it can be unified with an element of the list.

Backtracking

On backtracking, an attempt is made to unify *Element* with successive elements of *List*. If *List* is not a proper list, then on backtracking it is unified with lists of ever increasing length.

Examples

```
| ?- member(foo(X), [foo(1), bar(2), foo(3)]).
X = 1 ? ;
X = 3 ? ;
no
```

Exceptions

None.

See Also

Section 4.8.3 [ref-lte-acl], page 132, `library(lists)`.

11.3.120 memberchk/2

Synopsis

`memberchk(?Element, ?List)`

is true if the given *Element* occurs in the given *List*. Its purpose is to test for membership. Normally, the two arguments are ground.

Arguments

Element	*term*
List	*list of term*

Description

In the context of this predicate, a term occurs in a list if it can be unified with an element of the list.

Backtracking

The predicate is determinate and commits to the first successful unification, if any.

Examples

```
| ?- memberchk(bar, [foo,bar,baz]).
yes
```

Exceptions

None.

See Also

Section 4.8.3 [ref-lte-acl], page 132, `library(lists)`.

11.3.121 `message_hook/3` ***hook***

Synopsis

```
:- multifile user:message_hook/3.

user:message_hook(+Severity, +MessageTerm, +Lines)
```

Overrides the call to `print_message_lines/3` in `print_message/2`. A way for the user to intercept the *Message* of type *Severity*, whose translations is *Lines*, before it is actually printed.

Arguments

Severity *one of* `[informational,warning,error,help,silent]`

MessageTerm
term

Lines *list of list of pair*
Is of the form `[Line1, Line2, ...]`, where each *Linei* is of the form `[Control_1-Args_1,Control_2-Args_2, ...]`.

Description

After a message is parsed, but before the message is written, `print_message/2` calls

```
user:message_hook(+Severity,+MsgTerm,+Lines)
```

If the call to `user:message_hook/3` succeeds, then `print_message/2` succeeds without further processing. Otherwise the built-in message portrayal is used. It is often useful to have a message hook that performs some action and then fails, allowing other message hooks to run, and eventually allowing the message to be printed as usual.

Exceptions

An exception raised by this predicate causes an error message to be printed and then the original message is printed using the default message text and formatting.

See Also

Section 4.16 [ref-msg], page 216.

11.3.122 `meta_predicate/1` *declaration*

Synopsis

```
:- meta_predicate +MetaSpec
```

Provides for module name expansion of arguments in calls to the predicate given by *MetaSpec*. All `meta_predicate/1` declarations should be at the beginning of a module.

Arguments

:MetaSpec *callable*, must be ground

Goal template or list of goal templates, of the form `functor(Arg1, Arg2,...)`. Each *Argn* is one of:

‘`:`’ requires module name expansion

If the argument will be treated as a goal, then it is better to explicitly indicate this using an integer, see the next item.

nsuppressed

a non-negative integer.

This is a special case of ‘`:`’ that means that the argument can be made into a goal by adding *nsuppressed* additional arguments. E.g., if the argument will be passed to `call/1`, then `0` (zero) should be used.

As another example, the meta_predicate declaration for the built-in `call/3` would be `:- meta_predicate call(2,?,?)`, since `call/3` will add two arguments to its first argument in order to to construct the goal to invoke.

An integer is treated the same as ‘`:`’ above by the SICStus runtime. Other tools, such as the cross referencer (see Section 9.12 [The Cross-Referencer], page 383) and the SICStus Prolog IDE (see Section 3.11 [SPIDER], page 32), will use this information to better follow predicate references in analyzed source code.

‘`*`’
‘`+`’
‘`-`’
‘`?`’ ignored

Exceptions

Exceptions in the context of loading code are printed as error messages.

`instantiation_error`
MetaSpec not ground.

`type_error`
MetaSpec not a valid specification.

`context_error`
Declaration appeared in a goal.

`permission_error`
: Declaration appeared as a clause.

Examples

Consider a sort routine, `mysort/3`, to which the name of the comparison predicate is passed as an argument:

```
mysort(LessThanOrEqual, InputList, OutputList) :-
   ...
   %% LessThanOrEqual is called exactly like the built-in @=</2
   ( call(LessThanOrEqual, Term1, Term2) -> ... ; ... ),
   ...
```

An appropriate `meta_predicate` declaration for `mysort/3` is:

```
:- meta_predicate mysort(2, +, -).
```

since the first argument, *LessThanOrEqual*, will have two additional arguments added to it (by `call/3`) when invoked.

This means that whenever a goal `mysort(A, B, C)` appears in a clause, it will be transformed at load time into `mysort(M:A, B, C)`, where M is the source module. The transformation will happen unless:

1. A has an explicit module prefix, or
2. A is a variable and the same variable appears in the head of the clause in a module-name-expansion position.

See Also

Section 4.3.4.6 [Meta-Predicate Declarations], page 89, Section 4.11.15 [ref-mod-mne], page 175.

11.3.123 `mode/1` *declaration*

Synopsis

```
:- mode +Mode
```

Currently a dummy declaration.

Arguments

:Mode *term*

Exceptions

Exceptions in the context of loading code are printed as error messages.

`context_error`
: Declaration appeared in a goal.

`permission_error`
: Declaration appeared as a clause.

See Also

Section 4.3.4.9 [Mode Declarations], page 90.

11.3.124 `module/[2,3]` *declaration*

Synopsis

```
:- module(+ModuleName, +PublicPred).

:- module(+ModuleName, +PublicPred, +Options).
```

Declares the file in which the declaration appears to be a module file named *ModuleName*, with public predicates *PublicPred*. Must appear as the first term in the file.

Arguments

ModuleName
: *atom*, must be nonvar

PublicPred
: *list of simple_pred_spec*, must be ground
: List of predicate specifications of the form *Name/Arity*.

Options *list of term*, must be ground
: A list of zero or more options of the form:

`hidden(`*Boolean*`)`
: *Boolean* is `false` (the default) or `true`. In the latter case, tracing of the predicates of the module is disabled (although spypoints can be set), and no source information is generated at compile time.

Description

The definition of a module is not limited to a single file, because a module file may contain commands to load other files. If `myfile`, a module file for *ModuleName*, contains an embedded command to load `yourfile` and if `yourfile` is not itself a module file, then all the predicates in `yourfile` are loaded into module *ModuleName*.

Exceptions

Exceptions in the context of loading code are printed as error messages.

`instantiation_error`
: Declaration not ground.

`type_error`
: An argument has the wrong type.

`domain_error`
: Some arity is an integer < 0, or invalid option given.

`representation_error`
: Some arity is an integer > 255.

`context_error`
: Declaration appeared in a goal, or not first in the file being loaded.

`permission_error`
: Declaration appeared as a clause.

Examples

A module declaration from the Prolog library:

```
:- module(varnumbers, [
        numbervars/1,
        varnumbers/2,
        varnumbers/3
          ],[
        hidden(true)
   ]).
```

See Also

Section 4.3.4.7 [Module Declarations], page 89, Section 4.11 [ref-mod], page 165.

11.3.125 `multifile/1` *declaration*, *ISO*

Synopsis

`:- multifile` *+PredSpecs*

Declares the clauses of the predicates defined by *PredSpecs* to be multifile in the source file (suppresses compile-time warnings).

Arguments

:PredSpecs

pred_spec_forest, must be ground

A predicate specification, or a list of such, or a sequence of such separated by commas.

Description

By default, all clauses for a predicate are expected to come from just one file. This assists with reloading and debugging of code. Declaring a predicate `multifile` means that its clauses can be spread across several different files. This is independent of whether or not the predicate is declared `dynamic`.

Should precede all the clauses for the specified predicates in the file.

There should be a `multifile` declaration for a predicate P in every file that contains clauses for P. If a `multifile` predicate is dynamic, then there should be a `dynamic` declaration in every file containing clauses for the predicate.

When a file containing clauses for a `multifile` predicate (P) is reloaded, the clauses for P that previously came from that file are removed. Then the new clauses for P (which may be the same as the old ones) are added to the end of the definition of the `multifile` predicate.

If a `multifile` declaration is found for a predicate that has already been defined in another file (without a `multifile` declaration), then this is considered to be a redefinition of that predicate. Normally this will result in a multiple-definition style-check warning (see `style_check/1`).

The predicate `source_file/2` can be used to find all the files containing clauses for a `multifile` predicate.

Comments

`multifile` is not an ISO predefined prefix operator.

Exceptions

Exceptions in the context of loading code are printed as error messages.

`instantiation_error`

PredSpecs not ground.

`type_error`

PredSpecs not a valid *pred_spec_forest*.

`domain_error`
: Some arity is an integer < 0.

`representation_error`
: Some arity is an integer > 255.

`context_error`
: Declaration appeared in a goal.

`permission_error`
: Declaration appeared as a clause.

See Also

Section 4.3.4.1 [Multifile Declarations], page 87.

11.3.126 `mutable/1`

Synopsis

`mutable(+`*Term*`)`

Succeeds if *Term* is currently instantiated to a mutable term.

Arguments

Term *term*

Exceptions

None.

See Also

Section 4.8.1.1 [ref-lte-met-typ], page 130, Section 4.8.9 [ref-lte-mut], page 135.

11.3.127 name/2 *deprecated*

Synopsis

`name(+Constant, -Codes)`

`name(-Constant, +Codes)`

Codes is the list consisting of the *codes* comprising the printed representation of *Constant*.

Arguments

Constant *atomic*

Codes *codes*

Description

Initially, either *Constant* must be instantiated to a number or an atom, or *Codes* must be instantiated to a proper *codes*.

If *Codes* is instantiated to a proper *codes* that corresponds to the correct syntax of a number, then *Constant* will be unified with that number.

Else if *Codes* is instantiated to a proper *codes*, then *Constant* will be unified with the atom containing exactly those characters.

Else, *Constant* should be instantiated to a number or atom, and *Codes* will be unified with the *codes* that make up its printed representation.

There are atoms for which `name(Constant,Codes)` is true, but which will not be constructed if `name/2` is called with *Constant* uninstantiated. One such atom is the atom `'1976'`. It is recommended that new programs use `atom_codes/2` or `number_codes/2`, as these predicates do not have this ambiguity.

This predicate has been marked as deprecated since there are other, better and standard-conforming alternatives. However, we do not plan to remove it.

Exceptions

`instantiation_error`
: *Constant* is uninstantiated and *Codes* is not instantiated enough

`type_error`
: If *Constant* is a compound term

`representation_error`
: An element of *Codes* is an invalid character code, or *Codes* is a list corresponding to a number or atom that can't be represented

Examples

```
| ?- name(foo, L).

L = [102,111,111]
```

```
| ?- name('Foo', L).

L = [70,111,111]

| ?- name(431, L).

L = [52,51,49]

| ?- name(X, [102,111,111]).

X = foo

| ?- name(X, [52,51,49]).

X = 431

| ?- name(X, "15.0e+12").

X = 1.5E+13
```

See Also

Section 4.8.4 [ref-lte-c2t], page 132.

11.3.128 `nl/[0,1]` *ISO*

Synopsis

```
nl
```

```
nl(+Stream)
```

Terminates the current output record on the current output stream or on *Stream*.

Arguments

Stream	*stream_object*, must be ground
	A valid output *text* stream, defaults to the current output stream.

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113).

See Also

Section 4.6.6 [ref-iou-cou], page 112.

11.3.129 `nodebug/0` *development*

Synopsis

```
nodebug
```

Turns the debugger off.

Exceptions

None.

See Also

Section 5.2 [Basic Debug], page 237.

11.3.130 nonmember/2

Synopsis

`nonmember(?Element, ?List)`

is true if the given *Element* does not occur in the given *List*. Its purpose is to test for membership. Normally, the two arguments are ground.

Arguments

Element *term*

List *list of term*

Description

In the context of this predicate, a term occurs in a list if it can be unified with an element of the list.

Backtracking

The predicate is determinate and either succeeds or fails. It never binds variables.

Examples

```
| ?- nonmember(bar, [foo,bar,baz]).
no
```

Exceptions

None.

See Also

Section 4.8.3 [ref-lte-acl], page 132, `library(lists)`.

11.3.131 nonvar/1 *ISO*

Synopsis

`nonvar(+`*Term*`)`

Term is currently instantiated.

Arguments

Term *term*

Examples

```
| ?- nonvar(foo(X,Y)).

true ;
no
| ?- nonvar([X,Y]).

true ;
no
| ?- nonvar(X).

no
| ?- Term = foo(X,Y), nonvar(Term).

true ;
no
```

Exceptions

None.

See Also

Section 4.8.1.1 [ref-lte-met-typ], page 130.

11.3.132 `nospy/1` *development*

Synopsis

`nospy` *+PredSpecs*

Any spypoints (plain and conditional) on the predicates represented by *PredSpecs* are removed.

Arguments

:PredSpecs
: *pred_spec_tree*
: A predicate specification, or a list of such.

Exceptions

`instantiation_error`
`type_error`
`domain_error`
: if a *PredSpec* is not a valid procedure specification

See Also

Section 5.2 [Basic Debug], page 237, Section 5.3 [Plain Spypoint], page 239.

11.3.133 `nospyall/0` *development*

Synopsis

```
nospyall
```

Removes all the spypoints (including the generic ones) that have been set.

Exceptions

None.

See Also

Section 5.2 [Basic Debug], page 237.

11.3.134 =\=/2 *ISO*

Synopsis

+*Expr1* =\= +*Expr2*

Succeeds if the results of evaluating *Expr1* and *Expr2* are *not equal*.

Arguments

Expr1 *expr*, must be ground

Expr2 *expr*, must be ground

Description

Evaluates *Expr1* and *Expr2* as arithmetic expressions and compares the results.

Exceptions

Arithmetic errors (see Section 4.7.3 [ref-ari-exc], page 123).

Examples

```
| ?- 7 =\= 14/2.

no

| ?- 7 =\= 15/2.

yes
```

See Also

Section 4.7 [ref-ari], page 123,

11.3.135 =</2 *ISO*

Synopsis

+*Expr1* =< +*Expr2*

Succeeds if the result of evaluating *Expr1* is *less than or equal* to the result of evaluating *Expr2*.

Arguments

Expr1 *expr*, must be ground

Expr2 *expr*, must be ground

Description

Evaluates *Expr1* and *Expr2* as arithmetic expressions and compares the results.

Exceptions

Arithmetic errors (see Section 4.7.3 [ref-ari-exc], page 123).

Examples

```
| ?- 42 =< 42.

yes

| ?- "b" =< "a".

no
```

Comments

Note that the symbol '=<' is used here rather than '<=', which is used in some other languages. One way to remember this is that the inequality symbols in Prolog are the ones that cannot be thought of as looking like arrows. The '<' or '>' always points at the '='.

See Also

Section 4.7 [ref-ari], page 123,

11.3.136 >=/2 *ISO*

Synopsis

+*Expr1* >= +*Expr2*

Succeeds if the results of evaluating *Expr1* and *Expr2 are equal*.

Arguments

Expr1 *expr*, must be ground

Expr2 *expr*, must be ground

Description

Succeeds if the result of evaluating *Expr1* is *greater than or equal to* the result of evaluating *Expr2*.

Exceptions

Arithmetic errors (see Section 4.7.3 [ref-ari-exc], page 123).

Examples

```
| ?- 42 >= 42.

yes

| ?- "b" >= "a".

yes
```

See Also

Section 4.7 [ref-ari], page 123,

11.3.137 `\+/1` *ISO*

Synopsis

`\+ +`*P*

Fails if the goal *P* has a solution, and succeeds otherwise. Equivalent to:

```
call(P) -> fail ; true.
```

except that the use of `call/1` often can be avoided.

Arguments

:P	*callable*, must be nonvar

Description

This is not normally regarded as a built-in predicate, since it is part of the syntax of the language. However, it is like a built-in predicate in that you can say `call((\+ P))`.

Cuts in *P* do not make sense, but are allowed, their scope being the goal *P*.

Comments

Remember that with prefix operators such as this one it is necessary to be careful about spaces if the argument starts with a '`(`'. For example:

```
| ?- \+ (P,Q).
```

is this operator applied to the conjunction of *P* and *Q*, but

```
| ?- \+(P,Q).
```

would require a predicate `\+ /2` for its solution. The prefix operator can however be written as a functor of one argument; thus

```
| ?- \+((P,Q)).
```

is also correct.

Exceptions

Call errors (see Section 4.2.6 [ref-sem-exc], page 81).

See Also

Section 4.2 [ref-sem], page 65.

11.3.138 \=/2 *ISO*

Synopsis

+*Term1* \= +*Term2*

Term1 and *Term2* do not unify.

Arguments

Term1 *term*

Term2 *term*

Description

The same as \+ *X* = *Y*; i.e. *X* and *Y* are not unifiable.

Exceptions

None.

See Also

Chapter 2 [Glossary], page 7.

11.3.139 `notrace/0` *development*

Synopsis

```
notrace
```

Turns the debugger off.

Exceptions

None.

See Also

Section 5.2 [Basic Debug], page 237.

11.3.140 `nozip/0` *development*

Synopsis

```
nozip
```

Turns the debugger off.

Exceptions

None.

See Also

Section 5.2 [Basic Debug], page 237.

11.3.141 `number/1` *ISO*

Synopsis

`number(+`*Term*`)`

Term is currently instantiated to a number.

Arguments

Term *term*

Examples

```
| ?- number(5.2).

yes
| ?- number(5).

yes
```

Exceptions

None.

See Also

Section 4.8.1.1 [ref-lte-met-typ], page 130.

11.3.142 number_chars/2 *ISO*

Synopsis

`number_chars(+Number, -Chars)`

`number_chars(-Number, +Chars)`

Chars is the *chars* comprising the printed representation of *Number*.

Arguments

Number *number*

Chars *chars*

Description

Initially, either *Number* must be instantiated to a number, or *Chars* must be instantiated to a proper *chars*.

If *Chars* is instantiated to a *chars* that corresponds to the correct syntax of a number, then *Number* will be unified with that number.

Else, *Number* should be instantiated to a number, and *Chars* will be unified with the *chars* that make up its printed representation.

Exceptions

`instantiation_error`
: *Number* is uninstantiated and *Chars* is not instantiated enough

`type_error`
: *Number* is not a number or *Chars* cannot be unified with a *chars*

`representation_error`
: *Chars* is a list corresponding to a number that can't be represented

`syntax_error`
: *Chars* does not correspond to a syntactically valid number

The check of *Chars* when *Number* is instantiated was added in release 4.3 for alignment with the ISO Prolog standard. Previous releases simply failed in this case instead of reporting an error for malformed *Chars*.

See Also

`number_codes/2`.

11.3.143 number_codes/2 *ISO*

Synopsis

`number_codes(+`*Number*`, -`*Codes*`)`

`number_codes(-`*Number*`, +`*Codes*`)`

Codes is the *codes* comprising the printed representation of *Number*.

Arguments

Number *number*

Codes *codes*

Description

Initially, either *Number* must be instantiated to a number, or *Codes* must be instantiated to a proper *codes*.

If *Codes* is instantiated to a *codes* that corresponds to the correct syntax of a number, then *Number* will be unified with that number.

Else, *Number* should be instantiated to a number, and *Codes* will be unified with the *codes* that make up its printed representation.

Exceptions

`instantiation_error`
: *Number* is uninstantiated and *Chars* is not instantiated enough

`type_error`
: *Number* is not a number or *Codes* cannot be unified with a list of integers

`representation_error`
: An element of *Codes* is an invalid character code, or *Codes* is a list corresponding to a number that can't be represented

`syntax_error`
: *Codes* does not correspond to a syntactically valid number

The check of *Codes* when *Number* is instantiated was added in release 4.3 for alignment with the ISO Prolog standard. Previous releases simply failed in this case instead of reporting an error for malformed *Codes*.

Examples

```
| ?- number_codes(foo, L).

! Type error in argument 1 of number_codes/2
! expected a number, but found foo
! goal:  number_codes(foo,_104)
```

```
| ?- number_codes(431, L).

L = [52,51,49]

| ?- number_codes(X, [102,111,111]).

! Syntax error in number_codes/2
! number syntax
! in line 0

| ?- number_codes(X, [52,51,49]).

X = 431

| ?- number_codes(X, "15.0e+12").

X = 1.5E+13
```

See Also

number_chars/2.

11.3.144 numbervars/3

Synopsis

`numbervars(+`*Term*`, +`*FirstVar*`, -`*LastVar*`)`

instantiates each of the variables in *Term* to a term of the form `'$VAR'(`*N*`)`.

Arguments

Term	*term*
FirstVar	*integer*, must be nonvar
LastVar	*integer*

Description

FirstVar is used as the value of N for the first variable in *Term* (starting from the left). The second distinct variable in *Term* is given a value of N satisfying "N is *FirstVar*+1"; the third distinct variable gets the value *FirstVar*+2, and so on. The last variable in *Term* has the value *LastVar*-1.

Notice that in the example below, `write_canonical/1` is used rather than `writeq/1`. This is because `writeq/1` treats terms of the form `'$VAR'(`*N*`)` specially; it writes '`A`' if N=0, '`B`' if N=1, ...'`Z`' if N=25, '`A1`' if N=26, etc. That is why, if you type the goal in the example below, then the variable bindings will also be printed out as follows:

```
Term = foo(W,W,X),
A = W,
B = X
```

Exceptions

`instantiation_error`
: *FirstVar* is uninstantiated

`type_error`
: *FirstVar* is not an integer

Examples

```
| ?- Term = foo(A, A, B), number-
vars(Term, 22, _), write_canonical(Term).
foo('$VAR'(22),'$VAR'(22),'$VAR'(23))
```

See Also

Section 4.8.6 [ref-lte-anv], page 133, `write_term/[2,3]`.

11.3.145 on_exception/3 *deprecated*

Synopsis

`on_exception(-Exception, +ProtectedGoal, +Handler)`

same as:

`catch(ProtectedGoal, Exception, Handler)`

Specify an exception handler for *ProtectedGoal*, and call *ProtectedGoal*, as described in Section 4.15 [ref-ere], page 201.

Arguments

Exception *term*

:ProtectedGoal
callable, must be nonvar

:Handler *callable*, must be nonvar

Description

This predicate has been marked as deprecated since there is another, better and standard-conforming alternative. However, we do not plan to remove it.

Examples

Fail on exception:

```
:- meta_predicate fail_on_exception(0).
fail_on_exception(C):-
    on_exception(E, C, print_exception_then_fail(C, E)).

print_exception_then_fail(C, E):-
    format(user_error, 'Exception occurred while calling ~q:~n', [C]),
    print_message(warning, E),
    fail.
```

Backtracking

Depends on *ProtectedGoal* and *Handler*.

Exceptions

None.

See Also

Section 4.15 [ref-ere], page 201.

11.3.146 `once/1` *ISO*

Synopsis

`once(+P)`

Equivalent to:

```
call(P) -> true ; fail.
```

except that the use of `call/1` often can be avoided.

Arguments

:P	*callable*, must be nonvar

Cuts in P do not make sense, but are allowed, their scope being the goal P.

Exceptions

Call errors (see Section 4.2.6 [ref-sem-exc], page 81).

See Also

Section 4.2 [ref-sem], page 65.

11.3.147 op/3 *ISO*

Synopsis

`op(+Precedence, +Type, +Name)`

declares *Name* to be an operator of the stated *Type* and *Precedence*.

Arguments

Precedence
: *integer*, must be nonvar and in the range 1-1200

Type
: *one of* `[xfx,xfy,yfx,fx,fy,xf,yf]`, must be nonvar

Name
: *atom* or *list of atom*, must be ground

Description

Operators are a notational convenience to read and write Prolog terms. You can define new operators using `op/3`.

The *Precedence* of an operator is used to disambiguate the way terms are parsed. The general rule is that the operator with the highest precedence is the principal functor.

The *Type* of an operator decides the position of an operator and its associativity. In the atom that represents the type the character '`f`' represents the position of the operator. For example, a type '`fx`' says that the operator is a prefix operator. The character '`y`' indicates that the operator is associative in that direction. For example, an operator of type '`xfy`' is a right-associative, infix operator.

To cancel the operator properties of *Name* (if any) set *Precedence* to 0.

Please note: operators are *global*, as opposed to being local to the current module, Prolog text, or otherwise.

Exceptions

`instantiation_error`
: An argument is not ground

`type_error`
: *Precedence* is not an integer or *Type* is not an integer or an operator is not an atom

`domain_error`
: *Precedence* is not in the range 1-1200, or *Type* is invalid,

`permission_error`
: Attempt to redefine the operator `','`

See Also

`current_op/3`, Section 4.1.5 [ref-syn-ops], page 51.

11.3.148 `open/[3,4]` ***ISO***

Synopsis

`open(+`*`FileSpec`*`, +`*`Mode`*`, -`*`Stream`*`)`

`open(+`*`FileSpec`*`, +`*`Mode`*`, -`*`Stream`*`, +`*`Options`*`)`

Creates a Prolog stream by opening the file *FileSpec* in mode *Mode* with options *Options*.

Arguments

FileSpec *file_spec*, must be ground

A file specification.

Mode *one of* `[read,write,append]`, must be nonvar

An atom specifying the open mode of the target file. One of:

`read` open *FileSpec* for input.

`write` open *FileSpec* for output. A new file is created if *FileSpec* does not exist. If the file already exists, then it is set to empty and its previous contents are lost.

`append` opens *FileSpec* for output. If *FileSpec* already exists, then it adds output to the end of it. If not, then a new file is created, as for the `write` mode.

Options *list of term*, must be ground

A list of zero or more of the following.

`type(+`*`T`*`)` Specifies whether the stream is a `text` or `binary` stream. Default is `text`.

`reposition(+`*`Boolean`*`)`

Specifies whether repositioning is required for the stream (`true`), or not (`false`). The latter is the default.

For text streams `reposition(true)` affects the default `eol/1` and `encoding_signature/1` options, see below. Also, not all encodings supports this option (see Section 4.6.7.5 [ref-iou-sfh-enc], page 115).

`alias(+`*`A`*`)`

Specifies that the atom *A* is to be an alias for the stream.

`eof_action(+`*`Action`*`)`

Specifies what action is to be taken when the end of stream has already been reported (by returning -1 or `end_of_file`), and a further attempt to input is made. *Action* can have the following values:

`error` An exception is raised. This is the default.

`eof_code` An end of stream indicator (-1 or `end_of_file`) is returned again.

`reset` The stream is considered not to be past end of stream and another attempt is made to input from it.

`encoding(`*`Encoding`*`)`

Specifies the encoding to use if the stream is opened in text mode, as an atom. The default is `'ISO-8859-1'`, the 8 bit subset of Unicode, i.e. "ISO-8859-1" (Latin 1) (see Section 4.6.7.5 [ref-iou-sfh-enc], page 115).

Overridden by the `encoding_signature/1` option, see below.

`encoding_signature(+`*`Boolean`*`)`

Specifies whether an encoding signature should be used (`true`), or not (`false`). An encoding signature is a special byte sequence that identifies the encoding used in the file. The most common case is one of the Unicode signatures, often called "byte order mark" (BOM).

A Unicode signature is a special byte sequence that can be used to distinguish between several UTF encoding variants, such as "UTF-8", "UTF-16-BE" and "UTF-16-LE".

If `reposition(true)` is specified, then `encoding_signature/1` defaults to `false` for both streams opened in write mode and streams opened in read mode.

If `reposition(true)` is not specified, and if the file is opened in mode read, then `encoding_signature/1` defaults to `true`.

When `encoding_signature/1` option is `true` additional heuristics will be used if no Unicode signature is detected. Only if neither a Unicode signature nor these heuristics specifies a character encoding will the `encoding/1` option, if any, be used.

The method used for selecting character encoding when a text file is opened in mode `read` is the first applicable item in the following list:

1. If the `encoding_signature/1` option is `true`: If a byte order mark is detected, then it will be used to select between the encodings "UTF-8", "UTF-16" or "UTF-32" with suitable endianness.
2. If the `encoding_signature/1` option is `true`: If an Emacs style '`-*- coding:` *`coding-system`*`-*-`' is present on the first non-empty line of the file, then it will be used.
3. If an option `encoding(`*`ENCODING`*`)` Is supplied, then the specified encoding will be used.
4. As a final fallback, "ISO-8859-1" (Latin 1) will be used.

the character encoding selected in this way will be used if it is recognized, otherwise an error exception is raised.

If `reposition(true)` is not specified, and if the file is opened in mode write, then it depends on the character encoding whether

an encoding signature will be output by default or not. If you want to force an encoding signature to be output for those encodings that supports it, then you can specify `encoding_signature(true)`. Conversely, if you want to prevent an encoding signature from being output, then you can explicitly specify `encoding_signature(false)`.

All UTF encodings supports an encoding signature in the form of a BOM. "UTF-8" does not write a BOM unless you explicitly specify `encoding_signature(true)`, the 16 and 32 bit UTF encodings, e.g. "UTF-16 BE", "UTF-32 LE" writes a BOM unless explicitly requested not to with `encoding_signature(false)`.

If the file is opened in mode append, then `encoding_signature/1` defaults to `false`.

`eol(`*Eol*`)` Specifies how line endings in the file should be handled if the stream is opened in text mode.

In Prolog code, end of line is always represented by the character `'\n'`, which has character code 10, i.e. the same as ASCII Line Feed (`LFD`). The representation in the file may be different, however.

Eol can have the following values:

`lf` Line Feed (`LF`, character code 10) is used to specify a end of line. This can be used for both read mode and write mode streams.

`crlf` A two character sequence Carriage Return (`CR`, character code 13) followed by Line Feed (`LF`, character code 10) is used to specify a end of line. This can be used for both read mode and write mode streams.

`auto` Translate both the two character sequence `CR LF` and single `CR` or `LF` into an end of line character. This can be used only for read mode streams.

`default` Use a default end of line convention. This is the default.

If `reposition(true)` is specified, then this uses `lf` for both streams opened in write mode and streams opened in read mode, on all platforms.

If `reposition(true)` is not specified, then under UNIX, this uses `lf` for streams opened in write mode and `auto` for streams opened in read mode. Under Windows, this uses `crlf` for streams opened in write mode and `auto` for streams opened in read mode. This can be used for both read mode and write mode streams.

`if_exists(+`*Action*`)`
Specifies what should happen if the file already exists. Only valid if *Mode* is `write` or `append`. *Action* can have the following values:

`default` The file is overwritten or appended to, according to the *Mode* argument. This is the default.

`error` An exception is raised.

`generate_unique_name`
If a file named *FileSpec* already exists, then *FileSpec* is rewritten so that it refers to a non-existing file. *FileSpec* is rewritten by adding digits at the end of the file name (but before any extension). The generated name, *RealName* can be obtained by using `stream_property(`*Stream*`, file_name(RealName))` on the resulting stream. See the example below.

With this option `open/4` will never open an existing file but it may still fail to find a unique name. `open/4` may fail to find a unique name if there are thousands of files with similar names. In that case `open/4` behaves as if `if_exists(error)` had been passed.

Description

If *FileSpec* is a valid file specification, then the file that it denotes is opened in mode *Mode*.

The resulting stream is unified with *Stream*.

Stream is used as an argument to Prolog input and output predicates.

Stream can also be converted to the corresponding foreign representation through `stream_code/2` and used in foreign code to perform input/output operations.

On Windows, where file names are usually subject to case-normalization, the file will be created with the same case as in *FileSpec*. As an example, `open('HelloWorld.txt', write, S), stream_property(S,file_name(Name)),close(S).` will create a file with the mixed case name `HelloWorld.txt` whereas the stream property will reflect the case-normalized name `.../helloworld.txt`. Prior to release 4.3 the file would have been created in the file system with the case-normalized name `helloworld.txt`.

Exceptions

`instantiation_error`
FileSpec or *Mode* is not instantiated. *Options* argument is not instantiated enough.

`type_error`
FileSpec or *Mode* is not an atom type. *Options* is not a list type or an element in *Options* is not a correct type for open options or

`domain_error`
Mode is not one of `read`, `write` or `append`. *Options* has an undefined option or an element in *Options* is out of the domain of the option.

`uninstantiation_error`
Stream is not a variable

`existence_error`
: The specified *FileSpec* does not exist.

`permission_error`
: Cannot open *FileSpec* with specified *Mode* and *Options*.

`system_error`
: Unexpected error detected by the operating system

Examples

The following example creates two log files, both based on the base name `my.log`. The files will be written to a directory suitable for temporary files (see Section 4.5.1.3 [ref-fdi-fsp-pre], page 102).

```
| ?- open(temp('my.log'), write, S1, [if_exists(generate_unique_name)]),
     open(temp('my.log'), write, S2, [if_exists(generate_unique_name)]),
     stream_property(S1, file_name(N1)),
     stream_property(S2, file_name(N2)),
     format('Logging to ~a and ~a~n', [N1, N2]),
     ...
```

Under UNIX this would produce something like:

```
Logging to /tmp/my.log and /tmp/my1886415233.log
```

See Also

Section 4.6.7 [ref-iou-sfh], page 113.

11.3.149 `open_null_stream/1`

Synopsis

`open_null_stream(-`*`Stream`*`)`

opens an output *text* stream that is not connected to any file and unifies its stream object with *Stream*.

Arguments

Stream *stream_object*

Description

Characters or terms that are sent to this stream are thrown away. This predicate is useful because various pieces of local state are kept for null streams: the predicates `character_count/2`, `line_count/2`, and `line_position/2` can be used on these streams.

Exceptions

`uninstantiation_error`
: *Stream* is not a variable

`system_error`
: Unexpected error detected by the operating system

See Also

Section 4.6.7 [ref-iou-sfh], page 113.

11.3.150 ;/2 *ISO*

Synopsis

+*Q* ; +*R*

Disjunction: Succeeds if *Q* succeeds *or* *R* succeeds.

+*P* -> +*Q* ; +*R*

If *P* *then* *Q* *else* *R*, using first solution of *P* only.

Arguments

:*P*	*callable*, must be nonvar
:*Q*	*callable*, must be nonvar
:*R*	*callable*, must be nonvar

Description

These are normally regarded as part of the syntax of the language, but they are like a built-in predicate in that you can write `call((Q ; R))` or `call((P -> Q ; R))`, with identical effect if they do not contain any cuts.

By default, the character '`|`' (vertical bar) can be used as an alternative to the infix operator '`;`'. This equivalence does not hold when '`|`' has been declared as an operator.

Using '`|`' as an alternative to the infix operator '`;`' is not recommended. A future version of the ISO Prolog standard is likely to define '`|`' as an operator and with such an operator definition the '`|`' will no longer be equivalent to '`;`'.

The operator precedences of the '`;`' and '`->`' are both greater than 1000, so that they dominate commas.

Cuts in *P* do not make sense, but are allowed, their scope being the goal *P*. The scope of cuts in *Q* and *R* extends to the containing clause.

Backtracking

For the if-then-else construct: if *P* succeeds and *Q* then fails, then backtracking into *P* does not occur. A cut in *P* does not make sense. '`->`' acts like a cut except that its range is restricted to within the disjunction: it cuts away *R* and any choice points within *P*. '`->`' may be thought of as a "local cut".

Exceptions

Call errors (see Section 4.2.6 [ref-sem-exc], page 81).

See Also

Section 4.2 [ref-sem], page 65.

11.3.151 `otherwise/0`

Synopsis

```
otherwise
```

Always succeeds (same as `true/0`).

Tips

Useful for laying out conditionals in a readable way.

Exceptions

None.

See Also

Section 4.2 [ref-sem], page 65.

11.3.152 `peek_byte/[1,2]` ***ISO***

Synopsis

`peek_byte(-`*`Byte`*`)`

`peek_byte(+`*`Stream`*`, -`*`Byte`*`)`

looks ahead for next input byte on the input stream *Stream*.

Arguments

Stream *stream_object*, must be ground
A valid input *binary* stream, defaults to the current input stream.

Byte *byte* or -1
The resulting next input byte available on the stream.

Description

`peek_byte/[1,2]` looks ahead of the next input byte of the specified input stream and unifies the *byte* with *Byte*. The peeked byte is still available for subsequent input on the stream.

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113), plus:

`type_error`
Byte is an invalid byte.

`permission_error`
Trying to read beyond end of *Stream*

See Also

Section 4.6.5 [ref-iou-cin], page 111.

11.3.153 peek_char/[1,2] *ISO*

Synopsis

`peek_char(-Char)`

`peek_char(+Stream, -Char)`

looks ahead for next input character on the current input stream or on the input stream *Stream*.

Arguments

Stream	*stream_object*, must be ground
	A valid input *text* stream.
Char	*char* or *one of [*`end_of_file`*]*
	The resulting next input character available on the stream.

Description

`peek_char/[1,2]` looks ahead of the next input character of the specified input stream and unifies the character with *Char*. The peeked character is still available for subsequent input on the stream.

Comments

It is safe to call `peek_char/[1,2]` several times without actually inputting any character. For example:

```
| ?- peek_char(X), peek_char(X), get_char(X).
|: a

X = a
```

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113), plus:

`permission_error`
: Trying to read beyond end of *Stream*

See Also

Section 4.6.5 [ref-iou-cin], page 111.

11.3.154 peek_code/[1,2] *ISO*

Synopsis

`peek_code(-`*Code*`)`

`peek_code(+`*Stream*`, -`*Code*`)`

looks ahead for next input character on the input stream *Stream*.

Arguments

Stream	*stream_object*, must be ground A valid input *text* stream, defaults to the current input stream.
Code	*code* or -1 The resulting next input character available on the stream.

Description

`peek_code/[1,2]` looks ahead of the next input character of the specified input stream and unifies the character with *Code*. The peeked character is still available for subsequent input on the stream.

Comments

Comments

It is safe to call `peek_code/[1,2]` several times without actually inputting any character. For example:

```
| ?- peek_code(X), peek_code(X), get_code(X).
|: a

X = 97
```

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113), plus:

`permission_error`
: Trying to read beyond end of *Stream*

See Also

Section 4.6.5 [ref-iou-cin], page 111.

11.3.155 `phrase/[2,3]`

Synopsis

`phrase(+PhraseType, +List)`

`phrase(+PhraseType, +List, -Rest)`

Used in conjunction with a grammar to parse or generate strings.

Arguments

:PhraseType
: *callable*, must be nonvar

  Name of a phrase type.

List
: *list of term*

  A list of symbols — tokens or *codes*.

Rest
: *list of term*

  A suffix of *List*; what remains of *List* after *PhraseType* has been found. Defaults to `[]`.

Description

This predicate is a convenient way to start execution of grammar rules. Runs through the grammar rules checking whether there is a path by which *PhraseType* can be rewritten as *List*.

If *List* is bound, then this goal corresponds to using the grammar for parsing. If *List* is unbound, then this goal corresponds to using the grammar for generation.

`phrase/[2,3]` succeeds when the portion of *List* between the start of *List* and the start of *Rest* is a phrase of type *PhraseType* (according to the current grammar rules), where *PhraseType* is either a non-terminal or, more generally, a grammar rule body.

`phrase/[2,3]` allows variables to occur as non-terminals in grammar rule bodies, just as `call/1` allows variables to occur as goals in clause bodies.

Backtracking

Depends on *PhraseType*.

Exceptions

Call errors (see Section 4.2.6 [ref-sem-exc], page 81).

Examples

Here is a simple grammar that parses an arithmetic expression (made up of digits and operators) and computes its value. Create a file containing the following rules:

grammar.pl

```
expr(Z) --> term(X), "+", expr(Y), {Z is X + Y}.
expr(Z) --> term(X), "-", expr(Y), {Z is X - Y}.
expr(X) --> term(X).

term(Z) --> number(X), "*", term(Y), {Z is X * Y}.
term(Z) --> number(X), "/", term(Y), {Z is X / Y}.
term(Z) --> number(Z).

number(C) --> "+", number(C).
number(C) --> "-", number(X), {C is -X}.
number(X) --> [C], {"0"=<C, C=<"9", X is C - "0"}.
```

In the last rule, C is the character code of a decimal digit.

This grammar can now be used to parse and evaluate an expression:

```
| ?- [grammar].
| ?- phrase(expr(Z), "-2+3*5+1").

Z = 14

| ?- phrase(expr(Z), "-2+3*5", Rest).

Z = 13,
Rest = [] ;

Z = 1,
Rest = "*5" ;

Z = -2,
Rest = "+3*5" ;

no
```

See Also

Section 4.3.5 [ref-lod-exp], page 91, Section 4.14 [ref-gru], page 193.

11.3.156 `portray/1` *hook*

Synopsis

```
:- multifile user:portray/1.

user:portray(+Term)
```

A way for the user to over-ride the default behavior of `print/1`.

Arguments

Term *term*

Description

If `user:portray/1` is defined, then the predicates listed below performing term output will call it on the term itself and on every non-variable subterm T. If `user:portray/1` succeeds, then it is assumed to have written T. If it fails, then the calling predicate will write the principal functor of T and treat the arguments of T recursively.

Note that on lists (`[_|_]`), `user:portray/1` will be called on the whole list to `user:portray/1` and, if that call fails, on each list element, but *not* on every suffix of the list.

Note that a variable written from within `user:portray/1` may be written with a different name than that used by the surrounding write predicate.

The affected predicates are:

`print/[1,2]`
`write_term/[2,3]`
: when used with the option `portrayed(true)`

goals during debugging
: controlled by the `debugger_print_options` Prolog flag, whose value by default includes `portrayed(true)`

top-level variable bindings
: controlled by the `toplevel_print_options` Prolog flag, whose value by default includes `portrayed(true)`

Exceptions

Exceptions are treated as failures, except an error message is also printed.

See Also

Section 4.6.4 [ref-iou-tou], page 108, Section 4.9.4 [ref-lps-flg], page 140.

11.3.157 portray_clause/[1,2]

Synopsis

`portray_clause(+`*`Clause`*`)`

`portray_clause(+`*`Stream`*`, +`*`Clause`*`)`

Writes *Clause* to the current output stream. Used by `listing/[0,1]`.

Arguments

Stream *stream_object*, must be ground

A valid open Prolog stream, defaults to the current output stream.

Clause *term*

Description

The operation used by `listing/[0,1]`. *Clause* is written to *Stream*, in exactly the format in which `listing/[0,1]` would have written it, including a terminating full stop.

If you want to print a clause, then this is almost certainly the command you want. By design, none of the other term output commands puts a full stop after the written term. If you are writing a file of facts to be loaded by the Load Predicates, then use `portray_clause/[1,2]`, which attempts to ensure that the clauses it writes out can be read in again as clauses.

The output format used by `portray_clause/[1,2]` and `listing/[0,1]` has been carefully designed to be clear. We recommend that you use a similar style. In particular, never put a semicolon (disjunction symbol) at the end of a line in Prolog.

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113).

Examples

```
| ?- portray_clause((X:- a -> b ; c)).
_ :-
        (   a ->
            b
        ;   c
        ).
```

```
| ?- portray_clause((X:- a -> (b -> c ; d ; e); f)).
_ :-
        (   a ->
            (   b ->
                c
            ;   d
            ;   e
            )
        ;   f
        ).

| ?- portray_clause((a:-b)).
a :-
        b.

| ?- portray_clause((a:-b,c)).
a :-
        b,
        c.

| ?- portray_clause((a:-(b,!,c))).
a :-
        b, !,
        c.
```

See Also

`listing/[0,1]`, Section 4.6.4 [ref-iou-tou], page 108.

11.3.158 portray_message/2 *hook*

Synopsis

```
:- multifile user:portray_message/2.

user:portray_message(+Severity, +MessageTerm)
```

Called by `print_message/2` before processing the message. If this succeeds, then it is assumed that the message has been processed and nothing further is done.

Arguments

Severity *one of* `[informational,warning,error,help,silent]`

MessageTerm
term

Exceptions

An exception raised by this predicate causes an error message to be printed and then the original message is printed using the default message text and formatting.

See Also

Section 4.16 [ref-msg], page 216.

11.3.159 `predicate_property/2`

Synopsis

`predicate_property(?Callable, ?PredProperty)`

Unifies *PredProperty* with a predicate property of an existing predicate, and *Callable* with the most general term that corresponds to that predicate.

Arguments

:Callable *callable*

The skeletal specification of a loaded predicate.

PredProperty

term

The various properties associated with *Callable*. Each loaded predicate will have one or more of the properties:

- one of the atoms `built_in` (for built-in predicates) or `compiled` or `interpreted` (for user defined predicates) or `fd_constraint` for indexical predicates see Section 10.9.13 [Defining Indexical Constraints], page 495.
- the atom `dynamic` for predicates that have been declared dynamic (see Section 4.3.4.2 [Dynamic Declarations], page 88),
- the atom `multifile` for predicates that have been declared multifile (see Section 4.3.4.1 [Multifile Declarations], page 87),
- the atom `volatile` for predicates that have been declared volatile (see Section 4.3.4.3 [Volatile Declarations], page 88),
- the atom `jittable` for predicates that are amenable to JIT compilation,
- the atom `jitted` for predicates that have been JIT compiled,
- one or more terms `(block Term)` for predicates that have block declarations (see Section 4.3.4.5 [Block Declarations], page 88),
- the atom `exported` or terms `imported_from(ModuleFrom)` for predicates exported or imported from modules (see Section 4.11 [ref-mod], page 165),
- the term `(meta_predicate Term)` for predicates that have meta-predicate declarations (see Section 4.11.16 [ref-mod-met], page 175).

Description

If *Callable* is instantiated, then `predicate_property/2` successively unifies *PredProperty* with the various properties associated with *Callable*.

If *PredProperty* is bound to a valid predicate property, then `predicate_property/2` successively unifies *Callable* with the skeletal specifications of all loaded predicates having *PredProperty*.

If *Callable* is not a loaded predicate or *PredProperty* is not a valid predicate property, then the call fails.

If both arguments are unbound, then `predicate_property/2` can be used to backtrack through all currently defined predicates and their corresponding properties.

Examples

- Predicates acquire properties when they are defined:

```
| ?- [user].
| :- dynamic p/1.
| p(a).
| end_of_file.
% user compiled 0.117 sec 296 bytes

yes
| ?- predicate_property(p(_), Property).

Property = dynamic ;

Property = interpreted ;
```

- To backtrack through all the predicates `P` imported into module `m` from any module:

```
| ?- predicate_property(m:P, imported_from(_)).
```

- To backtrack through all the predicates `P` imported into module `m1` from module `m2`:

```
| ?- predicate_property(m1:P, imported_from(m2)).
```

- To backtrack through all the predicates `P` exported by module `m`:

```
| ?- predicate_property(m:P, exported).
```

- A variable can also be used in place of a module atom to find the names of modules having a predicate and property association:

```
| ?- predicate_property(M:f, imported_from(m1)).
```

  will return all modules `M` that import `f/0` from `m1`.

Exceptions

None.

See Also

Section 4.9.1 [ref-lps-ove], page 139.

11.3.160 `print/[1,2]` *hookable*

Synopsis

`print(+Stream, +Term)`

`print(+Term)`

Writes *Term* on *Stream*, without quoting atoms, calling `user:portray/1` on subterms.

Arguments

Stream	*stream_object*, must be ground A valid open Prolog stream, defaults to the current output stream.
Term	*term*

Description

`print(Term)` is equivalent to:

```
write_term(Term, [portrayed(true),numbervars(true)])
```

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113).

See Also

Section 4.6.4 [ref-iou-tou], page 108, `user:portray/1`.

11.3.161 `print_coverage/[0,1]` *development*

Synopsis

`print_coverage` *since release 4.2*

Prints the coverage data accumulated so far, to the current output stream, in a hierarchical format.

`print_coverage(+Data)` *since release 4.2*

Prints the coverage data *Data*, to the current output stream, in a hierarchical format. *Data* should be of type *list of coverage_pair*; see `coverage_data/1`.

Arguments

Data *list of coverage_pair*

Description

The output is formatted hierarchically into blocks of lines, one block per source file. A typical block looks like:

```
/home/matsc/tmp/primes.pl
    user:integers/3
        clause 1
           5:        100
           8:         99
        clause 2
           9:          1
    user:primes/2
        clause 1
           1:          1
           2:          1
           3:         *1
    user:remove/3
        clause 1
          16:        436
        clause 2
          17:        411
          20:       *337
        clause 3
          21:         74
          22:        *74
    user:sift/2
        clause 1
          11:          1
        clause 2
          12:         25
          13:        *25
          14:        *25
```

This block lists all the coverage sites for the given file. They are distributed over 4 predicates, 8 clauses, and 16 active lines of code. The coverage site on line 8 was hit 99 times. The coverage site on line 20 was hit 337 times, making at least one nondet call. And so on.

The variant `print_coverage/1` is useful e.g. if you want to somehow filter the execution coverage computed by `coverage_data/1` before printing it.

Exceptions

None.

See Also

Section 9.3 [Coverage Analysis], page 360. The collected coverage information can be presented by the SICStus Prolog IDE, SPIDER (see Section 3.11 [SPIDER], page 32). The Emacs interface also has commands for code coverage highlighting of the current buffer (`C-c C-o`, or use the Prolog menu; see Section 3.12.3 [Usage], page 37).

11.3.162 print_message/2 *hookable*

Synopsis

`print_message(+`*Severity*`, +`*MessageTerm*`)`

Print a *Message* of a given *Severity*. The behavior can be customized using the hooks `user:portray_message/2`, `user:generate_message_hook/3` and `user:message_hook/3`.

Arguments

Severity *atom*, must be nonvar

Unless the default system portrayal is overridden with `user:message_hook/3`, *Severity* must be one of:

Value	Prefix
`informational`	'% '
`warning`	'* '
`error`	'! '
`help`	
`query`	
`silent`	no prefix

MessageTerm

term

Description

First `print_message/2` calls `user:portray_message/2` with the same arguments. If this does not succeed, then the message is processed in the following phases:

- Message generation phase: the abstract message term *Message* is formatted, i.e. converted to a format-command list. First the hook predicate `user:generate_message_hook/3` is tried, then if it does not succeed, then `'SU_messages':generate_message/3` is called. The latter predicate is defined in terms of definite clause grammars in `library('SU_messages')`. If that also does not succeed, then the built-in default conversion is used, which gives the following result:

  `['~q'-[`*Message*`],nl]`
- Line splitting transformation: the format-command list is converted to format-command lines—the list is broken up into a list of lists, each list containing format-commands for one line.
- Message printing phase: The text of the message (format-command lines generated in the previous stage) is printed. First the hook predicate `user:message_hook/3` is tried, then, if it does not succeed, then the built-in predicate `print_message_lines/3` is called for the `user_error` stream.

An unhandled exception message *E* calls `print_message(error, `*E*`)` before returning to the top level. The convention is that an error message is the result of an unhandled exception.

Thus, an error message should only be printed if `raise_exception/1` does not find a handler and unwinds to the top level.

All messages from the system are printed using this predicate. Means of intercepting these messages before they are printed are provided.

`print_message/2` always prints to `user_error`. Messages can be redirected to other streams using `user:message_hook/3` and `print_message_lines/3`

Silent messages do not get translated or printed, but they can be intercepted with `user:portray_message/2` and `user:message_hook/3`.

Exceptions

`instantiation_error`
`type_error`
`domain_error`
in *Severity*

See Also

Section 4.16 [ref-msg], page 216.

11.3.163 print_message_lines/3

Synopsis

`print_message_lines(+`*Stream*`, +`*Severity*`, +`*Lines*`)`

Print the *Lines* to *Stream*, preceding each line with a prefix corresponding to *Severity*.

Arguments

Stream *stream_object*, must be ground
Any valid output stream.

Severity *one of* `[query,help,informational,warning,error,silent,`*term*`]`

Lines *list of list of pair*
Must be of the form `[`*Line1*`, `*Line2*`, ...]`, where each *Linei* must be of the form `[`*Control_1-Args_1*`,`*Control_2-Args_2*`, ...]`.

Description

If *Severity* is a valid severity, then the prefix will be as described for `print_message/2`, otherwise *Severity* itself will be used as the prefix. If *Severity* is `query`, then no newline is written after the last line (otherwise, a newline is written).

This predicate is intended to be used in conjunction with `user:message_hook/3`. After a message is intercepted using `user:message_hook/3`, this command is used to print the lines. If the hook has not been defined, then the arguments are those provided by the system.

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113), plus:

`instantiation_error`
`type_error`
in *Lines*.

Examples

Suppose you want to intercept messages and force them to go to a different stream:

```
user:message_hook(Severity, Message, Lines):-
    my_stream(MyStream),
    print_message_lines(MyStream, Severity, Lines).
```

See Also

Section 4.16 [ref-msg], page 216.

11.3.164 print_profile/[0,1] *development*

Synopsis

`print_profile` *since release 4.2*

Prints the profiling data accumulated so far, to the current output stream, in a format similar to `gprof(1)`.

`print_profile(+Data)` *since release 4.2*

Prints the profiling data *Data*, to the current output stream, in a format similar to `gprof(1)`. *Data* should be of type *list of profile_pair*; see `profile_data/1`.

Arguments

Data *list of profile_pair*

Description

The output is formatted into blocks of lines. There is one block per predicate with profiling data. A typical block looks like:

```
-----------------------------------------------------------------
                              6667/11582      user:extract_index_2/5
                              4915/11582      user:safe_insns/5
      174446       21862       11582        user:safe_insns/5
                             *10280/37221     user:safe_insn/1
                              4915/11582      user:safe_insns/5
-----------------------------------------------------------------
```

This block concerns `user:safe_insns/5`. We are told that 174446 virtual instructions were executed and 21862 choicepoints were accessed, and that it was called 11582 times. There are two callers: `user:extract_index_2/5` and `user:safe_insns/5` itself, which called `user:safe_insns/5` 6667 and 4915 times respectively. Finally `user:safe_insns/5` accounts for 10280 out of the 37221 calls to `user:safe_insn/1` and, as we already know, for 4915 out of the 11582 calls to itself. The '`*`' in front of 10280 tells us that for at least one of the 10280 calls, `user:safe_insn/1` left a choicepoint behind, which could be a case of unwanted nondeterminacy; see Section 9.7 [The Determinacy Checker], page 367. If `user:safe_insn/1` had been declared `nondet` (see Section 10.18 [lib-is_directives], page 582), '`%`' would have been used instead of '`*`'. If it had been declared `det` or `semidet`, '`!`' would have been used.

The variant `print_profile/1` is useful e.g. if you want to somehow filter the execution profile computed by `profile_data/1` before printing it.

Exceptions

None.

See Also

Section 9.2 [Execution Profiling], page 359.

11.3.165 `profile_data/1` *development*

Synopsis

`profile_data(-Data)` *since release 4.2*

Data is the profiling data accumulated so far.

Arguments

Data	*list of profile_pair*	
	where:	
	profile_pair	::= `caller-profile_info`
	profile_info	::= `counter(`*list of* `callee_pair,`*insns*`,`*chpts*`,`*tagged_calls*`)`
	insns	::= *integer* {virtual instructions executed}
	chpts	::= *integer* {choicepoints accessed}
	callee_pair	::= `callee-tagged_calls`
	tagged_calls	::= `det(`*calls*`)` {all calls were determinate} `| nondet(`*calls*`)` {not all calls were determinate}
	calls	::= *integer* {number of calls}
	caller	::= *pred_spec*
	callee	::= *pred_spec*

Description

The profiling data accumulated so far is collected into a term of type *list of profile_pair* and unified with *Data*.

Please note: The number of instructions and choicepoints are not counted for interpreted code, so *insns* and *chpts* will be 0 for such predicates.

Please note: In a *list of callee_pair*, *callee* is not necessarily unique. This happens if the given *caller* code contains more than one call to *callee*.

Please note: The *calls* of a *profile_info* can be greater than the total *calls* of its *list of callee_pair*. This happens e.g. if *caller* occurred in a metacall context.

Exceptions

None.

See Also

Section 9.2 [Execution Profiling], page 359.

11.3.166 `profile_reset/0` *development*

Synopsis

`profile_reset` *since release 4.2*

Resets all profiling data.

Exceptions

None.

See Also

Section 9.2 [Execution Profiling], page 359.

11.3.167 `prolog_flag/[2,3]`

Synopsis

`prolog_flag(?FlagName, ?Value)`

FlagName is a flag, which currently is set to *Value*.

`prolog_flag(+FlagName, -OldValue, +NewValue)`

Unifies the current value of *FlagName* with *OldValue* and then sets the value of the flag to *NewValue*. The available Prolog flags are listed in Section 4.9.4 [ref-lps-flg], page 140.

Arguments

FlagName *atom*, must be nonvar and a legal flag in `prolog_flag/3`

Value *term*

OldValue *term*

NewValue *term*, must be nonvar and belong to proper type/domain

Description

To inspect the value of a flag without changing it, use `prolog_flag/2` or the following idiom, where *FlagName* is bound to one of the valid flags above.

```
| ?- prolog_flag(FlagName, Value, Value).
```

Use `prolog_flag/2` to query and `set_prolog_flag/2` or `prolog_flag/3` to set values.

`prolog_flag/3` can be used to save flag values so that one can return a flag to its previous state. For example:

```
...
prolog_flag(debugging,Old,on), % Save in Old and set
...
prolog_flag(debugging,_,Old),  % Restore from Old
...
```

Backtracking

`prolog_flag/2` enumerates all valid flagnames of a given current value, or all pairs of flags and their current values.

Exceptions

`instantiation_error`
: In `prolog_flag/3`, *FlagName* unbound, *or NewValue* unbound and not identical to *OldValue*.

`type_error`
: *FlagName* is not an atom.

`domain_error`
: In `prolog_flag/3`, *FlagName* bound to an atom that does not represent a supported flag, *or NewValue* bound to a term that does not represent a valid value for *FlagName*.

`permission_error`
: In `prolog_flag/3`, *NewValue* not identical to *OldValue* for a read-only flag.

Examples

```
| ?- prolog_flag(X,Y).
X = bounded,
Y = false ? RET
yes

| ?- prolog_flag(X,Y,Y).
! Instantiation error in argument 1 of prolog_flag/3
! goal:  prolog_flag(_94,_95,_95)

| ?- prolog_flag(source_info,X,X).
X = on ? RET
yes
```

See Also

`current_prolog_flag/2`, `set_prolog_flag/2`, Section 4.9.4 [ref-lps-flg], page 140.

11.3.168 `prolog_load_context/2`

Synopsis

`prolog_load_context(?Key, ?Value)`

Finds out the context of the current load. The available context keys are described in Section 4.9.5 [ref-lps-lco], page 147.

Arguments

Key *atom*

Value *term*

Description

You can call `prolog_load_context/2` from an embedded command or from `term_expansion/6` to find out the context of the current load. If called outside the context of a load, then it simply fails.

Backtracking

Can be used to backtrack through all keys and values.

Exceptions

None.

See Also

`load_files/[2,3]`, Section 4.9.5 [ref-lps-lco], page 147.

11.3.169 `prompt/2`

Synopsis

`prompt(-OldPrompt, +NewPrompt)`

Queries or changes the prompt string of the current input stream or an input stream *Stream*.

Arguments

OldPrompt

atom

The old prompt atom.

NewPrompt

atom, must be nonvar

The new prompt atom.

Description

A *prompt atom* is a sequence of characters that indicates the Prolog system is waiting for input when a "Read" or "Get" predicate is called. If an input stream connected to a terminal is waiting for input at the beginning of a line (at line position 0), then the prompt atom will be printed through an output stream associated with the same terminal.

Prolog sets the prompt to '`|: `' for every new top-level query. This is the prompt that can be changed by invoking `prompt/2`.

Unlike state changes such as those implemented as prolog flags, the scope of a prompt change is a goal typed at the toplevel. Therefore, the change is in force only until returning to the toplevel (prompt = '`| ?- `').

To *query* the current prompt atom, *OldPrompt* and *NewPrompt* should be the same unbound variable.

To *set* the prompt, *NewPrompt* should be an instantiated atom.

The "Load" predicates change the prompt during the time operations are performed: If a built-in loading predicate is performed on `user` (such as `compile(user)`, etc.), then the prompt is set to '`| `'. This prompt is not affected by `prompt/2`.

Exceptions

`instantiation_error`
`type_error`

NewPrompt is not an atom

See Also

Section 4.6.3.2 [ref-iou-tin-cpr], page 108.

11.3.170 `public/1` *declaration*

Synopsis

```
:- public +Term
```

Currently a dummy declaration.

Arguments

:Term *term*

Exceptions

Exceptions in the context of loading code are printed as error messages.

`context_error`
: Declaration appeared in a goal.

`permission_error`
: Declaration appeared as a clause.

See Also

Section 4.3.4.8 [Public Declarations], page 90.

11.3.171 put_byte/[1,2] *ISO*

Synopsis

```
put_byte(+Byte)
```

```
put_byte(+Stream, +Byte)
```

Writes the byte *Byte* to *Stream*.

Arguments

Stream *stream_object*, must be ground
A valid output *binary* stream, defaults to the current output stream.

Byte *byte*, must be nonvar

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113), plus:

`instantiation_error`
`type_error`
Byte is not a *byte*.

`permission_error`
There is an error in the bottom layer of write function of the stream.

`type_error`
Byte is not a *byte*

See Also

Section 4.6.6 [ref-iou-cou], page 112.

11.3.172 put_char/[1,2] *ISO*

Synopsis

`put_char(+`*Char*`)`

`put_char(+`*Stream*`, +`*Char*`)`

The *char* *Char* is written to *Stream*.

Arguments

Stream	*stream_object*, must be ground A valid output *text* stream, defaults to the current output stream.
Char	*char*, must be nonvar

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113), plus:

`type_error`
: *Char* is not a *char*

`permission_error`
: There is an error in the bottom layer of write function of the stream.

See Also

Section 4.6.6 [ref-iou-cou], page 112.

11.3.173 `put_code/[1,2]` *ISO*

Synopsis

`put_code(+`*`Code`*`)`

`put_code(+`*`Stream`*`, +`*`Code`*`)`

The *code* *Code* is written to the stream *Stream*.

Arguments

Stream	*stream_object*, must be ground A valid output *text* stream, defaults to the current output stream.
Code	*code*, must be nonvar

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113), plus:

`instantiation_error`
`type_error`
: *Code* is not an integer

`permission_error`
: There is an error in the bottom layer of write function of the stream.

`representation_error`
: *Code* is not a *code*

See Also

Section 4.6.6 [ref-iou-cou], page 112.

11.3.174 query_abbreviation/3 *hook*

Synopsis

```
:- multifile 'SU_messages':query_abbreviation/3.

'SU_messages':query_abbreviation(+QueryClass, -Prompt, -Pairs)
```

A way to specify one letter abbreviations for responses to queries from the Prolog System.

Arguments

QueryClass
: *atom*

  The query class being defined.

Prompt
: *atom*

  The prompt to be used, typically indicating appropriate abbreviations.

Pairs
: *list of pair*

  A list of word-abbreviation pairs, defining the characters accepted and the corresponding abstract answers.

Description

This predicate defines a query class with the given prompt, the `line` input method, the `char(Pairs)` map method and `help_query` failure mode. The predicate is actually implemented by the first clause of `'SU_messages':query_class/5`:

```
query_class(QueryClass, Prompt, line, char(Pairs), help_query) :-
        query_abbreviation(QueryClass, Prompt, Pairs), !.
```

Prolog only asks for keyboard input in a few different ways. These are enumerated in the clauses for `'SU_messages':query_abbreviation/3`. These clauses specify valid abbreviations for a given key word. For example,

```
query_abbreviation(yes_or_no, ' (y or n) ', [yes-[-1,0'y], no-"n"]) :- !.
```

a French translator might decide that the letters '`O`' and '`o`' are reasonable abbreviations for '`oui`' (yes), and therefore write

```
query_abbreviation(yes_or_no, ' (y or n) ', [yes-[-1,0'o,0'O], no-"n"]) :- !.
```

Exceptions

`ask_query/4` checks the output arguments.

See Also

Section 4.16.3 [Query Processing], page 220.

11.3.175 `query_class/5` *hook*

Synopsis

```
:- multifile 'SU_messages':query_class/5.

'SU_messages':query_class(+QueryClass, -Prompt, -InputMethod, -MapMethod,
-FailureMode)
```

Access the parameters of a given *QueryClass*.

Arguments

QueryClass
: *term*

  Determines the allowed values for the atom *Answer*.

Prompt *atom*
: The prompt to display at the terminal.

InputMethod
: *term*

  A ground term, which specifies how to obtain input from the user

MapMethod
: *term*

  A ground term, which specifies how to process the input to get the abstract answer to the query.

FailureMode
: *term*

  An atom determining what to print in case of an input error, before re-querying the user. Possible values are:

  - `help_query` - print the help message and print the query text again;
  - `help` - only print the help message;
  - `query` - only print the query text;
  - `none` - do not print anything.

Description

For the list of default input- and map methods, see the "Default Input Methods" and "Default Map Methods" subsections in Section 4.16.3 [Query Processing], page 220.

Exceptions

`ask_query/4` checks the output arguments.

See Also

Section 4.16.3 [Query Processing], page 220.

11.3.176 `query_class_hook/5` *hook*

Synopsis

```
:- multifile user:query_class_hook/5.

user:query_class_hook(+QueryClass, -Prompt, -InputMethod, -MapMethod,
-FailureMode)
```

Provides the user with a method of overriding the call to `'SU_messages':query_class/5` in the preparation phase of query processing. This way the default query class characteristics can be changed.

Arguments

QueryClass
: *term*

  Determines the allowed values for the atom *Answer*.

Prompt *atom*
: The prompt to display at the terminal.

InputMethod
: *term*

  The input method to use.

MapMethod
: *term*

  The map method to use.

FailureMode
: *term*

  The failure mode to use.

Exceptions

All error handling is done by the predicates extended by this hook.

See Also

Section 4.16.3 [Query Processing], page 220.

11.3.177 `query_hook/6` *hook*

Synopsis

```
:- multifile 'SU_messages':query_hook/6.

'SU_messages':query_hook(+QueryClass, +Prompt, +PromptLines, +Help,
+HelpLines, -Answer)
```

Provides a method of overriding Prolog's default keyboard based input requests.

Arguments

QueryClass
: *term*
: Determines the allowed values for the atom *Answer*.

Prompt *term*
: A message term.

PromptLines
: *list of pair*
: The message generated from the *Prompt* message term.

Help *term*
: A message term.

HelpLines *list of pair*
: The message generated from the *Help* message term.

Answer *term*
: See *QueryClass*

Description

This provides a way of overriding Prolog's default method of interaction. If this predicate fails, then Prolog's default method of interaction is invoked.

The default method first prints out the prompt, then if the response from the user is not one of the allowed values, then the help message is printed.

It is useful to compare this predicate to `user:message_hook/3`, since this explains how you might use the *Prompt*, *PromptLines*, *Help*, *HelpLines*.

Exceptions

An exception raised by this predicate causes an error message to be printed and then the default method of interaction is invoked. In other words, exceptions are treated as failures.

See Also

Section 4.16.3 [Query Processing], page 220.

11.3.178 `query_input/3` *hook*

Synopsis

```
:- multifile 'SU_messages':query_input/3.

'SU_messages':query_input(+InputMethod, +Prompt, -RawInput)
```

Implements the input phase of query processing. The user is prompted with *Prompt*, input is read according to *InputMethod*, and the result is returned in *RawInput*.

Arguments

InputMethod *term*

The input method to use.

Prompt *atom*

The prompt to display at the terminal.

RawInput *term*

Exceptions

`ask_query/4` checks the output arguments.

See Also

Section 4.16.3 [Query Processing], page 220.

11.3.179 `query_input_hook/3` *hook*

Synopsis

```
:- multifile user:query_input_hook/3.

user:query_input_hook(+InputMethod, +Prompt, -RawInput)
```

Provides the user with a method of overriding the call to `'SU_messages':query_input/3` in the input phase of query processing. This way the implementation of the default input methods can be changed.

Arguments

InputMethod
: *term*
: The input method to use.

Prompt *atom*
: The prompt to display at the terminal.

RawInput *term*

Exceptions

All error handling is done by the predicates extended by this hook.

See Also

Section 4.16.3 [Query Processing], page 220.

11.3.180 query_map/4 *hook*

Synopsis

```
:- multifile 'SU_messages':query_map/4.

'SU_messages':query_map(+MapMethod, +RawInput, -Result, -Answer)
```

Implements the mapping phase of query processing. The *RawInput*, received from `query_input/3`, is mapped to the abstract answer term *Answer*.

Arguments

MapMethod
: *term*
: The map method to use.

RawInput *atom*
: As received from `query_input/3`.

Result *one of* `[success,failure,failure(Warning)]`
: Result of conversion.

Answer *one of* `[success,failure,failure(Warning)]`
: Abstract answer term.

Exceptions

`ask_query/4` checks the output arguments.

See Also

Section 4.16.3 [Query Processing], page 220.

11.3.181 query_map_hook/4 *hook*

Synopsis

```
:- multifile user:query_map_hook/4.

user:query_map_hook(+MapMethod, +RawInput, -Result, -Answer)
```

Provides the user with a method of overriding the call to `'SU_messages':query_map/4` in the map phase of query processing. This way the implementation of the default map methods can be changed.

Arguments

MapMethod
: *term*
: The map method to use.

RawInput
: *atom*
: As received from `query_input/3`.

Result
: *one of* `[success,failure,failure(Warning)]`
: Result of conversion.

Answer
: *one of* `[success,failure,failure(Warning)]`
: Abstract answer term.

Exceptions

All error handling is done by the predicates extended by this hook.

See Also

Section 4.16.3 [Query Processing], page 220.

11.3.182 `raise_exception/1` *deprecated*

Synopsis

`raise_exception(+`*`Exception`*`)`

Description

If *Exception* matches one of the SICStus error terms listed in Section 4.15.4 [ref-ere-err], page 204, then the corresponding error term `error(`*`ISO_Error, SICStus_Error`*`)` is thrown. Otherwise, *Exception* is thrown as is.

New code should prefer the ISO-standard conformant `throw/1`.

Please note: For backward compatibility reasons, some *Exception* terms are automatically transformed into their corresponding ISO `error/2` terms. The standard conformant `throw/1` does not perform any such transformation, and is generally preferable.

This predicate has been marked as deprecated since there is another, better and standard-conforming alternative. However, we do not plan to remove it.

Arguments

Exception *term*, must be nonvar

Exceptions

`instantiation_error`
: *Exception* is unbound.

See Also

Section 4.15 [ref-ere], page 201, `throw/1`.

11.3.183 `read/[1,2]` *ISO*

Synopsis

`read(-Term)`

`read(+Stream, -Term)`

Reads the next term from *Stream* and unifies it with *Term*. Same as:

`read_term(Term, [])`

`read_term(Stream, Term, [])`

Arguments

Stream *stream_object*, must be ground

A valid Prolog input stream, defaults to the current input stream.

Term *term*

The term to be read.

Description

Term must be followed by a full stop. The full stop is removed from the input stream and is not a part of the term that is read. The term is read with respect to current operator declarations.

Does not finish until the full stop is encountered. Thus, if you type at top level

```
| ?- read(X)
```

then you will keep getting prompts (first '`|: `', and five spaces thereafter) every time you type `RET`, but nothing else will happen, whatever you type, until you type a full stop.

If a syntax error is encountered, then the action taken depends on the current value of the `syntax_errors` Prolog flag.

If the end of the current input stream has been reached, then *Term* will be unified with the atom `end_of_file`. Further calls to `read/[1,2]` for the same stream will then raise an exception, unless the stream is connected to the terminal. The characters read are subject to character-conversion.

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113), plus:

`syntax_error`
: A syntax error was found.

Examples

See Also

`read_term/[2,3]`, `char_conversion/2`, Section 4.6.3.1 [ref-iou-tin-trm], page 107, Section 4.9.4 [ref-lps-flg], page 140.

11.3.184 `read_line/[1,2]`

Synopsis

`read_line(-`*`Line`*`)`

`read_line(+`*`Stream`*`, -`*`Line`*`)`

Reads one line of input from *Stream*, and unifies the *codes* with *Line*. On end of file, *Line* is unified with `end_of_file`.

Arguments

Stream	*stream_object*, must be ground
	A valid input *text* stream, defaults to the current input stream.
Line	*codes* or *one of [*`end_of_file`*]*

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113), plus:

`permission_error`
: Trying to read beyond end of *Stream*

See Also

`at_end_of_line/[0,1]`, Section 4.6.5 [ref-iou-cin], page 111.

11.3.185 `read_term/[2,3]` *ISO*

Synopsis

`read_term(-`*Term*`, +`*Options*`)`

`read_term(+`*Stream*`, -`*Term*`, +`*Options*`)`

Read a term from *Stream*, optionally returning extra information about the term.

Arguments

Stream *stream_object*, must be ground

A valid Prolog input stream, defaults to the current input stream.

Term *term*

The term that is read.

Options *list of term*, must be ground, except *Vars*, *Names*, and *Layout* as described below.

A list of zero or more of the following:

`syntax_errors(`*Val*`)`
: Controls what action to take on syntax errors. *Val* must be one of the values allowed for the `syntax_errors` Prolog flag. The default is set by that flag. See Section 4.9.4 [ref-lps-flg], page 140.

`variables(`*Vars*`)`
: *Vars* is bound to the list of variables in the term input, in left-to-right traversal order.

`variable_names(`*Names*`)`
: *Names* is bound to a list of *Name*`=`*Var* pairs, where each *Name* is an atom indicating the name of a non-anonymous variable in the term, and *Var* is the corresponding variable. The elements of the list are in the same order as in *Term*, i.e. in left-to-right traversal order.

`singletons(`*Names*`)`
: *Names* is bound to a list of *Name*`=`*Var* pairs, one for each non-anonymous variable appearing only once in the term. The elements of the list are in the same order as in *Term*, i.e. in left-to-right traversal order.

`cycles(`*Boolean*`)`
: *Boolean* must be `true` or `false`. If selected, then any occurrences of `@/2` in the term read in are replaced by the potentially cyclic terms they denote as described below. Otherwise (the default), *Term* is just unified with the term read in.

  The notation used when this option is selected is `@(`*Template*`,`*Substitution*`)` where *Substitution* is a list of *Var*=*Term* pairs where the *Var* occurs in *Template* or in one of the *Term*s. This notation stands for

the instance of *Template* obtained by binding each *Var* to its corresponding *Term*. The purpose of this notation is to provide a finite printed representation of cyclic terms. This notation is not used by default, and `@/2` has no special meaning except in this context.

Terms can be written in this notation using `write_term/[2,3]` (see Section 11.3.254 [mpg-ref-write_term], page 1289).

`layout(`*Layout*`)`
: *Layout* is bound to a *layout term* corresponding to *Term* (see Chapter 2 [Glossary], page 7).

`consume_layout(`*Boolean*`)`
: *Boolean* must be `true` or `false`. If this option is `true`, then `read_term/[2,3]` will consume the *layout-text-item* that follows the terminating '`.`' (this *layout-text-item* can either be a *layout-char* or a *comment* starting with a '`%`'). If the option is `false`, then the *layout-text-item* will remain in the input stream, so that subsequent character input predicates will see it. The default of the `consume_layout` option is `false`.

Description

The characters read are subject to character-conversion.

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113), plus:

`syntax_error`
: A syntax error was found.

`instantiation_error`
`type_error`
`domain_error`
: An illegal option was specified.

Examples

```
| ?- read_term(T, [variable_names(L)]).
|: append([U|X],Y,[U|Z]) :- append(X,Y,Z).
L = ['U'=_A,'X'=_B,'Y'=_C,'Z'=_D],
T = (append([_A|_B],_C,[_A|_D]):-append(_B,_C,_D))
```

```
| ?- read_term(T, [layout(L), variable_names(Va), singletons(S)]).
|: [
     foo(X),
     X = Y
     ].

L = [35,[36,36],[36,[37,37,37],38]],
S = ['Y'=_A],
T = [foo(_B),_B=_A],
Va = ['X'=_B,'Y'=_A]

| ?- read_term(T, [consume_layout(false)]), get_code(C).
|: 1.

C = 10,
T = 1

| ?- read_term(T, [consume_layout(true)]), get_code(C).
|: 1.
|: a

C = 97,
T = 1
```

See Also

`read/[1,2]`, `char_conversion/2`, Section 4.6.3.1 [ref-iou-tin-trm], page 107, Section 4.9.4 [ref-lps-flg], page 140.

11.3.186 `reconsult/1`

Synopsis

`reconsult(+Files)`

same as:

`consult(Files)`

Arguments

:Files	*file_spec* or *list of file_spec*, must be ground	
	A file specification or a list of file specifications; extensions optional.	

Exceptions

See `load_files/[2,3]`.

See Also

Section 4.3.2 [ref-lod-lod], page 84.

11.3.187 `recorda/3`

Synopsis

`recorda(+`*Key*`, +`*Term*`, -`*Ref*`)`

records the *Term* in the internal database as the first item for the principal functor of *Key*; a database reference to the newly-recorded term is returned in *Ref*.

Arguments

Key	*term*, must be nonvar
Term	*term*
Ref	*db_reference*, must be var

Description

If *Key* is a compound term, then only its principal functor is significant. That is, `foo(1)` represents the same key as `foo(n)`.

Any uninstantiated variables in the *Term* will be replaced by brand new, unattributed variables (see Section 4.2.4 [ref-sem-sec], page 78).

Exceptions

`instantiation_error`
: *Key* is not instantiated

`uninstantiation_error`
: *Ref* is not a variable

Examples

See Also

Section 4.12.8 [ref-mdb-idb], page 187.

11.3.188 `recorded/3`

Synopsis

`recorded(-Key, -Term, +Ref)`

`recorded(?Key, ?Term, ?Ref)`

Searches the internal database for a term recorded under the principal functor of *Key* that unifies with *Term*, and whose database reference unifies with *Ref*.

Arguments

Key	*term*
Term	*term*
Ref	*db_reference*

Description

If *Ref* is instantiated, then *Key* and *Term* are unified with the key and term associated with *Ref*. Otherwise, If *Key* is a compound term, then only its principal functor is significant. That is, `foo(1)` represents the same key as `foo(n)`.

Backtracking

Can be used to backtrack through all the matching terms recorded under the specified key.

Exceptions

`type_error`
: *Ref* is not a database reference

Examples

See Also

Section 4.12.8 [ref-mdb-idb], page 187.

11.3.189 `recordz/3`

Synopsis

`recordz(+Key, +Term, -Ref)`

records the *Term* in the internal database as the last item for the principal functor of *Key*; a database reference to the newly-recorded term is returned in *Ref*.

Arguments

Key	*term*, must be nonvar
Term	*term*
Ref	*db_reference*, must be var

Description

If *Key* is a compound term, then only its principal functor is significant. That is, `foo(1)` represents the same key as `foo(n)`.

Any uninstantiated variables in the *Term* will be replaced by brand new, unattributed variables (see Section 4.2.4 [ref-sem-sec], page 78).

Exceptions

`instantiation_error`
: *Key* is not instantiated

`uninstantiation_error`
: *Ref* is not a variable

Examples

See Also

Section 4.12.8 [ref-mdb-idb], page 187.

11.3.190 `remove_breakpoints/1` *development*

Synopsis

`remove_breakpoints(+BIDs)`

Removes the breakpoints specified by *BIDs*.

Arguments

BIDs	*list of integer*, must be ground	
	Breakpoint identifiers.	

Exceptions

`instantiation_error`
`type_error`
in *BIDs*

See Also

Section 5.6.7 [Built-in Predicates for Breakpoint Handling], page 264, Section 5.7 [Breakpoint Predicates], page 276.

11.3.191 `repeat/0` *ISO*

Synopsis

```
repeat
```

Succeeds immediately when called and whenever reentered by backtracking.

Description

Generally used to simulate the looping constructs found in traditional procedural languages.

Generates an infinite sequence of backtracking choices. In sensible code, `repeat/0` is hardly ever used except in *repeat loops*. A repeat loop has the structure

```
Head :-
        ...
        save_state(OldState),
        repeat,
          generate(Datum),
          action(Datum),
          test(Datum),
        !,
        restore_state(OldState),
        ...
```

The purpose is to repeatedly perform some *action* on elements that are somehow *generate*d, e.g. by reading them from a stream, until some *test* becomes true. Usually, *generate*, *action*, and *test* are all determinate. Repeat loops cannot contribute to the logic of the program. They are only meaningful if the *action* involves side effects.

The easiest way to understand the effect of `repeat/0` is to think of failures as "bouncing" back off them causing re-execution of the later goals.

Repeat loops are not often needed; usually recursive procedure calls will lead to code that is easier to understand as well as more efficient. There are certain circumstances, however, in which `repeat/0` will lead to greater efficiency. An important property of SICStus Prolog is that all runtime data is stored in stacks so that any storage that has been allocated during a proof of a goal is recovered immediately on backtracking through that goal. Thus, in the above example, any space allocated by any of the *actions* is very efficiently reclaimed. When an iterative construct is implemented using recursion, storage reclamation will only be done by the garbage collector.

Tips

In the most common use of repeat loops, each of the calls succeeds determinately. It can be confusing if calls sometimes fail, so that backtracking starts before the test is reached, or if calls are nondeterminate, so that backtracking does not always go right back to `repeat/0`.

Note that the repeat loop can only be useful if one or more of the *actions* involves a side effect — either a change to the data base (such as an assertion) or an I/O operation. Otherwise you would do the same thing each time around the loop (which would never terminate).

Backtracking

Succeeds repeatedly until backtracking is terminated by a cut or an exception.

Exceptions

None.

See Also

Section 4.2 [ref-sem], page 65.

11.3.192 `restore/1`

Synopsis

`restore(+`*FileSpec*`)`

Restores a saved state.

Arguments

FileSpec *file_spec*, must be ground
The name of a saved state, '`.sav`' extension optional.

Description

The system is returned to the program state previously saved to the file denoted by *FileSpec* with start-up goal *Goal*. `restore/1` may succeed, fail or raise an exception depending on *Goal*.

Exceptions

`instantiation_error`
`type_error`
In *FileSpec*.

`existence_error`
The specified file does not exist. If the `fileerrors` Prolog flag is `off`, then the predicate fails instead of raising this exception.

`permission_error`
A specified file is not readable. If the `fileerrors` Prolog flag is `off`, then the predicate fails instead of raising this exception.

Examples

```
| ?- save_program(state, format('Restored!\n',[])).
% /home/matsc/sicstus4/Bips/state.sav created in 0 msec
yes

| ?- restore(state).
% restoring /home/matsc/sicstus4/Bips/state.sav...
% /home/matsc/sicstus4/Bips/state.sav restored in 10 msec 16 bytes
Restored!
yes
```

See Also

`save_program/[1,2]`, Section 3.10 [Saving], page 30, Section 4.4 [ref-sls], page 96, Section 4.4.2 [ref-sls-sst], page 97, Section 4.9.4 [ref-lps-flg], page 140.

11.3.193 `retract/1` *ISO*

Synopsis

`retract(+Clause)`

Removes the first occurrence of dynamic clause *Clause* from module *M*.

Arguments

:Clause *callable*, must be nonvar
A valid Prolog clause.

Description

`retract/1` erases the first clause in the database that matches *Clause*. *Clause* is retracted in module *M* if specified. Otherwise, *Clause* is retracted in the source module.

`retract/1` is nondeterminate. If control backtracks into the call to `retract/1`, then successive clauses matching *Clause* are erased. If and when no clauses match, then the call to `retract/1` fails.

If the predicate did not previously exist, then it is created as a dynamic predicate and `retract/1` fails.

Clause must be of one of the forms:

- *Head*
- *Head* `:-` *Body*
- *Module*`:`*Clause*

where *Head* is of type callable and the principal functor of *Head* is the name of a dynamic procedure. If specified, then *Module* must be an atom.

`retract(`*Head*`)` means retract the unit-clause *Head*. The exact same effect can be achieved by `retract((`*Head* `:- true))`.

Body may be uninstantiated, in which case it will match any body. In the case of a unit-clause it will be bound to `true`. Thus, for example,

```
| ?- retract((foo(X) :- Body)), fail.
```

is guaranteed to retract all the clauses for `foo/1`, including any unit-clauses, providing of course that `foo/1` is dynamic.

Backtracking

Can be used to retract all matching clauses through backtracking.

Exceptions

`instantiation_error`
Head (in *Clause*) or *M* is uninstantiated.

`type_error`
: *Head* is not a callable, or *M* is not an atom, or *Body* is not a valid clause body.

`permission_error`
: the procedure corresponding to *Head* is not dynamic

See Also

`retractall/1`, Section 4.12.5 [ref-mdb-rcd], page 183.

11.3.194 `retractall/1` *ISO*

Synopsis

`retractall(+`*Head*`)`

Removes every clause in module *M* whose head matches *Head*.

Arguments

:Head	*callable*, must be nonvar
	Head of a Prolog clause.

Description

Head must be instantiated to a term that looks like a call to a dynamic procedure. For example, to retract all the clauses of `foo/3`, you would write

```
| ?- retractall(foo(_,_,_)).
```

Head may be preceded by a *M*: prefix, in which case the clauses are retracted from module *M* instead of the calling module.

`retractall/1` is useful for erasing all the clauses of a dynamic procedure without forgetting that it is dynamic; `abolish/1` will not only erase all the clauses, but will also forget absolutely everything about the procedure. `retractall/1` only erases the clauses. This is important if the procedure is called later on.

Since `retractall/1` erases *all* the dynamic clauses whose heads match *Head*, it has no choices to make, and is determinate. If there are no such clauses, then it succeeds trivially. None of the variables in *Head* will be instantiated by this command.

If the predicate did not previously exist, then it is created as a dynamic predicate and `retractall/1` succeeds.

Exceptions

`instantiation_error`
: *Head* or *Module* is uninstantiated.

`type_error`
: *Head* is not a callable.

`permission_error`
: the procedure corresponding to *Head* is not dynamic.

See Also

`retract/1`, Section 4.12.5 [ref-mdb-rcd], page 183.

11.3.195 `runtime_entry/1` *hook*

Synopsis

```
user:runtime_entry(Event)
```

This predicate is called upon start-up of stand alone applications. Currently, *Event* will be `start`, and the hook is only called when the stand alone application starts (after any saved state etc. has been loaded). In the future, other events may be defined, e.g. when the application exits, so unknown values of *Event* should be ignored. See Chapter 6 [Mixing C and Prolog], page 293, for details.

A typical definition just calls the user-defined code that should be run on startup:

```
user:runtime_entry(start) :-
   start_my_program.

% This is the "real" program code.
start_my_program :-
   write('Hello World\n').
```

11.3.196 `save_files/2`

Synopsis

`save_files(+SourceFiles, +File)`

Any code loaded from *SourceFiles*, as well as from any file included by them, is saved into *File* in PO format.

Arguments

SourceFiles
: *file_spec* or *list of file_spec*, must be ground

  A file specification or a list of file specifications; extensions optional.

File
: *file_spec*, must be ground

  A file specification, '`.po`' extension optional.

Description

Any module declarations, predicates, multifile clauses, or directives encountered in *SourceFiles*, as well as from any file included by them, are saved in object format into the file denoted by *File*. Source file information as provided by `source_file/[1,2]` for the relevant predicates and modules is also saved.

File can later be loaded by `load_files/[1,2]`, at which time any saved directives will be re-executed. If any of the *SourceFiles* declares a module, then *FileSpec* too will behave as a module file and export the predicates listed in the first module declaration encountered in *SourceFiles*. See Section 4.4 [ref-sls], page 96.

Exceptions

`instantiation_error`
: *SourceFiles* or *File* is not bound.

`type_error`
: *SourceFiles* or *File* is not a valid file specification.

`permission_error`
: *File* is not writable.

See Also

`load_files/[1,2]`, Section 3.10 [Saving], page 30, Section 4.4 [ref-sls], page 96, Section 4.4.3 [ref-sls-ssl], page 98.

11.3.197 `save_modules/2`

Synopsis

`save_modules(+`*Modules*`, +`*File*`)`

Saves all predicates in *Modules* in PO format to *File*.

Arguments

Modules *atom* or *list of atom*, must be ground

An atom representing a current module, or a list of such atoms representing a list of modules.

File *file_spec*, must be ground

A file specification, '`.po`' extension optional.

Description

The module declarations, predicates, multifile clauses and initializations belonging to *Modules* are saved in object format into the file denoted by *File*. Source file information and embedded directives (except initializations) are *not* saved.

The PO file produced can be loaded using `load_files/[1,2]`. When multiple modules are saved into a file, loading that file will import only the first of those modules into the module in which the load occurred.

Exceptions

`instantiation_error`
: *Modules* or *File* is not bound.

`type_error`
: *Modules* is not a valid list of module names, or a single module name, or *File* is not a valid file specification.

`permission_error`
: *File* is not writable.

`existence_error`
: A given module is not a current module.

See Also

`load_files/[1,2]`, Section 3.10 [Saving], page 30, Section 4.4 [ref-sls], page 96, Section 4.4.3 [ref-sls-ssl], page 98.

11.3.198 `save_predicates/2`

Synopsis

`save_predicates(+PredSpecs, +File)`

Saves all predicates in *PredSpecs* in PO format to *File*.

Arguments

:PredSpecs
: *pred_spec_tree*

  A predicate specification, or a list of such.

File
: *file_spec*, must be ground

  A file specification, '`.po`' extension optional.

Description

`save_predicates/2` saves the current definitions of all the predicates specified by the list of predicate specifications in PO format into a file. The module of the predicates saved in the PO file is fixed, so it is not possible to save a predicate from any module `foo`, and reload it into module `bar`. Source file information and embedded directives are *not* saved. A typical use of this would be to take a snapshot of a table of dynamic facts.

The PO file that is written out can be loaded using `load_files/[1,2]`.

Please note: if *PredSpecs* contains specifications for which no matching predicate can be found, then a warning is issued, and the file is written anyway. Also, no built-in predicates are saved.

Exceptions

`instantiation_error`
: *PredSpecs* is not instantiated enough, or *File* is not bound.

`type_error`
: *PredSpecs* is not a valid tree of predicate specifications, or *File* is not a valid file specification, or a *Name* is not an atom or an *Arity* is not an integer.

`domain_error`
: if an *Arity* is specified as an integer outside the range 0-255.

`permission_error`
: *File* is not writable.

See Also

`load_files/[1,2]`, Section 3.10 [Saving], page 30, Section 4.4 [ref-sls], page 96, Section 4.4.3 [ref-sls-ssl], page 98.

11.3.199 `save_program/[1,2]`

Synopsis

`save_program(+File)`

`save_program(+File, +Goal)`

Saves the state of the current execution in object format to *File*. A goal, *Goal*, to be called upon execution/restoring of the saved state, may be specified.

Arguments

File *file_spec*, must be ground

A file specification, '`.sav`' extension optional.

:Goal *callable*, must be nonvar

A goal, defaults to `true`.

Description

`save_program/[1,2]` creates a binary representation of all predicates in all modules existing in the system. However, it does not save the user's pre-linked code. It also saves such states of the system as operator definitions, Prolog flags, debugging and advice state, initializations, and dependencies on foreign resources.

The resulting file can be restored using `restore/1`.

Any unbound variables in *Goal* with attributes or blocked goals attached to them will be replaced by plain, brand new variables. This is analogous to the way attributed variables are handled in terms that are written, copied, asserted, gathered as solutions to `findall/3` and friends, or raised as exceptions. To retain the attributes, you can use `copy_term/3` (see Section 4.8.7 [ref-lte-cpt], page 133).

Exceptions

`instantiation_error`
: *File* or *Goal* is not bound.

`type_error`
: *File* is not a valid file specification, or *Goal* is not a callable.

`permission_error`
: *File* is not writable.

Examples

```
| ?- save_program(state, format('Restored!\n',[])).
% /home/matsc/sicstus4/Bips/state.sav created in 0 msec
yes

| ?- restore(state).
% restoring /home/matsc/sicstus4/Bips/state.sav...
% /home/matsc/sicstus4/Bips/state.sav restored in 10 msec 16 bytes
Restored!
yes
```

See Also

`restore/1`, Section 3.10 [Saving], page 30, Section 4.4 [ref-sls], page 96, Section 4.4.2 [ref-sls-sst], page 97.

11.3.200 `see/1`

Synopsis

`see(+FileOrStream)` Makes file *FileOrStream* the current input stream.

Arguments

FileOrStream
: *file_spec* or *stream_object*, must be ground

Description

If there is an open input stream associated with *FileOrStream*, and that stream was opened by `see/1`, then it is made the current input stream. Otherwise, the specified file is opened for input in text mode with default options and made the current input stream.

Different file names (that is, names that do not unify) represent different streams (even if they correspond to the same file). Therefore, assuming `food` and `./food` represent the same file, the following sequence will open two streams, both connected to the same file.

```
see(food)
...
see('./food')
```

It is important to remember to close streams when you have finished with them. Use `seen/0` or `close/[1,2]`.

Exceptions

`instantiation_error`
: *FileOrStream* is not instantiated enough.

`existence_error`
: *FileOrStream* specifies a nonexisting file, and the `fileerrors` Prolog flag is `on`.

`permission_error`
: *FileOrStream* is a stream not currently open for input, or *FileOrStream* specifies a file with insufficient access permission, and the `fileerrors` Prolog flag is `on`.

`domain_error`
: *FileOrStream* is neither a file_spec nor a stream_object.

See Also

`seen/0`, `open/[3,4]`, `current_input/1`, Section 4.6.7 [ref-iou-sfh], page 113, Section 4.9.4 [ref-lps-flg], page 140.

11.3.201 `seeing/1`

Synopsis

`seeing(-FileOrStream)`

Unifies *FileOrStream* with the current input stream or file.

Arguments

FileOrStream
: *file_spec* or *stream_object*

Description

Exactly the same as `current_input(FileOrStream)`, except that *FileOrStream* will be unified with a filename if the current input stream was opened by `see/1` (Section 4.6.7 [ref-iou-sfh], page 113).

Can be used to verify that `FileNameOrStream` is still the current input stream as follows:

```
% nonvar(FileNameOrStream),
see(FileNameOrStream),
...
seeing(FileNameOrStream)
```

If the current input stream has not been changed (or if changed, then restored), then the above sequence will succeed for all file names and all stream objects opened by `open/[3,4]`. However, it will fail for all stream objects opened by `see/1` (since only filename access to streams opened by `see/1` is supported). This includes the stream object `user_input` (since the standard input stream is assumed to be opened by `see/1`, and so `seeing/1` would return `user` in this case).

If *FileOrStream* is instantiated to a value that is not the identifier of the current input stream, then `seeing(FileOrStream)` simply fails.

Can be followed by `see/1` to ensure that a section of code leaves the current input unchanged:

```
% var(OldFileNameOrStream),
seeing(OldFileNameOrStream),
...
see(OldFileNameOrStream)
```

The above is analogous to its stream-object-based counterpart,

```
% var(OldStream),
current_input(OldStream),
...
set_input(OldStream)
```

Both of these sequences will always succeed regardless of whether the current input stream was opened by `see/1` or `open/[3,4]`.

Exceptions

None.

See Also

`see/1`, `open/[3,4]`, `current_input/1`, Section 4.6.7 [ref-iou-sfh], page 113.

11.3.202 `seek/4`

Synopsis

`seek(+Stream, +Offset, +Method, -NewLocation)`

Seeks to an arbitrary position in *Stream*.

Arguments

Stream *stream_object*, must be ground

A valid Prolog stream.

Offset *integer*, must be nonvar

The offset, in *items*, to seek relative to the specified *Method*. Items are bytes for binary streams, characters for text streams.

Method *one of* `[bof,current,eof]`, must be nonvar

Where start seeking, one of the following:

`bof`	Seek from beginning of the file stream.
`current`	Seek from current position of the file stream.
`eof`	Seek from end of the file stream.

NewLocation

integer

The offset from beginning of the file after seeking operation.

Description

Sets the current position of the file stream *Stream* to a new position according to *Offset* and *Method*. If *Method* is:

`bof`	then the new position is set to *Offset* *items* from beginning of the file stream.
`current`	then the new position is *Offset* plus the current position of *Stream*.
`eof`	then the new position is *Offset*, plus the current size of the stream. Avoid using this *Method*. Determining the size of the stream may be expensive or unsupported for some streams.

Positions and offsets are measured in *items*, bytes for binary streams and characters for text streams. Note that there may not be any simple relationship between the number of characters read and the byte offset of a text file.

After applying this operation on a text stream, the line counts and line position aspects of the stream position of *Stream* will be undefined.

The term “file” above is used even though the stream may be connected to other seekable objects that are not files, e.g. an in-memory buffer.

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113), plus:

`instantiation_error`
: *Offset* or *Method* is not instantiated.

`type_error`
: *Stream* is not a stream object, or *Offset* is not an integer, or *Method* is not an atom.

`domain_error`
: *Method* is not one of `bof`, `current` or `eof`, or the resulting position would refer to an unsupported location. Some streams supports setting the position past the current end of the stream, in this case the stream is padded with zero bytes or characters as soon as an item is written to the new location.

`permission_error`
: Seeking was not possible. Common reasons include: the stream has not been opened with `reposition(true)`, the stream is a text stream that does not implement seeking, or an I/O error happened during seek.

See Also

`stream_position/2`, `set_stream_position/2`, `open/[3,4]`, `byte_count/2`, `character_count/2`, `line_count/2`, `line_position/2`, Section 4.6.7 [ref-iou-sfh], page 113.

11.3.203 `seen/0`

Synopsis

`seen`

Closes the current input stream.

Description

Current input stream is set to be `user_input`; that is, the user's terminal.

Always succeeds

Exceptions

None.

Examples

See Also

`see/1`, `close/[1,2]`, `current_input/1`, Section 4.6.7 [ref-iou-sfh], page 113.

11.3.204 `set_input/1` ***ISO***

Synopsis

`set_input(+`*`Stream`*`)`

makes *Stream* the current input stream.

Arguments

Stream *stream_object*, must be ground
A valid input stream.

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113).

See Also

`see/1`, Section 4.6.7 [ref-iou-sfh], page 113.

11.3.205 `set_module/1`

Synopsis

`set_module(+`*`ModuleName`*`)`

Changes the type-in module (see Section 4.11.8 [ref-mod-tyi], page 170) to *ModuleName*. Thus subsequent top-level goals use *ModuleName* as their source module.

Arguments

ModuleName

atom, must be nonvar

The name of a module.

Description

If *ModuleName* is not a current module, then a warning message is issued, but the type-in module is changed nonetheless.

Calling `set_module/1` from a command embedded in a file that is being loaded does not affect the loading of clauses from that file. It only affects subsequent goals that are typed at top level.

Exceptions

`instantiation_error`
`type_error`

Examples

See Also

Section 4.11 [ref-mod], page 165, Section 4.11.8 [ref-mod-tyi], page 170.

11.3.206 `set_output/1` ***ISO***

Synopsis

`set_output(+`*`Stream`*`)`

makes *Stream* the current output stream.

Arguments

Stream *stream_object*, must be ground
A valid output stream.

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113).

See Also

`tell/1`, Section 4.6.7 [ref-iou-sfh], page 113.

11.3.207 `set_prolog_flag/2` *ISO*

Synopsis

`set_prolog_flag(+FlagName, +Value)`

same as:

`prolog_flag(FlagName, _, Value)`

Arguments

FlagName *atom*, must be nonvar

Value *term*, must be nonvar and belong to proper type/domain

Exceptions

`instantiation_error`
: An argument is unbound or insufficiently instantiated.

`type_error`
: *FlagName* is not an atom.

`domain_error`
: *FlagName* is not a valid flag name, or *Value* is not a valid value for it.

`permission_error`
: The flag is read-only.

See Also

`current_prolog_flag/2`, `prolog_flag/[2,3]`, Section 4.9.4 [ref-lps-flg], page 140.

11.3.208 `set_stream_position/2` *ISO*

Synopsis

`set_stream_position(+`*Stream*`, +`*Position*`)`

Sets the current position of *Stream* to *Position*.

Arguments

Stream *stream_object*, must be ground
An open stream.

Position *term*
Stream position object representing the current position of *Stream*.

Description

`set_stream_position/2` repositions the stream pointer, and also the other counts, such as byte, character, and line counts and line position. It may only be used on streams that have been opened with the `open/4` option `reposition(true)`.

Please note: A stream position object is represented by a special Prolog term. The only safe way of obtaining such an object is via `stream_position/2` or `stream_property/2`. You should not try to construct, change, or rely on the form of this object. It may change in subsequent releases.

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113), plus:

`instantiation_error`
`domain_error`
Position is not a valid stream position object.

See Also

`stream_position/2`, `stream_property/2`, Section 4.6.7 [ref-iou-sfh], page 113.

11.3.209 `setof/3` *ISO*

Synopsis

`setof(+Template, +Generator, -Set)`

Returns the non-empty set *Set* of all instances of *Template* such that *Generator* is provable.

Arguments

Template *term*

:Generator

callable, must be nonvar

A goal to be proved as if by `call/1`.

Set *list of term*

Description

Set is a non-empty set of terms represented as a list of those terms, without duplicates, in the standard order for terms (see Section 4.8.8 [ref-lte-cte], page 134). If there are no instances of *Template* such that *Generator* is satisfied, then `setof/3` simply fails.

Obviously, the set to be enumerated should be finite, and should be enumerable by Prolog in finite time. It is possible for the provable instances to contain variables, but in this case *Set* will only provide an imperfect representation of what is in reality an infinite set.

If *Generator* is instantiated, but contains uninstantiated variables that do not also appear in *Template*, then `setof/3` can succeed nondeterminately, generating alternative values for *Set* corresponding to different instantiations of the free variables of *Generator*. (It is to allow for such usage that *Set* is constrained to be non-empty.)

If *Generator* is of the form *A^B*, then all the variables in *A* are treated as being existentially quantified.

Please note: If the instances being gathered contain attributed variables (see Section 10.3 [lib-atts], page 397) or suspended goals (see Section 4.2.4 [ref-sem-sec], page 78), then those variables are replaced by brand new variables, without attributes, in the *Set*. To retain the attributes, you can use `copy_term/3` (see Section 4.8.7 [ref-lte-cpt], page 133).

Backtracking

`setof/3` can succeed nondeterminately, generating alternative values for *Set* corresponding to different instantiations of the free variables of *Generator*.

Exceptions

Call errors (see Section 4.2.6 [ref-sem-exc], page 81).

Examples

See `findall/3` for examples that illustrate the differences among `findall/3`, `setof/3`, and `bagof/3`.

See Also

`findall/3`, `bagof/3`, `^/2`, Section 4.13 [ref-all], page 190.

11.3.210 `simple/1`

Synopsis

`simple(+Term)`

Term is currently not instantiated to a compound term.

Arguments

Term *term*

Examples

```
| ?- simple(9).

yes
| ?- simple(_X).

yes
| ?- simple("a").

no
```

Exceptions

None.

See Also

Section 4.8.1.1 [ref-lte-met-typ], page 130.

11.3.211 `skip_byte/[1,2]`

Synopsis

`skip_byte(+`*Byte*`)`

`skip_byte(+`*Stream*`, +`*Byte*`)`

read up to and including the first occurrence of *Byte* on the current input stream or on the input stream *Stream*.

Arguments

Stream *stream_object*, must be ground

A valid input *binary* stream, defaults to the current input stream.

Byte *byte*

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113), plus:

`type_error`
: *Byte* is an invalid byte.

`permission_error`
: Trying to read beyond end of *Stream*

`type_error`
: *Byte* is not a *byte*

See Also

Section 4.6.5 [ref-iou-cin], page 111.

11.3.212 `skip_char/[1,2]`

Synopsis

`skip_char(+Char)`

`skip_char(+Stream, +Char)`

Read up to and including the first occurrence of *Char* on the current input stream or on the input stream *Stream*.

Arguments

Stream *stream_object*, must be ground
A valid input *text* stream.

Char *char*

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113), plus:

`permission_error`
Trying to read beyond end of *Stream*

`type_error`
Char is not a *char*

See Also

Section 4.6.5 [ref-iou-cin], page 111.

11.3.213 `skip_code/[1,2]`

Synopsis

`skip_code(+`*`Code`*`)`

`skip_code(+`*`Stream`*`, +`*`Code`*`)`

read up to and including the first occurrence of *Code* on the current input stream or on the input stream *Stream*.

Arguments

Stream	*stream_object*, must be ground
	A valid input *text* stream, defaults to the current input stream.
Code	*code*

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113), plus:

`permission_error`
: Trying to read beyond end of *Stream*

`representation_error`
: *Code* is not a *code*

See Also

Section 4.6.5 [ref-iou-cin], page 111.

11.3.214 `skip_line/[0,1]`

Synopsis

`skip_line`

`skip_line(+`*`Stream`*`)`

Skip the remaining input characters on the current line on *Stream*.

Arguments

Stream *stream_object*, must be ground
A valid input *text* stream, defaults to the current input stream.

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113), plus:

`permission_error`
Trying to read beyond end of *Stream*

See Also

`at_end_of_line/[0,1]`, Section 4.6.5 [ref-iou-cin], page 111.

11.3.215 `sort/2` *ISO*

Synopsis

`sort(+List, -Sorted)`

Sorts the elements of the list *List* into the ascending standard order, and removes any multiple occurrences of an element. The resulting sorted list is unified with the list *Sorted*.

Arguments

List *list of term*, must be a proper list

Sorted *list of term*

Sorted is type checked since release 4.3 for alignment with the ISO Prolog standard. Previous releases simply failed instead of reporting an error for malformed *Sorted*.

Exceptions

`instatiation_error`
`type_error`
: *List* is not a proper list

`type_error`
: *Sorted* cannot be unified with a proper list

Examples

```
| ?- sort([a,X,1,a(x),a,a(X)], L).
L = [X,1,a,a(X),a(x)]
```

(The time taken to do this is at worst order (N log N) where N is the length of the list.)

See Also

Section 4.8.8.3 [ref-lte-cte-sor], page 135.

11.3.216 source_file/[1,2]

Synopsis

`source_file(?AbsFile)`

`source_file(?Pred, ?AbsFile)`

AbsFile is the absolute name of a loaded file, and *Pred* is a predicate with clauses in that file. *AbsFile* will be `user` if the special file specification `user` was loaded, and *Pred* is a predicate with clauses from `user`.

Arguments

:Pred *callable*

Selected predicate specification.

AbsFile *atom*

Absolute filename.

Description

Loaded files include compiled, consulted, restored, PO loaded and pre-linked files.

If *AbsFile* is bound and not the name of a loaded file, or if *Pred* is bound and not the name of a loaded predicate, then `source_file(AbsFile)` simply fails.

To find *any* predicates defined in a given file, use the form:

```
source_file(M:P, File)
```

Examples

Suppose that the startup file `~/.sicstusrc` defines a predicate `user:cd/1`. Then upon startup:

```
| ?- source_file(F).
F = '/src/sicstus/matsc/sicstus4/Utils/x86-linux-glibc2.3/bin/sp-
4.1.0/sicstus-4.1.0/library/SU_messages.pl' ? ;
F = '/home/matsc/.sicstusrc' ? ;
no

| ?- source_file(P,F).
F = '/home/matsc/.sicstusrc',
P = cd(_A) ? ;
no

| ?- source_file('SU_messages':P,F).
F = '/src/sicstus/matsc/sicstus4/Utils/x86-linux-glibc2.3/bin/sp-
4.1.0/sicstus-4.1.0/library/SU_messages.pl',
P = query_class(_A,_B,_C,_D,_E) ? RET
yes
```

Exceptions

None.

See Also

Section 4.9.3 [ref-lps-apf], page 140.

11.3.217 `spy/[1,2]` *development*

Synopsis

`spy +PredSpecs`

Sets plain spypoints on all the predicates represented by *PredSpecs*.

`spy(+PredSpecs, +Conditions)`

Sets conditional spypoints on all the predicates represented by *PredSpecs*.

Arguments

:PredSpecs
: *pred_spec_tree*

  A predicate specification, or a list of such.

:Conditions
: *term*, must be ground

  Spypoint conditions.

Description

Turns debugger on in debug mode, so that it will stop as soon as it reaches a spypoint. Turning off the debugger does not remove spypoints. Use `nospy/1` or `nospyall/0`) to explicitly remove them.

If you use the predicate specification form *Name* but there are no clauses for *Name* (of any arity), then a warning message will be displayed and no spypoint will be set.

```
| ?- spy test.
* spy user:test - no matching predicate
```

Exceptions

`instantiation_error`
`type_error`
`domain_error`
: if a *PredSpec* is not a valid procedure specification

See Also

Section 5.2 [Basic Debug], page 237, Section 5.3 [Plain Spypoint], page 239, Section 5.7 [Breakpoint Predicates], page 276.

11.3.218 `statistics/[0,2]`

Synopsis

`statistics`

Displays statistics relating to memory usage and execution time.

`statistics(?Keyword, ?List)`

Obtains individual statistics.

Arguments

Keyword *atom*
: Statistics key (see Section 4.10.1.2 [ref-mgc-ove-sta], page 150).

List *list of integer*
: List of statistics.

Description

`statistics/0` displays various statistics relating to memory usage, runtime and garbage collection, including information about which areas of memory have overflowed and how much time has been spent expanding them. The printing is handled by `print_message/2`.

Garbage collection statistics are initialized to zero when a Prolog session starts. The statistics increase until the session is over.

`statistics/2` is usually used with *Keyword* instantiated to a keyword such as `runtime` and *List* unbound. The predicate then binds *List* to a list of statistics related to the keyword. It can be used in programs that depend on current runtime statistical information for their control strategy, and in programs that choose to format and write out their own statistical summaries.

Exceptions

`type_error`
`domain_error`
: Invalid keyword.

Examples

To report information on the runtime of a predicate `p/0`, add the following to your program:

```
:- statistics(runtime, [T0|_]),
   p,
   statistics(runtime, [T1|_]),
   T is T1 - T0,
   format('p/0 took ~3d sec.~n', [T]).
```

See Also

Section 4.10.1.2 [ref-mgc-ove-sta], page 150, Section 4.16 [ref-msg], page 216.

11.3.219 `stream_code/2`

Synopsis

`stream_code(-`*`Stream`*`, +`*`CStream`*`)`

`stream_code(+`*`Stream`*`, -`*`CStream`*`)`

Converts between Prolog representation, *Stream*, and C representation, *CStream*, of a stream.

Arguments

Stream *stream_object*

A valid Prolog stream.

CStream *integer*

Representing an `SP_stream *` pointer.

Description

At least one argument must be ground. `stream_code/2` is used when there are input/output related operations performed on the same stream in both Prolog code and foreign code. The *CStream* value can be used as the stream argument to any of the SP_* functions taking a stream argument.

Exceptions

`instantiation_error`
: Both *Stream* and *CStream* unbound.

`type_error`
: *Stream* or *CStream* is not a stream type or *CStream* is not an integer type.

`existence_error`
: *Stream* is syntactically valid but does not name an open stream or *CStream* is of integer type but does not name a pointer to a stream.

See Also

Section 6.6.1 [Prolog Streams], page 315.

11.3.220 `stream_position/2`

Synopsis

`stream_position(+`*`Stream`*`, -`*`Position`*`)`

True when *Position* represents the current position of *Stream*.

Arguments

Stream *stream_object*, must be ground

An open stream.

Position *term*

Stream position object representing the current position of *Stream*.

Description

Byte, character, and line counts and line position determine the position of the pointer in the stream. Such information is found by using `byte_count/2`, `character_count/2`, `line_count/2` and `line_position/2`. A stream position object packages this information as a single Prolog terms. You can retrieve this information from a stream position object using `stream_position_data/3`. Do not rely on the form of this object in any other way.

Standard term comparison of two stream position objects for the same stream will work as one expects. When *SP1* and *SP2* refer to positions in the same stream, *`SP1`* `@<` *`SP2`* if and only if *SP1* is before *SP2* in the stream.

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113).

Examples

See Also

Section 4.6.7 [ref-iou-sfh], page 113.

11.3.221 `stream_position_data/3`

Synopsis

stream_position_data(*?Field*, *?Position*, *?Value*)

Value is the value of the *Field* field of stream position object *Position*.

Arguments

Field	*one of* `[byte_count,line_count,character_count,line_position]` Note that `byte_count` is meaningful only for binary streams and that the other values are meaningful only for text streams.
Position	*term* Stream position object representing the current position of *Stream*.
Value	*integer*

Backtracking

Can be used to backtrack over the fields.

Exceptions

None.

See Also

Section 4.6.7 [ref-iou-sfh], page 113.

11.3.222 `stream_property/2` *ISO*

Synopsis

stream_property(*?Stream*, *?Property*)

Stream *Stream* has stream property *Property*.

Arguments

Stream *stream_object*

Property *term*

A stream property, one of the following:

`file_name(F)`
: *F* is the file name associated with the *Stream*.

`mode(M)` *Stream* has been opened in mode *M*.

`id(ID)` *since release 4.2*
: *Stream* has the unique identity *ID*. The identity of a stream is a positive integer that is never re-used during the life-time of the SICStus process. This is unlike the compound term *Stream* which is likely to be re-used for some new stream after the original stream denoted by *Stream* has been closed.

`input` *Stream* is an input stream. Note that both `input` and `output` stream properties are set for bidirectional streams.

`output` *Stream* is an output stream. Note that both `input` and `output` stream properties are set for bidirectional streams.

`alias(A)` *Stream* has an alias *A*.

`position(P)`
: *P* is a term representing the current stream position of *Stream*. Only guaranteed to be available if the stream has been opened with the `open/4` option `reposition(true)`.

  Same as `stream_position(Stream, P)` except that the latter can be called on any stream, regardless of the value of the `reposition/1` `open/4` option.

`end_of_stream(E)`
: *E* describes the position of the input stream *Stream*, with respect to the end of stream. If not all characters have been read, or if peeking ahead to determine this fact would block, then *E* is unified with `not`; otherwise, (all characters read) but no end of stream indicator (-1 or `end_of_file`) was reported yet, then *E* is unified with `at`; otherwise, *E* is unified with `past`.

`eof_action(A)`
: *A* is the end-of-file action applicable to *Stream*, cf. the `eof_action` option of `open/4`.

`type(T)` *Stream* is of type *T*, one of `text`, `binary`, cf. the `type` option of `open/4`.

`input_encoding(CS)` *since release 4.3*
`output_encoding(CS)` *since release 4.3*
Stream is a text stream with encoding *CS* in the input direction, cf. the `encoding` option of `open/4`. Note that the encoding used may be different from the `encoding` option passed to `open/4` if a byte order mark or other information was used to determine the real encoding of the file, cf. the `encoding_signature` option of `open/4`.

`encoding(CS)`
Stream is a text stream open in direction input, with input encoding *CS* or *Stream* is a text stream open in direction output but not in direction input, with output encoding *CS*.

Note that, for bi-directional streams, the `encoding/1` property reflects the `input_encoding/1`.

`eol(EOL)` *Stream* is a text stream with end of line convention *EOL*, cf. the `eol` option of `open/4`.

`encoding_signature(ES)`
If *Stream* is a text stream, then *ES* is determined as follows:

If the file contents was used to determine the character encoding, then *ES* will be true. Typically this is the result of opening, in mode `read`, a text file that contains a byte order mark or some other information that lets `open/[3,4]` determine a suitable encoding, cf. the `encoding_signature` option of `open/4`.

Otherwise, if the stream is open in direction output, then *ES* will be as specified when the file was opened.

`reposition(REPOSITION)`
REPOSITION is true if it is possible to set the position of the stream with `set_stream_position/2`, cf. the `reposition` option of `open/4`.

`interactive` *since release 4.1*
Stream is an interactive stream.

Most streams have only a subset of these properties set.

More properties may be added in the future.

Backtracking

Can be used to backtrack over all currently open streams, including the standard input/output/error streams, and all their properties. See Section 4.6.7.8 [ref-iou-sfh-bos], page 117.

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113), plus:

`domain_error`
: *Stream* is not a valid stream object, or *Property* is not a valid stream property.

See Also

Section 4.6.7 [ref-iou-sfh], page 113.

11.3.223 sub_atom/5 *ISO*

Synopsis

`sub_atom(+Atom,-Before,-Length,-After,-SubAtom)`

The characters of *SubAtom* form a sublist of the characters of *Atom*, such that the number of characters preceding *SubAtom* is *Before*, the number of characters after *SubAtom* is *After*, and the length of *SubAtom* is *Length*.

Arguments

Atom *atom*, must be nonvar
The atom from which a part is selected.

Before *integer*
The number of characters preceding *SubAtom*.

Length *integer*
The number of characters of *SubAtom*.

After *integer*
The number of characters following *SubAtom*.

SubAtom *atom*
The selected part of *Atom*.

Description

Capable of nondeterminately enumerating all sub-atoms and their all possible placements, e.g.:

```
| ?- sub_atom(abrakadabra, Before, _, After, ab).

After = 9,
Before = 0 ? ;

After = 2,
Before = 7 ? ;

no
```

Exceptions

`instantiation_error`
Atom is uninstantiated.

`type_error`
Atom is not an atom. *Before*, *Length*, or *After*, if instantiated, is not an integer. *SubAtom*, if instantiated, is not an atom.

`domain_error`
Before, *Length*, or *After*, if instantiated, is negative.

See Also

`atom_length/2`, `atom_concat/3`.

11.3.224 `subsumes_term/2` *ISO*

Synopsis

`subsumes_term(+General, +Specific)`

True iff there is a substitution that makes *General* identical to *Specific* and that does not affect *Specific*. It does not bind any variables.

Arguments

General any term.

Specific any term.

Description

True iff there is a substitution that makes *General* identical to *Specific* and that does not affect *Specific*.

The predicate is determinate and either succeeds or fails. It never binds variables.

The predicate does not take any constraints, variable attributes, or blocked goals into account when determining whether a substitution exists. This can be seen in the last two examples.

Examples

```
| ?- subsumes_term(a, a).
yes

| ?- subsumes_term(f(X,Y), f(Z,Z)).
yes

| ?- subsumes_term(f(Z,Z), f(X,Y)).
no

| ?- subsumes_term(f(X,Y), f(Y,X)).
no

| ?- subsumes_term(g(X), g(f(X))).
no

| ?- subsumes_term(X, f(X)).
no

| ?- subsumes_term(X, Y), subsumes_term(Y, f(X)).
yes

| ?- when(nonvar(X), X=a), subsumes_term(X, b), X = a.
X = a ?
yes

| ?- when(nonvar(X), X=a), subsumes_term(X, b), X = b.
no
```

Exceptions

None.

See Also

Section 4.8.1.2 [ref-lte-met-usu], page 130.

11.3.225 `tell/1`

Synopsis

`tell(+`*`FileOrStream`*`)`

Makes file *FileOrStream* the current output stream.

Arguments

FileOrStream
: *file_spec* or *stream_object*, must be ground

Description

If there is an open output stream associated with *FileOrStream*, and that stream was opened by `tell/1`, then it is made the current output stream. Otherwise, the specified file is opened for output in text mode with default options and made the current output stream.

Different file names (that is, names that do not unify) represent different streams (even if they correspond to the same file). Therefore, assuming `food` and `./food` represent the same file, the following sequence will open two streams, both connected to the same file.

```
tell(food)
...
tell('./food')
```

It is important to remember to close streams when you have finished with them. Use `told/0` or `close/[1,2]`.

Exceptions

`instantiation_error`
: *FileOrStream* is not instantiated enough.

`existence_error`
: *FileOrStream* specifies a nonexisting file, and the `fileerrors` Prolog flag is `on`.

`permission_error`
: *FileOrStream* is a stream not currently open for output, or *FileOrStream* specifies a file with insufficient access permission, and the `fileerrors` Prolog flag is `on`.

`domain_error`
: *FileOrStream* is neither a file_spec nor a stream_object.

See Also

`told/0`, `open/[3,4]`, `current_output/1`, Section 4.6.7 [ref-iou-sfh], page 113, Section 4.9.4 [ref-lps-flg], page 140.

11.3.226 `telling/1`

Synopsis

`telling(-`*`FileOrStream`*`)`

Unifies *FileOrStream* with the current output stream or file.

Arguments

FileOrStream
: *file_spec* or *stream_object*

Description

Exactly the same as `current_output(`*`FileOrStream`*`)`, except that *FileOrStream* will be unified with a filename if the current output stream was opened by `tell/1` (Section 4.6.7 [ref-iou-sfh], page 113).

Can be used to verify that `FileNameOrStream` is still the current output stream as follows:

```
% nonvar(FileNameOrStream),
tell(FileNameOrStream),
...
telling(FileNameOrStream)
```

If the current output stream has not been changed (or if changed, then restored), then the above sequence will succeed for all file names and all stream objects opened by `open/[3,4]`. However, it will fail for all stream objects opened by `tell/1` (since only filename access to streams opened by `tell/1` is supported). This includes the stream object `user_output` (since the standard output stream is assumed to be opened by `tell/1`, and so `telling/1` would return `user` in this case).

If *FileOrStream* is instantiated to a value that is not the identifier of the current output stream, then `telling(`*`FileOrStream`*`)` simply fails.

Can be followed by `tell/1` to ensure that a section of code leaves the current output unchanged:

```
% var(OldFileNameOrStream),
telling(OldFileNameOrStream),
...
tell(OldFileNameOrStream)
```

The above is analogous to its stream-object-based counterpart,

```
% var(OldStream),
current_output(OldStream),
...
set_output(OldStream)
```

Both of these sequences will always succeed regardless of whether the current output stream was opened by `tell/1` or `open/[3,4]`.

Exceptions

None.

See Also

`tell/1`, `open/[3,4]`, `current_input/1`, Section 4.6.7 [ref-iou-sfh], page 113.

11.3.227 ==/2 *ISO*

Synopsis

+*Term1* == +*Term2*

Succeeds if *Term1* and *Term2* are *identical terms*.

Arguments

Term1 *term*

Term2 *term*

Examples

For example, the query

```
| ?- X == Y.
```

fails (answers 'no') because X and Y are distinct uninstantiated variables. However, the query

```
| ?- X = Y, X == Y.
```

succeeds because the first goal unifies the two. variables

Exceptions

None.

See Also

Section 4.8.8 [ref-lte-cte], page 134.

11.3.228 `term_expansion/6` *hook*

Synopsis

```
:- multifile user:term_expansion/6.

user:term_expansion(+Term1, +Layout1, +Tokens1, -Term2, -Layout2, -Tokens2)
```

Overrides or complements the standard transformations to be done by `expand_term/2`.

Arguments

Term1	*term*
	Term to transform.
Layout1	*term*
	Layout term of *Term1*.
Tokens1	*list of atom*
Term2	*term*
	Transformed term.
Layout2	*term*
	Layout term of *Term2*.
Tokens2	*list of atom*

Description

`expand_term/2` calls this hook predicate first; if it succeeds, then the standard grammar rule expansion is not tried.

Tokens1 is a list of atoms, each atom uniquely identifying an expansion. It is used to look up what expansions have already been applied to the clause or goal. The tokens are defined by the user, and should simply be added to the input list, before expansions recursively are applied. This token list can for instance be used to avoid cyclic expansions. The token `dcg` is reserved and denotes grammar rule expansion. *Tokens2* should be unified with *[Token|Tokens1]*.

Layout1 and *Layout2* are for supporting source-linked debugging in the context of clause expansion. The predicate should construct a suitable *Layout2* compatible with *Term2* that contains the line number information from *Layout1*. If source-linked debugging of *Term2* is not important, then *Layout2* should be `[]`. The recording of source info is affected by the `source_info` prolog flag (see Section 4.9.4 [ref-lps-flg], page 140).

A clause of this predicate should conform to the following template, where `convert(Term1, Layout1, Expansion, Layout)` should be a goal that performs the actual transformation. *Token* should be the atom uniquely identifying this particular transformation rule. *Tokens2* should be unified with *[Token|Tokens1]*.

```
user:term_expansion(Term1, Layout1, Tokens1, Term2, Layout2, Tokens2) :-
        nonmember(Token, Tokens1),
        convert(Term1, Layout1, Expansion, Layout),
        !, % commit to this expansion
        Term2 = Expansion,
        Layout2 = Layout,
        Tokens2 = [Token|Tokens1].
```

This hook predicate may return a list of terms rather than a single term. Each of the terms in the list is then treated as a separate clause (or directive).

This hook predicate may also be used to transform queries entered at the terminal in response to the '`| ?- `' prompt. In this case, it will be called with *Term1* = `?-(Query)` and should succeed with *Term2* = `?-(ExpandedQuery)`.

For accessing aspects of the load context, e.g. the name of the file being compiled, the predicate `prolog_load_context/2` (see Section 4.9.5 [ref-lps-lco], page 147) can be used.

Exceptions

Exceptions are treated as failures, except an error message is printed also.

See Also

Section 4.3.5 [ref-lod-exp], page 91, Chapter 2 [Glossary], page 7.

11.3.229 `@>/2` *ISO*

Synopsis

+*Term1* `@>` +*Term2*

Succeeds if *Term1* is *after* *Term2* in the standard order.

Arguments

Term1 *term*

Term2 *term*

Exceptions

None.

See Also

Section 4.8.8 [ref-lte-cte], page 134.

11.3.230 `@</2` ***ISO***

Synopsis

+*Term1* `@<` +*Term2*

Succeeds if *Term1* is *before* *Term2* in the standard order.

Arguments

Term1 *term*

Term2 *term*

Exceptions

None.

See Also

Section 4.8.8 [ref-lte-cte], page 134.

11.3.231 \==/2 *ISO*

Synopsis

+*Term1* \== +*Term2*

Succeeds if *Term1* and *Term2* are *non-identical terms*.

Arguments

Term1	*term*
Term2	*term*

Exceptions

None.

See Also

Section 4.8.8 [ref-lte-cte], page 134.

11.3.232 `@=</2` ***ISO***

Synopsis

+*Term1* `@=<` +*Term2*

Succeeds if *Term1* is *not after* *Term2* in the standard order.

Arguments

Term1	*term*
Term2	*term*

Exceptions

None.

See Also

Section 4.8.8 [ref-lte-cte], page 134.

11.3.233 `@>=/2` *ISO*

Synopsis

+*Term1* `@>=` +*Term2*

Succeeds if *Term1* is *not before Term2* in the standard order.

Arguments

Term1 *term*

Term2 *term*

Exceptions

None.

See Also

Section 4.8.8 [ref-lte-cte], page 134.

11.3.234 `?=/2`

Synopsis

`?=(+`*`Term1`*`,+`*`Term2`*`)`

Succeeds if *Term1* and *Term2* are *identical terms*, or if they are syntactically non-unifiable.

Arguments

Term1 *term*

Term2 *term*

Comments

Succeeds if and only if `dif(`*`Term1`*`,`*`Term2`*`)` does not block.

Exceptions

None.

See Also

Section 4.8.1.2 [ref-lte-met-usu], page 130.

11.3.235 term_variables/2 *ISO*

Synopsis

`term_variables(+Term, -Variables)` *since release 4.3* True if *Variables* is the list of variables occurring in *Term*, without duplicates, in first occurrence order.

Arguments

Term Any *term*, a cyclic term is also accepted.

-*Variables* The variables in the term. Must be a variable or a list.

Exceptions

`type_error`
Variables is not a variable or a list.

Description

Please note: "first occurrence order" is *not*, in general, well-defined for cyclic terms. This means that for two equal cyclic terms the order of the list of variables returned by `term_variables/2` may differ. Sorting, e.g. with `sort/2`, can be used to obtain the ordered set of variables of a term. The set of variables in a term will be the same for any pair of equal terms, including cyclic terms.

Examples

```
| ?- term_variables(f(A, B, A), Vs).
Vs = [A,B] ?
yes
| ?- term_variables(f(a, b, a), Vs).
Vs = [] ?
yes
| ?- T=[A,B|T], term_variables(f(C,T), Vs).
T = [A,B,A,B,A,B,A,B,A,B|...],
Vs = [C,A,B] ?
yes
```

See Also

Section 4.8.2 [ref-lte-act], page 131.

11.3.236 `throw/1` *ISO*

Synopsis

`throw(+`*Exception*`)`

Exception is thrown as an exception.

Arguments

Exception *term*, must be nonvar

Exceptions

`instantiation_error`
: *Exception* is unbound.

See Also

Section 4.15 [ref-ere], page 201, `catch/3`.

11.3.237 `told/0`

Synopsis

`told`

Closes the current output stream.

Description

Current output stream is set to be `user_output`; that is, the user's terminal.

Always succeeds

Exceptions

None.

Examples

See Also

`tell/1`, `close/[1,2]`, `current_output/1`, Section 4.6.7 [ref-iou-sfh], page 113.

11.3.238 `trace/0` *development*

Synopsis

```
trace
```

Turns on the debugger in trace mode.

Description

The debugger will start showing goals as soon as the first call is reached, and it will stop to allow you to interact as soon as it reaches a leashed port (see `leash/1`). Setting the debugger to trace mode means that every time you type a query, the debugger will start by creeping.

The effect of this predicate can also be achieved by typing the letter `t` after a `^C` interrupt (see Section 3.7 [Execution], page 29).

Exceptions

None.

See Also

Section 5.2 [Basic Debug], page 237.

11.3.239 `trimcore/0`

Synopsis

```
trimcore
```

Force reclamation of memory in all of Prolog's data areas.

Description

Trims the stacks, reclaims any dead clauses and predicates, defragmentizes Prolog's free memory, and endeavors to return any unused memory to the operating system.

The system property `PROLOGKEEPSIZE` can be used to define a lower bound on the amount of memory to be retained. Also, the system property `PROLOGINITSIZE` can be used to request that an initial amount of memory be allocated. This initially allocated memory will not be touched by `trimcore/0`.

When trimming a given stacks, `trimcore/0` will retain at least the amount of space initially allocated for that stack.

`trimcore/0` is called each time Prolog returns to the top level or the top of a break level, except it does not trim the stacks then.

Exceptions

None.

See Also

Section 4.10.1.1 [ref-mgc-ove-rsp], page 150, Section 4.17.1 [System Properties and Environment Variables], page 228.

11.3.240 `true/0` *ISO*

Synopsis

```
true
```

Always succeeds.

Exceptions

None.

See Also

Section 4.2 [ref-sem], page 65.

11.3.241 =/2 *ISO*

Synopsis

+*Term1* = +*Term2*

unifies *Term1* and *Term2*.

Arguments

Term1 *term*

Term2 *term*

Description

This is defined as if by the clause '`Z = Z.`'.

If `=/2` is not able to unify *Term1* and *Term2*, then it will simply fail. A successful unification may unblock a goal or trigger an attribute handler, which may raise an exception with the culprit given as `(=)/2`. That is the case for `library(clpfd)`.

Exceptions

None by `(=)/2` per se, but see above.

See Also

Chapter 2 [Glossary], page 7, Section 4.2.7 [ref-sem-occ], page 82.

11.3.242 `unify_with_occurs_check/2` *ISO*

Synopsis

`unify_with_occurs_check(+`*Term1*`, +`*Term2*`)`

Term1 and *Term2* unify to a finite (acyclic) term.

Arguments

Term1 *term*

Term2 *term*

Description

Runs in almost linear time.

Exceptions

None.

See Also

Chapter 2 [Glossary], page 7.

11.3.243 =../2 *ISO*

Synopsis

+*Term* =.. -*List*

-*Term* =.. +*List*

Unifies *List* with a list whose head is the atomic term corresponding to the principal functor of *Term* and whose tail is a list of the arguments of *Term*.

Arguments

Term	*term* any term
List	*list of term* and not empty

Description

If *Term* is uninstantiated, then *List* must be instantiated either to a proper list whose head is an atom, or to a list of length 1 whose head is a number.

This predicate is not strictly necessary, since its functionality can be provided by `arg/3` and `functor/3`, and using the latter two is usually more efficient.

Examples

```
| ?- product(0, n, n-1) =.. L.

L = [product,0,n,n-1]

| ?- n-1 =.. L.

L = [-,n,1]

| ?- product =.. L.

L = [product]
```

Exceptions

`instantiation_error`
: *Term* is unbound and *List* is not instantiated enough.

`type_error`
: *List* is not a proper list, or the head of *List* is not atomic, or the head of *List* is a number and the tail of *List* is not empty.

`domain_error`
: *List* is the empty list.

`representation_error`
: *Term* is uninstantiated and *List* is longer than 256.

See Also

`functor/3`, `arg/3`, Section 4.8.2 [ref-lte-act], page 131.

11.3.244 unknown/2 *development*

Synopsis

`unknown(-OldAction, +NewAction)`

Unifies *OldAction* with the current action on unknown procedures, i.e. the current value of the `unknown` Prolog flag, sets the current action to *NewAction*, and prints a message about the change.

Arguments

OldAction *one of* `[error,fail,trace,warning]`

NewAction
one of `[error,fail,trace,warning]`, must be nonvar

Description

This is merely a front-end to the `unknown` Prolog flag, which see.

Note that:

```
| ?- unknown(Action, Action).
```

just returns *Action* without changing it.

Procedures that are known to be dynamic just fail when there are no clauses for them.

Exceptions

`instantiation_error`
`type_error`
`domain_error`
Invalid *NewAction*.

See Also

Section 3.6 [Undefined Predicates], page 29, Section 4.15 [ref-ere], page 201, Section 4.9.4 [ref-lps-flg], page 140.

11.3.245 `unknown_predicate_handler/3` *hook*

Synopsis

```
:- multifile user:unknown_predicate_handler/3.

user:unknown_predicate_handler(+Goal, +Module, -NewGoal)
```

User definable hook to trap calls to unknown predicates.

Arguments

Goal *callable*
The goal to trap.

Module *atom*
Any atom that is a current module

NewGoal *callable*
The goal to call instead.

Description

When Prolog comes across a call to an unknown predicate, Prolog makes a call to `user:unknown_predicate_handler/3` with the first two arguments bound. *Goal* is bound to the call to the undefined predicate and *Module* is the module in which that predicate is supposed to be defined. If the call to `user:unknown_predicate_handler/3` succeeds, then Prolog replaces the call to the undefined predicate with the call to *Module:NewGoal*. Otherwise, the action taken is governed by the `unknown` Prolog flag.

Exceptions

Exceptions are treated as failures, except an error message is printed.

Examples

The following clause gives the same behavior as setting `unknown(_,fail)`:

```
unknown_predicate_handler(_, _, fail).
```

The following clause causes calls to undefined predicates whose names begin with '`xyz_`' in module `m` to be trapped to `my_handler/1` in module `n`. Predicates with names not beginning with this character sequence are not affected.

```
unknown_predicate_handler(G, m, n:my_handler(G)) :-
    functor(G,N,_),
    atom_concat(xyz_, _, N).
```

See Also

Section 3.6 [Undefined Predicates], page 29, Section 4.15 [ref-ere], page 201, Section 4.9.4 [ref-lps-flg], page 140.

11.3.246 `unload_foreign_resource/1` *hookable*

Synopsis

`unload_foreign_resource(`*`:Resource`*`)`

Unload the foreign resource *Resource* from Prolog. Relies on the hook predicates `foreign_resource/2` and `foreign/[2,3]`.

Arguments

:Resource *file_spec*, must be ground
The foreign resource to be unloaded. The file extension can be omitted.

Exceptions

`instantiation_error`
Resource not ground.

`type_error`
Resource not an atom.

`existence_error`
Resource does not exist as a foreign resource.

See Also

`load_foreign_resource/1`, `foreign_resource/2`, `foreign/[2,3]`, Section 6.2.1 [Foreign Resources], page 295, Section 6.2 [Calling C from Prolog], page 295.

11.3.247 `update_mutable/2`

Synopsis

`update_mutable(+`*`Datum`*`, +`*`Mutable`*`)`

Updates the current value of the mutable term *Mutable* to become *Datum*.

Arguments

Datum	*term*, must be nonvar
Mutable	*mutable*, must be nonvar

Exceptions

`instantiation_error`
: *Datum* or *Mutable* is uninstantiated.

`type_error`
: *Mutable* is not a mutable.

See Also

Section 4.8.9 [ref-lte-mut], page 135.

11.3.248 use_module/[1,2,3]

Synopsis

`use_module(+File)`

Loads the module file(s) *File*, if not already loaded and up-to-date. Imports all exported predicates.

`use_module(+File, +Imports)`

Loads module file *File*, if not already loaded and up-to-date. Imports according to *Imports*.

`use_module(+Module, -File, +Imports)`

Module is already loaded. Imports according to *Imports*. The *File* argument must be a variable or a legal file specification but is otherwise ignored.

`use_module(-Module, +File, +Imports)`

Module is a variable or has not been loaded. Loads module file *File*, if not already loaded and up-to-date. Imports according to *Imports*, i.e. similar to what `use_module(File, Imports)` does. Finally, the *Module* argument is bound to the loaded module.

Arguments

:File — *file_spec* or *list of file_spec*, must be ground

Any legal file specification. Only `use_module/1` accepts a list of file specifications, file extensions optional.

Imports — *list of simple_pred_spec* or the atom `all`, must be ground

Either a list of predicate specifications in the *Name/Arity* form to import into the calling module, or the atom `all`, meaning all predicates exported by the loaded module are to be imported.

Module — *atom*

The module name in *File*, or a variable, in which case the module name is returned.

Description

Loads each specified file except the previously loaded files that have not been changed since last loaded. All files should be module files; if they are not, then warnings are issued.

`use_module/1` imports all the exported predicates of the loaded modules into the calling module (or module *M* if specified).

`use_module/2` imports only the predicates in *Imports* from the loaded module. If an attempt is made to import a predicate that is not public, then a warning is issued.

`use_module/3` allows *Module* to be imported without requiring that its source file (*File*) be known, as long as the *Module* already exists in the system.

Generally, `use_module/3` is similar to `use_module/2`, except that if *Module* is already in the system, then predicates from *Module*, are simply imported into the calling module, and *File* is not loaded again. If *Module* does not already exist in the system, then *File* is loaded, and `use_module/3` behaves like `use_module/2`, except that *Module* is unified, after the file has been loaded, with the actual name of the module in *File*. If *Module* is a variable, or *Module* is a module that has not been loaded, then *File* must exist, and the module name in *File* is returned.

`use_module/1` is similar to `ensure_loaded/1` except that all files should be module files; if they are not, then warnings are issued.

An attempt to import a predicate may fail or require intervention by the user because a predicate with the same name and arity has already been defined in, or imported into, the loading module (or module *M* if specified). Details of what happens in the event of such a *name clash* are given in Section 4.11.2 [ref-mod-bas], page 166.

After possibly loading the module file, the source module will attempt to import all the predicates in *Imports*. *Imports* must be a list of predicate specifications in *Name/Arity* form.

If the file is not a module file, then nothing is imported. If any of the predicates in *Imports* are not public predicates, then a warning is issued, but the predicates are imported nonetheless. This lack of strictness is for convenience; if you forget to declare a predicate to be public, then you can supply the necessary declaration and reload its module, without having to reload the module that has imported the predicate.

While `use_module/1` may be more convenient at the top level, `use_module/2` is recommended in files because it helps document the interface between modules by making the list of imported predicates explicit.

For `use_module/[2,3]`, *Imports* may be specified as the term `all`, in which case it behaves the same as `use_module/1`, importing the entire module into the caller.

Exceptions

See also `load_files/[2,3]`.

`instantiation_error`
: *File* or *Imports* is not ground.

`type_error`
: In *File* or *Imports*.

Examples

`use_module/[1,2]` could be defined as:

```
use_module(Files) :-
    load_files(Files, [if(changed)]).

use_module(File, Imports) :-
    load_files([File], [if(changed),imports(Imports)]).
```

`use_module/3` can be used to access the (primary) module name of a module file:

```
| ?- use_module(Module, library(clpfd), all).
% loading .../library/clpfd.po...
[...]
% loaded .../library/clpfd.po in module clpfd, 830 msec 496796 bytes
Module = clpfd ?
yes
```

See Also

Section 4.3.2 [ref-lod-lod], page 84.

11.3.249 var/1 *ISO*

Synopsis

`var(+`*Term*`)`

Term is currently uninstantiated.

Arguments

Term *term*

Examples

```
| ?- var(foo(X,Y)).

no
| ?- var([X,Y]).

no
| ?- var(X).

true ;

no
| ?- Term = foo(X,Y), var(Term).

no
```

Exceptions

None.

See Also

Section 4.8.1.1 [ref-lte-met-typ], page 130.

11.3.250 `volatile/1` *declaration*

Synopsis

`:- volatile` *+PredSpecs*

Declares *PredSpecs* to be volatile. Clauses of volatile predicates are not saved by the '`save_*`' predicates.

Arguments

:PredSpecs

pred_spec_forest, must be ground

A predicate specification, or a list of such, or a sequence of such separated by commas.

Exceptions

Exceptions in the context of loading code are printed as error messages.

`instantiation_error`
: *PredSpecs* not ground.

`type_error`
: *PredSpecs* not a valid *pred_spec_forest*.

`domain_error`
: Some arity is an integer < 0.

`representation_error`
: Some arity is an integer > 255.

`context_error`
: Declaration appeared in a goal.

`permission_error`
: Declaration appeared as a clause.

See Also

Section 4.3.4.3 [Volatile Declarations], page 88.

11.3.251 when/2

Synopsis

`when(+Condition,+Goal)`

Blocks *Goal* until the *Condition* is true.

Arguments

Condition *callable*, must be nonvar and one of:

`nonvar(X)`
: False until X is nonvar.

`ground(X)`
: False until X is ground.

`?=(X,Y)` False while `dif(X,Y)` would block.

`Condition``,`*`Condition`*
: True if both conditions are true.

`Condition``;`*`Condition`*
: True if at least one condition is true.

:Goal *callable*, must be nonvar

Backtracking

Depends on *Goal*.

Examples

```
| ?- when(((nonvar(X);?=(X,Y)),ground(T)), process(X,Y,T)).
```

Exceptions

Call errors (see Section 4.2.6 [ref-sem-exc], page 81).

See Also

Section 4.2.4 [ref-sem-sec], page 78.

11.3.252 `write/[1,2]` *ISO*

Synopsis

`write(+`*`Stream`*`, +`*`Term`*`)`

`write(+`*`Term`*`)`

Writes *Term* on *Stream*, without quoting atoms.

Arguments

Stream	*stream_object*, must be ground A valid open Prolog stream, defaults to the current output stream.
Term	*term*

Description

`write(Term)` is equivalent to:

```
write_term(Term, [numbervars(true)])
```

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113).

See Also

Section 4.6.4 [ref-iou-tou], page 108.

11.3.253 write_canonical/[1,2] *ISO*

Synopsis

`write_canonical(+`*Stream*`, +`*Term*`)`

`write_canonical(+`*Term*`)`

Writes *Term* on *Stream*, quoting atoms, in functional notation, without treating `'$VAR'/1` terms specially.

Arguments

Stream	*stream_object*, must be ground A valid open Prolog stream, defaults to the current output stream.
Term	*term*

Description

This predicate is provided so that *Term*, if written to a file, can be read back by `read/[1,2]` regardless of special characters in *Term* or prevailing operator declarations.

`write_canonical(Term)` is equivalent to:

```
write_term(Term, [quoted(true),ignore_ops(true),quoted_charset(portable)])
```

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113).

Examples

To contrast `write/[1,2]`, `writeq/[1,2]` and `write_canonical/[1,2]`:

```
| ?- write({'A' + '$VAR'(0) + [a]}).

{A+A+[a]}

| ?- writeq({'A' + '$VAR'(0) + [a]}).

{'A'+A+[a]}

| ?- write_canonical({'A' + '$VAR'(0) + [a]}).

{}(+(+('A','$VAR'(0)),.(a,[])))
```

See Also

Section 4.6.4 [ref-iou-tou], page 108.

11.3.254 write_term/[2,3] *hookable*, *ISO*

Synopsis

`write_term(+Stream, +Term, +Options)`

`write_term(+Term, +Options)`

Writes *Term* on *Stream*, subject to *+Options*.

Arguments

Stream *stream_object*, must be ground

A valid open Prolog stream, defaults to the current output stream.

Term *term*

Options *list of term.*

A list of zero or more of the following, where *Boolean* must be `true` or `false` (`false` is the default).

`quoted(Boolean)`
: If selected, then atoms and functors are quoted where necessary to make the result acceptable as input to `read/1`. `write_canonical/1`, `writeq/1`, and `portray_clause/1` select this.

  Any output produced by `write_term/2` with the option `quoted(true)` will be in Normal Form C, as defined by Unicode. See Section 4.1.7.5 [ref-syn-syn-tok], page 60, for further details.

`ignore_ops(Boolean)`
: If selected, then *Term* is written in standard functional notation instead of using operators. `write_canonical/1` and `display/1` select this.

`portrayed(Boolean)`
: If selected, then `user:portray/1` is called for each non-variable subterm. `print/1` selects this.

`variable_names(Names)` *since release 4.3*
: *Names* should be a list of *Name=Var* pairs, where each *Name* is an atom indicating the name to be used if *Var* is a variable occurring in the written term.

  This argument has the same form as the corresponding `read_term/[2,3]` option and provides a convenient and safe way to preserve variable names when writing a previously read term.

`numbervars(Boolean)`
: If selected, then terms of the form `'$VAR'(N)` where N is an integer >= 0 are treated specially (see `numbervars/3`). `print/1`, `write/1`, `writeq/1`, and `portray_clause/1` select this.

`legacy_numbervars(`*Boolean*`)` *since release 4.3*

If selected, then terms of the form `'$VAR'(`*N*`)` where *N* is an integer `>=` 0, an atom, or a code list, are treated specially, in a way consistent with versions prior to release 4.3, as follows.

If *N* is an integer `>=` 0, then the behavior is as for the `numbervars/1` option. Otherwise the characters of the atom or code list are written instead of the term.

The preferred way to specify variable names is with the `variable_names/1` option.

`cycles(`*Boolean*`)`

If selected, then the potentially cyclic term is printed in finite `@/2` notation, as discussed for `read_term/[2,3]` (see Section 11.3.185 [mpg-ref-read_term], page 1202).

`indented(`*Boolean*`)`

If selected, then the term is printed with the same indentation as is used by `portray_clause/1` and `listing/[0,1]`.

`max_depth(`*Depth*`)`

Depth limit on printing. *Depth* is an integer. 0 (the default) means no limit.

`quoted_charset(`*Charset*`)`

Only relevant if `quoted(true)` holds. *Charset* should be a legal value of the `quoted_charset` Prolog flag, where it takes its default value from. `write_canonical/1` selects the value `portable`. See Section 4.9.4 [ref-lps-flg], page 140.

`float_format(`*Spec*`)`

How to print floats. *Spec* should be an atom of the form '`~`*NC*', like one of the `format/[2,3]` character sequences for printing floats. The default is '`~H`'.

`priority(`*Prio*`)`

The term is printed as if in the context of an associative operator of precedence *Prio*, where *Prio* is an integer. The default is 1201, meaning that no parentheses will be printed around the term. See Section 4.1.5 [ref-syn-ops], page 51.

Description

This predicate subsumes the predicates that output terms except `portray_clause/[1,2]`, which additionally prints a period and a newline, and removes module prefixes that are redundant wrt. the current type-in module.

During debugging, goals are written out by this predicate with options given by the `debugger_print_options` Prolog flag.

Top-level variable bindings are written out by this predicate with options given by the `toplevel_print_options` Prolog flag.

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113), plus:

`instantiation_error`
`type_error`
`domain_error`
in *Options*.

Examples

How certain options affect the output of `write_term/2`:

```
| ?- write_term('a b', [quoted(true)]).
'a b'

| ?- write_term(a+b, [ignore_ops(true)]).
+(a,b)

| ?- write_term(f('$VAR'(2)),
                 [numbervars(true)].)
f(C)


| ?- write_term(A+B,
                    [variable_names(['Hello'=A, 'World'=B])]).
Hello+World
```

If your intention is to name variables such as that generated by `read_term/2` with the `variable_names` option, then this can be done by simply passing on the `variable_names` option to `write_term/2`:

```
| ?- read_term(T, [variable_names(Names)]),
     write_term(T, [variable_names(Names),quoted(true)]),
     nl,
     fail.
|: a(X, Y).
a(X, Y)
no
```

There is, currently, no documented way to write single-occurrence variables as `_`, e.g. as done by `portray_clause/1` (see Section 11.3.157 [mpg-ref-portray_clause], page 1168).

See Also

Section 4.6.4 [ref-iou-tou], page 108, Section 4.9.4 [ref-lps-flg], page 140, `user:portray/1`.

11.3.255 `writeq/[1,2]` ***ISO***

Synopsis

`writeq(+`*`Stream`*`, +`*`Term`*`)`

`writeq(+`*`Term`*`)`

Writes *Term* on *Stream*, quoting atoms.

Arguments

Stream	*stream_object*, must be ground A valid open Prolog stream, defaults to the current output stream.
Term	*term*

Description

`writeq(Term)` is equivalent to:

```
write_term(Term, [quoted(true),numbervars(true)])
```

Exceptions

Stream errors (see Section 4.6.7.2 [ref-iou-sfh-est], page 113).

See Also

Section 4.6.4 [ref-iou-tou], page 108.

11.3.256 `zip/0` *development*

Synopsis

`zip`

Turns on the debugger in zip mode.

Description

`zip/0` turns the debugger on and sets it to zip mode. Turning the debugger on in zip mode means that it will stop at the next spypoint encountered in the current execution. Until the spypoint is reached, it does not keep any information of the execution of the goal, and hence you will not be able to see the ancestors of the goal when you reach the spypoint.

The effect of this predicate can also be achieved by typing the letter *z* after a `^C` interrupt (see Section 3.7 [Execution], page 29).

Exceptions

None.

See Also

Section 5.2 [Basic Debug], page 237.

12 C Reference Pages

12.1 Return Values and Errors

Many, but not all, C functions return one of the codes `SP_SUCCESS` for success, `SP_FAILURE` for failure, `SP_ERROR` if an error condition occurred, or if an uncaught exception was raised during a call from C to Prolog. If the value is `SP_ERROR`, then the macro `SP_errno` will return a value (an integer) describing the error condition.

The function `SP_error_message()` returns a pointer to the diagnostic message corresponding to a specified error number.

See Section 11.1.1 [mpg-ref-ove], page 937, for a description of the conventions observed in the Reference Pages for Prolog predicates. C function Reference Pages differ primarily in the synopsis. Also, the Reference Page for each C function documents its return values.

The following function annotations are used in the Reference Pages:

hook The function is user defined and is called in some specific context.

macro The function is defined as a C macro.

preinit It is only meaningful to call the function before initializing the Prolog engine

12.2 Topical List of C Functions

12.2.1 C Errors

`SP_error_message()`
: gets the corresponding error message from an error number obtained from `SP_error`

12.2.2 I/O

`SP_get_byte()`
: gets a byte from a Prolog binary input stream

`SP_get_code()`
: gets a character code from a Prolog input text stream

`SP_unget_byte()`
`SP_unget_code()`
: Ungets a byte or character, respectively.

`SP_fprintf()`
`SP_printf()`
: prints formatted output on a Prolog output text stream

`SP_put_byte()`
`SP_put_bytes()`
: Writes one or more bytes to a Prolog output binary stream.

`SP_put_code()`
`SP_put_codes()`
`SP_put_encoded_string()`
: Writes one or more characters to a Prolog output text stream.

12.2.3 Exceptions

`SP_exception_term()`
: fetches the Prolog term representing the most recently raised exception

`SP_fail()`
: propagates failure to Prolog

`SP_on_fault()` *macro*
: provide a scope for faults

`SP_raise_exception()`
: propagates an exception to Prolog

`SP_raise_fault()`
: raise a fault

12.2.4 Files and Streams

`SP_fopen()`
: opens a file as a Prolog stream

`SP_fclose()`
: closes a Prolog stream

`SP_flush_output()`
: flushes output on a Prolog output stream

`SP_load()`
: same as `load_files/1`

`SP_create_stream()`
: makes a new Prolog stream

`SP_restore()`
: same as `restore/1`

`SP_set_user_stream_hook()` *preinit*
`SP_set_user_stream_post_hook()` *preinit*
: provide hooks for setting up standard streams

12.2.5 Foreign Interface

`SP_atom_from_string()`
: returns the encoded string representing a Prolog atom

`SP_atom_length()`
: returns the length of the encoded string representing a Prolog atom

`SP_close_query()`
: closes a Prolog query opened from C by `SP_open_query()`

`SP_cons_functor()`
`SP_cons_functor_array()`
: creates a Prolog compound term from C

`SP_cons_list()`
: creates a Prolog list from C

`SP_cut_query()`
: commits to the current solution of a Prolog query opened from C by `SP_open_query()`

`SP_define_c_predicate()`
: defines a Prolog predicate linked to a C function

`SP_exception_term()`
: returns the Prolog term to C corresponding to the most recent Prolog error

`SP_get_address()`
: fetches an integer representing a pointer in an SP_term_ref

`SP_get_arg()`
: fetches a specified argument of a compound term in an SP_term_ref

`SP_get_atom()`
: fetches an atom from an SP_term_ref

`SP_get_current_dir()`
: obtain name of current working directory

`SP_get_float()`
: fetches a floating point number from an SP_term_ref

`SP_get_functor()`
: fetches the name and arity of a term in an SP_term_ref

`SP_get_integer()`
: fetches an integer in an SP_term_ref

`SP_get_integer_bytes()`
: fetches an arbitrarily sized integer in an SP_term_ref

`SP_get_list()`
: fetches the head and tail of a list in an SP_term_ref

`SP_get_list_codes()`
: fetches a code list in an SP_term_ref

`SP_get_list_n_codes()`
: fetches the first part of a code list in an SP_term_ref

`SP_get_list_n_bytes()`
: fetches the first part of a byte list in an SP_term_ref

`SP_get_number_codes()`
: fetches a number encoded as a code list in an SP_term_ref

`SP_get_string()`
: fetches the encoded string representing a Prolog atom in an SP_term_ref

`SP_next_solution()`
: gets the next solution, if any, to an open Prolog query

`SP_open_query()`
: opens a Prolog query from C

`SP_pred()`
: fetches an identifier for a Prolog predicate

`SP_predicate()`
: fetches an identifier a Prolog predicate

`SP_put_address()`
: assigns a pointer to an SP_term_ref

`SP_put_atom()`
: assigns an atom to an SP_term_ref

`SP_put_float()`
: assigns a floating point number to an SP_term_ref

`SP_put_functor()`
: assigns a new compound term to an SP_term_ref

`SP_put_integer()`
: assigns an integer to an SP_term_ref

`SP_put_integer_bytes()`
: assigns an arbitrarily sized integer to an SP_term_ref

`SP_put_list()`
: assigns a new list to an SP_term_ref

`SP_put_list_codes()`
: assigns a code list to an SP_term_ref

`SP_put_list_n_codes()`
: assigns the first part of a code list to an SP_term_ref

`SP_put_list_n_bytes()`
: assigns the first part of a byte list to an SP_term_ref

`SP_put_number_codes()`
: assigns a number encoded as a code list to an SP_term_ref

`SP_put_string()`
: assigns the atom represented by an encoded string to an SP_term_ref

`SP_put_term()`
: assigns the value of an SP_term_ref to another SP_term_ref

`SP_put_variable()`
: assigns a Prolog variable to an SP_term_ref

`SP_query()`
: makes a determinate query to a Prolog predicate, committing to the solution

`SP_query_cut_fail()`
: makes a determinate query to a Prolog predicate for side effects only

`SP_read_from_string()`
: assigns a Prolog term read from a string to an SP_term_ref

`SP_set_current_dir()`
: set name of current working directory

`SP_string_from_atom()`
: returns a null-terminated string corresponding to a Prolog atom

12.2.6 Initialization

`SP_deinitialize()`
: shuts down the Prolog engine

`SP_force_interactive()` *preinit*
: consider standard streams to be interactive streams, even if they appear not to be TTY streams

`SP_initialize()` *macro*
: initializes the Prolog engine

`SP_set_argv()`
: sets the `argv` Prolog flag.

`SP_set_user_stream_hook()` *preinit*
`SP_set_user_stream_post_hook()` *preinit*
: provide hooks for setting up standard streams

`SU_initialize()` *hook*
: called before initializing the Prolog engine in applications built with `--userhook`

12.2.7 Memory Management

`SP_calloc()`
: Allocates memory for an array of elements, and clears the allocated memory.

`SP_foreign_stash()` *macro*
: provide a memory location unique to the current foreign resource instance

`SP_free()`
: Deallocates a piece of memory.

`SP_malloc()`
: Allocates a piece of memory.

`SP_mutex_lock()`
: Locks a mutex.

`SP_mutex_unlock()`
: Unlocks a mutex.

`SP_realloc()`
: Changes the size of an allocated piece of memory.

`SP_register_atom()`
: prevents an atom from being discarded by atom garbage collection even if not referenced by Prolog code

`SP_strdup()`
: Makes a copy of a string in allocated memory.

`SP_unregister_atom()`
: enables an atom to be discarded during atom garbage collection if not referenced by Prolog code

12.2.8 Signal Handling

`SP_signal()`
: install a signal handler

`SP_event()`
: Schedules a function for execution in the main thread in contexts where queries cannot be issued.

12.2.9 Terms in C

`SP_compare()`
: compares two terms using Prolog's standard term order

`SP_new_term_ref()`
: returns an SP_term_ref, which can be used to hold a Prolog term in C

`SP_unify()`
: unifies two Prolog terms

12.2.10 Type Tests

`SP_is_atom()`
: tests whether an SP_term_ref contains an atom

`SP_is_atomic()`
: tests whether an SP_term_ref contains an atomic term

`SP_is_compound()`
: tests whether an SP_term_ref contains a compound term

`SP_is_float()`
: tests whether an SP_term_ref contains a floating point number

`SP_is_integer()`
: tests whether an SP_term_ref contains a Prolog integer

`SP_is_list()`
: tests whether an SP_term_ref contains a list cell

`SP_is_number()`
: tests whether an SP_term_ref contains an integer or a floating point number

`SP_is_variable()`
: tests whether an SP_term_ref contains a Prolog variable

`SP_term_type()`
: returns the type of the term in an SP_term_ref

12.3 API Functions

The following reference pages, alphabetically arranged, describe the SICStus Prolog API functions.

12.3.1 SP_atom_from_string()

Synopsis

```
#include <sicstus/sicstus.h>

SP_atom
SP_atom_from_string(char const *str);
```

Finds the Prolog atom whose characters are encoded by `str`.

Arguments

str The characters comprising the atom.

Return Value

The SP_atom, if `str` is a valid internal character encoding, and 0 otherwise.

See Also

Section 6.4.1 [Creating and Manipulating SP_term_refs], page 305.

12.3.2 `SP_atom_length()`

Synopsis

```
#include <sicstus/sicstus.h>

size_t
SP_atom_length(SP_atom atom);
```

Obtains the length of the encoded string representing a Prolog atom.

Arguments

atom The atom to inspect.

Return Value

The length if `atom` is valid, and 0 otherwise.

Description

Same as `strlen(SP_string_from_atom(a)`, but runs in *O(1)* time.

See Also

Section 6.4.1 [Creating and Manipulating SP_term_refs], page 305.

12.3.3 SP_calloc()

Synopsis

```
#include <sicstus/sicstus.h>

void *
SP_calloc(size_t nmemb,
          size_t size);
```

Allocates a block of at least `size * nemb`. The first `size * nmemb` bytes are set to zero.

Arguments

nmemb How many items to allocate.

size Size of each item.

Return Value

The pointer, if allocation was successful, otherwise `NULL`.

See Also

Section 6.4.7.1 [OS Memory Management], page 309.

12.3.4 SP_close_query()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_close_query(SP_qid query);
```

Discard the current solution to the given query, and close it.

Arguments

query The query, created by `SP_open_query()`.

Return Value

`SP_SUCCESS` for success, `SP_ERROR` if an error condition occurred.

Description

This will discard the choices created since the corresponding `SP_open_query()`, and then backtrack into the query, throwing away any current solution, like the goal `!, fail`. The given argument does not have to be the innermost open query; any open queries in its scope will also be closed.

See Also

Section 6.5.2 [Finding Multiple Solutions of a Call], page 311.

12.3.5 SP_compare()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_compare(SP_term_ref x,
           SP_term_ref y)
```

Compares two terms.

Arguments

x	The one term to compare
y	The other term to compare

Return Value

-1 if `x` @< `y`, 0 if `x` == `y`, and 1 if `x` @> `y`.

See Also

Section 4.8.8 [ref-lte-cte], page 134, Section 6.4.6 [Unifying and Comparing Terms], page 309.

12.3.6 SP_cons_functor()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_cons_functor(SP_term_ref term,
                SP_atom name,
                int arity,
                SP_term_ref arg, ...);
```

Assigns to `term` a reference to a compound term whose arguments are the values of `arg`.... If `arity` is 0, assigns the Prolog atom whose canonical representation is `name`. This is similar to calling `=../2` with the first argument unbound and the second argument bound.

Arguments

term	The SP_term_ref to be assigned
name	The name of the functor
arity	The arity of the functor
arg ...	The arguments

Return Value

Zero if the conversion fails (as far as failure can be detected), and a nonzero value otherwise.

See Also

Section 6.4.3 [Creating Prolog Terms], page 307.

12.3.7 SP_cons_functor_array()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_cons_functor_array(SP_term_ref term,
                      SP_atom name,
                      int arity,
                      SP_term_ref *arg);
```

Assigns to `term` a reference to a compound term whose arguments are the elements of `arg`. If `arity` is 0, assigns the Prolog atom whose canonical representation is `name`. This is similar to calling `=../2` with the first argument unbound and the second argument bound.

Arguments

term	The SP_term_ref to be assigned
name	The name of the functor
arity	The arity of the functor
arg	The argument array

Return Value

Zero if the conversion fails (as far as failure can be detected), and a nonzero value otherwise.

See Also

Section 6.4.3 [Creating Prolog Terms], page 307.

12.3.8 SP_cons_list()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_cons_list(SP_term_ref term,
             SP_term_ref head,
             SP_term_ref tail);
```

Assigns to `term` a reference to a Prolog list whose head and tail are the values of `head` and `tail`.

Arguments

term	The SP_term_ref to be assigned
head	The head of the new list
tail	The tail of the new list

Return Value

Zero if the conversion fails (as far as failure can be detected), and a nonzero value otherwise.

See Also

Section 6.4.3 [Creating Prolog Terms], page 307.

12.3.9 SP_create_stream()

Synopsis

```
#include <sicstus/sicstus.h>

spio_t_error_code
SP_create_stream(
   void *user_data,
   void const *user_class,
   spio_t_simple_device_read *user_read,
   spio_t_simple_device_write *user_write,
   spio_t_simple_device_flush_output *user_flush_output,
   spio_t_simple_device_seek *user_seek,
   spio_t_simple_device_close *user_close,
   spio_t_simple_device_interrupt *user_interrupt,
   spio_t_simple_device_ioctl *user_ioctl,
   spio_t_bits create_stream_options,
   SP_stream **pstream);
```

Create a Prolog stream that will call user defined functions to perform stream operations.

Arguments

user_data This is a pointer to arbitrary user specified data. It is passed to all user defined stream methods. It must not be `NULL`.

user_class Arbitrary pointer. This is used with `SP_get_stream_user_data()`, which see.

user_read If non-NULL then this is an input stream. See Section 12.3.106 [cpg-ref-user_read], page 1424, for details.

user_write If non-NULL then this is an output stream. See Section 12.3.107 [cpg-ref-user_write], page 1426, for details.

Note that both `user_read` and `user_write` can be specified, signifying a bidirectional stream.

user_flush_output
Will be called to flush output on the stream. Ignored if `user_write` is `NULL`. Can be `NULL` if the stream need not be flushed, e.g. if `user_write` always ensures that any output reaches its destination immediately. See Section 12.3.105 [cpg-ref-user_flush_output], page 1422, for details.

user_seek Reserved, should be `NULL`.

user_close Closes the stream. See Section 12.3.104 [cpg-ref-user_close], page 1420, for details.

user_interrupt
Reserved, should be `NULL`.

user_ioctl Reserved, should be `NULL`.

args Reserved, should be `NULL`.

create_stream_options

The following bits can be set:

`SP_CREATE_STREAM_OPTION_BINARY`
: This is a binary stream. The `user_read` and `user_write` methods transfer bytes.

`SP_CREATE_STREAM_OPTION_TEXT`
: This is a TEXT stream. The `user_read` and `user_write` methods transfer wide characters.

`SP_CREATE_STREAM_OPTION_AUTOFLUSH`
: After writing to this stream prolog predicates will do a `flush_output/1`. In essence this ensures that the stream behaves as if it were unbuffered.

`SP_CREATE_STREAM_OPTION_INTERACTIVE`
: Treat this stream as an interactive stream. Implies `SP_CREATE_STREAM_OPTION_AUTOFLUSH`.

`SP_CREATE_STREAM_OPTION_EOF_ON_EOF`
`SP_CREATE_STREAM_OPTION_RESET_ON_EOF`
: These correspond to the `open/4` options `eof_action(eof)` and `eof_action(reset)` respectively. The default is to give an error if reading after reaching end of file.

Exactly one of `SP_CREATE_STREAM_OPTION_BINARY` and `SP_CREATE_STREAM_OPTION_TEXT` must be set.

pstream
: This is assigned to the created SICStus stream on success. It should be closed with `SP_fclose()` or `close/[1,2]`.

Return Value

On success, `*pstream` is assigned, and `SPIO_S_NOERR` or some other success code is returned. You should use the `SPIO_FAILED()` macro to determine if the return value signifies failure or success.

See Also

Section 6.6.2 [Defining a New Stream], page 317.

12.3.10 SP_cut_query()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_cut_query(SP_qid query);
```

Commit to the current solution to the given query, and close it.

Arguments

query The query, created by `SP_open_query()`.

Return Value

`SP_SUCCESS` for success, `SP_FAILURE` for failure, `SP_ERROR` if an error condition occurred.

Description

This will discard the choices created since the corresponding `SP_open_query()`, like the goal `!`. The current solution is retained in the arguments until backtracking into any enclosing query. The given argument does not have to be the innermost open query; any open queries in its scope will also be cut.

See Also

Section 6.5.2 [Finding Multiple Solutions of a Call], page 311.

12.3.11 SP_define_c_predicate()

Synopsis

```
#include <sicstus/sicstus.h>

typedef int
SP_CPredFun(SP_term_ref goal,
            void *stash);

int
SP_define_c_predicate(char *name,
                      int arity,
                      char *module,
                      SP_CPredFun *proc,
                      void *stash);
```

Defines a Prolog predicate such that when the Prolog predicate is called it will call a C function with a term corresponding to the Prolog goal.

Arguments

name	The predicate name.
arity	The predicate arity.
module	The predicate module name.
proc	The function.
stash	See below.

Return Value

Nonzero on success, and 0 otherwise.

Description

The Prolog predicate *module*:*name*/*arity* will be defined (the module *module* must already exist). The `stash` argument can be anything and is simply passed as the second argument to the C function *proc*.

The C function should return `SP_SUCCESS` for success and `SP_FAILURE` for failure. The C function may also call `SP_fail()` or `SP_raise_exception()` in which case the return value will be ignored.

Examples

Here is an end-to-end example of the above:

```
                                                        % square.pl
foreign_resource(square, [init(square_init)]).

:- load_foreign_resource(square).
```

```
                                                                  // square.c
#include <sicstus/sicstus.h>

static int square_it(SP_term_ref goal, void *stash)
{
  SP_integer arg1;
  SP_term_ref tmp = SP_new_term_ref();
  SP_term_ref square_term = SP_new_term_ref();

  // goal will be a term like square(42,X)
  SP_get_arg(1,goal,tmp); // extract first arg
  if (!SP_get_integer(tmp,&arg1))
    return SP_FAILURE;   // type check first arg

  SP_put_integer(square_term, arg1*arg1);
  SP_get_arg(2,goal,tmp); // extract second arg

  // Unify output argument.
  // SP_put_integer(tmp,...) would *not* work!
  return (SP_unify(tmp, square_term) ? SP_SUCCESS : SP_FAILURE);
}

void square_init(int when)
{
  (void)when;                    // unused
  // Install square_it as user:square/2
  SP_define_c_predicate("square", 2, "user", square_it, NULL);
}
                                                                  # terminal
% splfr square.pl square.c
% sicstus -f -l square
% compiling /home/matsc/tmp/square.pl...
%  loading foreign resource /home/matsc/tmp/square.so in module user
% compiled /home/matsc/tmp/square.pl in module user, 0 msec 816 bytes
SICStus 4.10.2 ...
Licensed to SICS
| ?- square(4711, X).
X = 22193521 ?
yes
| ?- square(not_an_int, X).
no
```

See Also

See Section 6.2 [Calling C from Prolog], page 295.

12.3.12 `SP_deinitialize()`

Synopsis

```
#include <sicstus/sicstus.h>

void
SP_deinitialize(void);
```

Shuts down the Prolog engine.

Description

`SP_deinitialize()` will make a best effort to restore the system to the state it was in at the time of calling `SP_initialize()`. This involves unloading foreign resources, shutting down the emulator, and deallocating memory used by Prolog.

`SP_deinitialize()` is idempotent i.e. it is a no-op unless SICStus has actually been initialized.

See Also

Section 6.7.4.1 [Initializing the Prolog Engine], page 334.

12.3.13 SP_error_message()

Synopsis

```
#include <sicstus/sicstus.h>
char const *
SP_error_message(int errnum);
```

Obtains a pointer to the diagnostic message corresponding to a specified error number.

Arguments

errnum The error number.

Return Value

A pointer to the diagnostic message.

See Also

Section 6.1 [CPL Notes], page 294.

12.3.14 SP_event()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_event(int (*func)(void*), void *arg)
```

Schedules a function for execution in the main thread in contexts where queries cannot be issued.

Arguments

func The function to schedule for execution.

arg Its argument.

Return Value

Nonzero on success, and 0 otherwise.

Description

If you wish to call Prolog back from a signal handler that has been installed with `SP_signal` or a thread other than the thread that called `SP_initialize()`, that is, the *main thread*, you cannot use `SP_query()` etc. directly. The call to Prolog has to be delayed until such time that the Prolog execution can accept an interrupt and the call has to be performed from the main thread (the Prolog execution thread). This function serves this purpose, and installs `func` to be called from Prolog (in the main thread) when the execution can accept a callback.

A queue of functions, with corresponding arguments, is maintained; that is, if several calls to `SP_event()` occur before Prolog can accept an interrupt, the functions are queued and executed in turn at the next possible opportunity. A `func` installed with `SP_event()` will not be called until SICStus is actually running. One way of ensuring that all pending functions installed with `SP_event()` are run is to call, from the main thread, some dummy goal, such as,

```
SP_query_cut_fail(SP_predicate("true",0,"user"));
```

While `SP_event()` is safe to call from any thread, it is not safe to call from arbitrary signal handlers. If you want to call `SP_event()` when a signal is delivered, you need to install your signal handler with `SP_signal()`.

Note that `SP_event()` is one of the *very* few functions in the SICStus API that can safely be called from another thread than the main thread.

Depending on the value returned from `func`, the interrupted Prolog execution will just continue (`SP_SUCCESS`) or backtrack (`SP_FAILURE` or `SP_ERROR`). An exception raised by `func`, using `SP_raise_exception()`, will be processed in the interrupted Prolog execution. If `func` calls `SP_fail()` or `SP_raise_exception()` the return value from `func` is ignored

and handled as if `func` returned `SP_FAILURE` or `SP_ERROR`, respectively. In case of failure or exception, the event queue is flushed.

It is generally not robust to let `func` raise an exception or (even worse) fail. The reason is that not all Prolog code is written such that it gracefully handles being interrupted. If you want to interrupt some long-running Prolog code, it is better to let the event handler set a flag (in C) and let your Prolog code test the flag (using a foreign predicate) in some part of your code that is executed repeatedly.

Examples

How to install the predicate `user:event_pred/1` as the signal handler for `SIGUSR1` and `SIGUSR2` signals.

The function `signal_init()` installs the function `signal_handler()` as the primary signal handler for the signals `SIGUSR1` and `SIGUSR2`. That function invokes the predicate as the actual signal handler, passing the signal number as an argument to the predicate.

```
SP_pred_ref event_pred;

static int signal_event(void *handle)
{
  int signal_no = (int) handle;
  SP_term_ref x=SP_new_term_ref();
  int rc;

  SP_put_integer(x, signal_no); // Should not give an error
  rc = SP_query_cut_fail(event_pred, x);
  if (rc == SP_ERROR && SP_exception_term(x))
    SP_raise_exception(x);        // Propagate any raised exception
  return rc;
}

static void signal_handler(int signal_no)
{
  SP_event(signal_event, (void *)signal_no);
}

void signal_init(void)
{
  event_pred = SP_predicate("prolog_handler",1,"user");

  SP_signal(SIGUSR1, signal_handler);
  SP_signal(SIGUSR2, signal_handler);
}
```

See Also

Section 6.5.4 [Calling Prolog Asynchronously], page 313, `SP_signal()`, `SP_fail()`, `SP_raise_exception()`.

12.3.15 `SP_exception_term()`

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_exception_term(SP_term_ref term);
```

Retracts the current pending exception term, if it exists, and assigns it to `term`.

Arguments

term The SP_term_ref to assign.

Return Value

1 if an exception term was retracted and assigned, and 0 otherwise.

See Also

Section 6.5.5 [Exception Handling in C], page 314.

12.3.16 SP_expand_file_name()

Synopsis

```
#include <sicstus/sicstus.h>

spio_t_error_code
SP_expand_file_name(
   char const *relpath,
   char const *cwd,
   spio_t_bits options,
   char **pabspath);
```

Expand a file name into an absolute path.

Arguments

relpath

The relative path to expand. It should be an encoded string. The path is subject to syntactic rewriting, as if by `absolute_file_name/2`.

cwd If the `relpath` is a relative path, it is expanded relative to `cwd`, unless `cwd` is `NULL`. If `cwd` is `NULL`, a relative `relpath` is expanded relative to the SICStus working directory (as returned by `SP_get_current_dir()`).

options

The following option bits can be set:

`SP_EXPAND_FILE_NAME_OPTION_DIR`
: The `relpath` is expanded as a directory, i.e. `*pabspath` will be slash terminated.

`SP_EXPAND_FILE_NAME_OPTION_NO_CWD`
: An error is returned if the `relpath` is not an absolute path after syntactic rewriting.

`SP_EXPAND_FILE_NAME_OPTION_NO_ENV`
: Do not expand system properties and environment variables during syntactic rewriting.

`SP_EXPAND_FILE_NAME_OPTION_NO_HOME`
: Do not expand '`~`' and '`~user`' during syntactic rewriting.

`SP_EXPAND_FILE_NAME_OPTION_ROOT_SLASH`
: If the expanded value would refer to the root directory, return a slash terminated absolute path, as if `SP_EXPAND_FILE_NAME_OPTION_DIR` had been set. By default, an error is returned if the expanded absolute path would refer to a root directory and `SP_EXPAND_FILE_NAME_OPTION_DIR` is not set.

`SP_EXPAND_FILE_NAME_OPTION_ROOT_DOT`
: If the expanded value would refer to the root directory, return an absolute path terminated with '`/.`'. By default, an error is returned

if the expanded absolute path would refer to a root directory and `SP_EXPAND_FILE_NAME_OPTION_DIR` is not set.

pabspath On success, `*pabspath` is set to the expanded path. This value is allocated with `SP_malloc()` and should be freed with `SP_free()`.

Return Value

On success, `*pabspath` is set to the expanded path and `SPIO_S_NOERR` or some other success code is returned.

On failure, an error code is returned.

See Also

Section 12.3.29 [cpg-ref-SP_get_current_dir], page 1338. See Section 4.5.2 [ref-fdi-syn], page 103, for a description of syntactic rewriting. Section 6.4.7.2 [OS File System], page 310.

12.3.17 `SP_fail()`

Synopsis

```
#include <sicstus/sicstus.h>

void
SP_fail(SP_term_ref term);
```

Fails in the scope of Prolog calling C.

Arguments

term The SP_term_ref whose value will be the exception term.

Description

This function is normally used in the context of a call from Prolog to C, and will cause Prolog to backtrack on return from the call.

Please note: this should only be called right before returning to Prolog.

See Also

Section 6.5.5 [Exception Handling in C], page 314.

12.3.18 SP_fclose()

Synopsis

```
#include <sicstus/sicstus.h>

spio_t_error_code
SP_fclose(
  SP_stream *stream,
  spio_t_bits close_options);
```

Close the stream.

Arguments

stream The stream to close unless the `SP_FCLOSE_OPTION_USER_STREAMS` is set, see below.

close_options

The following bits can be set:

`SP_FCLOSE_OPTION_READ`
`SP_FCLOSE_OPTION_WRITE`

Close the specified directions. If neither of these options is specified, the stream is closed in all opened directions, i.e. as if both options were specified. If the stream is not opened in a direction specified by an option, that option is ignored.

Note that it is possible to close only one direction of a bidirectional stream. The return value will tell whether the stream is still open; see below.

`SP_FCLOSE_OPTION_FORCE`

Close the specified direction forcibly, i.e. without flushing buffers etc. This also ensures that the close finishes *quickly*, i.e. does not block.

`SP_FCLOSE_OPTION_NO_FSYNC`

Do not use OS `fclose()` or similar when closing a stream in write direction, i.e. do not wait for written data to reach the disk.

By default, closing a stream will try to ensure that all written data have been stored on disk before the call returns. This makes stream handling more robust, e.g. if the process crashes shortly after closing the stream. However, waiting for data to reach the disk is sometimes *very* slow (e.g. on some Linux configurations), in which case this flag can be used to speed things up, at the cost of somewhat reduced robustness.

`SP_FCLOSE_OPTION_NONBLOCKING`

You should avoid using this option.

Pass non-blocking option to lower level routines, including the call to `SP_flush_output()` that is issued when non-forcibly closing write direction.

One possible use for this option is to perform a *best effort* close, which falls back to using `SP_FCLOSE_OPTION_FORCE` only if ordinary close would block.

`SP_FCLOSE_OPTION_USER_STREAMS`
: In this case the *stream* should not be a stream but instead be the `user_class` of a user defined stream. When this option is passed, all currently opened streams of that class is closed, using the remaining option flags. E.g. to close all user defined streams of class my_class in the read direction only do: `SP_fclose((SP_stream*)my_class,SP_FCLOSE_OPTION_USER_STREAMS|SP_FCLOSE_OPTION_READ)`.

Return Value

On success, all specified directions has been closed. Since some direction may still be open, there are two possible return values on success:

`SPIO_S_NOERR`
: The stream is still valid, some direction is still not closed.

`SPIO_S_DEALLOCATED`
: The stream has been deallocated and cannot be used further. All directions have been closed.

On failure, returns a SPIO error code. Error codes with special meaning for `SP_fclose()` are the same as for `SP_flush_output()`, which see. Other error codes may also be returned.

See Also

Section 12.3.19 [cpg-ref-SP_flush_output], page 1326. Section 6.6.1 [Prolog Streams], page 315.

12.3.19 SP_flush_output()

Synopsis

```
#include <sicstus/sicstus.h>

spio_t_error_code
SP_flush_output(
  SP_stream *stream,
  spio_t_bits flush_options);
```

Ensure that all buffered data reaches its destination.

Arguments

stream The stream to flush. This stream should be open for writing.

flush_options
The following bits can be set:

`SP_FLUSH_OUTPUT_OPTION_NO_FSYNC`
If this is set, flush will not wait for data to reach the disk. See the `SP_fclose()` option `SP_FCLOSE_OPTION_NO_FSYNC` for more information.

`SP_FLUSH_OUTPUT_OPTION_NONBLOCKING`
If this is set, the function should return *quickly* or with a `SPIO_E_WOULD_BLOCK` code.

Can return `SPIO_E_NOT_SUPPORTED` if the stream cannot support non-blocking flush.

`SP_FLUSH_OUTPUT_OPTION_AUTOFLUSH`
Only flush stream if it has AUTOFLUSH enabled.

Return Value

On success, all buffered data should have been written and `SPIO_S_NOERR` or some other success code returned.

On failure, returns a SPIO error code. Error codes with special meaning for `SP_flush_output()`:

`SPIO_E_END_OF_FILE`
Returned if it is not possible to write more data onto the stream, e.g. some underlying device has been closed.

`SPIO_E_WOULD_BLOCK`
`SP_FLUSH_OUTPUT_OPTION_NONBLOCKING` was set but the operation would block.

`SPIO_E_NOT_SUPPORTED`
Some unsupported option, e.g. `SP_FLUSH_OUTPUT_OPTION_NONBLOCKING`, was passed.

Other error codes may also be returned.

See Also

Section 6.6.1 [Prolog Streams], page 315.

12.3.20 SP_fopen()

Synopsis

```
#include <sicstus/sicstus.h>

spio_t_error_code
SP_fopen(
  char const *pathname,
  void *reserved,
  spio_t_bits options,
  SP_stream **pstream);
```

Opens a file and creates a SICStus stream reading and/or writing to it.

Arguments

pathname The path to the file as an encoded string. It is expanded by `SP_expand_file_name()` unless the option `SP_FOPEN_OPTION_NOEXPAND` is specified, in which case the path must already have been expanded by `SP_expand_file_name()`.

reserved Reserved, should be `NULL`.

read_options

The following bits can be set:

`SP_FOPEN_OPTION_READ`
: Open the file for reading. The file must exist.

`SP_FOPEN_OPTION_WRITE`
: Open the file for writing. The file is overwritten if it exists. The file is created if it does not exist.

`SP_FOPEN_OPTION_APPEND`
: Open the file for writing but start writing at the end of the file if it exists. The file is created if it does not exist.

`SP_FOPEN_OPTION_BINARY`
: Open the file as a binary (byte) stream.

`SP_FOPEN_OPTION_TEXT`
: Open the file as a text stream. The default character encoding is *Latin 1* (i.e. the 8 bit subset of Unicode). The default end of line convention is OS specific.

`SP_FOPEN_OPTION_AUTOFLUSH`
: After writing to this stream, Prolog predicates will do a `flush_output/1`. In essence this ensures that the stream behaves as if it were unbuffered.

`SP_FOPEN_OPTION_INTERACTIVE`
: Treat this stream as an interactive stream. Implies SP_CREATE_STREAM_OPTION_AUTOFLUSH.

`SP_FOPEN_OPTION_NO_FSYNC`
: If this is set, flush and close of the stream will not wait for data to reach the disk. See the `SP_fclose()` option `SP_FCLOSE_OPTION_NO_FSYNC` for more information.

`SP_FOPEN_OPTION_NOEXPAND`
: The `pathname` has already been expanded with `SP_expand_file_name()` or something similar. This implies that `pathname` is an absolute path. If this option is not specified, `pathname` is expanded with `SP_expand_file_name()` before use.

pstream On successful return, `*pstream` will be set to the created stream.

Return Value

On success, `*pstream` will be set to the created stream and `SPIO_S_NOERR` or some other success code returned.

On failure, some SPIO failure code will be returned. Error codes with special meaning for `SP_fopen()`:

`SPIO_E_FILE_NOT_FOUND`
: The file does not exist.

`SPIO_E_FILE_ACCESS`
: Insufficient permissions to open or create the file.

`SPIO_E_OPEN_ERROR`
: Generic error during open.

Other error codes may also be returned.

See Also

Section 6.6.1 [Prolog Streams], page 315.

12.3.21 SP_foreign_stash() *macro*

Synopsis

```
#include <sicstus/sicstus.h>

void *
SP_foreign_stash();
```

Obtains a storage location that is unique to the calling foreign resource.

Return Value

The location, initially set to `NULL`.

Description

A dynamic foreign resource that is used by multiple SICStus runtimes in the same process may need to maintain a global state that is kept separate for each SICStus runtime. Each SICStus runtime maintains a location (containing a `void*`) for each foreign resource. A foreign resource can then access this location to store any data that is specific to the calling SICStus runtime.

You can use `SP_foreign_stash()` to get access to a location, where the foreign resource can store a `void*`. Typically this would be a pointer to a C struct that holds all information that need to be stored in global variables. This struct can be allocated and initialized by the foreign resource init function, it should be deallocated by the foreign resource deinit function.

`SP_foreign_stash()` is only available for use in dynamic foreign resources.

Examples

The value returned by `SP_foreign_stash()` is only valid until the next SICStus API call. The correct way to initialize the location pointed at by `SP_foreign_stash()` is therefore:

```
struct my_state {...};

init_my_foreign_resource(...)
{
   struct my_state *p = SP_malloc(sizeof(struct my_state));
   (*SP_foreign_stash()) = (void*)p;
}
```

The following example is incorrect; `SP_malloc()` may be called between the time `SP_foreign_stash()` is called and the time its return value is used:

```
// WRONG
(*SP_foreign_stash()) = SP_malloc(sizeof(struct my_state));
```

See Also

Section 6.4.7.3 [OS Threads], page 310.

12.3.22 `SP_fprintf()`

Synopsis

```
#include <sicstus/sicstus.h>

spio_t_error_code
SP_fprintf(
   SP_stream *stream,
   char const *fmt, ...);
```

Formatted output on the Prolog stream `stream`.

Arguments

stream	The stream. Must be a text stream open for output.
fmt	The format string. This uses the same syntax as the C library `printf` functions.
...	The data to format.

Return Value

On success, all data has been written and `SPIO_S_NOERR` or some other success code returned.

On failure, returns an error code without transferring any data. Error codes with special meaning for `SP_fprintf()`:

`SPIO_E_PARAMETER_ERROR`
: The underlying C library function reported an error while formatting the string.

Other error codes may also be returned.

Description

First the formatting operation will be performed. The resulting string will be assumed to be in internal encoding, and will then be output using the `SP_put_encoded_string()` function. This means e.g. that the '`%c`' printf conversion specification can only be used for ASCII characters, and the strings included using a '`%s`' specification should also be encoded strings.

See Also

Section 6.6.1 [Prolog Streams], page 315.

12.3.23 `SP_free()`

Synopsis

```
#include <sicstus/sicstus.h>

void
SP_free(void *ptr);
```

Disposees of the block referenced by `ptr`, which must have been obtained by a call to `SP_malloc()` or `SP_realloc()`, and must not have been released by a call to `SP_free()` or `SP_realloc()`.

Arguments

ptr Block to dispose of.

See Also

See Section 6.4.7.1 [OS Memory Management], page 309.

12.3.24 SP_get_address()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_get_address(SP_term_ref term,
               void **p);
```

Assigns to `*p` the pointer that corresponds to a Prolog integer

Arguments

term	The SP_term_ref holding the value
p	The location to assign

Return Value

Zero if the conversion fails (as far as failure can be detected), and a nonzero value otherwise.

See Also

Section 6.4.4 [Accessing Prolog Terms], page 308.

12.3.25 SP_get_arg()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_get_arg(int i,
           SP_term_ref term,
           SP_term_ref arg);
```

Assigns to `arg` the `i`:th argument of a compound term. This is similar to calling `arg/3`.

Arguments

i	The (one-based) argument number
term	The SP_term_ref holding the compound term
arg	The SP_term_ref to be assigned

Return Value

Zero if the conversion fails (as far as failure can be detected), and a nonzero value otherwise.

See Also

Section 6.4.4 [Accessing Prolog Terms], page 308.

12.3.26 SP_get_atom()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_get_atom(SP_term_ref term,
            SP_atom *a);
```

Assigns to `*a` the canonical representation of a Prolog atom

Arguments

term	The SP_term_ref holding the value
a	The location to assign

Return Value

Zero if the conversion fails (as far as failure can be detected), and a nonzero value otherwise.

See Also

Section 6.4.4 [Accessing Prolog Terms], page 308.

12.3.27 `SP_get_byte()`

Synopsis

```
#include <sicstus/sicstus.h>

spio_t_error_code
SP_get_byte(
  SP_stream *stream);
```

Read a byte from a binary stream.

Arguments

stream The stream. Must be a binary stream open for input.

Return Value

On success, the byte just read will be returned, cast to a `spio_t_error_code`. The value returned on successful return will never be negative.

On failure, returns an error code, recognizable with `SPIO_FAILED()`. Error codes are always negative.

Description

Note that `SP_get_byte()` is implemented as a macro and may evaluate the `stream` argument more than once.

See Also

Section 12.3.28 [cpg-ref-SP_get_code], page 1337. Section 6.6.1 [Prolog Streams], page 315.

12.3.28 SP_get_code()

Synopsis

```
#include <sicstus/sicstus.h>

spio_t_error_code
SP_get_code(
  SP_stream *stream);
```

Read a character code from a text stream.

Arguments

stream The stream. Must be a text stream open for input.

Return Value

On success, the character just read will be returned, cast to a `spio_t_error_code`. The value returned on successful return will never be negative.

On failure, returns an error code, recognizable with `SPIO_FAILED()`. Error codes are always negative.

Description

Note that `SP_get_code()` is implemented as a macro and may evaluate the `stream` argument more than once.

See Also

Section 12.3.27 [cpg-ref-SP_get_byte], page 1336. Section 6.6.1 [Prolog Streams], page 315.

12.3.29 SP_get_current_dir()

Synopsis

```
#include <sicstus/sicstus.h>

char *
SP_get_current_dir(void);
```

Obtains an encoded string containing the absolute, slash (/) terminated, path to the current working directory. The return value is allocated with SP_malloc and should be freed with SP_free.

Return Value

The string on success and NULL on error.

See Also

Section 12.3.92 [cpg-ref-SP_set_current_dir], page 1407. Section 6.4.7.2 [OS File System], page 310.

12.3.30 SP_get_dispatch()

Synopsis

```
#include <sicstus/sicstus.h>

SICSTUS_API_STRUCT_TYPE *
SP_get_dispatch(void *reserved);
```

Arguments

reserved Reserved, should be `NULL`.

Return Value

Returns the dispatch vector of the SICStus runtime.

Description

This function can be called from any thread.

This function is special in that it is not accessed through the dispatch vector; instead, it is exported in the ordinary manner from the SICStus runtime dynamic library (`sprt4-10-2.dll` under Windows and, typically, `libsprt4-10-2.so` under UNIX).

The address of this function is typically obtained by linking to the SICStus runtime library or, when using multiple SICStus runtimes, by a call to `SP_load_sicstus_run_time()`.

See Also

Chapter 8 [Multiple SICStus Runtimes], page 353.

12.3.31 SP_get_float()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_get_float(SP_term_ref term,
             double *f);
```

Assigns to `*f` the float that corresponds to a Prolog number.

If the term is an integer that does not fit in a `double`, then the call will fail.

Arguments

term	The SP_term_ref holding the value
f	The location to assign

Return Value

Zero if the conversion fails (as far as failure can be detected), and a nonzero value otherwise.

See Also

Section 6.4.4 [Accessing Prolog Terms], page 308.

12.3.32 SP_get_functor()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_get_functor(SP_term_ref term,
               SP_atom *name,
               int *arity);
```

Assigns to `*name` and `*arity` the canonical representation and arity of the principal functor of a Prolog compound term. If the value of `term` is an atom, then that atom is assigned to `*name` and 0 is assigned to `*arity`. This is similar to calling `functor/3` with the first argument bound to a compound term or an atom and the second and third arguments unbound.

Arguments

term	The SP_term_ref holding the value
name	The location to assign to the functor name
arity	The location to assign to the functor arity

Return Value

Zero if the conversion fails (as far as failure can be detected), and a nonzero value otherwise.

See Also

Section 6.4.4 [Accessing Prolog Terms], page 308.

12.3.33 SP_get_integer()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_get_integer(SP_term_ref term,
               SP_integer *i);
```

Assigns to `*i` the integer that corresponds to a Prolog number. The value must fit in `*i` for the operation to succeed.

Arguments

term	The SP_term_ref holding the value
i	The location to assign

Return Value

Zero if the conversion fails (as far as failure can be detected), and a nonzero value otherwise.

See Also

Section 6.4.4 [Accessing Prolog Terms], page 308.

12.3.34 SP_get_integer_bytes()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_get_integer_bytes(SP_term_ref term,
                     void *buf,
                     size_t *pbuf_size,
                     int native);
```

Extracts from `term` an arbitrarily sized integer.

Arguments

term	The SP_term_ref holding the integer
buf	The buffer receiving the integer
pbuf_size	Should point at the size of `buf`
native	See the description below

Return Value

Zero if the conversion fails (as far as failure can be detected), and a nonzero value otherwise.

Description

In the following, assume that the integer referred to by `term` requires a minimum of *size* bytes to store (in twos-complement representation).

1. If `term` does not refer to a Prolog integer, zero is returned and the other arguments are ignored.
2. If `*pbuf_size` is less than *size*, then `*pbuf_size` is updated to *size* and zero is returned. The fact that `*pbuf_size` has changed can be used to distinguish insufficient buffer size from other possible errors. By calling `SP_get_integer_bytes()` with `*pbuf_size` set to zero, you can determine the buffer size needed; in this case, `buf` is ignored.
3. `*pbuf_size` is set to *size*.
4. If `native` is zero, `buf` is filled with the twos complement representation of the integer, with the least significant bytes stored at lower indices in `buf`. Note that all of `buf` is filled, even though only *size* bytes was needed.
5. If `native` is non-zero, `buf` is assumed to point at a native `*pbuf_size` byte integral type. On most platforms, native integer sizes of two (16-bit), four (32 bit) and eight (64 bytes) bytes are supported. Note that `*pbuf_size == 1`, which would correspond to `signed char`, is *not* supported with `native`.
6. If an unsupported size is used with `native`, zero is returned.

Examples

The following example gets a Prolog integer into a (presumably 64 bit) `long long` C integer.

```
{
  long long x; // C99, GCC supports this
  size_t sz = sizeof x;
  if (!SP_get_integer_bytes(tr, &x, &sz, 1)) // 1 for native
    .. error handling ..
  .. use x .. // sz may have decreased
}
```

See Also

Section 6.4.4 [Accessing Prolog Terms], page 308.

12.3.35 `SP_get_list()`

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_get_list(SP_term_ref term,
            SP_term_ref head,
            SP_term_ref tail);
```

Assigns to `head` and `tail` the head and tail of a Prolog list.

Arguments

term	The SP_term_ref holding the list
head	The SP_term_ref to be assigned the head
tail	The SP_term_ref to be assigned the tail

Return Value

Zero if the conversion fails (as far as failure can be detected), and a nonzero value otherwise.

See Also

Section 6.4.4 [Accessing Prolog Terms], page 308.

12.3.36 SP_get_list_codes()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_get_list_codes(SP_term_ref term,
                  char const **s);
```

Assigns to `*s` a zero-terminated array containing an encoded string that corresponds to the given Prolog code list. The array is subject to reuse by other support functions, so if the value is going to be used on a more than temporary basis, it must be moved elsewhere.

Arguments

term	The SP_term_ref holding the code list
s	The location to assign

Return Value

Zero if the conversion fails (as far as failure can be detected), and a nonzero value otherwise.

See Also

Section 6.4.4 [Accessing Prolog Terms], page 308.

12.3.37 SP_get_list_n_bytes()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_get_list_n_bytes(SP_term_ref term,
                    SP_term_ref tail,
                    size_t n,
                    size_t *w,
                    unsigned char *s);
```

Copies into the byte array `s` the initial elements of `term`, which should hold a list of integers in the range [0,255], so that at most `n` bytes are used. The number of bytes actually written is assigned to `*w`. `tail` is set to the remainder of the list. The array `s` must have room for at least `n` bytes.

Arguments

term	The SP_term_ref holding the list
tail	The SP_term_ref to be assigned the remainder of the list
n	Max number of bytes to use
w	Location to assign to number of bytes actually used
s	The location to assign to the encoded string

Return Value

Zero if the conversion fails (as far as failure can be detected), and a nonzero value otherwise.

See Also

Section 6.4.4 [Accessing Prolog Terms], page 308.

12.3.38 SP_get_list_n_codes()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_get_list_n_codes(SP_term_ref term,
                    SP_term_ref tail,
                    size_t n,
                    size_t *w,
                    char *s);
```

Copies into `s` the encoded string representing the character codes in the initial elements of list `term`, so that at most `n` bytes are used. The number of bytes actually written is assigned to `*w`. `tail` is set to the remainder of the list. The array `s` must have room for at least `n` bytes.

Please note: The array `s` is never `NUL`-terminated. Any zero character codes in the list `term` will be converted to the overlong UTF-8 sequence `0xC0 0x80`.

Arguments

term	The SP_term_ref holding the code list
tail	The SP_term_ref to be assigned the remainder of the list
n	Max number of bytes to use
w	Location to assign to number of bytes actually used
s	The location to assign to the encoded string

Return Value

Zero if the conversion fails (as far as failure can be detected), and a nonzero value otherwise.

See Also

Section 6.4.4 [Accessing Prolog Terms], page 308.

12.3.39 SP_get_number_codes()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_get_number_codes(SP_term_ref term,
                    char const **s);
```

Assigns to `*s` a zero-terminated array of characters corresponding to the printed representation of a Prolog number. The array is subject to reuse by other support functions, so if the value is going to be used on a more than temporary basis, it must be moved elsewhere.

Arguments

term	The SP_term_ref holding the number
s	The location to assign to the array

Return Value

Zero if the conversion fails (as far as failure can be detected), and a nonzero value otherwise.

See Also

Section 6.4.4 [Accessing Prolog Terms], page 308.

12.3.40 SP_get_stream_counts()

Synopsis

```
#include <sicstus/sicstus.h>

spio_t_error_code
SP_get_stream_counts(
   SP_stream *stream,
   spio_t_offset *pitem_count,
   spio_t_offset *pnewline_count,
   spio_t_offset *pline_length,
   spio_t_bits options);
```

Obtain the stream counters.

Arguments

stream The stream.

item_count

If `pitem_count` is `NULL` it is not used, otherwise it is used as follows.

On success, `*pitem_count` is assigned to the number of items read from an input-only or bidirectional stream or with the number of items written to a output-only stream.

For binary streams, an *item* is a byte, for text streams it is a character.

pnewline_count

If `pnewline_count` is `NULL` it is not used, otherwise it is used as follows.

On success `*pnewline_count` is assigned to the number of newlines read from an input-only or bidirectional text stream or with the number of newlines written to a output-only text stream.

For binary streams, `*pnewline_count` is set to zero.

pline_length

If `pline_length` is `NULL` it is not used, otherwise it is used as follows.

On success, `*pline_length` is assigned to the number of characters read on the current line from an input-only or bidirectional text stream or with the characters written on the current line to a output-only text stream.

For binary streams, `*pline_length` is set to zero.

options The following bits can be set:

`SP_GET_STREAM_COUNTS_OPTION_READ`

Return the real input counts of a read-only or bidirectional stream.

`SP_GET_STREAM_COUNTS_OPTION_WRITE`

Return the real output counts of a write-only stream.

Currently, the call will fail with `SPIO_E_NOT_SUPPORTED` if the stream is bidirectional and `SP_GET_STREAM_COUNTS_OPTION_WRITE` is specified. This is because there is only one set of counters for

each stream and these are used to count in the input direction of bidirectional streams. This may be changed in a future release.

At most one of `SP_GET_STREAM_COUNTS_OPTION_READ` and `SP_GET_STREAM_COUNTS_OPTION_WRITE` can be specified. If neither is specified then default behavior is as follows

- If `stream` is interactive, a common set of counts shared by all interactive streams is returned.
- If `stream` is write-only, the output counts are returned.
- Otherwise, the `stream` is read-only or bidirectional and the input counts are returned.

Return Value

On success, `SPIO_S_NOERR` or some other success code is returned.

On failure, returns a SPIO error code. Error codes with special meaning for `SP_get_stream_counts()`:

`SPIO_E_NOT_READ`
: `SP_GET_STREAM_COUNTS_OPTION_READ` was specified but `stream` is not an input stream.

`SPIO_E_NOT_WRITE`
: `SP_GET_STREAM_COUNTS_OPTION_WRITE` was specified but `stream` is not an output stream.

`SPIO_E_NOT_SUPPORTED`
: `SP_GET_STREAM_COUNTS_OPTION_WRITE` was specified but `stream` is a bidirectional stream.

Description

There is only one set of counters for each stream. For a bidirectional stream, these counters only count in the input direction and the output direction does not affect the counts.

There is a common set of stream counters for all interactive streams. By default, these will be returned if `stream` is interactive instead of the real counts. This behavior can be changed with the `options` argument, see above.

See Also

Section 6.6.1 [Prolog Streams], page 315.

12.3.41 SP_get_stream_user_data()

Synopsis

```
#include <sicstus/sicstus.h>

spio_t_error_code
SP_get_stream_user_data(
   SP_stream *stream,
   void const *user_class,
   void **puser_data);
```

Get the user data of a user defined stream of a particular class.

Arguments

stream An arbitrary stream. It is legal, and often useful, to call `SP_get_stream_user_data()` on a stream even if it is not known whether the stream is in fact a user defined stream of a particular class.

puser_data
On success, `*puser_data` will be set to the `user_data` value used when the stream was created.

Return Value

On success, `*puser_data` is assigned and `SPIO_S_NOERR` or some other success code is returned.

On failure, e.g. if the stream was not created with this `user_class`, an error code is returned.

Description

This function is used in order to recognize streams of a particular type (or *class*). At the same time as it verifies the type of stream it also returns the `user_data` which gives the caller a handle to the internal state of the user defined stream.

The following sample illustrates how all streams of a particular class can be found and closed. This function mimics the behavior of the `SP_FCLOSE_OPTION_USER_STREAMS` option to `SP_fclose`, see Section 12.3.18 [cpg-ref-SP_fclose], page 1324.

```
spio_t_error_code close_streams(void const *user_class, int force)
{
  spio_t_error_code ecode = SPIO_E_ERROR;
  SP_stream *stream;
  SP_stream *next_stream;
  void *user_data;
  spio_t_bits fclose_options = 0;

  if (force) fclose_options |= SP_FCLOSE_OPTION_FORCE;

  stream = NULL;           /* means start of list of stream */
  do
    {
      /* Note: We need to do this before closing stream */
      ecode = SP_next_stream(stream, &next_stream);
      if (SPIO_FAILED(ecode)) goto barf;

      if (stream != NULL)
        {
          if (SPIO_SUCCEEDED(SP_get_stream_user_data(stream, user_class, &user_data)))
            {
              /* This is the right class of stream, close it */
              ecode = SP_fclose(stream, fclose_options);
              if (SPIO_FAILED(ecode))
                {
                  if (!force) goto barf; /* ignore error if force */
                }
            }
        }
      stream = next_stream;
    }
  while (stream != NULL);

  return SPIO_S_NOERR;

 barf:
  return ecode;
}
```

See Also

Section 12.3.9 [cpg-ref-SP_create_stream], page 1310. Section 6.6.2 [Defining a New Stream], page 317.

12.3.42 `SP_get_string()`

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_get_string(SP_term_ref term,
              char const **s);
```

Assigns to `*s` a pointer to the encoded string representing the name of a Prolog atom. This string must *not* be modified by the calling function.

Arguments

term	The SP_term_ref holding the value
s	The location to assign

Return Value

Zero if the conversion fails (as far as failure can be detected), and a nonzero value otherwise.

See Also

Section 6.4.4 [Accessing Prolog Terms], page 308.

12.3.43 SP_getenv()

Synopsis

```
#include <sicstus/sicstus.h>

void *
SP_getenv(const char *name);
```

Retrieves the value of the system property, or if no such system property exists the environment variable, with the given name.

The memory for the returned value is managed by Prolog and should be freed with `SP_free()`.

Arguments

name The name of the system property or environment variable.

Return Value

The value of the system property or environment variable, if set. `NULL` if neither a system property nor an environment variable of that name exists, or if an error occurs.

See Also

Section 4.17.1 [System Properties and Environment Variables], page 228.

12.3.44 SP_initialize() *macro*

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_initialize(int argc,
              char **argv,
              SP_options *options);
```

Initializes the Prolog engine.

Arguments

argc The number of elements of the `argv` vector.

argv A vector of strings that can be accessed by `prolog_flag(argv,X)`. This argument is copied by `SP_initialize()` so it can be discarded by the caller. May be passed as `NULL` if `argc` is zero.

Each entry should be an encoded string, i.e. encoded using '`UTF-8`'. This may not be the encoding used by the operating system when invoking `main()`. A better alternative is to pass zero for `argc`, NULL for `argv` and use `SP_set_argv()` to pass the `argv` entries.

options A pointer to an option block. In most cases it suffice to pass `NULL`.

An option block can be initialized with `SP_OPTIONS_STATIC_INITIALIZER` and its `options` field set to point to a `SP_option` array. Each `SP_option` is a typed value. Currently the only type is `SP_option_type_system_property`, for setting initial system properties (see Section 4.17.1 [System Properties and Environment Variables], page 228).

To pass the system properties `foo` and `bar`, with values `true` and `hello`, respectively, you would do something like this

```
...
int res;
SP_options opts = SP_OPTIONS_STATIC_INITIALIZER;
SP_option props[2];

opts.noptions = 0;
opts.options = &props;
props[opts.noptions].type = SP_option_type_system_property;
props[opts.noptions].u.prop.key = "foo";
props[opts.noptions].u.prop.value = "true";
opts.noptions++;

props[opts.noptions].type = SP_option_type_system_property;
props[opts.noptions].u.prop.key = "bar";
props[opts.noptions].u.prop.value = "hello";
opts.noptions++;

res = SP_initialize(argv, argc, &opts);
if (res != SP_SUCCESS) {
     ... /* error handling */
}
...
```

Return Value

`SP_SUCCESS` if initialization was successful. If initialization was successful, further calls to `SP_initialize()` will be no-ops (and return `SP_SUCCESS`).

Description

This must be done before any interface functions are called, except those annotated as *[preinit]*. The function will allocate data areas used by Prolog, initialize command line arguments so that they can be accessed by the `argv` Prolog flag, and load the Runtime Library.

See Also

Section 6.7.4.1 [Initializing the Prolog Engine], page 334.

12.3.45 `SP_is_atom()`

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_is_atom(SP_term_ref term);
```

Determines whether the value of `term` is a Prolog atom.

Arguments

term The SP_term_ref to be inspected

Return Value

1 if it is a atom and 0 otherwise.

See Also

Section 6.4.5 [Testing Prolog Terms], page 308.

12.3.46 `SP_is_atomic()`

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_is_atomic(SP_term_ref term);
```

Determines whether the value of `term` is a Prolog atomic term.

Arguments

term The SP_term_ref to be inspected

Return Value

1 if it is an atomic term and 0 otherwise.

See Also

Section 6.4.5 [Testing Prolog Terms], page 308.

12.3.47 `SP_is_compound()`

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_is_compound(SP_term_ref term);
```

Determines whether the value of `term` is a Prolog compound term.

Arguments

term The SP_term_ref to be inspected

Return Value

1 if it is a compound term and 0 otherwise.

See Also

Section 6.4.5 [Testing Prolog Terms], page 308.

12.3.48 `SP_is_float()`

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_is_float(SP_term_ref term);
```

Determines whether the value of `term` is a Prolog float.

Arguments

term The SP_term_ref to be inspected

Return Value

1 if it is a float and 0 otherwise.

See Also

Section 6.4.5 [Testing Prolog Terms], page 308.

12.3.49 SP_is_integer()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_is_integer(SP_term_ref term);
```

Determines whether the value of `term` is a Prolog integer.

Arguments

term The SP_term_ref to be inspected

Return Value

1 if it is a integer and 0 otherwise.

Please note: `SP_is_integer()` will return true also for integers that are too large to be passed to `SP_get_integer()`. In this case you will need to use `SP_get_integer_bytes()` to obtain the value.

See Also

Section 6.4.5 [Testing Prolog Terms], page 308.

12.3.50 `SP_is_list()`

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_is_list(SP_term_ref term);
```

Determines whether the value of `term` is a Prolog list cell, i.e. a compound term with functor `./2`.

Arguments

term The SP_term_ref to be inspected

Return Value

1 if the argument is a list cell and 0 otherwise.

See Also

Section 6.4.5 [Testing Prolog Terms], page 308.

12.3.51 SP_is_number()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_is_number(SP_term_ref term);
```

Determines whether the value of `term` is a Prolog number.

Arguments

term The SP_term_ref to be inspected

Return Value

1 if it is a number and 0 otherwise.

See Also

Section 6.4.5 [Testing Prolog Terms], page 308.

12.3.52 `SP_is_variable()`

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_is_variable(SP_term_ref term);
```

Determines whether the value of `term` is a Prolog variable.

Arguments

term The SP_term_ref to be inspected

Return Value

1 if it is a variable and 0 otherwise.

See Also

Section 6.4.5 [Testing Prolog Terms], page 308.

12.3.53 `SP_load()`

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_load(char const *filename);
```

Calls `load_files/1`.

Arguments

filename The file name, which is treated as a Prolog atom.

Return Value

See `SP_query_cut_fail()`.

See Also

Section 6.7.4.2 [Loading Prolog Code], page 335.

12.3.54 SP_load_sicstus_run_time()

Synopsis

since release 4.0.3

```
#include <sicstus/sicstus.h>

int
SP_load_sicstus_run_time(SP_get_dispatch_type **pfuncp,
                         void *reserved);
```

Arguments

pfuncp On success the address of the `SP_get_dispatch()` function of the newly loaded SICStus runtime is stored at this address.

reserved Reserved, should be `NULL`.

Return Value

Positive if a new runtime could be loaded, non-positive on error. **Please note**: The return value was incorrectly described prior to SICStus Prolog 4.0.5. Also note that, for historical reasons, the meaning of the return value is different from the convention used by most of the SICStus Prolog C API.

Description

`SP_load_sicstus_run_time()` loads a new SICStus runtime.

As a special case, if `SP_load_sicstus_run_time()` is called from a SICStus runtime that has not been initialized (with `SP_initialize()`) and that has not previously been loaded as the result of calling `SP_load_sicstus_run_time()`, no new runtime is loaded. Instead, the `SP_get_dispatch()` of the runtime itself is returned. In particular, the first time `SP_load_sicstus_run_time()` is called on the initial SICStus runtime, and if this happens before the initial SICStus runtime is initialized, no new runtime is loaded.

Calling `SP_load_sicstus_run_time()` from a particular runtime can be done from any thread.

An application that links statically with the SICStus runtime should not call `SP_load_sicstus_run_time()`.

You should not use pre-linked foreign resources when using multiple SICStus runtimes in the same process.

For an example of loading and using multiple SICStus runtimes, see `library/jasper/spnative.c` that implements this functionality for the Java interface Jasper.

See Also

Chapter 8 [Multiple SICStus Runtimes], page 353.

12.3.55 `SP_malloc()`

Synopsis

```
#include <sicstus/sicstus.h>

void *
SP_malloc(size_t size);
```

Allocates a block of at least `size` bytes.

Arguments

size Requested number of bytes.

Return Value

`NULL` on failure, the pointer otherwise.

See Also

See Section 6.4.7.1 [OS Memory Management], page 309.

12.3.56 SP_mutex_lock()

Synopsis

```
#include <sicstus/sicstus.h>

static SP_mutex volatile mutex = SP_MUTEX_INITIALIZER;

int
SP_mutex_lock(SP_mutex *pmx);
```

Locks the mutex.

Return Value

Zero on error, non-zero on success.

Examples

```
static SP_mutex volatile my_mutex = SP_MUTEX_INITIALIZER;
// only access this counter with my_mutex locked
int volatile protected_counter = 0;

// returns the new value of protected_counter
int increment_the_counter(void)
{
  int new_value;

  if(SP_mutex_lock(&my_mutex) == 0) goto error_handling;
  // No other thread can update protected_counter here
  new_value = protected_counter+1;
  protected_counter = new_value;
  if (SP_mutex_unlock(&my_mutex) == 0) goto error_handling;
  return new_value;

error_handling:
  ...
}
```

See Also

Section 6.4.7.3 [OS Threads], page 310.

12.3.57 SP_mutex_unlock()

Synopsis

```
#include <sicstus/sicstus.h>

static SP_mutex volatile mutex = SP_MUTEX_INITIALIZER;

int
SP_mutex_unlock(SP_mutex *pmx);
```

Unlocks the mutex.

Return Value

Zero on error, non-zero on success.

Description

The number of unlocks must match the number of locks and only the thread that performed the lock can unlock the mutex.

Examples

See the example of `SP_mutex_lock()`.

See Also

Section 6.4.7.3 [OS Threads], page 310.

12.3.58 SP_new_term_ref()

Synopsis

```
#include <sicstus/sicstus.h>

SP_term_ref
SP_new_term_ref(void);
```

Creates a new SP_term_ref, initialized to the empty list `[]`.

Return Value

The new SP_term_ref.

See Also

Section 6.4.1 [Creating and Manipulating SP_term_refs], page 305.

12.3.59 SP_next_solution()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_next_solution(SP_qid query);
```

Look for the next solution to the given query.

Arguments

query The query, created by `SP_open_query()`.

Return Value

`SP_SUCCESS` for success, `SP_FAILURE` for failure, `SP_ERROR` if an error condition occurred.

Description

This will cause the Prolog engine to backtrack over any current solution of an open query and look for a new one. The given argument must be the innermost query that is still open, i.e. it must not have been terminated explicitly by `SP_close_query()` or `SP_cut_query()`. Only when the return value is `SP_SUCCESS` are the values in the query arguments valid, and will remain so until backtracking into this query or an enclosing one.

See Also

Section 6.5.2 [Finding Multiple Solutions of a Call], page 311.

12.3.60 SP_next_stream()

Synopsis

```
#include <sicstus/sicstus.h>

spio_t_error_code
SP_next_stream(SP_stream *stream, SP_stream **pnext);
```

Iterate through all Prolog streams.

Arguments

stream If this is NULL then *pnext is set to the first stream in the list of streams. If this is non-NULL then the stream following *stream* in the list of streams is returned in *pnext.

pnext The returned stream is returned in *pnext.

Return Value

On success, *pnext is assigned, and SPIO_S_NOERR or some other success code is returned. You should use the SPIO_FAILED() macro to determine if the return value signifies failure or success.

When stream is the last stream *pnext is set to NULL.

This function can be used to iterate over all Prolog streams. One way to use this is together with SP_get_stream_user_data to find all currently open user defined streams of a particular type.

See Also

Section 6.6 [SICStus Streams], page 315.

12.3.61 `SP_open_query()`

Synopsis

```
#include <sicstus/sicstus.h>

SP_qid
SP_open_query(SP_pred_ref predicate,
              SP_term_ref arg1,
              ...);
```

Sets up a query for use by `SP_next_solution()`, `SP_close_query()`, `SP_cut_query()`.

Arguments

predicate The predicate to call.

arg1... The arguments to pass.

Return Value

The query identifier if successful, otherwise 0,

Description

Note that if a new query is opened while another is already open, the new query must be terminated before exploring the solutions of the old one. That is, queries must be strictly nested.

See Also

Section 6.5.2 [Finding Multiple Solutions of a Call], page 311.

12.3.62 `SP_pred()`

Synopsis

```
#include <sicstus/sicstus.h>

SP_pred_ref
SP_pred(SP_atom name_atom,
        SP_integer arity,
        SP_atom module_atom);
```

Returns a pointer to the predicate definition.

Arguments

name_atom
: Predicate name.

arity
: Arity.

module_atom
: Module name.

Return Value

The reference if the predicate is found, `NULL` otherwise with error code `PRED_NOT_FOUND`.

Description

Faster than `SP_predicate()`.

See Also

Section 6.5 [Calling Prolog from C], page 310.

12.3.63 SP_predicate()

Synopsis

```
#include <sicstus/sicstus.h>

SP_pred_ref
SP_predicate(char *name_string,
             SP_integer arity,
             char *module_string);
```

Returns a pointer to the predicate definition.

Arguments

name_string
: Predicate name.

arity
: Arity.

module_string
: Module name, optional. `NULL` and `""` (the empty string) both denote the type-in module (see Section 4.11.8 [ref-mod-tyi], page 170).

Return Value

The reference if the predicate is found, `NULL` otherwise with error code `PRED_NOT_FOUND` or, if one of the string arguments are malformed, `INV_STRING`.

Description

Slower than `SP_pred()`.

See Also

Section 6.5 [Calling Prolog from C], page 310.

12.3.64 SP_printf()

Synopsis

```
#include <sicstus/sicstus.h>

spio_t_error_code
SP_printf(
   char const *fmt,
   ...);
```

Same as `SP_fprintf(SP_stdout, fmt, ...)`.

See Also

Section 12.3.22 [cpg-ref-SP_fprintf], page 1331.

12.3.65 SP_put_address()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_put_address(SP_term_ref term,
               void *pointer);
```

Assigns to `term` a reference to a Prolog integer representing a pointer.

Arguments

term The SP_term_ref to be assigned

pointer The pointer

Return Value

Zero if the conversion fails (as far as failure can be detected), and a nonzero value otherwise.

See Also

Section 6.4.3 [Creating Prolog Terms], page 307.

12.3.66 SP_put_atom()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_put_atom(SP_term_ref term,
            SP_atom atom);
```

Assigns to `term` a reference to a Prolog atom.

Arguments

term The SP_term_ref to be assigned

atom The atom

Return Value

Zero if the conversion fails (as far as failure can be detected), and a nonzero value otherwise.

See Also

Section 6.4.3 [Creating Prolog Terms], page 307.

12.3.67 `SP_put_byte()`

Synopsis

```
#include <sicstus/sicstus.h>

spio_t_error_code
SP_put_byte(
  SP_stream *stream,
  int item);
```

Write a byte to a binary stream.

Arguments

stream The stream. Must be a binary stream open for output.

Return Value

On success, the written byte will be returned, cast to a `spio_t_error_code`. The value returned on successful return will never be negative.

On failure, returns an error code, recognizable with `SPIO_FAILED()`. Error codes are always negative.

Description

Note that `SP_put_byte()` is implemented as a macro and may evaluate the arguments more than once. For the same reason, no error checking is performed on the arguments.

See Also

Section 12.3.69 [cpg-ref-SP_put_code], page 1382. Section 6.6.1 [Prolog Streams], page 315.

12.3.68 SP_put_bytes()

Synopsis

```
#include <sicstus/sicstus.h>

spio_t_error_code
SP_put_bytes(
  SP_stream *stream,
  spio_t_uint8 const *bytes,
  size_t byte_count,
  spio_t_bits options);
```

Write several bytes to a binary stream.

Arguments

stream The stream. Must be a binary stream open for output.

bytes A pointer to the data to write.

byte_count
The number of bytes to write.

options The following bits can be set:

`SP_PUT_BYTES_OPTION_NONBLOCKING`
Write the bytes without blocking.

Return Value

On success, all data has been written and `SPIO_S_NOERR` or some other success code returned.

On failure, returns an error code without transferring any data. Error codes with special meaning for `SP_put_bytes()`:

`SPIO_E_WOULD_BLOCK`
`SP_PUT_BYTES_OPTION_NONBLOCKING` was set but the operation would block.

Other error codes may also be returned.

See Also

Section 12.3.67 [cpg-ref-SP_put_byte], page 1380. Section 6.6.1 [Prolog Streams], page 315.

12.3.69 SP_put_code()

Synopsis

```
#include <sicstus/sicstus.h>

spio_t_error_code
SP_put_code(
  SP_stream *stream,
  int item);
```

Write a character code to a text stream.

Arguments

stream The stream. Must be a text stream open for output.

Return Value

On success, the written character will be returned, cast to a `spio_t_error_code`. The value returned on successful return will never be negative.

On failure, returns an error code, recognizable with `SPIO_FAILED()`. Error codes are always negative.

Description

Note that `SP_put_code()` is implemented as a macro and may evaluate the arguments more than once. For the same reason, no error checking is performed on the arguments.

See Also

Section 12.3.67 [cpg-ref-SP_put_byte], page 1380. Section 6.6.1 [Prolog Streams], page 315.

12.3.70 SP_put_codes()

Synopsis

```
#include <sicstus/sicstus.h>

spio_t_error_code
SP_put_codes(
  SP_stream *stream,
  spio_t_wchar const *codes,
  size_t code_count,
  spio_t_bits options);
```

Write several codes to a text stream.

Arguments

stream The stream. Must be a text stream open for output.

codes A pointer to the data to write.

code_count
The number of character codes to write. Note that this is the number of character codes, not the number of bytes.

options The following bits can be set:

`SP_PUT_CODES_OPTION_NONBLOCKING`
Write the codes without blocking.

Return Value

On success, all data has been written and `SPIO_S_NOERR` or some other success code returned.

On failure, returns an error code without transferring any data. Error codes with special meaning for `SP_put_codes()`:

`SPIO_E_WOULD_BLOCK`
`SP_PUT_CODES_OPTION_NONBLOCKING` was set but the operation would block.

Other error codes may also be returned.

See Also

Section 12.3.69 [cpg-ref-SP_put_code], page 1382. Section 6.6.1 [Prolog Streams], page 315.

12.3.71 SP_put_encoded_string()

Synopsis

```
#include <sicstus/sicstus.h>

spio_t_error_code
SP_put_encoded_string(
  SP_stream *stream,
  spio_t_wchar const *encoded_string,
  spio_t_bits options);
```

Write an encoded string to a text stream.

Arguments

stream The stream. Must be a text stream open for output.

encoded_string
An encoded string to write.

options The following bits can be set:

`SP_PUT_ENCODED_STRING_OPTION_NONBLOCKING`
Write the string without blocking.

Return Value

On success, all data has been written and `SPIO_S_NOERR` or some other success code returned.

On failure, returns an error code without transferring any data. Error codes with special meaning for `SP_put_encoded_string()`:

`SPIO_E_WOULD_BLOCK`
`SP_PUT_ENCODED_STRING_OPTION_NONBLOCKING` was set but the operation would block.

Other error codes may also be returned.

See Also

Section 12.3.70 [cpg-ref-SP_put_codes], page 1383. Section 6.6.1 [Prolog Streams], page 315.

12.3.72 `SP_put_float()`

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_put_float(SP_term_ref term,
             double f);
```

Assigns to `term` a reference to a float.

Arguments

term	The SP_term_ref to be assigned
f	The float (must be finite)

Return Value

Zero if the conversion fails (as far as failure can be detected), and a nonzero value otherwise.

See Also

Section 6.4.3 [Creating Prolog Terms], page 307.

12.3.73 SP_put_functor()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_put_functor(SP_term_ref term,
               SP_atom name,
               int arity);
```

Assigns to `term` a reference to a compound term with all the arguments unbound variables. If `arity` is 0, assigns the Prolog atom whose canonical representation is `name`. This is similar to calling `functor/3` with the first argument unbound and the second and third arguments bound to an atom and an integer, respectively.

Arguments

term	The SP_term_ref to be assigned
name	The name of the functor
arity	The arity of the functor

Return Value

Zero if the conversion fails (as far as failure can be detected), and a nonzero value otherwise.

See Also

Section 6.4.3 [Creating Prolog Terms], page 307.

12.3.74 `SP_put_integer()`

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_put_integer(SP_term_ref term,
               SP_integer i);
```

Assigns to `term` a reference to an integer.

Arguments

term	The SP_term_ref to be assigned
i	The integer

Return Value

Zero if the conversion fails (as far as failure can be detected), and a nonzero value otherwise.

See Also

Section 6.4.3 [Creating Prolog Terms], page 307.

12.3.75 SP_put_integer_bytes()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_put_integer_bytes(SP_term_ref term,
                     void *buf,
                     size_t buf_size,
                     int native);
```

Assigns to `term` a reference to an arbitrarily sized integer.

Arguments

term The SP_term_ref to be assigned

buf

- If `native` is zero, `buf` consists of the `buf_size` bytes of the twos complement representation of the integer. Less significant bytes are at lower indices.
- If `native` is nonzero, `buf` is a pointer to the native `buf_size` bytes integer type.

buf_size The size of `buf`

native See above. Supported native sizes typically include two, four and eight (64bit) bytes.

Return Value

Zero if the conversion fails (as far as failure can be detected), and a nonzero value otherwise.

See Also

Section 6.4.3 [Creating Prolog Terms], page 307.

12.3.76 `SP_put_list()`

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_put_list(SP_term_ref term);
```

Assigns to `term` a reference to a Prolog list whose head and tail are both unbound variables.

Arguments

term The SP_term_ref to be assigned

Return Value

Zero if the conversion fails (as far as failure can be detected), and a nonzero value otherwise.

See Also

Section 6.4.3 [Creating Prolog Terms], page 307.

12.3.77 SP_put_list_codes()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_put_list_codes(SP_term_ref term,
                  SP_term_ref tail,
                  char const *s);
```

Assigns to `term` a Prolog code list represented by the encoded string `s`, prepended to the value of `tail`.

Arguments

term	The SP_term_ref to be assigned
tail	The tail of the code list
s	The string to convert

Return Value

Zero if the conversion fails (as far as failure can be detected), and a nonzero value otherwise.

See Also

Section 6.4.3 [Creating Prolog Terms], page 307.

12.3.78 SP_put_list_n_bytes()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_put_list_n_bytes(SP_term_ref term,
                    SP_term_ref tail,
                    size_t n,
                    unsigned char const *s);
```

Assigns to `term` a list of integers represented by the first `n` elements of the byte array `s`, prepended to the value of `tail`.

Arguments

term	The SP_term_ref to be assigned
tail	The tail of the list
n	The number of bytes of `s` to convert
s	The byte array to convert

Return Value

Zero if the conversion fails (as far as failure can be detected), and a nonzero value otherwise.

See Also

Section 6.4.3 [Creating Prolog Terms], page 307.

12.3.79 SP_put_list_n_codes()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_put_list_n_codes(SP_term_ref term,
                    SP_term_ref tail,
                    size_t n,
                    char const *s);
```

Assigns to `term` a Prolog code list represented by the first `n` **bytes** of the encoded string `s`, prepended to the value of `tail`.

Please note: Some characters may be encoded using more than one byte so the number of characters may be less than `n`.

Arguments

term	The SP_term_ref to be assigned
tail	The tail of the code list
n	The number of character codes of `s` to convert
s	The string to convert

Return Value

Zero if the conversion fails (as far as failure can be detected), and a nonzero value otherwise.

See Also

Section 6.4.3 [Creating Prolog Terms], page 307.

12.3.80 SP_put_number_codes()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_put_number_codes(SP_term_ref term,
                    char const *s);
```

Assigns to `term` a reference to a Prolog number obtained by parsing `s` as if by `number_codes/2`.

Arguments

term	The SP_term_ref to be assigned
s	The string to parse

Return Value

Zero if the conversion fails (as far as failure can be detected), and a nonzero value otherwise.

See Also

Section 6.4.3 [Creating Prolog Terms], page 307.

12.3.81 SP_put_string()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_put_string(SP_term_ref term,
              char const *string);
```

Assigns to `term` a reference to a Prolog atom.

Arguments

term	The SP_term_ref to be assigned
string	The string corresponding to the atom

Return Value

Zero if the conversion fails (as far as failure can be detected), and a nonzero value otherwise.

See Also

Section 6.4.3 [Creating Prolog Terms], page 307.

12.3.82 `SP_put_term()`

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_put_term(SP_term_ref to,
            SP_term_ref from);
```

Assigns to `to` the value of `from`.

Arguments

to	The SP_term_ref to be assigned
from	The SP_term_ref whose value is accessed

Return Value

Zero if the conversion fails (as far as failure can be detected), and a nonzero value otherwise.

See Also

Section 6.4.3 [Creating Prolog Terms], page 307.

12.3.83 SP_put_variable()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_put_variable(SP_term_ref term);
```

Assigns to `term` a reference to a new unbound Prolog variable.

Arguments

term The SP_term_ref to be assigned

Return Value

Zero if the call fails (as far as failure can be detected), and a nonzero value otherwise.

See Also

Section 6.4.3 [Creating Prolog Terms], page 307.

12.3.84 SP_query()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_query(SP_pred_ref predicate,
         SP_term_ref arg1,
         ...);
```

Calls a predicate, committing to its first solution.

Arguments

predicate The predicate to call.

arg1... The arguments to pass.

Return Value

`SP_SUCCESS` if the goal succeeded, `SP_FAILURE` if it failed, and `SP_ERROR` if an error condition occurred.

Description

Use this if you are only interested in the first solution. It will create a goal from the predicate definition and the arguments, call it, and commit to the first solution found, if any. If it returns `SP_SUCCESS`, values in the query arguments valid, and will remain so until backtracking into any enclosing query.

See Also

Section 6.5.1 [Finding One Solution of a Call], page 311.

12.3.85 SP_query_cut_fail()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_query_cut_fail(SP_pred_ref predicate,
                  SP_term_ref arg1,
                  ...);
```

Calls a predicate for side effects, reclaiming any storage used.

Arguments

predicate The predicate to call.

arg1... The arguments to pass.

Return Value

`SP_SUCCESS` if the goal succeeded, `SP_FAILURE` if it failed, and `SP_ERROR` if an error condition occurred.

Description

Call this is you are only interested in the side effects of a predicate. It will try to prove the predicate, cut away the rest of the solutions, and finally fail. This will reclaim the storage used after the call, and throw away any solution found.

See Also

Section 6.5.1 [Finding One Solution of a Call], page 311.

12.3.86 `SP_raise_exception()`

Synopsis

```
#include <sicstus/sicstus.h>

void
SP_raise_exception(SP_term_ref term);
```

Raises an exception in the scope of Prolog calling C.

Arguments

term The SP_term_ref whose value will be the exception term.

Description

The exception will be stored as pending. This function is normally used in the context of a call from Prolog to C, and will cause the exception to be propagated to Prolog on return from the call. The effect is as if `raise_exception/1` was called with the term as argument.

Please note: this should only be called right before returning to Prolog.

See Also

Section 6.5.5 [Exception Handling in C], page 314.

12.3.87 SP_read_from_string()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_read_from_string(SP_term_ref t,
                    const char *string,
                    SP_term_ref values[])
```

Assigns to `tt` the result of reading a term from the its textual representation `string`. Variables that occur in the term are bound to the corresponding term in `val`.

Arguments

term The SP_term_ref to assign.

string The string to read from.

values The SP_term_refs to bind variables to. The vector is terminated by `0` (zero). `values` may be `NULL`, which is treated as an empty vector.

Return Value

Nonzero on success, and 0 otherwise.

Description

The variables in the term are ordered according to their first occurrence during a depth first traversal in increasing argument order. That is, the same order as used by `terms:term_variables_bag/2` (see Section 10.47 [lib-terms], page 902). Variables that do not have a corresponding entry in `vals` are ignored. Entries in `vals` that do not correspond to a variable in the term are ignored.

The string should be encoded using the SICStus Prolog internal encoding.

Examples

This example creates the term `foo(X,42,42,X)` (without error checking):

```
SP_term_ref x = SP_new_term_ref();
SP_term_ref y = SP_new_term_ref();
SP_term_ref term = SP_new_term_ref();
SP_term_ref vals[] = {x,y,x,0}; // zero-terminated

SP_put_variable(x);
SP_put_integer(y,42);

SP_read_from_string(term, "foo(A,B,B,C).", vals);
#if 0
   A corresponds to vals[0] (x),
   B to vals[1] (y),
   C to vals[2] (x).
   A and C therefore both are bound to
   the variable referred to by x.
   B is bound to the term referred to by y (42).
   So term refers to a term foo(X,42,42,X).
#endif
```

See Section 6.5.6 [Reading a goal from a string], page 315, for an example of using `SP_read_from_string()` to call an arbitrary goal.

See Also

Section 6.4.3 [Creating Prolog Terms], page 307.

12.3.88 SP_realloc()

Synopsis

```
#include <sicstus/sicstus.h>

void *
SP_realloc(void *ptr,
           size_t size);
```

Changes the size of the block referenced by `ptr` to `size` bytes and returns a pointer to the (possibly moved) block. The contents will be unchanged up to the lesser of the new and old sizes. The block referenced by `ptr` must have been obtained by a call to `SP_malloc()` or `SP_realloc()`, and must not have been released by a call to `SP_free()` or `SP_realloc()`.

Arguments

ptr	The current block.
size	Requested number of bytes of the new block.

Return Value

`NULL` on failure, the pointer otherwise.

See Also

See Section 6.4.7.1 [OS Memory Management], page 309.

12.3.89 SP_register_atom()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_register_atom(SP_atom atom);
```

Registers the atom `atom` with the Prolog memory manager by incrementing its reference counter.

Arguments

atom The atom to register

Return Value

1 if `atom` is valid, and 0 otherwise.

See Also

Section 6.4.1 [Creating and Manipulating SP_term_refs], page 305.

12.3.90 `SP_restore()`

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_restore(char const *filename);
```

Calls `restore/1`.

Arguments

filename The file name, which is treated as a Prolog atom.

Return Value

See `SP_query_cut_fail()`.

See Also

Section 6.7.4.2 [Loading Prolog Code], page 335.

12.3.91 SP_set_argv()

Synopsis

since release 4.0.3

```
#include <sicstus/sicstus.h>

int
SP_set_argv(int argc,
            char **argv,
            spio_t_bits options);
```

Initializes the `argv` prolog flag.

Arguments

argc The number of elements of the `argv` vector.

argv A vector of strings that can be accessed by `prolog_flag(argv,X)`. This argument is copied by `SP_set_argv()` so it can be discarded by the caller. May be passed as `NULL` if `argc` is zero.

The encoding used when converting the entries to atoms is determined by the `options` argument.

options

If `options` is zero then each entry in `argv` is assumed to be an encoded string, i.e. encoded using '`UTF-8`'. This is the same as passing `argc` and `argv` to `SP_initialize()` except that `SP_initialize()` will not report failure even if the `argv` entries are not suitable as atom names. Note that UTF-8 may not be the encoding used by the operating system when invoking `main()`.

If `options` is `SP_SET_ARGV_OPTION_SYSTEM_ENCODING` then each entry in `argv` is assumed to be encoded using some system encoding. This is only useful on Unix-like systems since it is preferable, and trivial, to obtain and pass a UTF-8 `argv` vector on Windows.

The system encoding used by `SP_set_argv()` will be the first character encoding specified by the following environment variables:

`SP_CTYPE`

`LC_ALL (only on Unix)`
`LC_CTYPE (only on Unix)`
`LANG (only on Unix)`

if none of these are set then the operating system will be queried in some platform specific way.

Please note: For best results on Unix-like platforms you should use a locale based on UTF-8.

Return Value

Zero if the argument entries cannot be converted to atoms, and a nonzero value otherwise.

Description

See Also

Section 6.7.4.1 [Initializing the Prolog Engine], page 334.

12.3.92 `SP_set_current_dir()`

Synopsis

```
#include <sicstus/sicstus.h>

spio_t_error_code
SP_set_current_dir(char const *dir);
```

Makes a directory pointed to by `dir` to become the current working directory. `path` should be an encoded string.

Arguments

dir Name of the directory to become current.

Return Value

On success, `SPIO_S_NOERR` or some other success code is returned.

On failure, an error code is returned and the working directory is not changed.

See Also

Section 12.3.29 [cpg-ref-SP_get_current_dir], page 1338. Section 6.4.7.2 [OS File System], page 310.

12.3.93 SP_set_user_stream_hook() *preinit*

Synopsis

```
#include <sicstus/sicstus.h>

typedef SP_stream *
SP_UserStreamHook(void *user_data, int which);

SP_UserStreamHook *
SP_set_user_stream_hook(SP_UserStreamHook *hook, void *user_data);
```

Sets the user-stream hook to `hook`. Must be called *before* `SP_initialize()`.

Arguments

hook It is called three times, one for each stream. The `which` argument indicates which stream it is called for. The value of `which` is one of:

`SP_STREAMHOOK_STDIN`
: Create stream for standard input.

`SP_STREAMHOOK_STDOUT`
: Create stream for standard output.

`SP_STREAMHOOK_STDERR`
: Create stream for standard error.

The hook should return a standard SICStus text I/O stream, as described in Section 6.6.2 [Defining a New Stream], page 317.

user_data An arbitrary pointer that will be passed to the `hook`.

See Also

Section 6.6.3 [Hookable Standard Streams], page 321.

12.3.94 `SP_set_user_stream_post_hook()` *preinit*

Synopsis

```
#include <sicstus/sicstus.h>

typedef SP_stream *
SP_UserStreamPostHook(void *user_data, int which, SP_stream *str);

SP_UserStreamPostHook *
SP_set_user_stream_post_hook(SP_UserStreamPostHook *hook, void *user_data);
```

Sets the user-stream post-hook to `hook`. Must be called *before* `SP_initialize()`.

Arguments

hook The user-stream post-hook is, if defined, called after all the streams have been defined, once for each of the three standard streams. It has a slightly different prototype:

```
void user_stream_post_hook(void *user_data, int which, SP_stream *str)
```

where `user_data` is the value passed to `SP_set_user_stream_post_hook` and where `str` is a pointer to the corresponding `SP_stream` structure. There are no requirements as to what this hook must do; the default behavior is to do nothing at all.

The post-hook is intended to be used to do things that may require that all streams have been created.

user_data An arbitrary pointer that will be passed to the `hook`.

See Also

Section 6.6.3 [Hookable Standard Streams], page 321.

12.3.95 SP_signal()

Synopsis

```
#include <sicstus/sicstus.h>

typedef void
SP_SigFun (int sig, void *user_data);

SP_SigFun
SP_signal(int sig,
          SP_SigFun fun, void *user_data);
```

Installs a function `fun` as a handler for the signal `sig`. It will be called with `sig` and `user_data` as arguments.

Arguments

sig	The signal
fun	The function
user_data	An extra, user defined value passed to the function.

Return Value

`SP_SIG_ERR` if an error occurs error. On success, some value different from `SP_SIG_ERR`.

Description

When the OS delivers a signal `sig` for which `SP_signal(sig,func,...)` has been called, SICStus will *not* call `func` immediately. Instead the call to `func` will be delayed until it is safe for Prolog to do so, in much the same way that functions installed by `SP_event()` are handled.

Since the signal handling function `func` will not be called immediately upon delivery of the signal to the process it only makes sense to use `SP_signal()` to handle certain asynchronous signals such as `SIGINT`, `SIGUSR1`, `SIGUSR2`. Other asynchronous signals handled specially by the OS, such as `SIGCHLD` are not suitable for handling via `SP_signal()`. Note that the development system installs a handler for '`SIGINT`', and, under Windows, '`SIGBREAK`', to catch keyboard interrupts. As of release 4.4, `library(timeout)` no longer uses any signals.

When `func` is called it may only call other (non SICStus) C code and `SP_event()`. Note that `func` will be called in the main thread.

If `fun` is one of the special constants `SP_SIG_IGN` or `SP_SIG_DFL`, then one of two things happens:

1. If a signal handler for `sig` has already been installed with `SP_signal()`, then the SICStus OS-level signal handler is removed and replaced with, respectively, `SIG_IGN` or `SIG_DFL`.
2. If a signal handler has not been installed with `SP_signal()`, then `SP_signal()` does nothing and returns `SP_SIG_ERR`.

A signal handler installed by a foreign resource should be uninstalled in the deinit function for the foreign resource. This is to prevent the handler in the foreign resource from being called after the code of the foreign resource has been unloaded (e.g. by `unload_foreign_resource/1`).

Note that `SP_signal()` is not suitable for installing signal handlers for synchronous signals like `SIGSEGV`.

See Also

`SP_event()`, Section 6.5.4.1 [Signal Handling], page 314.

12.3.96 `SP_strdup()`

Synopsis

```
#include <sicstus/sicstus.h>

void *
SP_strdup(const char *str);
```

Allocates a string, which is a duplicates of the given string. The memory for the new string is managed by Prolog.

Arguments

str The given string.

Return Value

The pointer, if allocation was successful, otherwise `NULL`.

See Also

Section 6.4.7.1 [OS Memory Management], page 309.

12.3.97 `SP_string_from_atom()`

Synopsis

```
#include <sicstus/sicstus.h>

char const *
SP_string_from_atom(SP_atom atom);
```

Obtains the encoded string holding the characters of a Prolog atom. This string must *not* be modified by the calling function.

Arguments

atom The atom to inspect.

Return Value

The encoded string if `atom` is valid, and 0 otherwise.

See Also

Section 6.4.1 [Creating and Manipulating SP_term_refs], page 305.

12.3.98 SP_term_type()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_term_type(SP_term_ref term);
```

Determines the type of the value of `term`.

Arguments

term The SP_term_ref to be inspected

Return Value

One of:

`SP_TYPE_VARIABLE`
: a variable

`SP_TYPE_INTEGER`
: an integer

`SP_TYPE_FLOAT`
: a float

`SP_TYPE_ATOM`
: an atom

`SP_TYPE_COMPOUND`
: a compound term

`SP_TYPE_ERROR`
: an error occurred.

See Also

Section 6.4.5 [Testing Prolog Terms], page 308.

12.3.99 SP_unget_byte()

Synopsis

```
#include <sicstus/sicstus.h>

spio_t_error_code
SP_unget_byte(
  SP_stream *stream,
  int item);
```

Push back a byte so it can be read again by subsequent read operations.

Arguments

stream The stream. Must be a binary stream open for input.

item The byte to push back. This must be the byte that was most recently read from `stream`, e.g. with `SP_get_byte()`. As a special case, -1 can be put back if the last read operation returned end of file, i.e., `SPIO_E_END_OF_FILE`.

Return Value

On success, the byte has been pushed back and will be read by the next read operation. `SPIO_S_NOERR` or some other success code is returned.

On failure, an error code is returned.

See Also

Section 12.3.27 [cpg-ref-SP_get_byte], page 1336. Section 6.6.1 [Prolog Streams], page 315.

12.3.100 SP_unget_code()

Synopsis

```
#include <sicstus/sicstus.h>

spio_t_error_code
SP_unget_code(
  SP_stream *stream,
  int item);
```

Push back a character so it can be read again by subsequent read operations.

Arguments

stream The stream. Must be a text stream open for input.

item The character to push back. This must be the same character that was most recently read from `stream`, e.g. with `SP_get_code()`. As a special case, -1 can be put back if the last read operation returned end of file, i.e., `SPIO_E_END_OF_FILE`.

Return Value

On success, the character has been pushed back and will be read by the next read operation. `SPIO_S_NOERR` or some other success code is returned.

On failure, returns an error code.

See Also

Section 12.3.28 [cpg-ref-SP_get_code], page 1337. Section 6.6.1 [Prolog Streams], page 315.

12.3.101 `SP_unify()`

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_unify(SP_term_ref x,
         SP_term_ref y)
```

Unifies two terms.

Arguments

x	The one term to unify
y	The other term to unify

Return Value

1 if they unify, and 0 otherwise.

Description

Bear in mind that the unification may unblock some goals. such goals are *not* run in the scope of `SP_unify()`; they remain pending until the next Prolog goal is run.

See Also

Section 6.4.6 [Unifying and Comparing Terms], page 309.

12.3.102 SP_unregister_atom()

Synopsis

```
#include <sicstus/sicstus.h>

int
SP_unregister_atom(SP_atom atom);
```

Unregisters the atom `atom` with the Prolog memory manager by incrementing its reference counter.

Arguments

atom The atom to unregister

Return Value

1 if `atom` is valid, and 0 otherwise.

See Also

Section 6.4.1 [Creating and Manipulating SP_term_refs], page 305.

12.3.103 `SU_initialize()` *hook*

Synopsis

```
int
SU_initialize(int argc, char *argv[])
```

In applications built with `--userhook`, `SU_initialize()` is called by the main program before `SP_initialize()`. Its purpose is to call interface functions, which must be called before `SP_initialize()`. It is not meaningful to specify this option if `--main=user` or `--main=none` is given.

Arguments

argc	Number of command-line arguments.
argv	The command-line arguments, should not be modified.

Return Value

Zero on success, and nonzero otherwise. If a non-zero value is returned, the application system exits with the return value as error code.

See Also

Section 6.7.3 [The Application Builder], page 327.

12.3.104 `user_close()`

Synopsis

```
spio_t_error_code
user_close(
  void **puser_data,
  spio_t_bits close_options
  );
```

This is the prototype for one of the *methods* of user defined streams. It is used when SICStus wants to close one or both directions of a user defined stream.

Arguments

puser_data

A pointer to the same value as was passed to `SP_create_stream()`. On successful return, if the stream has been closed and any resources freed, then `*puser_data` should be set to `NULL`.

If `user_close` fails, it can still set `*puser_data` to `NULL` to signify that the stream is no longer usable.

close_options

The following bits can be set:

`SPIO_DEVICE_CLOSE_OPTION_READ`

The read direction should be closed. Only set if the device was created as an input or bidirectional device.

`SPIO_DEVICE_CLOSE_OPTION_WRITE`

The write direction should be closed. Only set if the device was created as an output or bidirectional device.

`SPIO_DEVICE_CLOSE_OPTION_FORCE`

The specified directions should be closed without attempting to flush any data. Among other things this option may be passed if a previous call to `user_close` returned an error.

Note that a bidirectional stream should only close the directions specified by the `close_options`. Also note that `user_close` for a bidirectional stream may be called several times and that the same direction flag, e.g. `SPIO_DEVICE_CLOSE_OPTION_READ` may be specified more than once, even if that direction has already been closed successfully.

Once a call to `user_close` has set `*puser_data` to `NULL`, none of the device *methods* will be called again. Note that a `*puser_data` may be set to `NULL` even when a failure code is returned. This is useful if the failure is unrecoverable.

There is no option to specify non-blocking close, it is expected that `user_close` will finish *quickly*. To make this more likely, `user_flush_output` is called before non-forcibly closing an output stream.

Return Value

On success, return `SPIO_S_NOERR` or some other success code and set `*puser_data` if and only if the user data and any other resources have been freed.

On failure, return a SPIO error code. Error codes with special meaning for `user_close`:

`SPIO_E_END_OF_FILE`
: Returned if there were buffered data and it is not possible to write more data onto the stream, e.g. some underlying device has been closed.

Other error codes may also be returned.

Description

Should close one or all directions depending on the `close_options`. If all directions have been closed, the user data should be deallocated and `*puser_data` set to `NULL`.

See Also

Section 12.3.9 [cpg-ref-SP_create_stream], page 1310. Section 6.6.2 [Defining a New Stream], page 317.

12.3.105 `user_flush_output()`

Synopsis

```
spio_t_error_code
user_flush_output(
  void *user_data,
  spio_t_bits flush_options
  );
```

This is the prototype for one of the *methods* of user defined streams. It is used when SICStus wants to write data to the user defined stream.

Arguments

user_data The same value as was passed to `SP_create_stream()`.

flush_options

The following bits can be set:

`SPIO_DEVICE_FLUSH_OPTION_NONBLOCKING`

If this is set, the function should return *quickly* or with a `SPIO_E_WOULD_BLOCK` code.

If your `user_flush_output` will never block, you can ignore this value.

You should return `SPIO_E_NOT_SUPPORTED` if `user_flush_output` cannot support non-blocking flush.

Return Value

On success, all buffered data should have been written and `SPIO_S_NOERR` or some other success code returned.

On failure, return a SPIO error code. Error codes with special meaning for `user_flush_output`:

`SPIO_E_END_OF_FILE`

Returned if it is not possible to write more data onto the stream, e.g. some underlying device has been closed.

`SPIO_E_WOULD_BLOCK`

`SPIO_DEVICE_FLUSH_OPTION_NONBLOCKING` was set but the operation would block.

`SPIO_E_NOT_SUPPORTED`

Some unsupported option, e.g. `SPIO_DEVICE_FLUSH_OPTION_NONBLOCKING`, was passed.

Other error codes may also be returned.

Description

Should ensure that any buffered data is transmitted to its destination. Can be passed as `NULL`.

See Also

Section 12.3.9 [cpg-ref-SP_create_stream], page 1310. Section 6.6.2 [Defining a New Stream], page 317.

12.3.106 `user_read()`

Synopsis

```
spio_t_error_code
user_read(
  void *user_data,
  void *buf,
  size_t *pbuf_size,
  spio_t_bits read_options
  );
```

This is the prototype for one of the *methods* of user defined streams. It is used when SICStus need to obtain more data from the user defined stream.

Arguments

user_data The same value as was passed to `SP_create_stream()`.

buf Points to a buffer allocated by the caller.

pbuf_size Points to the size of the buffer. The buffer is always large enough to hold at least one byte (for binary streams) or one character (for text streams). When this function returns successfully, `*pbuf_size` should be set to the number of *bytes* stored in the buffer, which should always be positive for successful return.

Note that buffer size is measured in bytes also for text streams.

read_options

The following bits can be set:

`SPIO_DEVICE_READ_OPTION_BINARY`

This is always specified if the device was created as a binary device. The buffer should be filled with up to `*pbuf_size` bytes.

`SPIO_DEVICE_READ_OPTION_TEXT`

This is always specified if the device was created as a text device. The buffer should be filled with wide characters, i.e. `spio_t_wchar`. Note that `*buf_size` is size in *bytes*, not in characters.

`SPIO_DEVICE_READ_OPTION_NONBLOCKING`

If this is set then the function should return *quickly*, either with some data read or with a `SPIO_E_WOULD_BLOCK` code.

If your `user_read` will never block, you can ignore this value.

You should return `SPIO_E_NOT_SUPPORTED` if `user_read` cannot support non-blocking read.

Return Value

On success, `*pbuf_size` should be assigned and `SPIO_S_NOERR` or some other success code returned.

On failure, return a SPIO error code. Error codes with special meaning for `user_read`:

`SPIO_E_END_OF_FILE`
: Return this when there are no more data to read.

`SPIO_E_WOULD_BLOCK`
: `SPIO_DEVICE_READ_OPTION_NONBLOCKING` was set but the operation would block.

`SPIO_E_NOT_SUPPORTED`
: Some unsupported option, e.g. `SPIO_DEVICE_READ_OPTION_NONBLOCKING`, was passed.

Other error codes may also be returned.

Description

Should fill `buf` with up to `*buf_size` bytes of data. Data should be either bytes, for a binary device, or `spio_t_wchar` (32 bit) wide characters, for a text device.

See Also

Section 12.3.9 [cpg-ref-SP_create_stream], page 1310. Section 6.6.2 [Defining a New Stream], page 317.

12.3.107 `user_write()`

Synopsis

```
spio_t_error_code
user_write(
  void *user_data,
  void const *buf,
  size_t *pbuf_size,
  spio_t_bits write_options
  );
```

This is the prototype for one of the *methods* of user defined streams. It is used when SICStus wants to write data to the user defined stream.

Arguments

user_data The same value as was passed to `SP_create_stream()`.

buf Points to a buffer allocated by the caller containing the data to be written.

pbuf_size Points to the size of the buffer, always positive. When this function returns successfully, `*pbuf_size` should be set to the number of bytes actually written, which should always be positive for successful return.

Note that buffer size is measured in bytes also for text streams.

write_options

The following bits can be set:

`SPIO_DEVICE_WRITE_OPTION_BINARY`

This is always specified if the device was created as a binary device. The buffer contains `*pbuf_size` bytes.

`SPIO_DEVICE_WRITE_OPTION_TEXT`

This is always specified if the device was created as a text device. The buffer contains wide characters, i.e. `spio_t_wchar`. Note that `*buf_size` is size in *bytes*, not in characters.

`SPIO_DEVICE_WRITE_OPTION_NONBLOCKING`

If this is set, the function should return *quickly*, either with some data written or with a `SPIO_E_WOULD_BLOCK` code.

If your `user_write` will never block, you can ignore this value.

You should return `SPIO_E_NOT_SUPPORTED` if `user_write` cannot support non-blocking write.

Return Value

On success, `*pbuf_size` should be assigned to with the number of bytes written and `SPIO_S_NOERR` or some other success code returned. On success, something must have been written, e.g. `*pbuf_size` must be set to a positive value.

On failure, return a SPIO error code. Error codes with special meaning for `user_write`:

`SPIO_E_END_OF_FILE`
: Returned if it is not possible to write more data onto the stream, e.g. some underlying device has been closed.

`SPIO_E_WOULD_BLOCK`
: `SPIO_DEVICE_WRITE_OPTION_NONBLOCKING` was set but the operation would block.

`SPIO_E_NOT_SUPPORTED`
: Some unsupported option, e.g. `SPIO_DEVICE_WRITE_OPTION_NONBLOCKING`, was passed.

Other error codes may also be returned.

Description

Should write up to `*buf_size` bytes of data from `buf`. Data could be either bytes, for a binary device, or wide characters, for a text device.

See Also

Section 12.3.9 [cpg-ref-SP_create_stream], page 1310. Section 6.6.2 [Defining a New Stream], page 317.

13 Command Reference Pages

The reference pages for the SICStus Prolog command line tools follow.

`sicstus(1)`
: SICStus Prolog Development System

`mzn-sicstus(1)` *since release 4.3*
: Shortcut for MiniZinc with SICStus back-end

`spfz(1)` *since release 4.3*
: FlatZinc Interpreter

`spdet(1)` Determinacy Checker

`spld(1)` SICStus Prolog Application Builder

`splfr(1)` SICStus Prolog Foreign Resource Linker

`splm(1)` SICStus Prolog License Manager

`spxref(1)`
: Cross Referencer

13.1 `sicstus` — SICStus Prolog Development System

Synopsis

```
% sicstus [options] [-- argument...]
```

Description

The prompt '`| ?-`' indicates that the execution is in top-level mode. In this mode, Prolog queries may be issued and executed interactively. To exit from the top level and return to the shell, either type `^D` at the top level, or call the built-in predicate `halt/0`, or use the `e` (exit) command following a `^C` interruption.

Under Windows, `sicstus.exe` is a console-based program that can run in a command prompt window, whereas `spwin.exe` runs in its own window and directs the Prolog standard streams to that window. `spwin.exe` is a "windowed" executable.

Options

`-f` Fast start. Do Not read any initialization file on startup. If the option is omitted and the initialization file exists, then SICStus Prolog will consult it on startup after running any initializations and printing the version banners. The initialization file is `.sicstusrc` or `sicstus.ini` in the users home directory, i.e. `~/.sicstusrc` or `~/sicstus.ini`. See Section 4.5.2 [ref-fdi-syn], page 103, for an explanation of how a file specification starting with '`~/`' is interpreted.

`-i` Forced interactive. Prompt for user input, even if the standard input stream does not appear to be a terminal.

`-m` Use `malloc()` et al. for memory allocations.

`--noinfo` Start with the `informational` Prolog flag set to `off` initially, suppressing informational messages. The flag is set before any *prolog-file* or initialization file is loaded or any *saved state* is restored.

`--nologo` Start without the initial version message.

`-l` *prolog-file*
Ensure that the file *prolog-file* is loaded on startup. This is done before any initialization file is loaded. The `-l` option can be specified more than once, and all files will be loaded in the order specified.

`-r` *saved state*
Restore the saved state *saved state* on startup. This is done before any *prolog-file* or initialization file is loaded. Only one `-r` option is allowed.

`--goal` *Goal*
Read a term from the text *Goal* and pass the resulting term to `call/1` after all files have been loaded. As usual *Goal* should be terminated by a full stop ('`.`'). Only one `--goal` option is allowed.

`-D`*var*`=`*value*
Sets the system property *var* to value *value*. Most system properties take their default value from the environment but often it is convenient to pass a system

property directly instead of setting the corresponding environment variable. See Section 4.17.1 [System Properties and Environment Variables], page 228, for details.

`--locale` *name*
: Sets the process locale to the given locale name. The process locale primarily affects the character encoding used for the standard streams.

  The default, also available by specifying '`default`' as the *name*, is to inherit the locale from the environment.

  This option is not supported on Windows.

`--no-locale`
: Do not inherit the process locale from the environment.

  This is, in effect, the default on Windows.

`-Xrs`
: Reduce use of OS-signals.

  On UNIX-like platforms, several OS signals are handled specially in a development system. The option `-Xrs`, prevents this and keeps the OS default behavior.

  On both UNIX-like platforms and Windows, the development system will install handlers for the signal `SIGINT` (corresponding to a *`C-c`* keyboard interrupt). On Windows, a signal handler will also be added for `SIGBREAK` (signalled when the console window is closed). The handling of `SIGINT` and `SIGBREAK` is not affected by `-Xrs`.

`--help`
: Display a help message and exit.

`--` *argument...* *since release 4.0.3*
`-a` *argument...*
: where the arguments can be retrieved from Prolog by `prolog_flag(argv, Args)`, which will unify *Args* with *argument...* represented as a list of atoms.

Files

`file``.pl`
`file``.pro`
: Prolog source file

`file``.po`
: Prolog object file

`file``.sav`
: Prolog saved state file

`.sicstusrc`
`sicstus.ini`
: SICStus Prolog initialization file, looked up in the home directory

See Also

Section 3.1 [Start], page 23, Section 4.17.1 [System Properties and Environment Variables], page 228.

13.2 `mzn-sicstus` — Shortcut for MiniZinc with SICStus back-end

Synopsis

```
% mzn-sicstus [options] mznfile
```

Description

This tool is a shortcut for invoking `minizinc(1)` with SICStus as the FlatZinc interpreter and with the appropriate global constraint definitions.

Options

See `minizinc(1)`.

See Also

Section 10.55 [lib-zinc], page 923.

13.3 `spfz` — FlatZinc Interpreter

Synopsis

```
% spfz [-help | --help | -?] [--version] [-a] [-f] [-n N] [-
o ofile] [-P P] [-p P] [-r R] [-s] [-t T] [-time T] [-search S] [-
s] fznfile
```

Description

This tool interprets the FlatZinc ('`.fzn`') file *fznfile* with options taken from the command line.

Options

`-help, --help, -?`
: print help message

`--version`
: print version

`-a` return all solutions (equal to `-n 0`)

`-f` solver is free to ignore search strategy (does nothing)

`-n` *N* number of solutions (0 = all) (default: 1)

`-o` *ofile* file to send output to (default: standard output stream)

`-P` *P* precision, i.e., lower bound of domain size of nonground real variables

`-p` *P* number of cores available (does nothing)

`-r` *R* random seed

`-s` emit statistics

`-t, -time` *T*
: time (in ms) cutoff (default: no cutoff)

`-search` *S* optimization method is *S*, one of `bab` (the default) and `restart`

See Also

Section 10.55 [lib-zinc], page 923.

13.4 `spdet` — Determinacy Checker

Synopsis

```
% spdet [-r] [-d] [-D] [-i ifile] fspec...
```

Description

The determinacy checker can help you spot unwanted nondeterminacy in your programs. This tool examines your program source code and points out places where nondeterminacy may arise.

Options

`-r` Process files recursively, fully checking the specified files and all the files they load.

`-d` Print out declarations that should be added.

`-D` Print out all needed declarations.

`-i` *`ifile`* An initialization file, which is loaded before processing begins.

See Also

Section 9.7 [The Determinacy Checker], page 367.

13.5 `spld` — SICStus Prolog Application Builder

Synopsis

```
% spld [ Option | InputFile ] ...
```

Description

The application builder, `spld`, is used for creating stand-alone executables. See Section 6.7.3 [The Application Builder], page 327, for an overview.

`spld` takes the files specified on the command line and combines them into an executable file, much like the UNIX `ld` or the Windows `link` commands.

Note that no pathnames passed to `spld` should contain spaces. Under Windows, this can be avoided by using the short version of pathnames as necessary.

Options

The input to `spld` can be divided into *Options* and *Files*, which can be arbitrarily mixed on the command line. Anything not interpreted as an option will be interpreted as an input file. Do not use spaces in any file or option passed to `spld`. Under Windows you can use the short file name for files with space in their name. The following options are available:

`-?`
`--help` Prints out a summary of all options. This may document more options than those described in this manual.

`-v`
`--verbose`
Print detailed information about each step in the compilation/linking sequence. Multiple occurrences increase verbosity.

`-vv` Same as -v -v.

`--version`
Prints out the version number of `spld` and exits successfully.

`-o`
`--output=`*`filename`*
Specify output file name. The default depends on the linker (e.g. `a.out` on UNIX systems).

`-E`
`--extended-rt`
Create an extended runtime system. In addition to the normal set of built-in runtime system predicates, extended runtime systems include the compiler. Extended runtime systems require the extended runtime library, available from RISE as an add-on product. Extended runtime systems need access to license information; see Section 6.7.3.4 [Extended Runtime Systems], page 332.

`-D`
`--development`
Create a development system (with top level, debugger, compiler, etc.). The default is to create a runtime system. Implies `--main=prolog`.

`--main=`*type*

Specify what the executable should do upon startup. The possible values are:

`prolog` Implies `-D`. The executable will start the Prolog top level. This is the default if `-D` is specified and no '`.sav`', '`.pl`', or '`.po`' files are specified.

`user` The user supplies his/her own main program by including C-code (object file or source), which defines a function `user_main()`. This option is not compatible with `-D`. See Section 6.7.4 [User-defined Main Programs], page 334.

`restore` The executable will restore a saved state created by `save_program/[1,2]`. This is the default if a '`.sav`' file is found among *Files*. It is only meaningful to specify one '`.sav`' file. If it was created by `save_program/2`, then the given startup goal is run. Then the executable will any Prolog code specified on the command line. Finally, the goal `user:runtime_entry(start)` is run. The executable exits with 0 upon normal termination and with 1 on failure or exception. Not compatible with `-D`.

`load` The executable will load any Prolog code specified on the command line, i.e. files with extension '`.pl`' or '`.po`'. This is the default if there are '`.pl`' or '`.po`' but no '`.sav`' files among *Files*. Finally, the goal `user:runtime_entry(start)` is run. The executable exits with 0 upon normal termination and with 1 on failure or exception. Not compatible with `-D`. Note that this is almost like `--main==restore` except that no saved state will be restored before loading the other files.

`none` No main function is generated. The main function must be supplied in one of the user supplied files. Not compatible with `-D`.

`--window`

Win32 only. Create a windowed executable. A console window will be opened and connected to the Prolog standard streams. If `--main=user` is specified, then `user_main()` should not set the user-stream hooks. C/C++ source code files specified on the command line will be compiled with `-DSP_WIN=1` if this option is given.

`--moveable`
`--no-moveable`

Controls whether to hard-code certain paths into the executable in order for it to find the SICStus libraries and bootfiles etc.

Under UNIX, if `--no-moveable` is specified, then paths are hard-coded into executables in order for them to find the SICStus libraries and bootfiles. Two paths are normally hard-coded; the value of `SP_PATH` and, where possible, the runtime library search path using the `-R` linker option (or equivalent). If the linker does not support the `-R` option (or an equivalent), then a wrapper script is generated instead, which sets `LD_LIBRARY_PATH` (or equivalent).

The `--moveable` option turns off this behavior, so the executable is not dependent on SICStus being installed in a specific place. On most platforms the executable can figure out where it is located and so can locate any files it need, e.g. using `SP_APP_DIR` and `SP_RT_DIR`. On some UNIX platforms, however, this is not possible. In these cases, `--moveable` is in effect, the executable will rely on the system properties and environment variables (`SP_PATH` (see Section 4.17.1 [System Properties and Environment Variables], page 228) and `LD_LIBRARY_PATH` etc.) to find all relevant files.

Under Windows, `--moveable` is always on, since Windows applications do not need to hard-code paths in order for them to find out where they are installed. On UNIX platforms, `--moveable` is the default (as of release 4.2) but can be turned off with `--no-moveable`. See Section 6.7.2 [Runtime Systems on Target Machines], page 323, for more information on how SICStus locates its libraries and bootfiles.

`-S`
`--static` Link statically with SICStus runtime and foreign resources. When `--static` is specified, a static version of the SICStus runtime will be used and any SICStus foreign resources specified with `--resources` will be statically linked with the executable. In addition, `--static` implies `--embed-rt-sav`, `--embed-sav-file` and `--resources-from-sav`.

Even with `--static`, `spld` will go with the linker's default, which is usually dynamic. If you are in a situation where you would want `spld` to use a static library instead of a dynamic one, then you will have to hack into `spld`'s configuration file `spconfig-`*`version`* (normally located in `<installdir>/bin`). We recommend that you make a copy of the configuration file and specify the new configuration file using `--config=<file>`. A typical modification of the configuration file for this purpose may look like:

```
[...]
TCLLIB=-Bstatic -L/usr/local/lib -ltk8.0 -ltcl8.0 -Bdynamic
[...]
```

Use the new configuration file by typing

```
% spld [...] -S --config=/home/joe/hacked_spldconfig [...]
```

The SICStus runtime depends on certain OS support that is only available in dynamically linked executables. For this reason it will probably not work to try to tell the linker to build a completely static executable, i.e. an executable that links statically also with the C library and that cannot load shared objects.

`--shared` Create a shared library runtime system instead of an ordinary executable. Implies `--main=none`.

Can be combined with `--static` to create a all-in-one shared library runtime system.

`--resources=`*`ResourceList`*
ResourceList is a comma-separated list of resource names, describing which resources should be prelinked with the executable. Names can be either simple

resource names, for example `tcltk`, or they can be complete paths to a foreign resource (with or without extensions). Example

```
% spld [...] --resources=tcltk,clpfd,/home/joe/foobar.so
```

This will cause `library(tcltk)`, `library(clpfd)`, and `/home/joe/foobar.so` to be prelinked with the executable. See also the option `--respath` below.

It is also possible to embed a *data resource*, that is, the contents of an arbitrary data file that can be accessed at runtime.

It is possible to embed any kind of data, but, currently, only `restore/1` knows about data resources. For this reason it only makes sense to embed '`.sav`' files.

The primary reason to embed files within the executable is to create an all-in-one executable, that is, an executable file that does not depend on any other files and that therefore is easy to run on machines without SICStus installed. See Section 6.7.3.2 [All-in-one Executables], page 328, for more information.

`--resources-from-sav`
`--no-resources-from-sav`

When embedding a saved state as a data resource (with `--resources` or `--embed-sav-file`), this option extracts information from the embedded saved state about the names of the foreign resources that were loaded when the saved state was created. This is the default for static executables when no other resource is specified except the embedded saved state. This option is only supported when a saved state is embedded as a data resource. See Section 6.7.3.2 [All-in-one Executables], page 328, for more information.

Use `--no-resources-from-sav` to ensure that this feature is *not* enabled.

`--respath=`*`Path`*

Specify additional paths used for searching for resources. *Path* is a list of search-paths, colon separated under UNIX, semicolon separated under Windows. `spld` will always search the default library directory as a last resort, so if this option is not specified, then only the default resources will be found. See also the `--resources` option above.

`--config=`*`ConfigFile`*

Specify another configuration file. This option is not intended for normal use. The file name may not contain spaces.

`--conf` *`VAR=VALUE`* *since release 4.0.3*

Override values from the configuration file. Can occur multiple times. For instance, '`--conf CC=/usr/bin/gcc`' would override the default C compiler.

`--cflag=`*`CFlag`*

CFlag is an option to pass to the C-compiler. This option can occur multiple times.

The current behavior is that if *CFlag* contains commas, then each comma-separated part is treated as a separate compiler option. This may change in the future, so instead you should use multiple occurrences of `--cflag`. To turn off splitting at commas and treat *CFlag* as a single option even it contains a comma, you can pass the option `--conf SPLIT_OPT_CFLAG=0`. This can be useful with certain options to the `gcc` compiler.

`--cxx` *since release 4.7.0*

This enables improved handling of C++ code. It is automatically enabled if any C++ source code is detected.

On some platforms the C++ compiler will be used for linking instead of the C compiler. On some platforms you may need to pass extra options to ensure the C++ library is available.

It can be disabled with `--nocxx`, e.g. if the C++ support causes some backward compatibility problem.

`--` *since release 4.0.3*

`--LD` *since release 4.0.3*

`-LD` Do not process the rest of the command line, but send it directly to the linker step. Note that linking is often performed by the compiler.

`--sicstus=`*Executable*

`spld` relies on using SICStus during some stages of its execution. The default is the development system installed with the distribution. *Executable* can be used to override this, in case the user wants to use another development system.

`--interactive`

`-i` Only applicable with `--main=load` or `--main=restore`. Calls `SP_force_interactive()` (see Section 6.7.4.1 [Initializing the Prolog Engine], page 334) before initializing SICStus.

`--userhook`

This option allows you to define your own version of the `SU_initialize()` function. `SU_initialize()` is called by the main program before `SP_initialize()`. Its purpose is to call interface functions that must be called before `SP_initialize()`, such as `SP_set_user_stream_hook()`. It is not meaningful to specify this option if `--main=user` or `--main=none` is given.

`--locale=`*LOCALE* *since release 4.3*

`--no-locale`

By default, on UNIX platforms, the executable created by `spld` sets the process locale from the environment.

Setting the process locale from the environment can suppressed by passing the `--no-locale` option to `spld`. This corresponds to the behavior prior to release 4.3.

An explicit locale that the process should set on initialization, can be passed with the `--locale` option to `spld`.

The valid locale names depends on the operating system. Typically you can use the `locale` utility, with the `-a` option, to list all valid locale names.

`--with_jdk=`*DIR*
`--with_tcltk=`*DIR*
`--with_tcl=`*DIR*
`--with_tk=`*DIR*
`--with_bdb=`*DIR*
: Specify the installation path for third-party software for foreign resources, such as `jasper`, that have special dependencies. This is mostly useful under Windows. Under UNIX, the installation script manages this automatically.

`--keep`
: Keep temporary files and interface code and rename them to human-readable names. Not intended for the casual user, but useful if you want to know exactly what code is generated.

`--nocompile`
: Do Not compile, just generate code. This may be useful in Makefiles, for example to generate the header file in a separate step. Implies `--keep`.

`--namebase=`*namebase*
: Use *namebase* to construct the name of generated files. This defaults to `spldgen_` or, if `--static` is specified, `spldgen_s_`.

`--embed-rt-sav`
`--no-embed-rt-sav`
: `--embed-rt-sav` will embed the SICStus runtime '`.sav`' file into the executable. This is off by default unless `--static` is specified. It can be forced on (off) by specifying `--embed-rt-sav` (`--no-embed-rt-sav`).

`--embed-sav-file`
`--no-embed-sav-file`
: `--embed-sav-file` will embed any '`.sav`' file passed to `spld` into the executable. This is just a shorthand for avoiding the ugly data resource syntax of the `--resources` option. This is the default when `--static` is specified. It can be forced on (off) by specifying `--embed-sav-file` (`--no-embed-sav-file`). A file `./foo/bar.sav` will be added with the data resource name '`/bar.sav`', i.e. as if `--resources=./foo/bar.sav=/bar.sav` had been specified.

`--license-file=`*LicenseFile*
: Specify the path to the license information needed by extended runtime systems. Only relevant with `--extended-rt`. See Section 6.7.3.4 [Extended Runtime Systems], page 332, for details.

`--embed-license`
`--no-embed-license`
: Controls whether to embed the license information in the executable. `--no-embed-license` is the default. Only relevant with `--extended-rt`. See Section 6.7.3.4 [Extended Runtime Systems], page 332, for details.

`--multi-sp-aware`
: Compile the application with support for using more than one SICStus runtime in the same process. Not compatible with `--static` or prelinked foreign resources. See Section 8.2 [Multiple SICStus Runtimes in C], page 353, for details.

There may be additional, undocumented, options, some of which may be described with the `--help` option.

Files

Arguments to `spld` not recognized as options are assumed to be input files and are handled as follows:

'`*.pro`'
'`*.pl`'
'`*.po`' These are interpreted as names of files containing Prolog code and will be passed to `SP_load()` at runtime (if `--main` is `load` or `restore`). **Please note:** If the intention is to make an executable that works independently of the working directory at run time, then avoid relative file names, for they will be resolved at run time, not at `spld` time. Use absolute file names instead, `SP_APP_DIR`, `SP_LIBRARY_DIR`, or embed a '`.sav`' file as a data resource, using `--resource`.

'`*.sav`' These are interpreted as names of files containing saved states and will be passed to `SP_restore()` at runtime if `--main=restore` is specified, subject to the above caveat about relative file names.

It is not meaningful to give more than one '`.sav`' argument.

'`*.so`'
'`*.sl`'
'`*.s.o`'
'`*.o`'
'`*.obj`'
'`*.dll`'
'`*.lib`'
'`*.dylib`' These files are assumed to be input files to the linker and will be passed on unmodified.

'`*.c`'
'`*.C`' These files are assumed to be C source code and will be compiled by the C-compiler before being passed to the linker.

'`*.cc`'
'`*.cpp`'
'`*.c++`' These files are assumed to be C++ source code and will be compiled by the C++ compiler before being passed to the linker.

Prior to release 4.7, these files would be compiled with the C compiler. The `--nocxx` option can be used if the legacy behavior is desired.

If an argument is still not recognized, then it will be passed unmodified to the linker.

See Also

See Section 6.7.3 [The Application Builder], page 327.

13.6 `splfr` — SICStus Prolog Foreign Resource Linker

Synopsis

```
% splfr [ Option | InputFile ] ...
```

Description

The foreign resource linker, `splfr`, is used for creating foreign resources (see Section 6.2.1 [Foreign Resources], page 295). `splfr` reads terms from a Prolog file, applying op declarations and extracting any `foreign_resource/2` fact with first argument matching the resource name and all `foreign/[2,3]` facts. Based on this information, it generates the necessary glue code, and combines it with any additional C or object files provided by the user into a linked foreign resource. The output file name will be the resource name with a suitable extension.

Options

The input to `splfr` can be divided into *Option*s and *InputFile*s and they can be arbitrarily mixed on the command line. Anything not interpreted as an option will be interpreted as an input file. Exactly one of the input files should be a Prolog file. The following options are available:

`-?`
`--help` Prints out a summary of all options.

`-v`
`--verbose`
Print detailed information about each step in the compilation/linking sequence. Multiple occurrences increase verbosity.

`-vv` Same as -v -v.

`--version`
Prints out the version number of `spld` and exits successfully.

`--config=`*`ConfigFile`*
Specify another configuration file. This option is not intended for normal use. The file name may not contain spaces.

`--conf` *`VAR=VALUE`* *since release 4.0.3*
Override values from the configuration file. Can occur multiple times. For instance, '`--conf CC=/usr/bin/gcc`' would override the default C compiler.

`--cflag=`*`CFlag`*
CFlag is an option to pass to the C-compiler (or C++ compiler). This option can occur multiple times.

The current behavior is that if *CFlag* contains commas, then each comma-separated part is treated as a separate compiler option. This may change in the future, so instead you should use multiple occurrences of `--cflag`. To turn off splitting at commas and treat *CFlag* as a single option even it contains a comma, you can pass the option `--conf SPLIT_OPT_CFLAG=0`. This can be useful with certain options to the `gcc` compiler.

`--cxxflag=`*`CXXFlag`* *since release 4.7.0*

CXXFlag is an option to pass to the C++ compiler (in addition to any C flags specified with `--cflag`). This option can occur multiple times.

`--cxx` *since release 4.7.0*

This enables improved handling of C++ code. It is automatically enabled if any C++ source code is detected.

On some platforms the C++ compiler will be used for linking instead of the C compiler. On some platforms you may need to pass extra options to ensure the C++ library is available.

It can be disabled with `--nocxx`, e.g. if the C++ support causes some backward compatibility problem.

`--` *since release 4.0.3*

`--LD` *since release 4.0.3*

`-LD` Do not process the rest of the command line, but send it directly to the compiler/linker. Note that linking is often performed by the compiler.

`--sicstus=`*`Executable`*

`splfr` relies on using SICStus during some stages of its execution. The default is the development system installed with the distribution. *Executable* can be used to override this, in case the user wants to use another development system.

`--keep` Keep temporary files and interface code and rename them to human-readable names. Not intended for the casual user, but useful if you want to know exactly what code is generated.

`--resource=`*`ResourceName`*

Specify the resource's name. This defaults to the basename of the Prolog source file found on the command line.

`-o, --output=`*`OutputFileName`*

Specify output file name. This defaults to the name of the resource, suffixed with the platform's standard shared object suffix (i.e. '`.so`' on most UNIX dialects, '`.dll`' under Windows). The use of this option is discouraged, except to change the output directory.

`-S`

`--static` Create a statically linked foreign resource instead of a dynamically linked one, which is the default. A statically linked foreign resource is a single object file, which can be prelinked into a Prolog system. See also the `spld` tool, Section 6.7.3 [The Application Builder], page 327.

`--no-rpath`

Under UNIX, the default is to embed into the shared object all linker library directories for use by the dynamic linker. For most UNIX linkers this corresponds to adding a `-R`*`path`* for each `-L`*`path`*. The `--no-rpath` option inhibits this.

`--nocompile`

Do Not compile, just generate code. This may be useful in Makefiles, for example to generate the header file in a separate step. Implies `--keep`.

`--namebase=`*namebase*
: *namebase* will be used as part of the name of generated files. The default name base is the resource name (e.g. as specified with `--resource`). If `--static` is specified, then the default *namebase* is the resource name followed by '`_s`'.

`--header=`*headername*
: Specify the name of the generated header file. The default is *namebase*`_glue.h`. All C files that define foreign functions or that call SICStus API functions should include this file. Among other things the generated header file includes prototypes corresponding to the `foreign/[2,3]` declarations in the Prolog code.

`--multi-sp-aware`
: Create a (dynamic) foreign resource that can be loaded by several SICStus runtimes in the same process, at the same time. See Section 8.3 [Foreign Resources and Multiple SICStus Runtimes], page 355, for details.

`--moveable`
: Do Not embed paths into the foreign resource.

  On platforms that support it, i.e. some versions of UNIX, the default behavior of `splfr` is to add each directory *dir* specified with `-L`*dir* to the search path used by the runtime loader (using the SysV `ld -R` option or similar). The option `--moveable` turns off this behavior. For additional details, see the corresponding option to `spld` (see Section 6.7.3 [The Application Builder], page 327).

`--structs`
: The Prolog source file uses `library(structs)`. This option makes `splfr` understand foreign type specifications and translate them into C declarations in the generated header file. See See Section 10.44 [lib-structs], page 799.

`--objects` *since release 4.3*
: The Prolog source file uses `library(objects)`. This option makes `splfr` understand that library's syntax extensions. See See Section 10.30 [lib-objects], page 671.

there may be additional, undocumented, options, some of which may be described with the `--help` option.

Files

Arguments to `spld` not recognized as options are assumed to be input files and are handled as follows:

'`*.pro`'
'`*.pl`' The Prolog file containing the relevant declarations. Exactly one such argument should be given.

‘`*.so`’
‘`*.sl`’
‘`*.s.o`’
‘`*.o`’
‘`*.obj`’
‘`*.dll`’
‘`*.lib`’
‘`*.dylib`’ These files are assumed to be input files to the linker and will be passed on unmodified.

‘`*.c`’
‘`*.C`’

These files are assumed to be C source code and will be compiled by the C-compiler before being passed to the linker.

‘`*.cc`’
‘`*.cpp`’
‘`*.c++`’

These files are assumed to be C++ source code and will be compiled by the C++-compiler before being passed to the linker.

Prior to release 4.7, these files would be compiled with the C compiler. The `--nocxx` option can be used if the legacy behavior is desired.

See Also

Section 6.2.5 [The Foreign Resource Linker], page 300.

13.7 `splm` — SICStus Prolog License Manager

Synopsis

```
% splm -i Site
% splm -a LicensedProduct ExpirationDate Code
```

Description

SICStus Prolog requires a license code to run. You should have received from RISE your site name, the expiration date and the code. This information is normally entered during installation, but it can also be entered later on by means of this command-line tool.

Under Windows, `splm` must be run by a user with Administrative rights. The windowed version of SICStus (`spwin.exe`) has a menu item for license entry, making `splm` unnecessary under Windows.

Please note: when using `spwin.exe` for changing the license information, it too must be run with Administrative rights.

Files

`library/license.pl`

See Also

Section 3.1 [Start], page 23.

13.8 `spxref` — Cross Referencer

Synopsis

```
% spxref [-R] [-v] [-c] [-i ifile] [-w wfile] [-x xfile] [-
u ufile] fspec ...
```

Description

The main purpose is to find undefined predicates and unreachable code. To this end, it begins by looking for initializations, hooks and `public` directives to start tracing the reachable code from. If an entire application is being checked, then it also traces from `user:runtime_entry/1`. If individual module files are being checked, then it also traces from their export lists.

Options

File arguments should be given as atoms or as `-`, denoting the standard output stream.

`-R` Check an application, i.e. follow `user:runtime_entry/1`, as opposed to module declarations.

`-c` Generate standard compiler style error messages.

`-v` Verbose output. This echoes the names of the files being read.

`-i` *`ifile`* An initialization file, which is loaded before processing begins.

`-w` *`wfile`* Warning file. Warnings are written to the standard error stream by default.

`-x` *`xfile`* Generate a cross-reference file. This is not generated by default.

`-m` *`mfile`* Generate a file indicating which predicates are imported and which are exported for each file. This is not generated by default.

`-u` *`ufile`* Generate a file listing all the undefined predicates. This is not generated by default.

See Also

Section 9.12 [The Cross-Referencer], page 383.

References

[Aggoun & Beldiceanu 90]
A. Aggoun and N. Beldiceanu, *Time Stamps Techniques for the Trailed Data in Constraint Logic Programming Systems*, Actes du séminaires Programmation en Logique, Trégastel, France, May 1990.

[Aggoun & Beldiceanu 93]
A. Aggoun and N. Beldiceanu, *Extending CHIP in order to Solve Complex Scheduling and Placement Problems*, Mathl. Comput. Modelling, vol. 17, no. 7, pp. 57–73, Pergamon Press Ltd., 1993.

[Beldiceanu, Carlsson, Flener & Pearson 10]
N. Beldiceanu, M. Carlsson, P. Flener, J. Pearson, *On Matrices, Automata, and Double Counting*, Constraints 18(1): 108-140, 2013.

[Beldiceanu & Carlsson 02]
N. Beldiceanu and M. Carlsson, *A new multi-resource cumulatives constraint with negative heights*, CP, LNCS 2470, Springer, 2002.

[Beldiceanu, Carlsson & Petit 04]
N. Beldiceanu, M. Carlsson, T. Petit, *Deriving Filtering Algorithms from Constraint Checkers*, CP, LNCS 3258, Springer, 2004.

[Beldiceanu, Carlsson & Rampon 05]
N. Beldiceanu, M. Carlsson, J.-X. Rampon, *Global Constraint Catalog*, SICS Technical Report T2005-08, 2005.

[Beldiceanu & Contejean 94]
N. Beldiceanu and E. Contejean, *Introducing Global Constraints in CHIP*, Mathl. Comput. Modelling, vol. 20, no. 12, pp. 97–123, Pergamon Press Ltd., 1994.

[Bryant 86]
R.E. Bryant, *Graph-Based Algorithms for Boolean Function Manipulation*, IEEE Trans. on Computers, August, 1986.

[CHIP 03] *CHIP Finite domain constraints Reference Manual*, Release 5.5, pp. 36–38, 2003.

[Carlsson 90]
M. Carlsson, *Design and Implementation of an OR-Parallel Prolog Engine*, SICS Dissertation Series 02, 1990.

[Carlsson & Beldiceanu 02]
M. Carlsson, N. Beldiceanu, *Arc-Consistency for a Chain of Lexicographic Ordering Constraints*, SICS Technical Report T2002-18, 2002.

[Carlsson, Beldiceanu & Martin 08]
M. Carlsson, N. Beldiceanu, J. Martin, *A Geometric Constraint over k-Dimensional Objects and Shapes Subject to Business Rules*, SICS Technical Report T2008-04, 2008.

[Carreiro & Gelernter 89a]
N. Carreiro and D. Gelernter, *Linda in Context*, CACM, 32(4) 1989.

[Carreiro & Gelernter 89b]
N. Carreiro and D. Gelernter, *How to Write Parallel Programs: A Guide to the Perplexed*, ACM Computing Surveys, September 1989.

[Clocksin & Mellish 81]
W.F. Clocksin and C.S. Mellish, *Programming in Prolog*, Springer, 1981.

[Colmerauer 90]
Colmerauer A.: An Introduction to Prolog III, CACM, 33(7), 69-90, 1990.

[Diaz & Codognet 93]
D. Diaz and P. Codognet, *A Minimal Extension of the WAM for clp(FD)*, ICLP, MIT Press, 1993.

[Fruehwirth 98]
Th. Fruehwirth, *Theory and Practice of Constraint Handling Rules*, Special Issue on Constraint Logic Programming (P. Stuckey and K. Marriot, Eds.), Journal of Logic Programming, Vol 37(1-3), pp. 95-138, October 1998.

[Gorlick & Kesselman 87]
M.M. Gorlick and C.F. Kesselman, *Timing Prolog Programs Without Clocks*, Symposium on Logic Programming, pp. 426–432, IEEE Computer Society, 1987.

[Hanak et al. 04]
D. Hanák, T. Szeredi, P. Szeredi: *FDBG, the CLPFD Debugger Library of SICStus Prolog*. International Workshop on Logic Programming Environments (WLPE'04), 2004.

[Heintze et al. 87]
N. Heintze, J. Jaffar, S. Michaylov, P. Stuckey, R. Yap, *The CLP(R) Programmers Manual*, Monash University, Clayton, Victoria, Australia, Department of Computer Science, 1987.

[Holzbaur 92a]
C. Holzbaur, *A High-Level Approach to the Realization of CLP Languages*, JICSLP92 Post-Conference Workshop on Constraint Logic Programming Systems, Washington D.C., 1992.

[Holzbaur 94]
C. Holzbaur, *A Specialized, Incremental Solved Form Algorithm for Systems of Linear Inequalities*, Austrian Research Institute for Artificial Intelligence, Vienna, TR-94-07, 1994.

[Jaffar & Michaylov 87]
J. Jaffar, S. Michaylov, *Methodology and Implementation of a CLP System*, ICLP, MIT Press, Cambridge, MA, 1987.

[Kowalski 74]
R.A. Kowalski, *Logic for Problem Solving*, DCL Memo 75, Dept of Artificial Intelligence, University of Edinburgh, March, 1974.

[Kowalski 79]
R.A. Kowalski, *Artificial Intelligence: Logic for Problem Solving*. North Holland, 1979.

[Letort, Beldiceanu & Carlsson 14]
A. Letort, N. Beldiceanu, M. Carlsson, *Synchronized sweep algorithms for scalable scheduling constraints*, Constraints, DOI 10.1007/s10601-014-9172-8, 2014.

[Lopez-Ortiz 03]
A Lopez-Ortiz, CG Quimper, J Tromp, P van Beek, *A fast and simple algorithm for bounds consistency of the alldifferent constraint*, IJCAI 2003.

[Mehlhorn 00]
K. Mehlhorn and Sven Thiel, *Faster algorithms for bound-consistency of the sortedness and the alldifferent constraint*, CP, LNCS 1894, Springer, 2000.

[MiniZincHandbook]
P.J. Stuckey, K. Marriott, G. Tack, *MiniZinc Handbook*, online, 2023.

[CPHandbook]
F. Rossi, P. Van Beek, T. Walsh, eds., *Handbook of constraint programming*, Elsevier, 2006.

[O'Keefe 90]
R.A. O'Keefe, *The Craft of Prolog*, MIT Press, 1990.

[Ousterhout 94]
John K. Ousterhout, *Tcl and the Tk Toolkit*. Addison-Wesley, 1994.

[Regin 94] J.-C. Regin, *A filtering algorithm for constraints of difference in CSPs*, AAAI, pp. 362–367, 1994

[Regin 96] J.-C. Regin, *Generalized Arc Consistency for Global Cardinality Constraint*, AAAI, 1996.

[Regin 99] J.-C. Regin, *Arc Consistency for Global Cardinality with Costs*, CP, LNCS 1713, pp. 390-404, 1999.

[Schrijvers & Demoen 04]
T. Schrijvers and B. Demoen, *The K.U.Leuven CHR System: Implementation and Application*, First Workshop on Constraint Handling Rules: Selected Contributions (T. Fruehwirth and M. Meister, eds.), pp. 1–5, 2004.

[Sellmann 02]
M. Sellmann, *An Arc Consistency Algorithm for the Minimum Weight All Different Constraint*, CP, LNCS 2470, Springer, 2002.

[Razakarison, Carlsson, Beldiceanu & Simonis 13]
N. Razakarison, M. Carlsson, N. Beldiceanu and H. Simonis, *GAC for a linear inequality and an atleast constraint with an application to learning simple polynomials*, Sixth Annual Symposium on Combinatorial Search, 2013.

[Robinson 65]
J.A. Robinson, *A Machine-Oriented Logic Based on the Resolution Principle*, JACM 12:23-44, January 1965.

[Roussel 75]
P. Roussel, *Prolog : Manuel de Reference et d'Utilisation*, Groupe d'Intelligence Artificielle, Marseille-Luminy, 1975.

[Schimpf 2002]
J. Schimpf, *Logical Loops*. ICLP, pp. 224-238, MIT Press, 2002.

[Sterling & Shapiro 86]
L. Sterling and E. Shapiro, *The Art of Prolog*. The MIT Press, Cambridge MA, 1986.

[Van Hentenryck 89]
P. Van Hentenryck, *Constraint Satisfaction in Logic Programming*, Logic Programming Series, The MIT Press, 1989.

[Van Hentenryck et al. 95]
P. Van Hentenryck, V. Saraswat and Y. Deville, *Design, implementation and evaluation of the constraint language cc(FD)*. In A. Podelski, ed., Constraints: Basics and Trends, LNCS 910. Springer, 1995.

[Warren 83]
D.H.D. Warren, *An Abstract Prolog Instruction Set*, Technical Note 309, SRI International, 1983.

Predicate Index

!

!/0 (built-in, ref page) 1040
!/0, cut 68

#

#/\ /2 (clpfd) 442
#< /2 (clpfd) 437
#<= /2 (clpfd) 442
#<=> /2 (clpfd) 436, 442
#= /2 (clpfd) 437
#=< /2 (clpfd) 437
#=> /2 (clpfd) 442
#> /2 (clpfd) 437
#>= /2 (clpfd) 437
#\ /1 (clpfd) 442
#\ /2 (clpfd) 442
#\/ /2 (clpfd) 442
#\= /2 (clpfd) 437

$

$= /2 (clpfd) 437
$=< /2 (clpfd) 437
$>= /2 (clpfd) 437

,

'SU_messages':generate_message/3 219
'SU_messages':generate_message/3
(hook, ref page) 1083
'SU_messages':query_abbreviation/3 226
'SU_messages':query_abbreviation/3
(hook, ref page) 1190
'SU_messages':query_class/5 226
'SU_messages':query_class/5
(hook, ref page) 1191
'SU_messages':query_hook/6
(hook, ref page) 1193
'SU_messages':query_input/3 226
'SU_messages':query_input/3
(hook, ref page) 1194
'SU_messages':query_map/4 226
'SU_messages':query_map/4
(hook, ref page) 1196

,

,/2 (built-in, ref page) 974
,/2, conjunction 68

—

-> /2 ;/2, if then else 71
-> /2, if then 71
->/2 (built-in, ref page) 1098

:

: /2, module qualifier 78
:- /1, directive 27

;

;/2 (built-in, ref page) 1160
;/2, disjunction 70

<

<-/2 (objects) 702
</2 (built-in, ref page) 1110
<</2 (objects) 703

=

=../2 (built-in) 131
=../2 (built-in, ref page) 1275
=/2 (built-in) 130
=/2 (built-in, ref page) 1273
=:=/2 (built-in, ref page) 1054
=</2 (built-in, ref page) 1140
==/2 (built-in) 135
==/2 (built-in, ref page) 1258
=\=/2 (built-in, ref page) 1139

>

>/2 (built-in, ref page) 1094
>=/2 (built-in, ref page) 1141
>>/2 (objects) 704

?

?- /1, query 25
?=/2 (built-in) 131
?=/2 (built-in, ref page) 1266

@

@</2 (built-in) 135
@</2 (built-in, ref page) 1262
@=</2 (built-in) 135
@=</2 (built-in, ref page) 1264
@>/2 (built-in) 135
@>/2 (built-in, ref page) 1261
@>=/2 (built-in) 135
@>=/2 (built-in, ref page) 1265

^

^ /2, existential quantifier 78
^/2 (built-in) 192
^/2 (built-in, ref page) 1058

\

\+ /1, not provable 72
\+/1 (built-in, ref page) 1142
\= /2 (built-in) 131
\=/2 (built-in, ref page) 1143
\==/2 (built-in) 135
\==/2 (built-in, ref page) 1263

{

{}/1 (clpqr) 514

A

abolish/[1,2] (built-in) 183
abolish/[1,2] (built-in, ref page) 962
abort/0 (built-in) 215
abort/0 (built-in, ref page) 964
absolute_file_name/[2,3]
  (built-in, ref page) 965
acyclic_term/1 (built-in, ref page) 972
acyclic_term/2 (built-in) 131
add_breakpoint/2 (built-in) 277
add_breakpoint/2 (built-in, ref page) 973
add_edges/3 (ugraphs) 914
add_edges/3 (wgraphs) 919
add_element/3 (sets) 788
add_vertices/3 (ugraphs) 913
add_vertices/3 (wgraphs) 918
aggregate/3 (aggregate) 392
aggregate/4 (aggregate) 392
aggregate_all/3 (aggregate) 392
aggregate_all/4 (aggregate) 392
all/1 (plunit option) 751
all_different/[1,2] (clpfd) 444
all_different_except_0/1 (clpfd) 445
all_distinct/[1,2] (clpfd) 444
all_distinct_except_0/1 (clpfd) 445
all_equal/1 (clpfd) 443
all_equal_reif/2 (clpfd) 444
append/[2,5] (lists) 643
append/3 (built-in) 132
append/3 (built-in, ref page) 975
append_length/[3,4] (lists) 647
append_queue/3 (queues) 782
arg/3 (built-in) 131
arg/3 (built-in, ref page) 978
arithmetic_mean/2 (statistics) 796
ask_query/4 (built-in) 226
ask_query/4 (built-in, ref page) 979
assert/[1,2] (built-in) 183
assert/[1,2] (built-in, ref page) 981
asserta/[1,2] (built-in) 183
asserta/[1,2] (built-in, ref page) 983
assertz/[1,2] (built-in) 183
assertz/[1,2] (built-in, ref page) 985
assignment/[2,3] (clpfd) 445
assoc_to_list/2 (assoc) 394
at_end_of_line/[0,1] (built-in) 112
at_end_of_line/[0,1]
  (built-in, ref page) 987
at_end_of_stream/[0,1] (built-in) 112
at_end_of_stream/[0,1]
  (built-in, ref page) 988
atom/1 (built-in, ref page) 990
atom_chars/2 (built-in) 132
atom_chars/2 (built-in, ref page) 991
atom_codes/2 (built-in) 132
atom_codes/2 (built-in, ref page) 992
atom_concat/3 (built-in) 133
atom_concat/3 (built-in, ref page) 993
atom_length/2 (built-in) 133
atom_length/2 (built-in, ref page) 994
atomic/1 (built-in, ref page) 995
atomic_type/[1,2,3] (structs) 804
attribute/1 (declaration) 397
attribute_goal/2 (Module) 399
automaton/[3,8,9] (clpfd) 468
avl_change/5 (avl) 406
avl_del_max/4 (avl) 407
avl_del_min/4 (avl) 407
avl_delete/4 (avl) 407
avl_domain/2 (avl) 405
avl_fetch/2 (avl) 406
avl_fetch/3 (avl) 406
avl_height/2 (avl) 405
avl_incr/4 (avl) 407
avl_map/2 (avl) 407
avl_map/3 (avl) 408
avl_max/2 (avl) 405
avl_max/3 (avl) 405
avl_member/2 (avl) 406
avl_member/3 (avl) 406
avl_min/2 (avl) 405
avl_min/3 (avl) 405
avl_next/3 (avl) 406
avl_next/4 (avl) 406

avl_prev/3 (avl) 406
avl_prev/4 (avl) 406
avl_range/2 (avl) 405
avl_size/2 (avl) 405
avl_store/4 (avl) 407
avl_to_list/2 (avl) 405

B

bag_add_element/4 (bags) 412
bag_del_element/4 (bags) 412
bag_intersect/2 (bags) 412
bag_intersection/2 (bags) 412
bag_length/3 (bags) 412
bag_max/2 (bags) 411
bag_max/3 (bags) 411
bag_member/3 (bags) 411
bag_memberchk/3 (bags) 411
bag_min/2 (bags) 411
bag_subtract/3 (bags) 412
bag_to_list/2 (bags) 410
bag_to_ord_set/2 (bags) 410
bag_to_ord_set/3 (bags) 410
bag_to_set/2 (bags) 410
bag_to_set/3 (bags) 410
bag_union/2 (bags) 412
bag_union/3 (bags) 412
bagof/3 (built-in) 192
bagof/3 (built-in, ref page) 996
bagof_rd_noblock/3 (linda_client) 641
bb_delete/2 (built-in) 188
bb_delete/2 (built-in, ref page) 997
bb_get/2 (built-in) 188
bb_get/2 (built-in, ref page) 998
bb_inf/[3,5] (clpqr) 516
bb_put/2 (built-in) 188
bb_put/2 (built-in, ref page) 999
bb_update/3 (built-in) 188
bb_update/3 (built-in, ref page) 1000
begin_tests/[1,2] (plunit declaration) ... 748
between/3 (between) 413
bin_packing/2 (clpfd) 461
block/1 (built-in, ref page) 1001
block/1 (declaration) 88
blocked/1 (plunit option) 749
bool_and/2 (clpfd) 448
bool_channel/4 (clpfd) 448
bool_or/2 (clpfd) 448
bool_xor/2 (clpfd) 448
break/0 (built-in) 30, 86, 215
break/0 (built-in, ref page) 1003
breakpoint_expansion/2
(hook, ref page) 1004
breakpoint_expansion/2 (user, hook) .. 271, 286
byte_count/2 (built-in) 115, 118
byte_count/2 (built-in, ref page) 1005

C

call/[1,2,...,255]
(built-in, ref page) 1006
call_cleanup/2 (built-in, ref page) 1007
call_residue_vars/2
(built-in, ref page) 1009
callable/1 (built-in, ref page) 1010
case/[3,4] (clpfd) 450
cast/1 (structs) 803
catch/3 (built-in) 202
catch/3 (built-in, ref page) 1011
central_moment/3 (statistics) 796
char_code/2 (built-in) 132
char_code/2 (built-in, ref page) 1012
char_conversion/2 (built-in, ref page) ... 1013
character_count/2 (built-in) 115, 118
character_count/2 (built-in, ref page) ... 1014
checkbag/2 (bags) 409
chr_constraint/1 (CHR declaration) 417
chr_flag/3 (chr) 421
chr_leash/1 (chr) 420
chr_notrace/0 (chr) 420
chr_option/2 (CHR declaration) 416
chr_show_store/1 (chr) 421
chr_trace/0 (chr) 420
chr_type/1 (CHR declaration) 418
circuit/[1,2] (clpfd) 455
class/1 (objects) 705
class_ancestor/2 (objects) 708
class_method/1 (objects) 709
class_of/2 (objects) 711
class_superclass/2 (objects) 710
clause/[2,3] (built-in) 185
clause/[2,3] (built-in, ref page) 1015
cleanup/1 (plunit option) 749
close/[1,2] (built-in, ref page) 1017
close/1 (built-in) 118
close_all_streams/0 (file_systems) 573
close_client/0 (linda_client) 640
clpfd:dispatch_global/4 488
clpfd:full_answer/0 487
clumped/2 (lists) 658
clumps/2 (lists) 658
comclient_clsid_from_
progid/2 (comclient) 543
comclient_create_instance/2 (comclient) .. 544
comclient_equal/2 (comclient) 543
comclient_exception_code/2 (comclient) ... 545
comclient_exception_
culprit/2 (comclient) 545
comclient_exception_
description/2 (comclient) 545
comclient_garbage_collect/0 (comclient) .. 543
comclient_get_active_
object/2 (comclient) 544
comclient_iid_from_name/2 (comclient) 544
comclient_invoke_method_
fun/3 (comclient) 544

comclient_invoke_method_
proc/2 (comclient) 544
comclient_invoke_put/3 (comclient) 544
comclient_is_exception/1 (comclient) 545
comclient_is_object/1 (comclient) 543
comclient_name_from_iid/2 (comclient) 544
comclient_progid_from_
clsid/2 (comclient) 543
comclient_release/1 (comclient) 544
comclient_valid_object/1 (comclient) 543
compare/3 (built-in, ref page) 1019
compile/1 (built-in) 167
compile/1 (built-in, ref page) 1020
complement/2 (ugraphs) 914
compose/3 (ugraphs) 914
compound/1 (built-in, ref page) 1021
condition/1 (plunit option) 749
cons/3 (lists) 649
consult/1 (built-in, ref page) 1022
contains_term/2 (terms) 905
contains_var/2 (terms) 905
convlist/3 (lists) 654
copy_term/[2,3] (built-in) 133
copy_term/[2,3] (built-in, ref page) 1023
correlation/3 (statistics) 797
correspond/4 (lists) 643
count/4 (clpfd) 443
covariance/3 (statistics) 797
coverage_data/1 (built-in) 361
coverage_data/1 (built-in, ref page) 1025
create/2 (objects) 712
create_mutable/2 (built-in) 136
create_mutable/2 (built-in, ref page) 1026
cumlist/[4,5,6] (lists) 650
cumulative/[1,2] (clpfd) 456
cumulatives/[2,3] (clpfd) 457
current_atom/1 (built-in, ref page) 1027
current_breakpoint/5 (built-in) 265, 277
current_breakpoint/5
(built-in, ref page) 1028
current_char_conversion/2
(built-in, ref page) 1029
current_class/1 (objects) 714
current_directory/[1,2] (file_systems) ... 576
current_host/1 (sockets) 795
current_input/1 (built-in) 116
current_input/1 (built-in, ref page) 1030
current_key/2 (built-in) 188
current_key/2 (built-in, ref page) 1031
current_module/[1,2] (built-in) 173
current_module/[1,2]
(built-in, ref page) 1032
current_op/3 (built-in) 54
current_op/3 (built-in, ref page) 1034
current_output/1 (built-in) 117
current_output/1 (built-in, ref page) 1035
current_predicate/[1,2]
(built-in, ref page) 1036
current_predicate/2 (built-in) 173
current_prolog_flag/2
(built-in, ref page) 1038
current_stream/3 (built-in) 117
current_stream/3 (built-in, ref page) 1039
cyclic_term/1 (terms) 905

D

datime/[1,2] (system) 808
db_reference/1 (built-in, ref page) 1041
debug/0 (built-in) 237
debug/0 (built-in, ref page) 1042
debug_message/0 (objects) 715
debugger_command_hook/2
(hook, ref page) 1043
debugger_command_hook/2
(user, hook) 272, 278
debugging/0 (built-in) 29, 239
debugging/0 (built-in, ref page) 1044
decreasing/[1,2] (clpfd) 446
decreasing_prefix/[3,4] (lists) 658
define_method/3 (objects) 716
del_edges/3 (ugraphs) 914
del_edges/3 (wgraphs) 919
del_element/3 (sets) 788
del_vertices/3 (ugraphs) 914
del_vertices/3 (wgraphs) 919
delete/[3,4] (lists) 643
delete_directory/[1,2] (file_systems) 572
delete_file/1 (file_systems) 572
depth_bound/2 (terms) 906
descendant_of/2 (objects) 717
destroy/1 (objects) 718
dif/2 (built-in) 131
dif/2 (built-in, ref page) 1045
diffn/[1,2] (clpfd) 460
direct_message/4 (objects) 719
directory_exists/1 (file_systems) 572
directory_exists/2 (file_systems) 572
directory_member_of_directory/2
(file_systems) 573
directory_member_of_directory/3
(file_systems) 573
directory_member_of_directory/4
(file_systems) 573
directory_members_of_
directory/[1,2,3] (file_systems) 573
directory_must_exist/1 (file_systems) 572
directory_must_exist/2 (file_systems) 572
directory_property/[2,3] (file_systems) .. 574
disable_breakpoints/1 (built-in) 278
disable_breakpoints/1
(built-in, ref page) 1046
discontiguous/1 (built-in, ref page) 1047
discontiguous/1 (declaration) 88
disjoint/2 (sets) 788
disjoint_union/3 (sets) 790

disjoint1/[1,2] (clpfd) 459
disjoint2/[1,2] (clpfd) 460
dispatch_global/4 (clpfd) 488
display/1 (built-in) 110
display/1 (built-in, ref page) 1048
dispose/1 (structs) 802
do/2 (built-in, ref page) 1049
do/2, do loop 72
domain/2 (clpfd) 441
domain/3 (clpfd) 441
dump/3 (clpqr) 517
dynamic/1 (built-in, ref page) 1051
dynamic/1 (declaration) 88

E

edges/2 (ugraphs) 913
edges/2 (wgraphs) 918
element/2 (clpfd) 448
element/3 (clpfd) 448
elif/1 (conditional directive) 92
else/0 (conditional directive) 92
empty_assoc/1 (assoc) 394
empty_avl/1 (avl) 405
empty_bag/1 (bags) 411
empty_fdset/1 (clpfd) 492
empty_interval/2 (clpfd) 492
empty_queue/1 (queues) 781
enable_breakpoints/1 (built-in) 278
enable_breakpoints/1
(built-in, ref page) 1052
end_class/[0,1] (objects) 720
end_tests/1 (plunit declaration) 748
endif/0 (conditional directive) 92
ensure_loaded/1 (built-in) 167
ensure_loaded/1 (built-in, ref page) 1053
entailed/1 (clpqr) 515
environ/[2,3] (system) 808
erase/1 (built-in) 183
erase/1 (built-in, ref page) 1055
error/1 (plunit option) 751
error/2 (plunit option) 751
error_exception/1 (hook, ref page) 1056
error_exception/1 (user, hook) 202, 289
exception/1 (plunit option) 751
exclude/[3,4,5] (lists) 654
execution_state/[1,2] (built-in) 264, 266, 278
execution_state/[1,2]
(built-in, ref page) 1057
expand_term/2 (built-in) 92
expand_term/2 (built-in, ref page) 1059

F

fail/0 (built-in, ref page) 1060
fail/0 (plunit option) 751
false/0 (built-in, ref page) 1061
fd_batch/1 (clpfd) 435
fd_closure/2 (clpfd) 491
fd_degree/2 (clpfd) 491
fd_dom/2 (clpfd) 491
fd_failures/2 (clpfd) 491
fd_flag/3 (clpfd) 490
fd_getrand/1 (clpfd) 490
fd_global/[3,4] (clpfd) 489
fd_max/2 (clpfd) 490
fd_min/2 (clpfd) 490
fd_neighbors/2 (clpfd) 491
fd_purge/1 (clpfd) 435
fd_set/2 (clpfd) 491
fd_set_failures/2 (clpfd) 491
fd_setrand/1 (clpfd) 490
fd_size/2 (clpfd) 490
fd_statistics/[0,2] (clpfd) 486
fd_var/1 (clpfd) 490
fdbg_annotate/[3,4] (fdbg) 560
fdbg_assign_name/2 (fdbg) 551
fdbg_current_name/2 (fdbg) 551
fdbg_get_name/2 (fdbg) 552
fdbg_guard/3 (fdbg) 566
fdbg_label_show/3 (fdbg) 552
fdbg_labeling_step/2 (fdbg) 554
fdbg_legend/[1,2] (fdbg) 560
fdbg_off/0 (fdbg) 550
fdbg_on/[0,1] (fdbg) 550
fdbg_show/2 (fdbg) 552
fdbg_start_labeling/1 (fdbg) 554
fdbg_transform_actions/3 (fdbg) 560
fdset_add_element/3 (clpfd) 492
fdset_complement/2 (clpfd) 493
fdset_del_element/3 (clpfd) 493
fdset_disjoint/2 (clpfd) 493
fdset_eq/2 (clpfd) 493
fdset_intersect/2 (clpfd) 493
fdset_intersection/[2,3] (clpfd) 493
fdset_interval/3 (clpfd) 492
fdset_max/2 (clpfd) 492
fdset_member/2 (clpfd) 493
fdset_min/2 (clpfd) 492
fdset_parts/4 (clpfd) 492
fdset_singleton/2 (clpfd) 492
fdset_size/2 (clpfd) 492
fdset_subset/2 (clpfd) 493
fdset_subtract/3 (clpfd) 493
fdset_to_list/2 (clpfd) 492
fdset_to_range/2 (clpfd) 492
fdset_union/[2,3] (clpfd) 493
fdvar_portray/3 (fdbg, hook) 558
fetch_slot/2 (objects) 721
file_exists/1 (file_systems) 572
file_exists/2 (file_systems) 572

file_member_of_directory/[2,3,4] (file_systems) 573
file_members_of_directory/[1,2,3] (file_systems) 574
file_must_exist/1 (file_systems) 572
file_must_exist/2 (file_systems) 572
file_property/[2,3] (file_systems) 575
file_search_path/2 (hook, ref page) 1062
file_search_path/2 (user, hook) 100
find_chr_constraint/1 (chr) 421
findall/[3,4] (built-in) 192
findall/[3,4] (built-in, ref page) 1064
first_bound/2 (clpfd) 477, 480
fixme/1 (plunit option) 749
float/1 (built-in, ref page) 1067
flush_output/[0,1] (built-in, ref page) 1068
flush_output/1 (built-in) 118
forall/1 (plunit option) 749
forall/2 (aggregate) 392
foreach/2 (aggregate) 392
foreign/[2,3] (hook, ref page) 1069
foreign/[2,3] (Module, hook) 296
foreign_resource/2 (hook, ref page) 1070
foreign_resource/2 (Module, hook) 296
foreign_type/2 (structs) 801
format/[2,3] (built-in) 112
format/[2,3] (built-in, ref page) 1071
format_to_codes/[3,4] (codesio) 538
fractile/3 (statistics) 798
free_of_term/2 (terms) 905
free_of_var/2 (terms) 905
free_variables/4 (aggregate) 392
freeze/2 (built-in, ref page) 1077
frozen/2 (built-in, ref page) 1078
full_answer/0 (clpfd) 487
functor/3 (built-in) 131
functor/3 (built-in, ref page) 1079
fzn_dump/[2,3] (zinc) 928
fzn_identifier/3 (zinc) 926
fzn_load_file/2 (zinc) 925
fzn_load_stream/2 (zinc) 924
fzn_objective/2 (zinc) 926
fzn_output/1 (zinc) 926
fzn_post/1 (zinc) 925
fzn_run_file/[1,2] (zinc) 928
fzn_run_stream/[1,2] (zinc) 927
fzn_solve/1 (zinc) 925

G

garbage_collect/0 (built-in) 160
garbage_collect/0 (built-in, ref page) 1081
garbage_collect_atoms/0 (built-in) 161
garbage_collect_atoms/0 (built-in, ref page) 1082
gen_assoc/3 (assoc) 394
gen_int/1 (between) 413
gen_label/3 (trees) 909
gen_nat/1 (between) 413
generate_message/3 (hook, ref page) 1083
generate_message/3 (SU_messages) 219
generate_message_hook/3 (hook, ref page) 1085
generate_message_hook/3 (user, hook) 219
geometric_mean/2 (statistics) 796
geost/[2,3,4] (clpfd) 461
get_address/3 (structs) 802
get_assoc/3 (assoc) 394
get_atts/2 (Module) 397
get_byte/[1,2] (built-in) 111
get_byte/[1,2] (built-in, ref page) 1087
get_char/[1,2] (built-in) 111
get_char/[1,2] (built-in, ref page) 1088
get_code/[1,2] (built-in) 111
get_code/[1,2] (built-in, ref page) 1089
get_contents/3 (structs) 802
get_label/3 (trees) 909
get_mutable/2 (built-in) 136
get_mutable/2 (built-in, ref page) 1090
get_next_assoc/4 (assoc) 394
get_prev_assoc/4 394
getrand/1 (random) 784
global_cardinality/[2,3] (clpfd) 443
goal_expansion/5 (hook, ref page) 1091
goal_expansion/5 (Module, hook) 92
goal_source_info/3 (built-in) 205, 220
goal_source_info/3 (built-in, ref page) 1093
ground/1 (built-in, ref page) 1095
group/[3,4,5] (lists) 655

H

halt/[0,1] (built-in) 215
halt/[0,1] (built-in, ref page) 1096
harmonic_mean/2 (statistics) 796
head/2 (lists) 649

I

if/1 (conditional directive) 92
if/3 (built-in, ref page) 1097
if/3, soft cut 72
if_then_else/4 (clpfd) 441
illarg/[3,4] (types) 911
in/1 (linda_client) 641
in/2 (clpfd) 441
in/2 (linda_client) 641
in_noblock/1 (linda_client) 641
in_set/2 (clpfd) 441
include/[3,4,5] (lists) 655
include/1 (built-in, ref page) 1099
include/1 (declaration) 90
increasing/[1,2] (clpfd) 446
increasing_prefix/[3,4] (lists) 657

indomain/1 (clpfd) 477
inf/[2,4] (clpqr) 515
inherit/1 (objects) 722
initialization/1 (built-in, ref page) 1100
initialization/1 (declaration) 91
instance/2 (built-in) 185
instance/2 (built-in, ref page) 1101
instance_method/1 (objects) 724
integer/1 (built-in, ref page) 1102
intersect/2 (sets) 788
intersection/[2,3] (sets) 789
is/2 (built-in) 123
is/2 (built-in, ref page) 1103
is/2 (declaration) 90
is_assoc/1 (assoc) 395
is_avl/1 (avl) 405
is_bag/1 (bags) 409
is_fdset/1 (clpfd) 492
is_json_term/[1,2] (json) 622
is_list/1 (lists) 644
is_mutarray/1 (mutarray) 667
is_mutdict/1 (mutdict) 669
is_ordset/1 (ordsets) 744
is_process/1 (process) 765
is_queue/1 (queues) 781
is_set/1 (sets) 788

J

jasper_call/4 (jasper) 608
jasper_create_global_ref/3 (jasper) 609
jasper_create_local_ref/3 (jasper) 609
jasper_deinitialize/1 (jasper) 608
jasper_delete_global_ref/2 (jasper) 609
jasper_delete_local_ref/2 (jasper) 609
jasper_initialize/[1,2] (jasper) 607
jasper_is_instance_of/3 (jasper) 610
jasper_is_jvm/1 (jasper) 609
jasper_is_object/[1,2] (jasper) 610
jasper_is_same_object/3 (jasper) 610
jasper_new_object/5 (jasper) 608, 617
jasper_null/2 (jasper) 610
jasper_object_class_name/3 (jasper) 610
json_from_atom/[2,3] (json) 622
json_from_codes/[2,3] (json) 622
json_read/[2,3] (json) 622
json_to_atom/[2,3] (json) 622
json_to_codes/[2,3] (json) 622
json_write/[2,3] (json) 622

K

keyclumped/2 (lists) 658
keyclumps/2 (lists) 658
keymerge/3 (samsort) 787
keys_and_values/3 (lists) 644
keysort/2 (built-in) 135
keysort/2 (built-in, ref page) 1105
keysorting/[2,3] (clpfd) 447
kurtosis/2 (statistics) 797

L

labeling/1 (clpb) 424
labeling/2 (clpfd) 477
last/2 (lists) 644
last/3 (lists) 649
later_bound/2 (clpfd) 477, 480
leash/1 (built-in) 238
leash/1 (built-in, ref page) 1106
legend_portray/3 (fdbg, hook) 558
length/2 (built-in) 132
length/2 (built-in, ref page) 1108
length/3 (bags, deprecated) 412
length_bound/2 (terms) 906
lex_chain/[1,2] (clpfd) 447
library_directory/1 (hook, ref page) 1111
linda/[0,1] (linda) 639
linda_client/1 (linda_client) 640
linda_timeout/2 (linda_client) 641
line_count/2 (built-in) 115, 118
line_count/2 (built-in, ref page) 1112
line_position/2 (built-in) 115, 119
line_position/2 (built-in, ref page) 1113
list_queue/2 (queues) 782
list_to_assoc/2 (assoc) 395
list_to_avl/2 (avl) 407
list_to_bag/2 (bags) 410
list_to_fdset/2 (clpfd) 492
list_to_mutarray/2 (mutarray) 667
list_to_mutdict/2 (mutdict) 669
list_to_ord_set/2 (ordsets) 744
list_to_set/2 (sets) 789
list_to_tree/2 (trees) 909
listing/[0,1] (built-in) 29, 175
listing/[0,1] (built-in, ref page) 1114
lmdb_close/1 (lmdb) 661
lmdb_compress/2 (lmdb) 662
lmdb_create/[2,3] (lmdb) 661
lmdb_enumerate/3 (lmdb) 662
lmdb_erase/2 (lmdb) 662
lmdb_export/2 (lmdb) 663
lmdb_fetch/3 (lmdb) 662
lmdb_findall/3 (lmdb) 662
lmdb_import/2 (lmdb) 663
lmdb_iterator_done/1 (lmdb) 663
lmdb_iterator_next/3 (lmdb) 663
lmdb_make_iterator/3 (lmdb) 662
lmdb_open/[2,3] (lmdb) 661

lmdb_property/2 (lmdb) 663
lmdb_store/3 (lmdb) 661
lmdb_sync/1 (lmdb) 662
lmdb_with_db/[2,3] (lmdb) 661
lmdb_with_iterator/3 (lmdb) 662
load_files/[1,2] (built-in) 98
load_files/[1,2] (built-in, ref page) 1115
load_foreign_resource/1 (built-in) 299
load_foreign_resource/1
(built-in, ref page) 1118

M

make_directory/1 (file_systems) 572
make_sub_bag/2 (bags) 412
map_assoc/2 (assoc) 395
map_assoc/3 (assoc) 395
map_list_queue/3 (queues) 783
map_product/5 (lists) 652
map_queue/[2,3] (queues) 783
map_queue_list/3 (queues) 783
map_tree/3 (trees) 909
mapbag/2 (bags) 410
mapbag/3 (bags) 410
maplist/[2,3,4] (lists) 651
max/2 (statistics) 796
max_assoc/3 (assoc) 395
max_cliques/2 (ugraphs) 915
max_member/[2,3] (lists) 656
max_path/5 (ugraphs) 915
max_path/5 (wgraphs) 919
maximize/[2,3] (clpfd) 478
maximize/1 (clpqr) 516
maximum/2 (clpfd) 440
maximum_arg/2 (clpfd) 441
maybe/[0,1,2] (random) 784
mean/2 (statistics) 796
median/2 (statistics) 797
member/2 (built-in) 132
member/2 (built-in, ref page) 1120
member/3 (bags, deprecated) 411
memberchk/2 (built-in) 132
memberchk/2 (built-in, ref page) 1121
memberchk/3 (bags, deprecated) 411
merge/[3,4] (samsort) 787
message/4 (objects) 725
message_hook/3 (hook, ref page) 1122
message_hook/3 (user, hook) 220
meta_predicate/1 (built-in, ref page) 1123
meta_predicate/1 (declaration) 89, 175
min/2 (statistics) 796
min_assoc/3 (assoc) 395
min_max/3 (statistics) 796
min_member/[2,3] (lists) 656
min_path/5 (ugraphs) 915
min_path/5 (wgraphs) 919
min_paths/3 (ugraphs) 915
min_paths/3 (wgraphs) 919
min_tree/3 (ugraphs) 915
min_tree/3 (wgraphs) 920
minimize/[2,3] (clpfd) 478
minimize/1 (clpqr) 516
minimum/2 (clpfd) 440
minimum_arg/2 (clpfd) 440
ml_standard_deviation/2 (statistics) 797
ml_variance/2 (statistics) 797
mode/1 (built-in, ref page) 1125
mode/1 (declaration) 90
mode/2 (statistics) 796
module/[2,3] (built-in, ref page) 1126
module/[2,3] (declaration) 89, 168
multi_cumulative/[2,3] (clpfd) 458
multifile/1 (built-in, ref page) 1128
multifile/1 (declaration) 87
must_be/4 (types) 911
mutable/1 (built-in) 136
mutable/1 (built-in, ref page) 1130
mutarray_append/2 (mutarray) 668
mutarray_gen/3 (mutarray) 667
mutarray_get/3 (mutarray) 667
mutarray_last/2 (mutarray) 667
mutarray_length/2 (mutarray) 667
mutarray_put/3 (mutarray) 667
mutarray_set_length/2 (mutarray) 667
mutarray_to_list/2 (mutarray) 667
mutarray_update/4 (mutarray) 667
mutdict_append/2 (mutdict) 670
mutdict_clear/1 (mutdict) 669
mutdict_delete/2 (mutdict) 669
mutdict_empty/1 (mutdict) 669
mutdict_gen/3 (mutdict) 669
mutdict_get/3 (mutdict) 669
mutdict_items/2 (mutdict) 670
mutdict_keys/2 (mutdict) 670
mutdict_put/3 (mutdict) 669
mutdict_size/1 (mutdict) 669
mutdict_update/4 (mutdict) 669
mutdict_values/2 (mutdict) 670
mzn_load_file/[2,3] (zinc) 931
mzn_run_file/[1,2] (zinc) 929
mzn_run_model/[1,2] (zinc) 929
mzn_to_fzn/[2,3] (zinc) 932

N

name/2 (built-in) 132
name/2 (built-in, ref page) 1131
neighbors/3 (ugraphs) 914
neighbors/3 (wgraphs) 918
neighbours/3 (ugraphs) 914
neighbours/3 (wgraphs) 918
network_flow/[2,3] (clpfd) 455
new/[2,3] (structs) 802
new_mutarray/1 (mutarray) 667
new_mutarray/2 (mutarray) 667
new_mutdict/1 (mutdict) 669

nextto/3 (lists) 644
nl/[0,1] (built-in) 112
nl/[0,1] (built-in, ref page) 1133
nodebug/0 (built-in) 239
nodebug/0 (built-in, ref page) 1134
nodebug_message/0 (objects) 726
nondet/0 (plunit option) 749
nonmember/2 (built-in) 132
nonmember/2 (built-in, ref page) 1135
nonvar/1 (built-in, ref page) 1136
normalize/2 (statistics) 798
nospy/1 (built-in) 240
nospy/1 (built-in, ref page) 1137
nospyall/0 (built-in) 240
nospyall/0 (built-in, ref page) 1138
notrace/0 (built-in) 239
notrace/0 (built-in, ref page) 1144
now/1 (system) 808
nozip/0 (built-in) 239
nozip/0 (built-in, ref page) 1145
nth0/[3,4] (lists) 644
nth1/[3,4] (lists) 644
null_foreign_term/2 (structs) 803
number/1 (built-in, ref page) 1146
number_chars/2 (built-in) 132
number_chars/2 (built-in, ref page) 1147
number_codes/2 (built-in) 132
number_codes/2 (built-in, ref page) 1148
numbervars/1 (varnumbers) 916
numbervars/3 (built-in) 133
numbervars/3 (built-in, ref page) 1150
numlist/[2,3,5] (between) 413
nvalue/2 (clpfd) 445

O

occurrences_of_term/3 (terms) 905
occurrences_of_var/3 (terms) 905
odbc_db_open/3 (odbc) 739
odbc_db_open/4 (odbc) 739
odbc_db_open/5 (odbc) 739
odbc_env_open/1 (odbc) 739
odbc_list_DSN/2 (odbc) 740
on_exception/3 (built-in) 214
on_exception/3 (built-in, ref page) 1151
once/1 72
once/1 (built-in, ref page) 1152
one_longer/2 (lists) 645
op/3 (built-in) 54
op/3 (built-in, ref page) 1153
open/[3,4] (built-in) 113, 114
open/[3,4] (built-in, ref page) 1154
open_codes_stream/2 (codesio) 538
open_null_stream/1 (built-in) 115
open_null_stream/1 (built-in, ref page) 1159
ord_add_element/3 (ordsets) 744
ord_del_element/3 (ordsets) 744
ord_disjoint/2 (ordsets) 744
ord_disjoint_union/3 (ordsets) 745
ord_intersect/2 (ordsets) 744
ord_intersection/[2,3,4] (ordsets) 744
ord_list_to_assoc/2 (assoc) 395
ord_list_to_avl/2 (avl) 407
ord_member/2 (ordsets) 744
ord_nonmember/2 (ordsets) 745
ord_seteq/2 (ordsets) 745
ord_setproduct/3 (ordsets) 745
ord_subset/2 (ordsets) 745
ord_subtract/3 (ordsets) 745
ord_symdiff/3 (ordsets) 745
ord_union/[2,3,4] (ordsets) 745
ordered/[1,2] (lists) 656
ordering/1 (clpqr) 517, 527
ordset_order/3 (ordsets) 746
otherwise/0 (built-in, ref page) 1161
out/1 (linda_client) 641

P

pairfrom/4 (sets) 788
partition/5 (lists) 655
path/3 (ugraphs) 915
path/3 (wgraphs) 920
peek_byte/[1,2] (built-in) 111
peek_byte/[1,2] (built-in, ref page) 1162
peek_char/[1,2] (built-in) 111
peek_char/[1,2] (built-in, ref page) 1163
peek_code/[1,2] (built-in) 111
peek_code/[1,2] (built-in, ref page) 1164
perm/2 (lists) 645
perm2/4 (lists) 645
permutation/2 (lists) 645
phrase/[2,3] (built-in) 195
phrase/[2,3] (built-in, ref page) 1165
pointer_object/2 (objects) 727
population_standard_deviation/2 (statistics) 797
population_variance/2 (statistics) 797
portray/1 (hook, ref page) 1167
portray/1 (user, hook) 110, 536
portray_assoc/1 (assoc) 395
portray_avl/1 (avl) 406
portray_bag/1 (bags) 409
portray_clause/[1,2] (built-in) 110
portray_clause/[1,2] (built-in, ref page) 1168
portray_message/2 (hook, ref page) 1170
portray_message/2 (user, hook) 219
portray_queue/1 (queues) 781
power_set/2 (sets) 789
predicate_property/2 (built-in) 139, 174
predicate_property/2 (built-in, ref page) 1171
prefix/2 (lists) 649
prefix_length/3 (lists) 648

print/[1,2] (built-in) 110
print/[1,2] (built-in, ref page) 1173
print_coverage/[0,1] (built-in) 361
print_coverage/[0,1] (built-in, ref page) 1174
print_message/2 (built-in) 219
print_message/2 (built-in, ref page) 1176
print_message_lines/3 (built-in) 220
print_message_lines/3 (built-in, ref page) 1178
print_profile/[0,1] (built-in) 360
print_profile/[0,1] (built-in, ref page) 1179
process_create/[2,3] (process) 762
process_id/1 (process) 765
process_id/2 (process) 765
process_kill/[1,2] (process) 765
process_release/1 (process) 765
process_wait/[2,3] (process) 764
profile_data/1 (built-in) 360
profile_data/1 (built-in, ref page) 1180
profile_reset/0 (built-in) 360, 361
profile_reset/0 (built-in, ref page) 1181
project_attributes/2 (Module) 399
projecting_assert/1 (clpqr) 518
prolog_flag/[2,3] (built-in) 107
prolog_flag/[2,3] (built-in, ref page) 1182
prolog_load_context/2 (built-in, ref page) 1184
prompt/2 (built-in) 108
prompt/2 (built-in, ref page) 1185
proper_length/2 (lists) 645
proper_prefix/2 (lists) 649
proper_prefix_length/3 (lists) 648
proper_segment/2 (lists) 650
proper_suffix/2 (lists) 650
proper_suffix_length/3 (lists) 648
public/1 (built-in, ref page) 1186
public/1 (declaration) 90
put_assoc/4 (assoc) 396
put_atts/2 (Module) 397
put_byte/[1,2] (built-in) 112
put_byte/[1,2] (built-in, ref page) 1187
put_char/[1,2] (built-in) 112
put_char/[1,2] (built-in, ref page) 1188
put_code/[1,2] (built-in) 112
put_code/[1,2] (built-in, ref page) 1189
put_contents/3 (structs) 802
put_label/[4,5] (trees) 909

Q

query_abbreviation/3 (hook, ref page) 1190
query_abbreviation/3 (SU_messages) 226
query_class/5 (hook, ref page) 1191
query_class/5 (SU_messages) 226
query_class_hook/5 (hook, ref page) 1192
query_class_hook/5 (user, hook) 226
query_hook/6 (hook, ref page) 1193
query_hook/6 (user, hook) 226
query_input/3 (hook, ref page) 1194
query_input/3 (SU_messages) 226
query_input_hook/3 (hook, ref page) 1195
query_input_hook/3 (user, hook) 226
query_map/4 (hook, ref page) 1196
query_map/4 (SU_messages) 226
query_map_hook/4 (hook, ref page) 1197
query_map_hook/4 (user, hook) 226
queue_append/3 (queues) 782
queue_cons/3 (queues) 782
queue_head/2 (queues) 781
queue_last/[2,3] (queues) 782
queue_length/2 (queues) 782
queue_list/2 (queues) 782
queue_member/2 (queues) 782
queue_memberchk/2 (queues) 783
queue_tail/2 (queues) 781

R

raise_exception/1 (built-in) 214
raise_exception/1 (built-in, ref page) 1198
random/[1,3] (random) 784
random_member/2 (random) 785
random_numlist/4 (random) 785
random_perm2/4 (random) 785
random_permutation/2 (random) 785
random_select/3 (random) 785
random_subseq/3 (random) 785
random_ugraph/3 (ugraphs) 915
random_wgraph/4 (wgraphs) 920
range/2 (statistics) 796
range_to_fdset/2 (clpfd) 492
rd/[1,2] (linda_client) 641
rd_noblock/1 (linda_client) 641
reachable/3 (ugraphs) 915
reachable/3 (wgraphs) 920
read/[1,2] (built-in) 107
read/[1,2] (built-in, ref page) 1199
read_from_codes/2 (codesio) 538
read_line/[1,2] (built-in, ref page) 1201
read_record/[1,2] (csv) 540
read_record_from_codes/[2,3] (csv) 540
read_records/[1,2] (csv) 540
read_term/[2,3] (built-in) 107
read_term/[2,3] (built-in, ref page) 1202
read_term_from_codes/3 (codesio) 538
reconsult/1 (built-in, ref page) 1205
recorda/3 (built-in) 187

recorda/3 (built-in, ref page) 1206
recorded/3 (built-in, ref page) 1207
recordz/3 (built-in) 188
recordz/3 (built-in, ref page) 1208
reduce/2 (ugraphs) 915
reduce/2 (wgraphs) 920
register_event_listener/[2,3] (prologbeans) 773
register_query/[2,3] (prologbeans) 772
regular/2 (clpfd) 475
relation/3 (clpfd) 449
rem_add_link/4 (rem) 786
rem_create/2 (rem) 786
rem_equivalent/3 (rem) 786
rem_head/3 (random) 786
remove_breakpoints/1 (built-in) 265, 278
remove_breakpoints/1 (built-in, ref page) 1209
remove_dups/2 (lists) 645
rename_directory/2 (file_systems) 572
rename_file/2 (file_systems) 571
repeat/0 (built-in, ref page) 1210
repeat/1 (between) 413
restore/1 (built-in) 31, 97
restore/1 (built-in, ref page) 1212
retract/1 (built-in) 183
retract/1 (built-in, ref page) 1213
retractall/1 (built-in) 183
retractall/1 (built-in, ref page) 1215
rev/2 (lists) 646
reverse/2 (lists) 646
rotate_list/[2,3] (lists) 648
run_tests/[0,1,2] (plunit) 753
runtime_entry/1 (hook, ref page) 1216
runtime_entry/1 (user, hook) 1436

S

same_functor/[2,3,4] (terms) 906
same_length/[2,3] (lists) 646
samkeysort/2 (samsort) 787
sample_standard_deviation/2 (statistics) 797
sample_variance/2 (statistics) 797
samsort/[2,3] (samsort) 787
sat/1 (clpb) 424
save_files/2 (built-in) 32, 98
save_files/2 (built-in, ref page) 1217
save_modules/2 (built-in) 32, 98
save_modules/2 (built-in, ref page) 1218
save_predicates/2 (built-in) 32, 98
save_predicates/2 (built-in, ref page) 1219
save_program/[1,2] (built-in) 30, 97
save_program/[1,2] (built-in, ref page) 1220
scalar_product/[4,5] (clpfd) 440
scalar_product_reif/[5,6] (clpfd) 440
scanlist/[4,5,6] (lists) 652
see/1 (built-in) 115
see/1 (built-in, ref page) 1222
seeing/1 (built-in) 116
seeing/1 (built-in, ref page) 1223
seek/4 (built-in) 119
seek/4 (built-in, ref page) 1225
seen/0 (built-in) 118
seen/0 (built-in, ref page) 1227
segment/2 (lists) 650
select/3 (lists) 643
select/4 (lists) 646
select_max/[3,4] (lists) 657
select_min/[3,4] (lists) 657
selectchk/3 (lists) 643
selectchk/4 (lists) 646
seq_precede_chain/[1,2] (clpfd) 477
session_get/4 (prologbeans) 772
session_put/3 (prologbeans) 773
set/1 (plunit option) 751
set_input/1 (built-in) 114
set_input/1 (built-in, ref page) 1228
set_module/1 (built-in) 170
set_module/1 (built-in, ref page) 1229
set_order/3 (sets) 789
set_output/1 (built-in) 114
set_output/1 (built-in, ref page) 1230
set_prolog_flag/2 (built-in, ref page) 1231
set_stream_position/2 (built-in) 119
set_stream_position/2 (built-in, ref page) 1232
seteq/2 (sets) 789
setof/3 (built-in) 191
setof/3 (built-in, ref page) 1233
setproduct/3 (sets) 790
setrand/1 (random) 784
setup/1 (plunit option) 749
shorter_list/2 (lists) 646
shutdown/[0,1] (prologbeans) 771
shutdown_server/0 (linda_client) 640
simple/1 (built-in, ref page) 1235
singleton_queue/2 (queues) 781
size_bound/2 (terms) 906
skewness/2 (statistics) 796
skip_byte/[1,2] (built-in) 111
skip_byte/[1,2] (built-in, ref page) 1236
skip_char/[1,2] (built-in) 111
skip_char/[1,2] (built-in, ref page) 1237
skip_code/[1,2] (built-in) 111
skip_code/[1,2] (built-in, ref page) 1238
skip_line/[0,1] (built-in) 111
skip_line/[0,1] (built-in, ref page) 1239
sleep/1 (system) 808
smt/1 (clpfd) 442
socket_client_open/3 (sockets) 792
socket_select/7 (sockets) 794
socket_server_accept/4 (sockets) 794
socket_server_close/1 (sockets) 794
socket_server_open/[2,3] (sockets) 793

solve/2 (clpfd) 484
some/[2,3,4] (lists) 653
some_queue/[2,3] (queues) 783
somebag/2 (bags) 410
somechk/[2,3,4] (lists) 653
somechk_queue/[2,3] (queues) 783
somechkbag/2 (bags) 410
sort/2 (built-in) 135
sort/2 (built-in, ref page) 1240
sorting/3 (clpfd) 446
source_file/[1,2] (built-in) 140
source_file/[1,2] (built-in, ref page) ... 1241
spy/[1,2] (built-in) 239, 277
spy/[1,2] (built-in, ref page) 1243
start/[0,1] (prologbeans) 771
statistics/[0,2] (built-in) 150, 156
statistics/[0,2] (built-in, ref page) 1244
store_slot/2 (objects) 728
stream_code/2 (built-in) 113, 316
stream_code/2 (built-in, ref page) 1245
stream_position/2 (built-in) 119
stream_position/2 (built-in, ref page) ... 1246
stream_position_data/3
(built-in, ref page) 1247
stream_property/2 (built-in) 118
stream_property/2 (built-in, ref page) ... 1248
sub_atom/5 (built-in) 133
sub_atom/5 (built-in, ref page) 1251
sub_term/2 (terms) 905
subcircuit/[1,2] (clpfd) 455
sublist/[3,4,5] (lists) 649
subseq/3 (lists) 646
subseq0/2 (lists) 647
subseq1/2 (lists) 647
subset/2 (sets) 788
subsumes/2 (terms) 902
subsumes_term/2 (built-in) 131
subsumes_term/2 (built-in, ref page) 1253
subsumeschk/2 (terms) 902
subtract/3 (sets) 789
suffix/2 (lists) 649
suffix_length/3 (lists) 648
sum/3 (clpfd) 439
sumlist/2 (lists) 647
sup/[2,4] (clpqr) 516
symdiff/3 (sets) 790
symmetric_all_different/1 (clpfd) 446
symmetric_all_distinct/1 (clpfd) 446
symmetric_closure/2 (ugraphs) 914
symmetric_closure/2 (wgraphs) 919

T

table/[2,3] (clpfd) 449
tail/2 (lists) 649
taut/2 (clpb) 424
tcl_delete/1 (tcltk) 868, 899
tcl_eval/3 (tcltk) 870, 899
tcl_event/3 (tcltk) 873, 899
tcl_new/1 (tcltk) 867, 899
tell/1 (built-in) 115
tell/1 (built-in, ref page) 1255
telling/1 (built-in) 117
telling/1 (built-in, ref page) 1256
term_depth/2 (terms) 906
term_expansion/6 (hook, ref page) 1259
term_expansion/6 (user, hook) 91
term_hash/[2,3,4] (terms) 902
term_order/3 (terms) 905
term_size/2 (terms) 906
term_subsumer/3 (terms) 902
term_variables/2 (built-in) 131
term_variables/2 (built-in, ref page) 1267
term_variables/3 (aggregate) 392
term_variables_bag/2 (terms) 904
term_variables_set/2 (terms) 904
test/[1,2] (plunit declaration) 748
test_sub_bag/2 (bags) 412
throw/1 (built-in) 201
throw/1 (built-in, ref page) 1268
throws/1 (plunit option) 751
time_out/3 (timeout) 908
tk_destroy_window/1 (tcltk) 878, 900
tk_do_one_event/[0,1] (tcltk) 877, 899
tk_main_loop/0 (tcltk) 878, 900
tk_main_window/2 (tcltk) 878, 900
tk_make_window_exist/1 (tcltk) 878, 900
tk_new/2 (tcltk) 867, 899
tk_next_event/[2,3] (tcltk) 873, 878, 900
tk_num_main_windows/1 (tcltk) 879, 900
told/0 (built-in) 118
told/0 (built-in, ref page) 1269
top_sort/2 (ugraphs) 915
top_sort/2 (wgraphs) 919
trace/0 (built-in) 238
trace/0 (built-in, ref page) 1270
transitive_closure/2 (ugraphs) 914
transitive_closure/2 (wgraphs) 919
transitive_reduction/2 (ugraphs) 914
transpose/2 (lists) 647
transpose_ugraph/2 (ugraphs) 914
transpose_wgraph/2 (wgraphs) 919
tree_size/2 (trees) 909
tree_to_list/2 (trees) 909
trimcore/0 (built-in) 150
trimcore/0 (built-in, ref page) 1271
true/0 (built-in, ref page) 1272
true/0 (plunit option) 750
true/1 (plunit option) 750
type_definition/[2,3] (structs) 804

U

ugraph_to_wgraph/2 (wgraphs) 918
ugraph_to_wgraph/3 (wgraphs) 919
unbiased_standard_deviation/2
(statistics) 797
unbiased_variance/2 (statistics) 797
undefine_method/3 (objects) 729
unify_with_occurs_check/2 (built-in) 131
unify_with_occurs_check/2
(built-in, ref page) 1274
uninherit/1 (objects) 730
union/[2,3,4] (sets) 790
unknown/2 (built-in) 29, 204
unknown/2 (built-in, ref page) 1277
unknown_predicate_handler/3
(hook, ref page) 1278
unknown_predicate_handler/3
(user, hook) 29, 203
unload_foreign_resource/1 (built-in) 300
unload_foreign_resource/1
(built-in, ref page) 1279
unregister_event_listener/1
(prologbeans) 773
unregister_query/1 (prologbeans) 772
update_mutable/2 (built-in) 136
update_mutable/2 (built-in, ref page) 1280
use_module/[1,2,3] (built-in) 168
use_module/[1,2,3]
(built-in, ref page) 1281
user:breakpoint_expansion/2 (hook) ... 271, 286
user:breakpoint_expansion/2
(hook, ref page) 1004
user:debugger_command_hook/2 (hook) .. 272, 278
user:debugger_command_hook/2
(hook, ref page) 1043
user:error_exception/1 (hook) 202, 289
user:error_exception/1
(hook, ref page) 1056
user:file_search_path/2 (hook) 100
user:file_search_path/2
(hook, ref page) 1062
user:generate_message_hook/3 (hook) 219
user:generate_message_hook/3
(hook, ref page) 1085
user:library_directory/1
(hook, ref page) 1111
user:message_hook/3 (hook) 220
user:message_hook/3 (hook, ref page) 1122
user:portray/1 (hook) 110, 536
user:portray/1 (hook, ref page) 1167
user:portray_message/2 (hook) 219
user:portray_message/2
(hook, ref page) 1170
user:query_class_hook/5 (hook) 226
user:query_class_hook/5
(hook, ref page) 1192
user:query_hook/6 (hook) 226
user:query_input_hook/3 (hook) 226
user:query_input_hook/3
(hook, ref page) 1195
user:query_map_hook/4 (hook) 226
user:query_map_hook/4 (hook, ref page) ... 1197
user:runtime_entry/1 (hook) 1436
user:runtime_entry/1 (hook, ref page) 1216
user:term_expansion/6 (hook) 91
user:term_expansion/6 (hook, ref page) ... 1259
user:unknown_predicate_
handler/3 (hook) 29, 203
user:unknown_predicate_handler/3
(hook, ref page) 1278

V

value_precede_chain/[2,3] (clpfd) 477
var/1 (built-in, ref page) 1284
variant/2 (terms) 902
varnumbers/[2,3] (varnumbers) 916
verify_attributes/3 (Module) 398
vertices/2 (ugraphs) 913
vertices/2 (wgraphs) 918
vertices_edges_to_ugraph/3 (ugraphs) 913
vertices_edges_to_wgraph/3 (wgraphs) 919
view/0 (gauge) 577
volatile/1 (built-in, ref page) 1285
volatile/1 (declaration) 88

W

weighted_mean/3 (statistics) 796
weighted_standard_deviation/3
(statistics) 797
weighted_variance/3 (statistics) 797
wgraph_to_ugraph/2 (wgraphs) 918
when/2 (built-in, ref page) 1286
with_output_to_codes/[2,3,4] (codesio) ... 538
write/[1,2] (built-in) 108
write/[1,2] (built-in, ref page) 1287
write_canonical/[1,2] (built-in) 108
write_canonical/[1,2]
(built-in, ref page) 1288
write_record/[1,2] (csv) 541
write_record_to_codes/2 (csv) 541
write_records/[1,2] (csv) 541
write_term/[2,3] (built-in) 108
write_term/[2,3] (built-in, ref page) 1289
write_term_to_codes/[3,4] (codesio) 538
write_to_codes/[2,3] (codesio) 538
writeq/[1,2] (built-in) 108
writeq/[1,2] (built-in, ref page) 1292

X

xml_parse/[2,3] (xml) 922
xml_pp/1 (xml) 922
xml_subterm/2 (xml) 922

Z

zip/0 (built-in) 238
zip/0 (built-in, ref page) 1293

Keystroke Index

&

& (debugger command) 245, 553

*

* (debugger command) 245

+

+ (debugger command) 245

-

- (debugger command) 245

.

. (debugger command) 246

;

; (top-level command) 25

<

< (debugger command) 246
< (top-level command) 25

=

= (debugger command) 245

?

? (debugger command) 247
? (interruption command) 30
? (top-level command) 26

@

@ (debugger command) 246

[

[(debugger command) 244

]

] (debugger command) 245

^

^ (debugger command) 246
^ (top-level command) 25

\

\ (debugger command) 245

A

a (debugger command) 246
a (interruption command) 30
A (debugger command) 553

B

b (debugger command) 246
b (interruption command) 30
b (top-level command) 25

C

c (debugger command) 242
c (interruption command) 30
C-c < (emacs command) 39
C-c ? (emacs command) 40
C-c C-\ (emacs command) 40
C-c C-b (emacs command) 38
C-c C-c (emacs command) 40
C-c C-c b (emacs command) 38
C-c C-c f (emacs command) 38
C-c C-c p (emacs command) 38
C-c C-c r (emacs command) 38
C-c C-d (emacs command) 39
C-c C-g (emacs command) 39
C-c C-n (emacs command) 39
C-c C-o (emacs command) 39
C-c C-p (emacs command) 38
C-c C-r (emacs command) 38
C-c C-s (emacs command) 39
C-c C-t (emacs command) 38
C-c C-v a (emacs command) 39
C-c C-z (emacs command) 39
C-c RET (emacs command) 40
C-M-a (emacs command) 38
C-M-c (emacs command) 38
C-M-e (emacs command) 38
C-M-h (emacs command) 38
C-M-n (emacs command) 38
C-M-p (emacs command) 38

C-u C-c C-d (emacs command) 39
C-u C-c C-g (emacs command) 39
C-u C-c C-o (emacs command) 39
C-u C-c C-t (emacs command) 39
C-u C-c C-z (emacs command) 39
C-u C-c RET (emacs command) 40
C-u C-x SPC (emacs command) 39
C-x SPC (emacs command) 39

D

d (debugger command) 244
d (interruption command) 30
D (debugger command) 245

E

e (debugger command) 246
e (interruption command) 30
E (debugger command) 246

F

f (debugger command) 243

G

g (debugger command) 244

H

h (debugger command) 247
h (interruption command) 30
h (top-level command) 26

J

j<p> (debugger command) 243

L

l (debugger command) 242

M

M-; (emacs command) 38
M-{ (emacs command) 38
M-} (emacs command) 38
M-a (emacs command) 38
M-e (emacs command) 38
M-h (emacs command) 38
M-RET (emacs command) 39

N

n (debugger command) 245
n (top-level command) 25

O

o (debugger command) 243

P

p (debugger command) 244

Q

q (debugger command) 243

R

r (debugger command) 243
RET (debugger command) 242
RET (top-level command) 25

S

s (debugger command) 242

T

t (debugger command) 244
t (interruption command) 30

U

u (debugger command) 246

V

v (debugger command) 245

W

w (debugger command) 244
W (debugger command) 553

Y

y (top-level command) 25

Z

z (debugger command) 242
z (interruption command) 30

Book Index

!

!, cut 68
!/0 (built-in, ref page) 1040
!/0, cut 68

#

/2, boolean eor 423
#/\ /2 (clpfd) 442
#< /2 (clpfd) 437
#<= /2 (clpfd) 442
#<=> /2 (clpfd) 436, 442
#= /2 (clpfd) 437
#=/2 (all_different/2 option) 444
#=/2 (all_distinct/2 option) 444
#=< /2 (clpfd) 437
#=> /2 (clpfd) 442
#> /2 (clpfd) 437
#>= /2 (clpfd) 437
#\ /1 (clpfd) 442
#\ /2 (clpfd) 442
#\/ /2 (clpfd) 442
#\= /2 (clpfd) 437

$

$= /2 (clpfd) 437
$=< /2 (clpfd) 437
$>= /2 (clpfd) 437

'

'$VAR' 109
'SU_messages':generate_message/3 219
'SU_messages':generate_message/3
(hook, ref page) 1083
'SU_messages':query_abbreviation/3 226
'SU_messages':query_abbreviation/3
(hook, ref page) 1190
'SU_messages':query_class/5 226
'SU_messages':query_class/5
(hook, ref page) 1191
'SU_messages':query_hook/6
(hook, ref page) 1193
'SU_messages':query_input/3 226
'SU_messages':query_input/3
(hook, ref page) 1194
'SU_messages':query_map/4 226
'SU_messages':query_map/4
(hook, ref page) 1196

*

* /2, boolean and 423
* /2, multiplication (evaluable) 125
** /2, float power (evaluable) 128

+

+ (CHR mode) 418
+ /1, identity (evaluable) 125
+ /2, addition (evaluable) 125
+ /2, boolean ior 423
+, mode annotation 937

,

, atom 48
,/2 (built-in, ref page) 974
,/2 (iterator) 77, 1050
,/2 (when/2 condition) 1286
,/2, conjunction 68

-

- (CHR mode) 418
- /1, negation (evaluable) 125
- /2, subtraction (evaluable) 125
-, mode annotation 937
-->, grammar rules 193
-/2 (debugger show control) 287
-> /2 ;/2, if then else 71
-> /2, if then 71
-> ;, if-then-else 71
->/2 (built-in, ref page) 1098

.

. /2, identity (evaluable) 126
., functor 50
.emacs Emacs initialization file 35

/

/ /2, floating division (evaluable) 125
// /2, integer truncated division (evaluable) 125
/\ /2, bitwise conjunction (evaluable) 126

:

: /2, module qualifier 78
:, use in meta_predicate declaration 175
:, use in Module:Goal 168
:- /1, directive 27

;

;/2 (built-in, ref page) 1160
;/2 (when/2 condition) 1286
;/2, disjunction 70

<

< /2, boolean less 423
<, arithmetic less than 124
<-/2 (objects) 702
</2 (built-in, ref page) 1110
<< /2, left shift (evaluable) 126
<</2 (objects) 703

=

=../2 (built-in) 131
=../2 (built-in, ref page) 1275
=/0 (map method) 225
=/2 (built-in) 130
=/2 (built-in, ref page) 1273
=/2 (clpfd:dispatch_global/4 request) 488
=:= /2, boolean equal 423
=:=, arithmetic equal 124
=:=/2 (built-in, ref page) 1054
=< /2, boolean less or equal 423
=<, arithmetic less or equal 124
=</2 (built-in, ref page) 1140
==/2 (built-in) 135
==/2 (built-in, ref page) 1258
=\= /2, boolean not equal 423
=\=, arithmetic not equal 124
=\=/2 (built-in, ref page) 1139

>

> /2, boolean greater 423
>, arithmetic greater than 124
>/2 (built-in, ref page) 1094
>= /2, boolean greater or equal 423
>=, arithmetic greater or equal 124
>=/2 (built-in, ref page) 1141
>> /2, right shift (evaluable) 126
>>/2 (objects) 704

?

? (CHR mode) 418
?, mode annotation 937
?- /1, query 25
?=/2 (built-in) 131
?=/2 (built-in, ref page) 1266
?=/2 (when/2 condition) 1286

@

@</2 (built-in) 135
@</2 (built-in, ref page) 1262
@=</2 (built-in) 135
@=</2 (built-in, ref page) 1264
@>/2 (built-in) 135
@>/2 (built-in, ref page) 1261
@>=/2 (built-in) 135
@>=/2 (built-in, ref page) 1265

[

[], empty grammar body 194
[], empty list 50
[]/0 (debugger condition) 285

^

^ /2, boolean existential quantifier 423
^ /2, existential quantifier 78
^ /2, generic power (evaluable) 129
^/2 (built-in) 192
^/2 (built-in, ref page) 1058
^/2 (input method) 225

_

_, anonymous variable 48

\

\ /1, bitwise negation (evaluable) 126
\ /2, bitwise exclusive or (evaluable) 126
\" (escape sequence) 64
\' (escape sequence) 64
\+ /1, not provable 72
\+/1 (built-in, ref page) 1142
\/ /2, bitwise disjunction (evaluable) 126
\= /2 (built-in) 131
\=/2 (built-in, ref page) 1143
\==/2 (built-in) 135
\==/2 (built-in, ref page) 1263
\‘ (escape sequence) 64
\\ (escape sequence) 64
\a (escape sequence) 64
\b (escape sequence) 64
\d (escape sequence) 64
\e (escape sequence) 64
\f (escape sequence) 64
\LFD (escape sequence) 64
\n (escape sequence) 64
octal-digit...\ (escape sequence) 64
\r (escape sequence) 64
\t (escape sequence) 64
\v (escape sequence) 64
\x*hex-digit...*\ (escape sequence) 64

{

{}/1 (clpqr) 514

|

|, list separator 50

~

~ /1, boolean not 423

0

0’ notation for character conversion 47

A

abolish (definition) 7
abolish/[1,2] (built-in) 183
abolish/[1,2] (built-in, ref page) 962
abort (CHR debug command) 420
abort (debugger command) 246
abort/0 (built-in) 215
abort/0 (built-in, ref page) 964
abort/0 (debugger command control) 288
abs /1, absolute value (evaluable) 127
absolute path 103, 104
absolute_file_name/[2,3]
  (built-in, ref page) 965
accept (top-level command) 25
accepted_hosts/1 (start/1 option) 771
access to streams, random 119
access/1 (absolute_file_name/3 option) ... 966
accumulating parameter 372
acos /1, (evaluable) 128
acosh /1, (evaluable) 128
acot /1, (evaluable) 128
acot2 /2, (evaluable) 128
acoth /1, (evaluable) 128
action condition, breakpoint 285
action execution, breakpoint 258
action variables, debugger 256, 286
action, breakpoint 248, 256
acyclic_term/1 (built-in, ref page) 972
acyclic_term/2 (built-in) 131
add_breakpoint/2 (built-in) 277
add_breakpoint/2 (built-in, ref page) 973
add_edges/3 (ugraphs) 914
add_edges/3 (wgraphs) 919
add_element/3 (sets) 788
add_vertices/3 (ugraphs) 913
add_vertices/3 (wgraphs) 918
address, socket 792
advice breakpoint 247, 262
advice point (definition) 7
advice/0 (debugger condition) 262, 285
agc_count (statistics key) 155
agc_freed (statistics key) 155
agc_margin (prolog flag) 141, 161, 306
agc_nbfreed (statistics key) 155
agc_time (statistics key) 155
aggregate/3 (aggregate) 392
aggregate/4 (aggregate) 392
aggregate_all/3 (aggregate) 392
aggregate_all/4 (aggregate) 392
aggregation 390
alias, of a stream 113
alias, stream (definition) 13, 19
alias/1 (open/4 option) 113, 1154

alias/1 (stream property) 1248
all (absolute_file_name/3 solutions) 968
all (labeling/2 option) 482
all (maximize/3 option) 478
all (minimize/3 option) 478
all solutions, predicates for 193, 941
all/1 (plunit option) 751
all_different/[1,2] (clpfd) 444
all_different_except_0/1 (clpfd) 445
all_distinct/[1,2] (clpfd) 444
all_distinct_except_0/1 (clpfd) 445
all_equal/1 (clpfd) 443
all_equal_reif/2 (clpfd) 444
alphanumeric (definition) 7
among/3 (lex_chain/2 option) 447
among/3 (scalar_product/5 option) 440
analysis, coverage 360
ancestor goal 240
ancestor/2 (debugger condition) 268, 282
ancestors (CHR debug command) 420
ancestors (debugger command) 244
ancestors (definition) 7
and 68
annotate goal (debugger command) 553
annotation 548
anonymous variable 48
anonymous variable (definition) 7
ANSI conformance 5
answer constraint (definition) 7
anti_first_fail (labeling/2 option) 478
any (absolute_file_name/3 file type) 965
anystretchocc/1 (automaton/9 option) 469
API 293
append (absolute_file_name/3 access) 967
append (open/[3,4] mode) 1154
append, avoiding 373
append/[2,5] (lists) 643
append/3 (built-in) 132
append/3 (built-in, ref page) 975
append_length/[3,4] (lists) 647
append_queue/3 (queues) 782
appending, to existing files 114
application builder 327
apply (CHR port) 419
arg/3 (built-in) 131
arg/3 (built-in, ref page) 978
argument (definition) 7, 49
argument, Boolean 429
argument, integer 430
argument, real 431
arguments of terms 131
arguments, command-line 23
arguments, reference page field 937
arguments, types of 937, 939
argv (prolog flag) 141, 334, 1431
arithmetic and character codes 129
arithmetic equality 124
arithmetic errors 123
arithmetic exceptions 123
arithmetic expression 124
arithmetic expressions, evaluating 123
arithmetic functors 125
arithmetic limits 123
arithmetic, predicates for 129, 942
arithmetic_mean/2 (statistics) 796
arity (argument type) 940
arity (definition) 7
arity, of a functor 49
asin /1, (evaluable) 128
asinh /1, (evaluable) 128
ask/0 (debugger command control) 287
ask_query/4 (built-in) 226
ask_query/4 (built-in, ref page) 979
ASPX 768
assert/[1,2] (built-in) 183
assert/[1,2] (built-in, ref page) 981
asserta/[1,2] (built-in) 183
asserta/[1,2] (built-in, ref page) 983
assertion and retraction predicates 180
assertz/[1,2] (built-in) 183
assertz/[1,2] (built-in, ref page) 985
assignment 429
assignment, destructive 135
assignment, satisfying 432
assignment/[2,3] (clpfd) 445
assoc_to_list/2 (assoc) 394
association list 394, 405
associativity of operators 52
asynchronously, calling Prolog 313
at_end_of_line/[0,1] (built-in) 112
at_end_of_line/[0,1] (built-in, ref page) 987
at_end_of_stream/[0,1] (built-in) 112
at_end_of_stream/[0,1] (built-in, ref page) 988
atan /1, (evaluable) 128
atan2 /2, (evaluable) 128
atanh /1, (evaluable) 128
atom (definition) 7
atom (double_quotes flag value) 142
atom garbage collection 160
atom, one-char (definition) 15
atom/1 (built-in, ref page) 990
atom_chars/2 (built-in) 132
atom_chars/2 (built-in, ref page) 991
atom_codes/2 (built-in) 132
atom_codes/2 (built-in, ref page) 992

atom_concat/3 (built-in) 133
atom_concat/3 (built-in, ref page) 993
atom_garbage_collection
(statistics key) 153
atom_length/2 (built-in) 133
atom_length/2 (built-in, ref page) 994
atomic term (definition) 7
atomic/1 (built-in, ref page) 995
atomic_type/[1,2,3] (structs) 804
atoms 48
atoms (statistics key) 153
atoms, canonical representation of 306
atoms_nbfree (statistics key) 154
atoms_nbused (statistics key) 154
atoms_used (statistics key) 154
attribute declaration 397
attribute/1 (declaration) 397
attribute_goal/2 (Module) 399
attributed variables 397
auto-generation of names 549
automaton/[3,8,9] (clpfd) 468
aux (table/3 method/1 value) 449
avl_change/5 (avl) 406
avl_del_max/4 (avl) 407
avl_del_min/4 (avl) 407
avl_delete/4 (avl) 407
avl_domain/2 (avl) 405
avl_fetch/2 (avl) 406
avl_fetch/3 (avl) 406
avl_height/2 (avl) 405
avl_incr/4 (avl) 407
avl_map/2 (avl) 407
avl_map/3 (avl) 408
avl_max/2 (avl) 405
avl_max/3 (avl) 405
avl_member/2 (avl) 406
avl_member/3 (avl) 406
avl_min/2 (avl) 405
avl_min/3 (avl) 405
avl_next/3 (avl) 406
avl_next/4 (avl) 406
avl_prev/3 (avl) 406
avl_prev/4 (avl) 406
avl_range/2 (avl) 405
avl_size/2 (avl) 405
avl_store/4 (avl) 407
avl_to_list/2 (avl) 405
avoiding append 373

B

bab (labeling/2 option) 482
backtrace 244, 266
backtrace (debugger command) 244
backtrace (definition) 7
backtracking 79, 80
backtracking (definition) 7
backtracking, terminating a loop 363
backtracks (fd_statistics/2 option) 486
backward-paragraph (emacs command) 38
bag 409
bag_add_element/4 (bags) 412
bag_del_element/4 (bags) 412
bag_intersect/2 (bags) 412
bag_intersection/2 (bags) 412
bag_length/3 (bags) 412
bag_max/2 (bags) 411
bag_max/3 (bags) 411
bag_member/3 (bags) 411
bag_memberchk/3 (bags) 411
bag_min/2 (bags) 411
bag_subtract/3 (bags) 412
bag_to_list/2 (bags) 410
bag_to_ord_set/2 (bags) 410
bag_to_ord_set/3 (bags) 410
bag_to_set/2 (bags) 410
bag_to_set/3 (bags) 410
bag_union/2 (bags) 412
bag_union/3 (bags) 412
bagof/3 (built-in) 192
bagof/3 (built-in, ref page) 996
bagof_rd_noblock/3 (linda_client) 641
bb_delete/2 (built-in) 188
bb_delete/2 (built-in, ref page) 997
bb_get/2 (built-in) 188
bb_get/2 (built-in, ref page) 998
bb_inf/[3,5] (clpqr) 516
bb_put/2 (built-in) 188
bb_put/2 (built-in, ref page) 999
bb_update/3 (built-in) 188
bb_update/3 (built-in, ref page) 1000
bbkey (argument type) 940
begin_tests/[1,2] (plunit declaration) ... 748
best (labeling/2 option) 482
best (maximize/3 option) 478
best (minimize/3 option) 478
between/3 (between) 413
bid/1 (debugger condition) 265, 284
bin_packing/2 (clpfd) 461
binary tree 394, 405
binding (definition) 8
bisect (labeling/2 option) 479
blackboard 188

`block (predicate property)` 1171
block declaration 88
`block/0 (debugger port value)` 283
`block/1 (built-in, ref page)` 1001
`block/1 (declaration)` 88
`block/1 (predicate property)` 140
blocked goal 241
blocked goal (definition) 8
`blocked goals (debugger command)` 245, 553
`blocked/1 (plunit option)` 749
body (definition) 8
body of a clause 65
`bof (seek/4 method)` 1225
`bool_and/2 (clpfd)` 448
`bool_channel/4 (clpfd)` 448
`bool_or/2 (clpfd)` 448
`bool_xor/2 (clpfd)` 448
Boolean argument 429
`bound/1 (cumulatives/3 option)` 458
`bounded (prolog flag)` 141
`bounding_box/2 (geost/[2,3,4] option)` 463
`bounds (all_different/2 consistency/1 value)` 444
`bounds (all_distinct/2 consistency/1 value)` 444
`bounds (global_cardinality/3 consistency/1 value)` 443
`bounds (scalar_product/5 consistency/1 value)` 440
bounds consistency 429
box, invocation 237
box, invocation (definition) 13
box, procedure 235
box, procedure (definition) 16
break 30
`break (CHR debug command)` 420
`break (debugger command)` 246
`break (top-level command)` 25
`break/0 (built-in)` 30, 86, 215
`break/0 (built-in, ref page)` 1003
`break_level/1 (debugger condition)` ... 284, 286
breakpoint (definition) 8
breakpoint action 248, 256
breakpoint action condition 285
breakpoint action execution 258
breakpoint condition 248
breakpoint conditions 281
breakpoint handling predicates 276
breakpoint identifier 248
breakpoint processing 279
breakpoint specification 247
breakpoint specification (definition) 8
breakpoint test 248
breakpoint test condition 281
breakpoint, advice 247, 262
breakpoint, debugger 247
breakpoint, generic 255
breakpoint, line 39
breakpoint, setting 39
breakpoint, specific 255
`breakpoint_expansion/2 (hook, ref page)` 1004
`breakpoint_expansion/2 (user, hook)` .. 271, 286
buffer (definition) 8
builder, application 327
built-in operators 53
built-in operators, list of 55
built-in predicate (definition) 8
built-in predicates, annotations 938
built-in predicates, list of 941
`built_in (predicate property)` 1171
`built_in/0 (predicate property)` 139
`Button (Tk event type)` 858
`button (Tk widget)` 832
`ButtonPress (Tk event type)` 858
`ButtonRelease (Tk event type)` 858
byte (argument type) 940
byte list (definition) 8
`byte_count/2 (built-in)` 115, 118
`byte_count/2 (built-in, ref page)` 1005

C

C errors, functions for 1295
C functions for Exceptions 1296
C functions for File and Stream Handling 1296
C functions for Foreign Interface 1296
C functions for I/O 1295
C functions for initialization 1299
C functions for memory management 1299
C functions for signal handling 1300
C functions for terms 1300
C functions for type tests 1300
C functions, return values, errors 1295
`call (CHR port)` 419
`call (leashing mode)` 238
call errors 81
call exceptions 81
call, procedure 65, 80
`call/[1,2,...,255] (built-in, ref page)` 1006
`call/0 (debugger port value)` 283
`call/1 (clpfd:dispatch_global/4 request)` 489
`call_cleanup/2 (built-in, ref page)` 1007

call_residue_vars/2 (built-in, ref page) ... 1009
callable term (definition) ... 8
callable/1 (built-in, ref page) ... 1010
calling Prolog asynchronously ... 313
calling Prolog from C ... 310
CallSpec ... 543
canonical representation of atoms ... 306
canvas (Tk widget) ... 832
card/2, boolean cardinality ... 423
case-normalized path ... 104
case/[3,4] (clpfd) ... 450
cast/1 (structs) ... 803
Casting ... 803
catch/3 (built-in) ... 202
catch/3 (built-in, ref page) ... 1011
catching unknown procedures ... 182
ceiling /1, (evaluable) ... 127
central_moment/3 (statistics) ... 796
changing prompt ... 108
changing type-in module ... 170
char (argument type) ... 940
char list (definition) ... 8
char/1 (map method) ... 225
char_code/2 (built-in) ... 132
char_code/2 (built-in, ref page) ... 1012
char_conversion (prolog flag) ... 8, 141
char_conversion/2 (built-in, ref page) ... 1013
character code (definition) ... 8
character code set (definition) ... 8
character codes, arithmetic and ... 129
character codes, lists of ... 50
character encoding ... 115
character escaping ... 51
character I/O, predicates for ... 119, 942
character set ... 60, 115
character, EOF ... 5
character, interrupt ... 5
character-conversion ... 1013, 1029
character-conversion mapping (definition) ... 8
character-type mapping (definition) ... 9
character_count/2 (built-in) ... 115, 118
character_count/2 (built-in, ref page) ... 1014
characters, conversion to character code ... 47
characters, conversion to integers ... 129
characters, input and output of ... 111
characters, strings of ... 50
chars (argument type) ... 940
chars (double_quotes flag value) ... 142
check, occurs (definition) ... 15
check_guard_bindings (CHR option) ... 417
checkbag/2 (bags) ... 409
checkbutton (Tk widget) ... 832
checker, constraint ... 468
checking indexicals ... 496
choice (statistics key) ... 152
choice stack ... 148
choice_free (statistics key) ... 154
choice_used (statistics key) ... 154
choicepoints (definition) ... 9
CHOICESTKSIZE (system property) ... 230
chr_constraint/1 (CHR declaration) ... 417
chr_flag/3 (chr) ... 421
chr_leash/1 (chr) ... 420
chr_notrace/0 (chr) ... 420
chr_option/2 (CHR declaration) ... 416
chr_show_store/1 (chr) ... 421
chr_trace/0 (chr) ... 420
chr_type/1 (CHR declaration) ... 418
circuit/[1,2] (clpfd) ... 455
circuit/1 (all_different/2 option) ... 444
circuit/1 (all_distinct/2 option) ... 444
circuit/1 (assignment/3 option) ... 445
clash, name ... 172
clash, name (definition) ... 15
class/1 (objects) ... 705
class_ancestor/2 (objects) ... 708
class_method/1 (objects) ... 709
class_of/2 (objects) ... 711
class_superclass/2 (objects) ... 710
classes, error ... 204
Classname, Fully Qualified ... 608
clause ... 65
clause (definition) ... 9
clause, guarded ... 379
clause, guarded (definition) ... 12
clause, instance of ... 78
clause, unit ... 66
clause, unit (definition) ... 20
clause/[2,3] (built-in) ... 185
clause/[2,3] (built-in, ref page) ... 1015
clauseref/5 (source information descriptor) ... 1093
clauses, database references to ... 182
clauses, declarative interpretation of ... 78
clauses, printing ... 110
clauses, procedural interpretation of ... 78
cleanup/1 (plunit option) ... 749
close (Tcl command) ... 827
close/[1,2] (built-in, ref page) ... 1017
close/1 (built-in) ... 118
close_all_streams/0 (file_systems) ... 573
close_client/0 (linda_client) ... 640
closing a file ... 118
closing a stream ... 118
clpfd:dispatch_global/4 ... 488
clpfd:full_answer/0 ... 487
CLSID ... 542

clumped/2 (lists) 658
clumps/2 (lists) 658
code (argument type) 940
code list (definition) 9
code, character (definition) 8
code, glue (definition) 12
code, source (definition) 18
code, unreachable 383
codes (argument type) 940
codes (double_quotes flag value) 142
collection, garbage 143
collection, garbage (definition) 11
colored resource 458
colored/1
(multi_cumulative/[2,3] resource) 458
comclient_clsid_from_
progid/2 (comclient) 543
comclient_create_instance/2 (comclient) .. 544
comclient_equal/2 (comclient) 543
comclient_exception_code/2 (comclient) ... 545
comclient_exception_
culprit/2 (comclient) 545
comclient_exception_
description/2 (comclient) 545
comclient_garbage_collect/0 (comclient) .. 543
comclient_get_active_
object/2 (comclient) 544
comclient_iid_from_name/2 (comclient) 544
comclient_invoke_method_
fun/3 (comclient) 544
comclient_invoke_method_
proc/2 (comclient) 544
comclient_invoke_put/3 (comclient) 544
comclient_is_exception/1 (comclient) 545
comclient_is_object/1 (comclient) 543
comclient_name_from_iid/2 (comclient) 544
comclient_progid_from_
clsid/2 (comclient) 543
comclient_release/1 (comclient) 544
comclient_valid_object/1 (comclient) 543
ComInArg 542, 543
comint-interrupt-subjob (emacs command) ... 40
comint-quit-subjob (emacs command) 40
command (debugger command) 246
command-line arguments 23
command/1 (debugger condition) ... 257, 284, 285
commands, debug 241
comment-dwim (emacs command) 38
communication, process 638, 792
compactcode (compiling flag value) 84, 141
compactcode (definition) 9
compare/3 (built-in, ref page) 1019
comparison of terms 134
comparison, of numbers 124
compilation, JIT 84, 231
compilation_mode/1
(load_files/2 option) 1115
compile (definition) 9
compile-buffer (emacs command) 38
compile-file (emacs command) 38
compile-predicate (emacs command) 38
compile-region (emacs command) 38
compile/1 (built-in) 167
compile/1 (built-in, ref page) 1020
compiled (predicate property) 1171
compiled/0 (predicate property) 139
compiling 23
compiling (prolog flag) 9, 84, 141
complement/2 (ugraphs) 914
compose/3 (ugraphs) 914
compound term (definition) 9
compound, terms 49
compound/1 (built-in, ref page) 1021
computation rule 80
ComValue 542
concat (Tcl command) 819
concepts, FDBG 547
condition, breakpoint 248
condition/1 (plunit option) 749
conditional compilation 92
conditional compilation (definition) 9
conditional spypoint 248
conditionals 377
conditions, breakpoint 281
conformance, ANSI 5
conjunction 68
conjunction (definition) 9
connection_timeout/1
(odbc_db_open/4 option) 739
cons/3 (lists) 649
consistency errors 211
consistency, bounds 429
consistency, domain 429
consistency/1 (all_different/2 option) ... 444
consistency/1 (all_distinct/2 option) 444
consistency/1 (assignment/3 option) 445
consistency/1
(global_cardinality/3 option) 443
consistency/1 (scalar_product/5 option) .. 440
consistency_error/[3,4] (error class) 206
console-based executable (definition) 9
constant 47
constant (definition) 9
constraint 429
constraint checker 468
constraint event 547

constraint, answer (definition) 7
constraint, global 477, 487
constraint, indexical 477
constraints, forgetting 435
constraints, posting 434
consult (definition) 9
consult-buffer (emacs command) 38
consult-file (emacs command) 38
consult-predicate (emacs command) 38
consult-region (emacs command) 38
consult/1 (built-in, ref page) 1022
consulting 23
consume_layout/1
(read_term/[2,3] option) 1203
contains_term/2 (terms) 905
contains_var/2 (terms) 905
context errors 211
context, load 147
context-free grammars 193
context_error/[2,3] (error class) 206
control constructs in grammar rules 194
control structure 68
control structure (definition) 9
control, predicates for 82, 943
conversions, term 305
converting into module files 167
convlist/3 (lists) 654
copy_term/[2,3] (built-in) 133
copy_term/[2,3] (built-in, ref page) 1023
core (statistics key) 153
corners/1 (geost/[2,3,4] option) 463
correlation/3 (statistics) 797
correspond/4 (lists) 643
cos /1, (evaluable) 127
cosh /1, (evaluable) 127
cost/1 (network_flow/3 option) 455
cost/2 (all_different/2 option) 445
cost/2 (all_distinct/2 option) 445
cost/2 (assignment/3 option) 445
cost/2 (global_cardinality/3 option) 443
cot /1, (evaluable) 127
coth /1, (evaluable) 128
count /3, (iterator) 77
count/3 (iterator) 1049
count/4 (clpfd) 443
counter 359
counterseq/1 (automaton/9 option) 470
covariance/3 (statistics) 797
coverage analysis 360
coverage site 360
coverage_data/1 (built-in) 361
coverage_data/1 (built-in, ref page) 1025
create/2 (objects) 712
create_mutable/2 (built-in) 136
create_mutable/2 (built-in, ref page) 1026
creating new files 114
creep (CHR debug command) 420
creep (debugger command) 242
creep (definition) 10
cross-referencer 383
CSP 430
cumlist/[4,5,6] (lists) 650
cumulative resource 458
cumulative/[1,2] (clpfd) 456
cumulative/1 (geost/[2,3,4] option) 462
cumulative/1
(multi_cumulative/[2,3] resource) 458
cumulatives/[2,3] (clpfd) 457
current (seek/4 method) 1225
current frame 240, 241
current input 106
current input stream 113
current input streams 114, 116, 117
current operators 54
current output 106
current output stream 113
current output streams 114, 116, 117
current stream 117
current_atom/1 (built-in, ref page) 1027
current_breakpoint/5 (built-in) 265, 277
current_breakpoint/5
(built-in, ref page) 1028
current_char_conversion/2
(built-in, ref page) 1029
current_class/1 (objects) 714
current_directory/[1,2] (file_systems) ... 576
current_host/1 (sockets) 795
current_input/1 (built-in) 116
current_input/1 (built-in, ref page) 1030
current_key/2 (built-in) 188
current_key/2 (built-in, ref page) 1031
current_module/[1,2] (built-in) 173
current_module/[1,2]
(built-in, ref page) 1032
current_op/3 (built-in) 54
current_op/3 (built-in, ref page) 1034
current_output/1 (built-in) 117
current_output/1 (built-in, ref page) 1035
current_predicate/[1,2]
(built-in, ref page) 1036
current_predicate/2 (built-in) 173
current_prolog_flag/2
(built-in, ref page) 1038
current_stream/3 (built-in) 117
current_stream/3 (built-in, ref page) 1039
currently loaded modules 172, 173

cursor (definition) ... 10
customize-group (emacs command) ... 35
customize-variable (emacs command) ... 35
cut ... 361
cut (definition) ... 10
cut and generate-and-test ... 363
cut, green ... 69
cut, local ... 72
cut, placement of ... 363
cut, red ... 69
cut, soft ... 72
cycles/1 (read_term/[2,3] option) ... 1202
cycles/1 (write_term/[2,3] option) ... 1290
cyclic list ... 14
cyclic term ... 1202, 1290
cyclic terms ... 82
cyclic_term/1 (terms) ... 905

D

data areas, used by Prolog ... 148
data resource ... 1438
data tables ... 364
data type ... 47
data types, foreign ... 799
data_file/1 (zinc option) ... 933
database ... 96, 659
database (definition) ... 10
database modification ... 180
database reference ... 182
database references to clauses ... 182
database, internal ... 187
database, loading ... 96
database, predicates for ... 189, 945
database, saving ... 96
datime/[1,2] (system) ... 808
db-spec ... 659
db_reference (definition) ... 10
db_reference/1 (built-in, ref page) ... 1041
dcg, grammar rule expansion ... 1259
dcgc_count (statistics key) ... 155
dcgc_time (statistics key) ... 155
DCG ... 193
debug (CHR option) ... 417
debug (debugging flag value) ... 141, 1044
debug (definition) ... 10
debug (FD flag) ... 490
debug (prolog flag) ... 141, 323
debug commands ... 241
debug/0 (built-in) ... 237
debug/0 (built-in, ref page) ... 1042
debug/0 (debugger mode control) ... 288
debug_message/0 (objects) ... 715
debugcode (compiling flag value) ... 84, 141
debugcode (definition) ... 10
debugger action variables ... 256, 286
debugger breakpoint ... 247
debugger port ... 283
debugger, port ... 236
debugger-ancestor ... 282
debugger-parent ... 282
debugger/0 (debugger condition) ... 262, 285
debugger/0 (map method) ... 225
debugger_command_hook/2 (hook, ref page) ... 1043
debugger_command_hook/2 (user, hook) ... 272, 278
debugger_print_options (prolog flag) ... 142, 235, 246, 257, 287, 323, 1167, 1290
debugging ... 235
debugging (debugger command) ... 245
debugging (prolog flag) ... 141, 323
debugging messages ... 240
debugging modules ... 172
debugging predicates ... 237
debugging, predicates for ... 289, 946
debugging/0 (built-in) ... 29, 239
debugging/0 (built-in, ref page) ... 1044
dec10 (syntax_errors flag value) ... 145, 212
declaration (definition) ... 10
declaration (predicate annotation) ... 938
declaration, attribute ... 397
declaration, block ... 88
declaration, discontiguous ... 88
declaration, dynamic ... 88
declaration, include ... 90
declaration, is/2 ... 90
declaration, meta-predicate ... 89
declaration, meta_predicate ... 175
declaration, mode ... 90
declaration, module ... 89, 168
declaration, multifile ... 87
declaration, operator ... 87
declaration, predicate ... 87
declaration, public ... 90
declaration, volatile ... 88
declarations, mode ... 177
declarative semantics ... 78
declaring nondeterminacy ... 368
declaring operators ... 54
decreasing/[1,2] (clpfd) ... 446
decreasing_prefix/[3,4] (lists) ... 658
default (open/4 if_exists value) ... 1157
default (table/3 method/1 value) ... 449
define_method/3 (objects) ... 716

definite clause grammars 193
definition, procedure 80
defrag_count (statistics key) 155
defrag_time (statistics key) 155
defragmentation (statistics key) 153
deinit function 296
deinit function (definition) 10
del_edges/3 (ugraphs) 914
del_edges/3 (wgraphs) 919
del_element/3 (sets) 788
del_vertices/3 (ugraphs) 914
del_vertices/3 (wgraphs) 919
delete (delete_directory/2
if_nonempty option value) 572
delete/[3,4] (lists) 643
delete_directory/[1,2] (file_systems) 572
delete_file/1 (file_systems) 572
deprecated (predicate annotation) 938
depth/1 (debugger condition) 251, 281
depth_bound/2 (terms) 906
descendant_of/2 (objects) 717
destroy/1 (objects) 718
destructive assignment 135
determinacy checker 367
determinacy detection, last clause 366
determinacy detection, via indexing 365
determinate (definition) 10
development (predicate annotation) 938
development system 5
development system (definition) 10
dialect (prolog flag) 94, 142
dif/2 (built-in) 131
dif/2 (built-in, ref page) 1045
diffn/[1,2] (clpfd) 460
direct_message/4 (objects) 719
direction/1 (close/2 option) 1017
directive 23, 24, 65, 66
directive (definition) 10
directives, in files being compiled 86
directories 571
directory
(absolute_file_name/3 file type) 966
directory (load context key) 147
directory specification 100
directory_exists/1 (file_systems) 572
directory_exists/2 (file_systems) 572
directory_member_of_directory/2
(file_systems) 573
directory_member_of_directory/3
(file_systems) 573
directory_member_of_directory/4
(file_systems) 573
directory_members_of_
directory/[1,2,3] (file_systems) 573
directory_must_exist/1 (file_systems) 572
directory_must_exist/2 (file_systems) 572
directory_property/[2,3] (file_systems) .. 574
disable this (debugger command) 246
disable_breakpoints/1 (built-in) 278
disable_breakpoints/1
(built-in, ref page) 1046
discontiguous declaration 88
discontiguous/1 (built-in, ref page) 1047
discontiguous/1 (declaration) 88
discontiguous_warnings
(prolog flag) 85, 88, 142, 323
disjoint/2 (sets) 788
disjoint_union/3 (sets) 790
disjoint1/[1,2] (clpfd) 459
disjoint2/[1,2] (clpfd) 460
disjunction 70, 377
disjunction (definition) 10
disjunctive/1 (geost/[2,3,4] option) 462
dispatch_global/4 (clpfd) 488
display (debugger command) 244
display/0 (debugger show control) 287
display/1 (built-in) 110
display/1 (built-in, ref page) 1048
display/1 (tk_new/2 option) 867
displaying statistics 150
dispose/1 (structs) 802
distinctions among write predicates 109
div /2, integer floored
division (evaluable) 125
do loop 72
do loop (definition) 10
do/2 (built-in, ref page) 1049
do/2, do loop 72
dom/1 (fd_global/[3,4] option) 489
dom_w_deg (labeling/2 option) 479
domain (all_different/2
consistency/1 value) 444
domain (all_distinct/2
consistency/1 value) 444
domain (global_cardinality/3
consistency/1 value) 443
domain (scalar_product/5
consistency/1 value) 440
domain consistency 429
domain errors 208
domain store 429
domain variable 430
domain/2 (clpfd) 441
domain/3 (clpfd) 441
domain_error/[2,4] (error class) 206

double_quotes (prolog flag) 19, 51, 142
down (labeling/2 option) 480
dpgc_count (statistics key) 155
dpgc_time (statistics key) 155
dump/3 (clpqr) 517
dynamic (predicate property) 1171
dynamic code, indexing of 182
dynamic code, semantics of 180
dynamic creation of modules 171
dynamic declaration 88
dynamic predicate (definition) 10
dynamic predicates, importing 174
dynamic resource 296
dynamic, procedures and declarations 181
dynamic/0 (predicate property) 140
dynamic/1 (built-in, ref page) 1051
dynamic/1 (declaration) 88
dynamic_programming/1
(geost/[2,3,4] option) 463

E

Eclipse 32
edges/2 (ugraphs) 913
edges/2 (wgraphs) 918
effect, side (definition) 18
efficiency and specifying streams 106
efficiency, increasing 359
element/2 (clpfd) 448
element/3 (clpfd) 448
elif/1 (conditional directive) 92
else/0 (conditional directive) 92
Emacs initialization file .emacs 35
emacs interface 34
empty list (definition) 14
empty_assoc/1 (assoc) 394
empty_avl/1 (avl) 405
empty_bag/1 (bags) 411
empty_fdset/1 (clpfd) 492
empty_interval/2 (clpfd) 492
empty_queue/1 (queues) 781
enable this (debugger command) 246
enable_breakpoints/1 (built-in) 278
enable_breakpoints/1
(built-in, ref page) 1052
enabling and disabling garbage collection 158
encoded string 294
encoded string (definition) 11
encoding 115
encoding, UTF-8 294
encoding/1 (open/4 option) 1155
encoding/1 (stream property) 1249
encoding_signature/1 (open/4 option) 1155
encoding_signature/1 (stream property) .. 1249
end of line 987
end of stream 988
end-of-file on character input 111
end-of-file, characters 1003
end_class/[0,1] (objects) 720
end_of_file 107
end_of_file atom 1199
end_of_stream/1 (stream property) 1248
end_tests/1 (plunit declaration) 748
endif/0 (conditional directive) 92
ensure_loaded/1 (built-in) 167
ensure_loaded/1 (built-in, ref page) 1053
entailed/1 (clpqr) 515
entailment 430
entailments (fd_statistics/2 option) 486
Enter (Tk event type) 858
entry (Tk widget) 832
enum (labeling/2 option) 479
enumerating solutions to a goal 191, 192
environ/[2,3] (system) 808
environment variables 228
eof (seek/4 method) 1225
eof (Tcl command) 827
eof_action/1 (open/4 option) 1154
eof_action/1 (stream property) 1248
eof_code (open/4 eof_action value) 1154
EOF character 5
eol/1 (open/4 option) 1156
eol/1 (stream property) 1249
Epoch 574
equality of floats 124
equality, arithmetic 124
equality, unification 130
erase/1 (built-in) 183
erase/1 (built-in, ref page) 1055
error (absolute_file_name/3
fileerrors value) 210
error (absolute_file_name/3 fileerrors) .. 967
error (delete_directory/2
if_nonempty option value) 572
error (open/4 eof_action value) 1154
error (open/4 if_exists value) 1157
error (overflow FD flag value) 490
error (syntax_errors flag value) 145, 212
error (unknown flag value) 146, 203
error classes 204
error handling 289
error term 201
error, syntax 28
error/1 (plunit option) 751
error/2 (plunit option) 751
error_exception/1 (hook, ref page) 1056

`error_exception/1 (user, hook)` 202, 289
errors 201
errors, arithmetics 123
errors, calls 81
errors, consistency 211
errors, context 211
errors, domain 208
errors, evaluation 209
errors, existence 210
errors, instantiation 207
errors, permission 210
errors, representation 209
errors, resource 212
errors, streams 113
errors, syntax 212
errors, system 213
errors, type 208
errors, uninstantiation 207
escape sequence 64
escape sequence (definition) 11
escaping, character 51
`eval (Tcl command)` 822
evaluating arithmetic expressions 123
evaluation errors 209
`evaluation_error/[2,4] (error class)` 206
event, constraint 547
event, FDBG 547
event, labeling 547
`exception (leashing mode)` 238
exception handling 289
exception handling in C 314
exception term 201, 314
`exception/1 (debugger port value)` 283
`exception/1 (plunit option)` 751
exceptions 201
exceptions, arithmetic 123
Exceptions, C functions for 1296
exceptions, calls 81
exceptions, global handler 203
exceptions, module name expansion 939
exceptions, streams 113
`exclude/[3,4,5] (lists)` 654
`executable (absolute_file_name/3 access)` 967
`executable (absolute_file_name/3 file type)` 966
executable, console-based (definition) 9
executable, stand-alone 322
executable, stand-alone (definition) 18
executable, windowed (definition) 21
`execute (absolute_file_name/3 access)` 967
execution 29
execution profiling 359
execution state, predicates for 215, 947
execution, nested 30
`execution_state/[1,2] (built-in)` 264, 266, 278
`execution_state/[1,2] (built-in, ref page)` 1057
`exist (absolute_file_name/3 access)` 967
existence errors 210
`existence_error/[2,5] (error class)` 206
existential quantifier 192, 1058
`exit (CHR port)` 419
`exit (leashing mode)` 238
`exit/0 (clpfd:dispatch_global/4 request)` 488
`exit/1 (debugger port value)` 283
`exited/1 (debugger condition)` 267, 282
exiting 30
`exp /1, exponent (evaluable)` 128
`exp /2, float power (evaluable)` 128
`expand_term/2 (built-in)` 92
`expand_term/2 (built-in, ref page)` 1059
expansion, macro 1091
expansion, module name 5, 89
expansion, module name (definition) 15
explicit unification 130
export (definition) 11
`exported (predicate property)` 1171
`exported/0 (predicate property)` 140
exporting predicates from a module 166
expr (argument type) 940
`expr (Tcl command)` 817
expression, arithmetic 124
extended runtime system (definition) 11
`extended_characters/1 (xml_parse/3 option)` 922
extension 430
`extensions/1 (absolute_file_name/3 option)` 965

F

fact (definition) 11
`fail (absolute_file_name/3 fileerrors value)` 210
`fail (absolute_file_name/3 fileerrors)` ... 968
`fail (CHR debug command)` 420
`fail (CHR port)` 419
`fail (debugger command)` 243
`fail (delete_directory/2 if_nonempty option value)` 572
`fail (leashing mode)` 238
`fail (overflow FD flag value)` 490
`fail (syntax_errors flag value)` 146, 212

fail (unknown flag value) 146, 204
fail/0 (built-in, ref page) 1060
fail/0
(clpfd:dispatch_global/4 request) 488
fail/0 (debugger port value) 283
fail/0 (plunit option) 751
fail/1 (debugger command control) 288
false/0 (built-in, ref page) 1061
false/0 (debugger condition) 285
fd_batch/1 (clpfd) 435
fd_closure/2 (clpfd) 491
fd_constraint (predicate property) 1171
fd_constraint/0 (predicate property) 139
fd_degree/2 (clpfd) 491
fd_dom/2 (clpfd) 491
fd_failures/2 (clpfd) 491
fd_flag/3 (clpfd) 490
fd_getrand/1 (clpfd) 490
fd_global/[3,4] (clpfd) 489
fd_max/2 (clpfd) 490
fd_min/2 (clpfd) 490
fd_neighbors/2 (clpfd) 491
fd_purge/1 (clpfd) 435
fd_set/2 (clpfd) 491
fd_set_failures/2 (clpfd) 491
fd_setrand/1 (clpfd) 490
fd_size/2 (clpfd) 490
fd_statistics/[0,2] (clpfd) 486
fd_var/1 (clpfd) 490
FD set 491
fdbg_annotate/[3,4] (fdbg) 560
fdbg_assign_name/2 (fdbg) 551
fdbg_current_name/2 (fdbg) 551
fdbg_get_name/2 (fdbg) 552
fdbg_guard/3 (fdbg) 566
fdbg_label_show/3 (fdbg) 552
fdbg_labeling_step/2 (fdbg) 554
fdbg_legend/[1,2] (fdbg) 560
fdbg_off/0 (fdbg) 550
fdbg_on/[0,1] (fdbg) 550
fdbg_output 550
fdbg_show/2 (fdbg) 552
fdbg_start_labeling/1 (fdbg) 554
fdbg_transform_actions/3 (fdbg) 560
FDBG concepts 547
FDBG event 547
FDBG output stream 550
fdset_add_element/3 (clpfd) 492
fdset_complement/2 (clpfd) 493
fdset_del_element/3 (clpfd) 493
fdset_disjoint/2 (clpfd) 493
fdset_eq/2 (clpfd) 493
fdset_intersect/2 (clpfd) 493
fdset_intersection/[2,3] (clpfd) 493
fdset_interval/3 (clpfd) 492
fdset_max/2 (clpfd) 492
fdset_member/2 (clpfd) 493
fdset_min/2 (clpfd) 492
fdset_parts/4 (clpfd) 492
fdset_singleton/2 (clpfd) 492
fdset_size/2 (clpfd) 492
fdset_subset/2 (clpfd) 493
fdset_subtract/3 (clpfd) 493
fdset_to_list/2 (clpfd) 492
fdset_to_range/2 (clpfd) 492
fdset_union/[2,3] (clpfd) 493
fdvar_portray/3 (fdbg, hook) 558
fetch_slot/2 (objects) 721
ff (labeling/2 option) 478
ffc (labeling/2 option) 479
file (load context key) 147
File and Stream Handling, C functions for ... 1296
file and stream handling, predicates for ... 120, 948
file specification 100, 103
file specification (definition) 11
file, closing 118
file, initialization 102
file, module (definition) 15
file, PO (definition) 17
file/1 (debugger condition) 253, 283
file_errors/1
(absolute_file_name/3 option) 967
file_errors/1 (read_term/[2,3] option) ... 210
file_exists/1 (file_systems) 572
file_exists/2 (file_systems) 572
file_member_of_directory/[2,3,4]
(file_systems) 573
file_members_of_directory/[1,2,3]
(file_systems) 574
file_must_exist/1 (file_systems) 572
file_must_exist/2 (file_systems) 572
file_name/1 (stream property) 1248
file_property/[2,3] (file_systems) 575
file_search_path/2 (hook, ref page) 1062
file_search_path/2 (user, hook) 100
file_spec (argument type) 940
file_type/1
(absolute_file_name/3 option) 965
fileerrors (prolog flag) 85, 114, 143, 210, 211, 967, 970, 1212, 1222, 1255
fileerrors/1
(absolute_file_name/3 option) 967
fileerrors/1
(read_term/[2,3] option) 210, 211
filename manipulation, predicates for 105, 948
fileref/2 (source
information descriptor) 1093

files ... 571
files, appending to existing ... 114
files, creating new ... 114
files, opening ... 114
files, searching for in a library ... 99
`find this (debugger command)` ... 246
`find_chr_constraint/1 (chr)` ... 421
`findall/[3,4] (built-in)` ... 192
`findall/[3,4] (built-in, ref page)` ... 1064
finding nondeterminacy ... 367
`first (absolute_file_name/3 solutions)` ... 968
`first_bound/2 (clpfd)` ... 477, 480
`first_fail (labeling/2 option)` ... 478
`fixall/2 (geost/[2,3,4] option)` ... 463
`fixme/1 (plunit option)` ... 749
`flit/0 (debugger command control)` ... 287
`flit/2 (debugger command control)` ... 287
`float (CHR type)` ... 418
`float /1, coercion (evaluable)` ... 126
`float/1 (built-in, ref page)` ... 1067
`float_format/1 (write_term/[2,3] option)` ... 1290
`float_fractional_part /1, fractional part (evaluable)` ... 126
`float_integer_part /1, coercion (evaluable)` ... 126
floats, equality of ... 124
floats, range of ... 123
floats, syntax of ... 48
`floor /1, (evaluable)` ... 127
floundered query (definition) ... 11
floundering ... 80
`flush_output/[0,1] (built-in, ref page)` ... 1068
`flush_output/1 (built-in)` ... 118
flushing output ... 118
`for (Tcl command)` ... 821
`for /3, (iterator)` ... 77
`for/3 (iterator)` ... 1049
`forall/1 (plunit option)` ... 749
`forall/2 (aggregate)` ... 392
`force/1 (abolish/2 option)` ... 962
`force/1 (close/2 option)` ... 1017
`foreach (Tcl command)` ... 821
`foreach /2, (iterator)` ... 76
`foreach/2 (aggregate)` ... 392
`foreach/2 (iterator)` ... 1049
`foreacharg /2, (iterator)` ... 76
`foreacharg /3, (iterator)` ... 76
`foreacharg/2 (iterator)` ... 1049
`foreacharg/3 (iterator)` ... 1049
foreign data types ... 799
Foreign Interface, C functions for ... 1296
foreign interface, predicates for ... 949
foreign language interface ... 293, 295
foreign predicate (definition) ... 11
foreign resource ... 295
foreign resource (definition) ... 11
foreign resource linker ... 300
foreign resource, linked ... 295, 302
foreign resource, prelinked (definition) ... 16
foreign terms (definition) ... 799
`foreign/[2,3] (hook, ref page)` ... 1069
`foreign/[2,3] (Module, hook)` ... 296
foreign_arg (argument type) ... 940
`foreign_resource (absolute_file_name/3 file type)` ... 966
`foreign_resource/2 (hook, ref page)` ... 1070
`foreign_resource/2 (Module, hook)` ... 296
foreign_spec (argument type) ... 940
`foreign_type/2 (structs)` ... 801
forgetting constraints ... 435
formal syntax ... 56
`format (Tcl command)` ... 823
format-command ... 217
`format/[2,3] (built-in)` ... 112
`format/[2,3] (built-in, ref page)` ... 1071
`format/1 (xml_parse/3 option)` ... 922
`format_to_codes/[3,4] (codesio)` ... 538
formatted printing ... 112
`forward-paragraph (emacs command)` ... 38
`fractile/3 (statistics)` ... 798
`frame (Tk widget)` ... 833
frame, current ... 240, 241
`free_of_term/2 (terms)` ... 905
`free_of_var/2 (terms)` ... 905
`free_search/1 (zinc option)` ... 932
`free_variables/4 (aggregate)` ... 392
`freeze/2 (built-in, ref page)` ... 1077
`fromto /4, (iterator)` ... 76
`fromto/4 (iterator)` ... 1049
`frozen/2 (built-in, ref page)` ... 1078
full stop ... 78
full stop, use of ... 107, 108, 1199
`full_answer/0 (clpfd)` ... 487
Fully Qualified Classname ... 608
function prototype ... 5
function, deinit ... 296
function, deinit (definition) ... 10
function, init ... 296
function, init (definition) ... 13
function, objective ... 430
function, partial ... 430
functions for C errors ... 1295
functor (definition) ... 11
functor, principal ... 131
functor, principal (definition) ... 49

functor/3 (built-in) 131
functor/3 (built-in, ref page) 1079
functors 49
functors, arithmetic 125
fzn_dump/[2,3] (zinc) 928
fzn_file/1 (zinc option) 934
fzn_identifier/3 (zinc) 926
fzn_load_file/2 (zinc) 925
fzn_load_stream/2 (zinc) 924
fzn_objective/2 (zinc) 926
fzn_output/1 (zinc) 926
fzn_post/1 (zinc) 925
fzn_run_file/[1,2] (zinc) 928
fzn_run_stream/[1,2] (zinc) 927
fzn_solve/1 (zinc) 925

G

garbage collection 143, 149, 156, 962
garbage collection (definition) 11
garbage collection, atoms 160
garbage collection, enabling and disabling 158
garbage collection, invoking directly 160
garbage collection, monitoring 158
garbage_collect/0 (built-in) 160
garbage_collect/0 (built-in, ref page) ... 1081
garbage_collect_atoms/0 (built-in) 161
garbage_collect_atoms/0 (built-in, ref page) 1082
garbage_collection (statistics key) 153
gauge 577
gc (prolog flag) 143, 158
gc_count (statistics key) 154
gc_freed (statistics key) 154
gc_margin (prolog flag) 143, 160
gc_time (statistics key) 155
gc_trace (prolog flag) 143, 158, 159
gcd /2, greatest common divisor (evaluable) 127
gen_assoc/3 (assoc) 394
gen_int/1 (between) 413
gen_label/3 (trees) 909
gen_nat/1 (between) 413
generalization/1 (cumulatives/3 option) .. 458
generalized predicate specification (definition) .. 12
generate-and-test, use with cut 363
generate_debug_info (CHR flag) 421
generate_message/3 (hook, ref page) 1083
generate_message/3 (SU_messages) 219
generate_message_hook/3 (hook, ref page) 1085
generate_message_hook/3 (user, hook) 219
generate_unique_name (open/4 if_exists value) 1157
generic breakpoint 255
geometric_mean/2 (statistics) 796
geost/[2,3,4] (clpfd) 461
get/1 (debugger condition) 284
get_address/3 (structs) 802
get_assoc/3 (assoc) 394
get_atts/2 (Module) 397
get_byte/[1,2] (built-in) 111
get_byte/[1,2] (built-in, ref page) 1087
get_char/[1,2] (built-in) 111
get_char/[1,2] (built-in, ref page) 1088
get_code/[1,2] (built-in) 111
get_code/[1,2] (built-in, ref page) 1089
get_contents/3 (structs) 802
get_label/3 (trees) 909
get_mutable/2 (built-in) 136
get_mutable/2 (built-in, ref page) 1090
get_next_assoc/4 (assoc) 394
get_prev_assoc/4 394
getrand/1 (random) 784
gets (Tcl command) 827
glob/1 (absolute_file_name/3 option) 966
global (Tcl command) 831
global constraint 477, 487
global exception handler 203
global stack 149
global stack, expansion 149
global/1 (cumulative/2 option) 457
global/1 (disjoint1/2 option) 459
global/1 (disjoint2/2 option) 460
global/1 (lex_chain/2 option) 448
global/1 (value_precede_chain/3 option) .. 477
global_cardinality/[2,3] (clpfd) 443
global_stack (statistics key) 152
global_stack_free (statistics key) 153
global_stack_used (statistics key) 153
GLOBALSTKSIZE (system property) 230
glue code (definition) 12
GNU Emacsss 34
goal 65
goal (definition) 12
goal, ancestor 240
goal, blocked 241
goal, blocked (definition) 8
goal, skeletal (definition) 18
goal, unblocked (definition) 20
goal/1 (debugger condition) 249, 281
goal_expansion/5 (hook, ref page) 1091
goal_expansion/5 (Module, hook) 92
goal_private/1 (debugger condition) .. 269, 282
goal_source_info/3 (built-in) 205, 220

goal_source_info/3
(built-in, ref page) ... 1093
goals, enumerating solutions ... 191, 192
grammar rules, control constructs in ... 194
grammar rules, predicates for ... 200, 950
grammar rules, semantics of ... 196
grammars, context-free ... 193
grammars, definite clause ... 193
greedy/1 (multi_cumulatives/3 option) ... 459
green cut ... 69
ground (definition) ... 12
ground/1 (built-in, ref page) ... 1095
ground/1 (when/2 condition) ... 1286
group/[3,4,5] (lists) ... 655
GROWTHFACTOR (system property) ... 230
guarded clause ... 379
guarded clause (definition) ... 12

H

halt/[0,1] (built-in) ... 215
halt/[0,1] (built-in, ref page) ... 1096
handling, error ... 289
handling, exception ... 289
handling, interrupt ... 313
handling, signal ... 313
harmonic_mean/2 (statistics) ... 796
head (definition) ... 12
head of a clause ... 65
head/2 (lists) ... 649
heap (statistics key) ... 153
help (CHR debug command) ... 420
help (debugger command) ... 247
help (top-level command) ... 26
hidden module ... 167
hidden/1 (module/3 option) ... 167, 1126
hide/0 (debugger condition) ... 286
hook (function annotation) ... 1295
hook (predicate annotation) ... 938
hook predicate ... 87
hook predicate (definition) ... 12, 67
hook predicates ... 950
hookable (predicate annotation) ... 938
hookable predicate (definition) ... 12
host_type (prolog flag) ... 102, 143
host_type (prolog flag, volatile) ... 1062

I

I/O, C functions for ... 1295
id/1 (stream property) ... 1248
id3 (table/3 order/1 value) ... 449
idempotent/1 (fd_global/[3,4] option) ... 489
identifier, breakpoint ... 248
if (Tcl command) ... 820
if/1 (conditional directive) ... 92
if/1 (load_files/2 option) ... 1115
if/3 (built-in, ref page) ... 1097
if/3, soft cut ... 72
if_exists/1 (open/4 option) ... 1156
if_nonempty/1
(delete_directory/2 option) ... 572
if_then_else/4 (clpfd) ... 441
if_user/1 (absolute_file_name/3 option) ... 968
ignore (delete_directory/2
if_nonempty option value) ... 572
ignore_ops/1 (write_term/[2,3] option) ... 1289
IID ... 542
illarg/[3,4] (types) ... 911
impact (labeling/2 option) ... 479
import (definition) ... 13
importation ... 166, 168
importation, predicates from another module ... 167
imported_from (predicate property) ... 1171
imported_from/1 (predicate property) ... 140
importing dynamic predicates ... 174
importing predicates into modules ... 167
imports/1 (load_files/2 option) ... 1115
in (labeling/2 option) ... 481
in/1 (linda_client) ... 641
in/2 (clpfd) ... 441
in/2 (clpfd:dispatch_global/4 request) ... 488
in/2 (linda_client) ... 641
in_noblock/1 (linda_client) ... 641
in_set/2 (clpfd) ... 441
in_set/2
(clpfd:dispatch_global/4 request) ... 489
IName ... 542
include declaration ... 90
include/[3,4,5] (lists) ... 655
include/1 (built-in, ref page) ... 1099
include/1 (declaration) ... 90
incr (Tcl command) ... 817
increasing efficiency ... 359
increasing/[1,2] (clpfd) ... 446
increasing/0 (lex_chain/2 option) ... 447
increasing_prefix/[3,4] (lists) ... 657
indented/1 (write_term/[2,3] option) ... 1290
indexed term ... 659
indexical ... 496
indexical constraint ... 477, 498

indexicals, checking ... 496
indexicals, propagating ... 496
indexing ... 364
indexing (definition) ... 13
indexing of dynamic code ... 182
indexing, determinacy detection via ... 365
indomain/1 (clpfd) ... 477
inf/[2,4] (clpqr) ... 515
infix operators ... 49, 52
information, source ... 37, 145
informational (prolog flag) ... 143, 323, 1430
inherit/1 (objects) ... 722
init function ... 296
init function (definition) ... 13
initialization ... 91
initialization (definition) ... 13
initialization file ... 102
initialization of saved states ... 97
initialization, C functions for ... 1299
initialization/1 (built-in, ref page) ... 1100
initialization/1 (declaration) ... 91
input ... 106
input and output of characters ... 111
input and output of terms ... 106
input and output, streams ... 106
input stream, current ... 113
input, current ... 106
input, term ... 107
input/0 (stream property) ... 1248
input_encoding/1 (stream property) ... 1249
input_order (labeling/2 option) ... 478
insert (CHR port) ... 419
instance of clause ... 78
instance/2 (built-in) ... 185
instance/2 (built-in, ref page) ... 1101
instance_method/1 (objects) ... 724
instantiation (definition) ... 13
instantiation errors ... 207
instantiation_error/[0,2] (error class) ... 205
int (CHR type) ... 418
integer /1, coercion (evaluable) ... 126
integer argument ... 430
integer range expression ... 430
integer variable ... 430
integer, large (definition) ... 13
integer, small (definition) ... 18
integer/1 (built-in, ref page) ... 1102
integer_rounding_function (prolog flag) ... 143
integers, range of ... 123
integers, syntax of ... 47
interactive stream (definition) ... 13
interactive/0 (stream property) ... 1249
interf_arg_type (argument type) ... 940
interface, Eclipse ... 32
interface, emacs ... 34
interface, foreign language ... 293, 295
internal database ... 187
interoperability ... 293
interpret (definition) ... 13
interpretation of clauses, declarative ... 78
interpretation of clauses, procedural ... 78
interpreted (predicate property) ... 1171
interpreted/0 (predicate property) ... 139
interrupt character ... 5
interrupt handling ... 313
intersect/2 (sets) ... 788
intersection/[2,3] (sets) ... 789
interval (labeling/2 option) ... 480
inv/1 (debugger condition) ... 251, 281, 286
invocation box ... 237
invocation box (definition) ... 13
invoking garbage collection directly ... 160
is/2 (built-in) ... 123
is/2 (built-in, ref page) ... 1103
is/2 (declaration) ... 90
is/2 declaration ... 90
is_assoc/1 (assoc) ... 395
is_avl/1 (avl) ... 405
is_bag/1 (bags) ... 409
is_fdset/1 (clpfd) ... 492
is_json_term/[1,2] (json) ... 622
is_list/1 (lists) ... 644
is_mutarray/1 (mutarray) ... 667
is_mutdict/1 (mutdict) ... 669
is_ordset/1 (ordsets) ... 744
is_process/1 (process) ... 765
is_queue/1 (queues) ... 781
is_set/1 (sets) ... 788
ISO (predicate annotation) ... 938
iterator (definition) ... 13

J

jasper_call/4 (jasper) ... 608
jasper_create_global_ref/3 (jasper) ... 609
jasper_create_local_ref/3 (jasper) ... 609
jasper_deinitialize/1 (jasper) ... 608
jasper_delete_global_ref/2 (jasper) ... 609
jasper_delete_local_ref/2 (jasper) ... 609
jasper_initialize/[1,2] (jasper) ... 607
jasper_is_instance_of/3 (jasper) ... 610
jasper_is_jvm/1 (jasper) ... 609
jasper_is_object/[1,2] (jasper) ... 610
jasper_is_same_object/3 (jasper) ... 610
jasper_new_object/5 (jasper) ... 608, 617
jasper_null/2 (jasper) ... 610
jasper_object_class_name/3 (jasper) ... 610

Java Virtual Machine 589
jit_count (statistics key) 155
jit_time (statistics key) 156
JIT compilation 84, 231
jittable (predicate property) 1171
jitted (predicate property) 1171
JNDI 768
join (Tcl command) 820
json_from_atom/[2,3] (json) 622
json_from_codes/[2,3] (json) 622
json_read/[2,3] (json) 622
json_to_atom/[2,3] (json) 622
json_to_codes/[2,3] (json) 622
json_write/[2,3] (json) 622
jump to port (debugger command) 244
JVM 589

K

kernel, runtime (definition) 17
Key (Tk event type) 858
keyboard 5
keyclumped/2 (lists) 658
keyclumps/2 (lists) 658
keymerge/3 (samsort) 787
KeyPress (Tk event type) 858
KeyRelease (Tk event type) 858
keys, recorded 188
keys/1 (keysorting/3 option) 447
keys_and_values/3 (lists) 644
keysort/2 (built-in) 135
keysort/2 (built-in, ref page) 1105
keysorting/[2,3] (clpfd) 447
kurtosis/2 (statistics) 797

L

label (Tk widget) 833
labeling 554
labeling event 547
labeling levels 547
labeling/1 (clpb) 424
labeling/2 (clpfd) 477
large integer (definition) 13
largest (labeling/2 option) 478
last call optimization 372
last clause determinacy detection 366
last/2 (lists) 644
last/3 (lists) 649
later_bound/2 (clpfd) 477, 480
layout term 1203
layout term (definition) 13
layout/1 (read_term/[2,3] option) 1203
leap (debugger command) 242
leap (definition) 14
leash/0 (debugger condition) 286
leash/1 (built-in) 238
leash/1 (built-in, ref page) 1106
leashing (definition) 14
Leave (Tk event type) 858
leftmost (labeling/2 option) 478
leftmost (table/3 order/1 value) 449
legacy_char_classification
(prolog flag) 60, 85, 143
legacy_numbervars/1
(write_term/[2,3] option) 1290
legend 549
legend_portray/3 (fdbg, hook) 558
length/2 (built-in) 132
length/2 (built-in, ref page) 1108
length/3 (bags, deprecated) 412
length_bound/2 (terms) 906
level, top 23
levels, labeling 547
lex/1 (geost/[2,3,4] option) 462
lex_chain/[1,2] (clpfd) 447
lex_maximize/1 (labeling/2 option) 482
lex_minimize/1 (labeling/2 option) 482
library 385
library, searching for a file in 99
library_directory/1 (hook, ref page) 1111
limit/1 (cumulative/2 option) 457
limits, arithmetic 123
Linda 638
linda/[0,1] (linda) 639
linda_client/1 (linda_client) 640
linda_timeout/2 (linda_client) 641
lindex (Tcl command) 819
line breakpoint 39
line, end of 987
line/0 (input method) 225
line/1 (debugger condition) 253, 283
line/2 (debugger condition) 253, 283
line_count/2 (built-in) 115, 118
line_count/2 (built-in, ref page) 1112
line_position/2 (built-in) 115, 119
line_position/2 (built-in, ref page) 1113
linked foreign resource 295, 302
linked foreign resource (definition) 14
linker, foreign resource 300
linsert (Tcl command) 819
list (definition) 14
list (Tcl command) 819
list constructor (definition) 14
list of Type (argument type) 940
list of variables 549
list processing, predicates for 139, 951

list separator, '|' ... 50
list syntax ... 14
list, association ... 394, 405
list, byte (definition) ... 8
list, char (definition) ... 8
list, code (definition) ... 9
list, cyclic ... 14
list, empty (definition) ... 14
list, partial (definition) ... 14
list, proper (definition) ... 14
list_queue/2 (queues) ... 782
list_to_assoc/2 (assoc) ... 395
list_to_avl/2 (avl) ... 407
list_to_bag/2 (bags) ... 410
list_to_fdset/2 (clpfd) ... 492
list_to_mutarray/2 (mutarray) ... 667
list_to_mutdict/2 (mutdict) ... 669
list_to_ord_set/2 (ordsets) ... 744
list_to_set/2 (sets) ... 789
list_to_tree/2 (trees) ... 909
listbox (Tk widget) ... 833
listing/[0,1] (built-in) ... 29, 175
listing/[0,1] (built-in, ref page) ... 1114
lists, predicates for processing ... 132
lists, syntax of ... 50
llength (Tcl command) ... 819
lmdb_close/1 (lmdb) ... 661
lmdb_compress/2 (lmdb) ... 662
lmdb_create/[2,3] (lmdb) ... 661
lmdb_enumerate/3 (lmdb) ... 662
lmdb_erase/2 (lmdb) ... 662
lmdb_export/2 (lmdb) ... 663
lmdb_fetch/3 (lmdb) ... 662
lmdb_findall/3 (lmdb) ... 662
lmdb_import/2 (lmdb) ... 663
lmdb_iterator_done/1 (lmdb) ... 663
lmdb_iterator_next/3 (lmdb) ... 663
lmdb_make_iterator/3 (lmdb) ... 662
lmdb_open/[2,3] (lmdb) ... 661
lmdb_property/2 (lmdb) ... 663
lmdb_store/3 (lmdb) ... 661
lmdb_sync/1 (lmdb) ... 662
lmdb_with_db/[2,3] (lmdb) ... 661
lmdb_with_iterator/3 (lmdb) ... 662
load (--main option value) ... 1436
load (definition) ... 14
load context ... 147
load_files/[1,2] (built-in) ... 98
load_files/[1,2] (built-in, ref page) ... 1115
load_foreign_resource/1 (built-in) ... 299
load_foreign_resource/1 (built-in, ref page) ... 1118
load_type/1 (load_files/2 option) ... 1115
loading database ... 96
loading module files ... 168
loading modules ... 167
loading PO files ... 98
loading programs ... 83
loading programs, predicates for ... 95, 952
local cut ... 72, 1160
local stack ... 148
local_stack (statistics key) ... 152
local_stack_free (statistics key) ... 154
local_stack_used (statistics key) ... 153
LOCALSTKSIZE (system property) ... 230
locks, mutual exclusion ... 310
log /1, logarithm (evaluable) ... 128
log /2, logarithm (evaluable) ... 128
logic programming ... 1
logical loop ... 72
login_timeout/1 (odbc_db_open/4 option) ... 739
longest_hole/2 (geost/[2,3,4] option) ... 462
loop, do (definition) ... 10
loop, logical ... 72
lrange (Tcl command) ... 819
lreplace (Tcl command) ... 819
lsearch (Tcl command) ... 820
lsort (Tcl command) ... 820

M

macro (function annotation) ... 1295
macro expansion ... 1091
main thread ... 313
make_directory/1 (file_systems) ... 572
make_sub_bag/2 (bags) ... 412
map_assoc/2 (assoc) ... 395
map_assoc/3 (assoc) ... 395
map_list_queue/3 (queues) ... 783
map_product/5 (lists) ... 652
map_queue/[2,3] (queues) ... 783
map_queue_list/3 (queues) ... 783
map_tree/3 (trees) ... 909
mapbag/2 (bags) ... 410
mapbag/3 (bags) ... 410
maplist/[2,3,4] (lists) ... 651
mapsize/1 (lmdb option) ... 660
mapsize/1 (lmdb property) ... 663
margin/3 (disjoint1/2 option) ... 459
margin/4 (disjoint2/2 option) ... 460
mark-paragraph (emacs command) ... 38
max (labeling/2 option) ... 478
max /2, maximum value (evaluable) ... 127
max/1 (fd_global/[3,4] option) ... 489
max/2 (statistics) ... 796
max_arity (prolog flag) ... 143
max_assoc/3 (assoc) ... 395

max_cliques/2 (ugraphs) 915
max_depth/1 (write_term/[2,3] option) ... 1290
max_integer (prolog flag) 143
max_inv/1 (debugger condition) 267, 285
max_member/[2,3] (lists) 656
max_path/5 (ugraphs) 915
max_path/5 (wgraphs) 919
max_regret (labeling/2 option) 479
max_tagged_integer (prolog flag) 18, 144
maximize/[2,3] (clpfd) 478
maximize/1 (clpqr) 516
maximize/1 (labeling/2 option) 481
maximum/2 (clpfd) 440
maximum_arg/2 (clpfd) 441
maybe/[0,1,2] (random) 784
mean/2 (statistics) 796
median (labeling/2 option) 480
median/2 (statistics) 797
member/2 (built-in) 132
member/2 (built-in, ref page) 1120
member/3 (bags, deprecated) 411
memberchk/2 (built-in) 132
memberchk/2 (built-in, ref page) 1121
memberchk/3 (bags, deprecated) 411
memory (statistics key) 153
Memory management, C functions for 1299
memory statistics 150
memory, general description 148
memory, predicates for 165, 954
memory, reclamation 962
memory_buckets (statistics key) 155
memory_culprit (statistics key) 155
memory_free (statistics key) 153
memory_used (statistics key) 153
menu (Tk widget) 833
menubutton (Tk widget) 833
merge/[3,4] (samsort) 787
message (Tk widget) 833
message/4 (objects) 725
message_hook/3 (hook, ref page) 1122
message_hook/3 (user, hook) 220
messages and queries, predicates for 227, 954
messages, debugging 240
meta-call 81
meta-call (definition) 14
meta-logical (definition) 130
meta-logical predicate (definition) 14
meta-logical predicates 130
meta-predicate (definition) 15
meta-predicate declaration 89
meta-predicates (definition) 939
meta_predicate (predicate property) 1171
meta_predicate declaration 175
meta_predicate/1 (built-in, ref page) 1123
meta_predicate/1 (declaration) 89, 175
meta_predicate/1 (predicate property) 140
method/1 (table/3 option) 449
method/3 (Java method identifier) 608
middle (labeling/2 option) 480
min (labeling/2 option) 478
min /2, minimum value (evaluable) 127
min/1 (fd_global/[3,4] option) 489
min/2 (statistics) 796
min_assoc/3 (assoc) 395
min_integer (prolog flag) 144
min_max/3 (statistics) 796
min_member/[2,3] (lists) 656
min_path/5 (ugraphs) 915
min_path/5 (wgraphs) 919
min_paths/3 (ugraphs) 915
min_paths/3 (wgraphs) 919
min_tagged_integer (prolog flag) 18, 144
min_tree/3 (ugraphs) 915
min_tree/3 (wgraphs) 920
minimize/[2,3] (clpfd) 478
minimize/1 (clpqr) 516
minimize/1 (labeling/2 option) 481
minimum/2 (clpfd) 440
minimum_arg/2 (clpfd) 440
minmax/1 (fd_global/[3,4] option) 489
mixing C/C++ and Prolog 293
ml_standard_deviation/2 (statistics) 797
ml_variance/2 (statistics) 797
mod /2, integer floored
remainder (evaluable) 126
mode annotations 937
mode declaration 90
mode declarations 177
mode spec 5
mode/1 (built-in, ref page) 1125
mode/1 (debugger condition) 257, 284, 285
mode/1 (declaration) 90
mode/1 (lmdb option) 660, 663
mode/1 (stream property) 1248
mode/2 (statistics) 796
model 430
modification, database 180
modularity, procedural 165
module (definition) 15, 165
module (load context key) 147
module declaration 89, 168
module file (definition) 15
module files 166
module files, converting into 167
module files, loading 167, 168
module name expansion 5, 89, 175
module name expansion (definition) 15

module name expansion, exceptions 939
module prefixes on clauses 171
module, declaration 166
module, hidden 167
module, source 169
module, source (definition) 18
module, type-in 146, 169
module, type-in (definition) 20
module/[2,3] (built-in, ref page) 1126
module/[2,3] (declaration) 89, 168
module/1 (debugger condition) 281
modules, currently loaded 172, 173
modules, debugging 172
modules, defining 166
modules, dynamic creation of 171
modules, exporting predicates from 166
modules, importing predicates into 167
modules, loading 167
modules, name clashes 172
modules, predicates defined in 173
modules, predicates exported from 173
modules, predicates for 180, 955
modules, predicates imported into 174
modules, source 175
modules, visibility rules 168
monitoring garbage collection 158
most general unifier 80
most_constrained (labeling/2 option) 479
Motion (Tk event type) 858
msb /1, most significant bit (evaluable) .. 127
multi_cumulative/[2,3] (clpfd) 458
multifile (predicate property) 1171
multifile declaration 87
multifile predicate (definition) 15
multifile/0 (predicate property) 140
multifile/1 (built-in, ref page) 1128
multifile/1 (declaration) 87
multiset 409
must_be/4 (types) 911
mutable 543
mutable term 136
mutable term (definition) 15
mutable/1 (built-in) 136
mutable/1 (built-in, ref page) 1130
mutarray_append/2 (mutarray) 668
mutarray_gen/3 (mutarray) 667
mutarray_get/3 (mutarray) 667
mutarray_last/2 (mutarray) 667
mutarray_length/2 (mutarray) 667
mutarray_put/3 (mutarray) 667
mutarray_set_length/2 (mutarray) 667
mutarray_to_list/2 (mutarray) 667
mutarray_update/4 (mutarray) 667
mutdict_append/2 (mutdict) 670
mutdict_clear/1 (mutdict) 669
mutdict_delete/2 (mutdict) 669
mutdict_empty/1 (mutdict) 669
mutdict_gen/3 (mutdict) 669
mutdict_get/3 (mutdict) 669
mutdict_items/2 (mutdict) 670
mutdict_keys/2 (mutdict) 670
mutdict_put/3 (mutdict) 669
mutdict_size/1 (mutdict) 669
mutdict_update/4 (mutdict) 669
mutdict_values/2 (mutdict) 670
mutex 310
mutual exclusion locks 310
mzn-sicstus(1) (command line tool) 1432
mzn_load_file/[2,3] (zinc) 931
mzn_run_file/[1,2] (zinc) 929
mzn_run_model/[1,2] (zinc) 929
mzn_to_fzn/[2,3] (zinc) 932

N

name auto-generation 549
name clash 172
name clash (definition) 15
name expansion, module 175
name variable (debugger command) 553
name, of a functor 49
name/1 (tk_new/2 option) 867
name/2 (built-in) 132
name/2 (built-in, ref page) 1131
names of terms 548, 551
natural (CHR type) 418
neighbors/3 (ugraphs) 914
neighbors/3 (wgraphs) 918
neighbours/3 (ugraphs) 914
neighbours/3 (wgraphs) 918
nested execution 30
network path 104
network_flow/[2,3] (clpfd) 455
new/[2,3] (structs) 802
new_mutarray/1 (mutarray) 667
new_mutarray/2 (mutarray) 667
new_mutdict/1 (mutdict) 669
nextto/3 (lists) 644
nl/[0,1] (built-in) 112
nl/[0,1] (built-in, ref page) 1133
noaux (table/3 method/1 value) 449
nodebug (CHR debug command) 420
nodebug (debugger command) 245
nodebug/0 (built-in) 239
nodebug/0 (built-in, ref page) 1134
nodebug_message/0 (objects) 726
non-backtraced tests 281
nondet/0 (plunit option) 749

nondeterminacy, declaring ... 368
nondeterminacy, finding ... 367
nondeterminate (definition) ... 15
none (--main option value) ... 1436
none (absolute_file_name/3 access) ... 967
nonmember/2 (built-in) ... 132
nonmember/2 (built-in, ref page) ... 1135
nonvar/1 (built-in, ref page) ... 1136
nonvar/1 (when/2 condition) ... 1286
normalize/2 (statistics) ... 798
nospy this (debugger command) ... 245
nospy/1 (built-in) ... 240
nospy/1 (built-in, ref page) ... 1137
nospyall/0 (built-in) ... 240
nospyall/0 (built-in, ref page) ... 1138
notation ... 5, 57
notrace/0 (built-in) ... 239
notrace/0 (built-in, ref page) ... 1144
now/1 (system) ... 808
nozip/0 (built-in) ... 239
nozip/0 (built-in, ref page) ... 1145
nth0/[3,4] (lists) ... 644
nth1/[3,4] (lists) ... 644
null streams ... 115
null_foreign_term/2 (structs) ... 803
number (CHR type) ... 418
number/1 (built-in, ref page) ... 1146
number_chars/2 (built-in) ... 132
number_chars/2 (built-in, ref page) ... 1147
number_codes/2 (built-in) ... 132
number_codes/2 (built-in, ref page) ... 1148
numbers, comparison of ... 124
numbervars ... 916
numbervars/1 (varnumbers) ... 916
numbervars/1 (write_term/[2,3] option) ... 1289
numbervars/3 (built-in) ... 133
numbervars/3 (built-in, ref page) ... 1150
numeric argument ... 430
numlist/[2,3,5] (between) ... 413
nvalue/2 (clpfd) ... 445

O

Object ... 542
object (absolute_file_name/3 file type) ... 966
object, stream ... 113
object, stream position ... 119
objective function ... 430
objects (library package) ... 671
obsolescent (predicate annotation) ... 938
occurrence (labeling/2 option) ... 479
occurrences_of_term/3 (terms) ... 905
occurrences_of_var/3 (terms) ... 905
occurs check ... 82
occurs check (definition) ... 15
odbc_db_open/3 (odbc) ... 739
odbc_db_open/4 (odbc) ... 739
odbc_db_open/5 (odbc) ... 739
odbc_env_open/1 (odbc) ... 739
odbc_list_DSN/2 (odbc) ... 740
off (debug flag value) ... 141
off (debugging flag value) ... 141, 1044
off (fileerrors flag value) ... 210
off (gc_trace flag value) ... 143
off (profiling flag value) ... 142
off (redefine_warnings flag value) ... 145
off/0 (debugger mode control) ... 288
on (debug flag value) ... 141
on (fileerrors flag value) ... 210
on (profiling flag value) ... 142
on (redefine_warnings flag value) ... 145
on_exception/3 (built-in) ... 214
on_exception/3 (built-in, ref page) ... 1151
once/1 ... 72
once/1 (built-in, ref page) ... 1152
one of List (argument type) ... 940
one-char atom (definition) ... 15
one_longer/2 (lists) ... 645
op/1 (lex_chain/2 option) ... 447
op/3 (built-in) ... 54
op/3 (built-in, ref page) ... 1153
open (Tcl command) ... 826
open/[3,4] (built-in) ... 113, 114
open/[3,4] (built-in, ref page) ... 1154
open_codes_stream/2 (codesio) ... 538
open_null_stream/1 (built-in) ... 115
open_null_stream/1
(built-in, ref page) ... 1159
opening a file ... 114
operator (definition) ... 15
operator declaration ... 87
operators ... 1153
operators, associativity of ... 52
operators, built-in ... 53, 55
operators, built-in predicates for handling ... 54
operators, current ... 54
operators, declaring ... 54
operators, infix ... 49, 52
operators, list of ... 55
operators, postfix ... 49, 52
operators, precedence of ... 52
operators, prefix ... 49, 52
operators, reference page convention ... 939
operators, syntax restrictions on ... 54
operators, type of ... 52
optimalities (fd_statistics/2 option) ... 487

optimality (labeling/2 time_out/2 option value) ... 483
optimise/1 (zinc option) ... 934
optimization, last call ... 372
optimize (CHR flag) ... 421
optimize (CHR option) ... 417
optimize/1 (zinc option) ... 934
or ... 70
ord_add_element/3 (ordsets) ... 744
ord_del_element/3 (ordsets) ... 744
ord_disjoint/2 (ordsets) ... 744
ord_disjoint_union/3 (ordsets) ... 745
ord_intersect/2 (ordsets) ... 744
ord_intersection/[2,3,4] (ordsets) ... 744
ord_list_to_assoc/2 (assoc) ... 395
ord_list_to_avl/2 (avl) ... 407
ord_member/2 (ordsets) ... 744
ord_nonmember/2 (ordsets) ... 745
ord_seteq/2 (ordsets) ... 745
ord_setproduct/3 (ordsets) ... 745
ord_subset/2 (ordsets) ... 745
ord_subtract/3 (ordsets) ... 745
ord_symdiff/3 (ordsets) ... 745
ord_union/[2,3,4] (ordsets) ... 745
order (argument type) ... 940
order on terms, standard ... 134
order/1 (table/3 option) ... 449
ordered/[1,2] (lists) ... 656
ordering/1 (clpqr) ... 517, 527
ordset_order/3 (ordsets) ... 746
os_data (prolog flag) ... 144
otherwise/0 (built-in, ref page) ... 1161
out (debugger command) ... 243
out (labeling/2 option) ... 481
out/1 (linda_client) ... 641
output ... 106
output stream, current ... 113
output, current ... 106
output, flushing ... 118
output, term ... 108
output/0 (stream property) ... 1248
output/1 (zinc option) ... 932, 934
output_encoding/1 (stream property) ... 1249
overflow ... 430
overflow (FD flag) ... 490
overlap/1 (geost/[2,3,4] option) ... 463
ozn_file/1 (zinc option) ... 933

P

pair (argument type) ... 940
pair (definition) ... 16
pairfrom/4 (sets) ... 788
pallet_loading/1 (geost/[2,3,4] option) ... 463
param /1, (iterator) ... 77
param/1 (iterator) ... 1049
parameter, accumulating ... 372
parameters/1 (zinc option) ... 933
parconflict/1 (geost/[2,3,4] option) ... 462
parent (definition) ... 16
parent_clause/1 (debugger condition) ... 254, 283
parent_clause/2 (debugger condition) ... 254, 283
parent_clause/3 (debugger condition) ... 254, 283
parent_inv/1 (debugger condition) ... 268, 282
parent_pred/1 (debugger condition) ... 253, 283
parent_pred/2 (debugger condition) ... 253, 283
pareto_maximize/1 (labeling/2 option) ... 482
pareto_minimize/1 (labeling/2 option) ... 482
parsing phrases ... 1165
partial function ... 430
partial list (definition) ... 14
partition/5 (lists) ... 655
passive/1 (CHR pragma) ... 416
password/1 (odbc_db_open/4 option) ... 739
path root ... 103
path, absolute ... 103, 104
path, case-normalized ... 104
path, network ... 104
path, UNC ... 104
path/1 (lmdb property) ... 663
path/3 (ugraphs) ... 915
path/3 (wgraphs) ... 920
peek_byte/[1,2] (built-in) ... 111
peek_byte/[1,2] (built-in, ref page) ... 1162
peek_char/[1,2] (built-in) ... 111
peek_char/[1,2] (built-in, ref page) ... 1163
peek_code/[1,2] (built-in) ... 111
peek_code/[1,2] (built-in, ref page) ... 1164
perm/2 (lists) ... 645
perm2/4 (lists) ... 645
permission errors ... 210
permission/1 (lmdb option) ... 660
permission_error/[3,5] (error class) ... 206
permutation/1 (keysorting/3 option) ... 447
permutation/2 (lists) ... 645
phrase/[2,3] (built-in) ... 195
phrase/[2,3] (built-in, ref page) ... 1165
pi /0, pi (evaluable) ... 129
placement of cut ... 363

plain spypoint ... 239, 247
platform_data (prolog flag) ... 144
pltrace-break (emacs command) ... 39
PO file (definition) ... 17
PO files ... 96
PO files, loading ... 98
PO files, saving ... 98
point, advice (definition) ... 7
pointer_object/2 (objects) ... 727
polymorphic (predicate annotation) ... 433
polymorphism/1 (geost/[2,3,4] option) ... 463
population_standard_
deviation/2 (statistics) ... 797
population_variance/2 (statistics) ... 797
port (definition) ... 16
port debugger ... 236
port, debugger ... 283
port/1 (debugger condition) ... 254, 283
port/1 (start/1 option) ... 771
portable (quoted_charset flag value) ... 142
portray/1 (hook, ref page) ... 1167
portray/1 (user, hook) ... 110, 536
portray_assoc/1 (assoc) ... 395
portray_avl/1 (avl) ... 406
portray_bag/1 (bags) ... 409
portray_clause/[1,2] (built-in) ... 110
portray_clause/[1,2]
(built-in, ref page) ... 1168
portray_message/2 (hook, ref page) ... 1170
portray_message/2 (user, hook) ... 219
portray_queue/1 (queues) ... 781
portrayed/1 (write_term/[2,3] option) ... 1289
position in a stream ... 119
position, stream ... 118
position, stream (definition) ... 19
position/1 (stream property) ... 1248
post/1 (zinc option) ... 933
postfix operators ... 49, 52
posting ... 430
posting constraints ... 434
power_set/2 (sets) ... 789
precedence (definition) ... 16
precedence, of operators ... 52
precedences/1 (cumulative/2 option) ... 457
precedences/1
(multi_cumulatives/3 option) ... 459
precision (FD flag) ... 490
precision/1 (labeling/2 option) ... 481
precision/1 (zinc option) ... 933
pred/1 (debugger condition) ... 247, 281
pred_spec (argument type) ... 940
pred_spec_forest (argument type) ... 940
pred_spec_tree (argument type) ... 940
predicate ... 65
predicate (definition) ... 16
predicate declaration ... 87
predicate specification (definition) ... 16
predicate specification,
generalized (definition) ... 12
predicate, built-in (definition) ... 8
predicate, dynamic (definition) ... 10
predicate, foreign (definition) ... 11
predicate, hook ... 87
predicate, hook (definition) ... 12
predicate, hookable (definition) ... 12
predicate, indexical ... 498
predicate, meta-logical (definition) ... 14
predicate, multifile (definition) ... 15
predicate, public ... 166
predicate, static (definition) ... 19
predicate, steadfast (definition) ... 19
predicate, undefined ... 29, 146, 1278
predicate_property/2 (built-in) ... 139, 174
predicate_property/2
(built-in, ref page) ... 1171
predicates defined in modules ... 173
predicates exported from modules ... 173
predicates for all solutions ... 193, 941
predicates for arithmetic ... 129, 942
predicates for character I/O ... 119, 942
predicates for control ... 82, 943
predicates for database ... 189, 945
predicates for debugging ... 289, 946
predicates for execution state ... 215, 947
predicates for file and stream handling ... 120, 948
predicates for filename manipulation ... 105, 948
predicates for foreign interface ... 949
predicates for grammar rules ... 200, 950
predicates for list processing ... 139, 951
predicates for loading programs ... 95, 952
predicates for looking at terms ... 130
predicates for memory ... 165, 954
predicates for messages and queries ... 227, 954
predicates for modules ... 180, 955
predicates for processing lists ... 132
predicates for program state ... 147, 956
predicates for saving programs ... 99, 956
predicates for term comparison ... 137, 957
predicates for term handling ... 137, 957
predicates for term I/O ... 122, 959
predicates for type tests ... 130, 136, 960
predicates imported into modules ... 174
predicates, annotations ... 938
predicates, assertion and retraction ... 180
predicates, breakpoint handling ... 276
predicates, debugging ... 237
predicates, hook ... 950

predicates, importing dynamic 174
predicates, meta-logical 130
predicates, private 166
predicates, public 166
predicates, read 107
predicates, write 108
prefix operators 49, 52
`prefix/2 (lists)` 649
`prefix_length/3 (lists)` 648
preinit (function annotation) 938, 1295
prelinked foreign resource (definition) 16
prelinked resource 296
principal functor 131
principal functor (definition) 49
`print (debugger command)` 244
`print/[1,2] (built-in)` 110
`print/[1,2] (built-in, ref page)` 1173
`print/0 (debugger show control)` 287
`print_coverage/[0,1] (built-in)` 361
`print_coverage/[0,1] (built-in, ref page)` 1174
`print_message/2 (built-in)` 219
`print_message/2 (built-in, ref page)` 1176
`print_message_lines/3 (built-in)` 220
`print_message_lines/3 (built-in, ref page)` 1178
`print_profile/[0,1] (built-in)` 360
`print_profile/[0,1] (built-in, ref page)` 1179
printing clauses 110
printing, formatted 112
`priority/1 (write_term/[2,3] option)` 1290
private predicates 166
`private/1 (debugger condition)` 269, 285
`proc (Tcl command)` 828
procedural modularity 165
procedural semantics 78
procedure 67
procedure (definition) 16
procedure box 235
procedure box (definition) 16
procedure call 65, 80
procedure definition 80
procedure, search 432
procedures, dynamic and static 181
procedures, redefining during execution 86
procedures, removing properties 962
procedures, self-modifying 180, 185
`proceed (redefine_warnings flag value)` 145
`proceed/0 (debugger command control)` 287
`proceed/2 (debugger command control)` 287
process communication 638, 792
`process_create/[2,3] (process)` 762
`process_id/1 (process)` 765
`process_id/2 (process)` 765
`process_kill/[1,2] (process)` 765
`process_release/1 (process)` 765
`process_wait/[2,3] (process)` 764
processing, breakpoint 279
`profile_data/1 (built-in)` 360
`profile_data/1 (built-in, ref page)` 1180
`profile_reset/0 (built-in)` 360, 361
`profile_reset/0 (built-in, ref page)` 1181
profiling 577
profiling (definition) 17
`profiling (prolog flag)` 142, 323
profiling, execution 359
ProgID 542
program (definition) 17
`program (statistics key)` 153
program space 149
program state 30
program state, predicates for 147, 956
program, loading 83
programming in logic 1
`project_attributes/2 (Module)` 399
`projecting_assert/1 (clpqr)` 518
`prolog (--main option value)` 1436
`prolog (quoted_charset flag value)` 142
`prolog-backward-list (emacs command)` 38
`prolog-beginning-of-clause (emacs command)` 38
`prolog-beginning-of-predicate (emacs command)` 38
`prolog-debug-on (emacs command)` 39
`prolog-end-of-clause (emacs command)` 38
`prolog-end-of-predicate (emacs command)` ... 38
`prolog-forward-list (emacs command)` 38
`prolog-help-on-predicate (emacs command)` .. 40
`prolog-insert-next-clause (emacs command)` 39
`prolog-insert-predicate-template (emacs command)` 39
`prolog-insert-predspec (emacs command)` 39
`prolog-mark-clause (emacs command)` 38
`prolog-mark-predicate (emacs command)` 38
`prolog-trace-on (emacs command)` 38
`prolog-variables-to-anonymous (emacs command)` 39
`prolog-zip-on (emacs command)` 39
`prolog_flag/[2,3] (built-in)` 107
`prolog_flag/[2,3] (built-in, ref page)` ... 1182
`prolog_load_context/2 (built-in, ref page)` 1184
`PROLOGINCSIZE (system property)` 231
`PROLOGINITSIZE (system property)` 150, 231

PROLOGKEEPSIZE (system property) 150, 231
PROLOGMAXSIZE (system property) 231
prompt, changing 108
prompt/2 (built-in) 108
prompt/2 (built-in, ref page) 1185
propagating indexicals 496
propagation 431
propagations (fd_statistics/2 option) 486
propagator 431
propagators (fd_statistics/2 option) 487
proper list (definition) 14
proper_length/2 (lists) 645
proper_prefix/2 (lists) 649
proper_prefix_length/3 (lists) 648
proper_segment/2 (lists) 650
proper_suffix/2 (lists) 650
proper_suffix_length/3 (lists) 648
property, stream 1248
property, stream (definition) 19
prototype, function 5
pruning 431
prunings (fd_statistics/2 option) 486
public declaration 90
public predicate 166
public predicates 166
public/1 (built-in, ref page) 1186
public/1 (declaration) 90
put_assoc/4 (assoc) 396
put_atts/2 (Module) 397
put_byte/[1,2] (built-in) 112
put_byte/[1,2] (built-in, ref page) 1187
put_char/[1,2] (built-in) 112
put_char/[1,2] (built-in, ref page) 1188
put_code/[1,2] (built-in) 112
put_code/[1,2] (built-in, ref page) 1189
put_contents/3 (structs) 802
put_label/[4,5] (trees) 909
puts (Tcl command) 827

Q

qskip/1 (debugger mode control) 288
quantifier, existential 192
quasi-skip (debugger command) 243
query 23, 24, 66
query (definition) 17
query, floundered (definition) 11
query_abbreviation/3 (hook, ref page) 1190
query_abbreviation/3 (SU_messages) 226
query_class/5 (hook, ref page) 1191
query_class/5 (SU_messages) 226
query_class_hook/5 (hook, ref page) 1192
query_class_hook/5 (user, hook) 226
query_hook/6 (hook, ref page) 1193
query_hook/6 (user, hook) 226
query_input/3 (hook, ref page) 1194
query_input/3 (SU_messages) 226
query_input_hook/3 (hook, ref page) 1195
query_input_hook/3 (user, hook) 226
query_map/4 (hook, ref page) 1196
query_map/4 (SU_messages) 226
query_map_hook/4 (hook, ref page) 1197
query_map_hook/4 (user, hook) 226
queue_append/3 (queues) 782
queue_cons/3 (queues) 782
queue_head/2 (queues) 781
queue_last/[2,3] (queues) 782
queue_length/2 (queues) 782
queue_list/2 (queues) 782
queue_member/2 (queues) 782
queue_memberchk/2 (queues) 783
queue_tail/2 (queues) 781
quiet (syntax_errors flag value) 146, 212
quote characters, in atoms 48
quoted/1 (write_term/[2,3] option) 1289
quoted/1, write_term/[2,3] option 109
quoted_charset (prolog flag) 142, 1290
quoted_charset/1
  (write_term/[2,3] option) 1290

R

radiobutton (Tk widget) 833
raise exception (debugger command) 246
raise/1 (debugger command control) 288
raise_exception/1 (built-in) 214
raise_exception/1 (built-in, ref page) ... 1198
random (labeling/2 option) 480
random access to streams 119
random/[1,3] (random) 784
random_member/2 (random) 785
random_numlist/4 (random) 785
random_perm2/4 (random) 785
random_permutation/2 (random) 785
random_select/3 (random) 785
random_subseq/3 (random) 785
random_ugraph/3 (ugraphs) 915
random_wgraph/4 (wgraphs) 920
range expression, integer 430
range expression, real 431
range of floats 123
range of integers 123
range/2 (statistics) 796
range_to_fdset/2 (clpfd) 492
raw/1 (odbc_db_open/4 option) 739
rd/[1,2] (linda_client) 641

rd_noblock/1 (linda_client) 641
reachable/3 (ugraphs) 915
reachable/3 (wgraphs) 920
read (absolute_file_name/3 access) 967
read (open/[3,4] mode) 1154
read (Tcl command) 827
read predicates 107
read/[1,2] (built-in) 107
read/[1,2] (built-in, ref page) 1199
read_from_codes/2 (codesio) 538
read_line/[1,2] (built-in, ref page) 1201
read_record/[1,2] (csv) 540
read_record_from_codes/[2,3] (csv) 540
read_records/[1,2] (csv) 540
read_term/[2,3] (built-in) 107
read_term/[2,3] (built-in, ref page) 1202
read_term_from_codes/3 (codesio) 538
reading a goal from a string 315
reading in 23
real argument 431
real range expression 431
real variable 431
reclamation, space 150
reconsult 289
reconsult/1 (built-in, ref page) 1205
recorda/3 (built-in) 187
recorda/3 (built-in, ref page) 1206
recorded keys 188
recorded/3 (built-in, ref page) 1207
recordz/3 (built-in) 188
recordz/3 (built-in, ref page) 1208
recursion (definition) 17
red cut 69
redefine_warnings (prolog flag) ... 85, 145, 323
redefining procedures, during execution 86
redo (CHR port) 419
redo (leashing mode) 238
redo/0 (debugger port value) 283
redo/1 (debugger command control) 288
reduce/2 (ugraphs) 915
reduce/2 (wgraphs) 920
reexit/1 (debugger command control) 288
reference page conventions 937
reference, term 293
regexp (Tcl command) 824
region (definition) 17
register_event_listener/[2,3]
(prologbeans) 773
register_query/[2,3] (prologbeans) 772
regsub (Tcl command) 824
regular/2 (clpfd) 475
reifiable (predicate annotation) 432
reification 431, 436
reject (redefine_warnings flag value) 145
reject (top-level command) 25
relation/3 (clpfd) 449
relative_to/1
(absolute_file_name/3 option) 968
relax_and_reconstruct/2
(labeling/2 option) 483
relax_and_reconstruct/3
(labeling/2 option) 483
rem /2, integer truncated
remainder (evaluable) 125
rem_add_link/4 (rem) 786
rem_create/2 (rem) 786
rem_equivalent/3 (rem) 786
rem_head/3 (random) 786
remove (CHR port) 419
remove this (debugger command) 245
remove_attribute_prefixes/1
(xml_parse/3 option) 922
remove_breakpoints/1 (built-in) 265, 278
remove_breakpoints/1
(built-in, ref page) 1209
remove_dups/2 (lists) 645
rename_directory/2 (file_systems) 572
rename_file/2 (file_systems) 571
repeat/0 (built-in, ref page) 1210
repeat/1 (between) 413
reposition/1 (open/4 option) 1154
reposition/1 (stream property) 1249
representation errors 209
representation_error/[1,3]
(error class) 206
reset (open/4 eof_action value) 1155
reset printdepth (debugger command) 246
reset printdepth (top-level command) 25
reset subterm (debugger command) 247
reset subterm (top-level command) 25
resource errors 212
resource, colored 458
resource, cumulative 458
resource, data 1438
resource, dynamic 296
resource, foreign 295
resource, foreign (definition) 11
resource, linked foreign (definition) 14
resource, prelinked 296
resource, static 296
resource_error/[1,2] (error class) 207
rest of list, '|' 50
restart (labeling/2 option) 482
restart_constant/1 (labeling/2 option) ... 483
restart_geometric/2 (labeling/2 option) .. 483
restart_linear/1 (labeling/2 option) 483
restart_luby/1 (labeling/2 option) 483

restarts (fd_statistics/2 option) 486
restore (--main option value) 1436
restore/1 (built-in) 31, 97
restore/1 (built-in, ref page) 1212
restoring 30
restrictions, operator syntax 54
retract/1 (built-in) 183
retract/1 (built-in, ref page) 1213
retractall/1 (built-in) 183
retractall/1 (built-in, ref page) 1215
retry (debugger command) 243
retry/1 (debugger command control) 288
return (Tcl command) 829
rev/2 (lists) 646
reverse/2 (lists) 646
rewriting, syntactic 103
rotate_list/[2,3] (lists) 648
round /1, (evaluable) 127
rule (definition) 17
rule, computation 80
rule, search 80
run-prolog (emacs command) 40
run_tests/[0,1,2] (plunit) 753
running 23
runtime (statistics key) 152
runtime kernel (definition) 17
runtime system 5, 322
runtime system (definition) 17
runtime system, extended (definition) 11
runtime_entry/1 (hook, ref page) 1216
runtime_entry/1 (user, hook) 1436

S

same_functor/[2,3,4] (terms) 906
same_length/[2,3] (lists) 646
samkeysort/2 (samsort) 787
sample_standard_deviation/2 (statistics) 797
sample_variance/2 (statistics) 797
samsort/[2,3] (samsort) 787
sat/1 (clpb) 424
satisfy (labeling/2 option) 481
satisfying assignment 432
save_files/2 (built-in) 32, 98
save_files/2 (built-in, ref page) 1217
save_modules/2 (built-in) 32, 98
save_modules/2 (built-in, ref page) 1218
save_predicates/2 (built-in) 32, 98
save_predicates/2 (built-in, ref page) ... 1219
save_program/[1,2] (built-in) 30, 97
save_program/[1,2] (built-in, ref page) 1220
saved state 30, 97
saved state (definition) 17
saved states, initialization of 97
saved_state (absolute_file_name/3 file type) 966
saving 30
saving database 96
saving PO files 98
saving programs, predicates for 99, 956
scalar_product/[4,5] (clpfd) 440
scalar_product/4 (case/4 option) 450
scalar_product_reif/[5,6] (clpfd) 440
scale (Tk widget) 833
scan (Tcl command) 823
scanlist/[4,5,6] (lists) 652
scollbar (Tk widget) 833
scope of variables 66
search (absolute_file_name/3 access) 967
search procedure 432
search rule 80
search/1 (zinc option) 932
searchable (absolute_file_name/3 access) 967
searching, for a file in a library 99
seconds since the Epoch 574
see/1 (built-in) 115
see/1 (built-in, ref page) 1222
seeing/1 (built-in) 116
seeing/1 (built-in, ref page) 1223
seek/4 (built-in) 119
seek/4 (built-in, ref page) 1225
seen/0 (built-in) 118
seen/0 (built-in, ref page) 1227
segment/2 (lists) 650
select/3 (lists) 643
select/4 (lists) 646
select_max/[3,4] (lists) 657
select_min/[3,4] (lists) 657
selectchk/3 (lists) 643
selectchk/4 (lists) 646
selector 549
selector, subterm 25, 254
selector, subterm (definition) 19
self-modifying procedures 180, 185
semantics 65
semantics (definition) 18
semantics of dynamic code 180
semantics of grammar rules 196
semantics, declarative 78
semantics, procedural 78
sentence 65
sentence (definition) 18
sentences 56

seq_precede_chain/[1,2] (clpfd) 477
sequence, escape 64
sequence, escape (definition) 11
servlet 768
session_gc_timeout/1 (start/1 option) 771
session_get/4 (prologbeans) 772
session_put/3 (prologbeans) 773
session_timeout/1 (start/1 option) 771
set (Tcl command) 817
set printdepth (debugger command) 246
set printdepth (top-level command) 25
set subterm (debugger command) 247
set subterm (top-level command) 25
set, character 60
set, FD 491
set, solution 432
set/1 (plunit option) 751
set_input/1 (built-in) 114
set_input/1 (built-in, ref page) 1228
set_module/1 (built-in) 170
set_module/1 (built-in, ref page) 1229
set_order/3 (sets) 789
set_output/1 (built-in) 114
set_output/1 (built-in, ref page) 1230
set_prolog_flag/2 (built-in, ref page) ... 1231
set_stream_position/2 (built-in) 119
set_stream_position/2 (built-in, ref page) 1232
seteq/2 (sets) 789
setof/3 (built-in) 191
setof/3 (built-in, ref page) 1233
setproduct/3 (sets) 790
setrand/1 (random) 784
sets, collecting solutions to a goal 190
setting a breakpoint 39
setup/1 (plunit option) 749
shorter_list/2 (lists) 646
show/1 (debugger condition) 257, 284, 285
shutdown/[0,1] (prologbeans) 771
shutdown_server/0 (linda_client) 640
SICStus Prolog IDE (SPIDER) 32
sicstus(1) (command line tool) 1430
sicstus-bindings-on (emacs command) 39
sicstus-bindings-print-depth (emacs command) 39
sicstus-coverage-on (emacs command) 39
side effect (definition) 18
side effects, in repeat loops 1210
SIG_DFL (C macro) 1410
SIG_ERR (C macro) 1410
SIG_IGN (C macro) 1410
sigaction 314
SIGBREAK 314
SIGCHLD 314
SIGCLD 314
SIGINT 314
sign /1, (evaluable) 127
signal 314
signal handling 313
Signal handling, C functions for 1300
SIGUSR1 314
SIGUSR2 314
SIGVTALRM 314
silent/0 (debugger show control) 287
simple term (definition) 18
simple/1 (built-in, ref page) 1235
simple_pred_spec (argument type) 940
SimpleCallSpec 542
sin /1, (evaluable) 127
since (predicate annotation) 939
single_var_warnings (prolog flag) 85, 145, 323
singleton_queue/2 (queues) 781
singletons/1 (read_term/[2,3] option) ... 1202
sinh /1, (evaluable) 127
site, coverage 360
size_bound/2 (terms) 906
skeletal goal (definition) 18
skewness/2 (statistics) 796
skip (CHR debug command) 420
skip (debugger command) 243
skip/1 (debugger mode control) 288
skip_byte/[1,2] (built-in) 111
skip_byte/[1,2] (built-in, ref page) 1236
skip_char/[1,2] (built-in) 111
skip_char/[1,2] (built-in, ref page) 1237
skip_code/[1,2] (built-in) 111
skip_code/[1,2] (built-in, ref page) 1238
skip_line/[0,1] (built-in) 111
skip_line/[0,1] (built-in, ref page) 1239
sleep/1 (system) 808
small integer (definition) 18
smallest (labeling/2 option) 478
smt/1 (clpfd) 442
socket address 792
socket_client_open/3 (sockets) 792
socket_select/7 (sockets) 794
socket_server_accept/4 (sockets) 794
socket_server_close/1 (sockets) 794
socket_server_open/[2,3] (sockets) 793
sockets 792
soft cut 72
solution set 432
solutions (fd_statistics/2 option) 487
solutions/1 (absolute_file_name/3 option) 968

solutions/1 (zinc option) 932
solve/2 (clpfd) 484
some/[2,3,4] (lists) 653
some_queue/[2,3] (queues) 783
somebag/2 (bags) 410
somechk/[2,3,4] (lists) 653
somechk_queue/[2,3] (queues) 783
somechkbag/2 (bags) 410
sort/2 (built-in) 135
sort/2 (built-in, ref page) 1240
sorting/3 (clpfd) 446
source (absolute_file_name/3 file type) ... 965
source (load context key) 147
source (Tcl command) 831
source code (definition) 18
source information 37, 145
source module 169, 175
source module (definition) 18
source/1 (fd_global/[3,4] option) 489
source_file/[1,2] (built-in) 140
source_file/[1,2] (built-in, ref page) ... 1241
source_info (prolog flag) 37, 145, 253, 346
SP_ALLOW_CHDIR (system property) 230
SP_ALLOW_DEVSYS (system property) 348
SP_APP_DIR (system property) 229
SP_APP_PATH (system property) 229
SP_atom (C type) 7, 18, 306, 1302, 1303, 1307, 1308, 1335, 1341, 1375, 1379, 1386, 1403, 1413, 1418
SP_atom (definition) 18
SP_atom_from_string() (C function) .. 306, 1302
SP_atom_length() (C function) 306, 1303
SP_ATTACH_SPIDER (system property) 348
SP_calloc() (C function) 309, 1304
SP_close_query() (C function) 1305
SP_compare() (C function) 309, 1306
SP_cons_functor() (C function) 307, 1307
SP_cons_functor_array() (C function) 1308
SP_cons_list() (C function) 307, 1309
SP_create_stream() (C function) 1310
SP_curin (C stream) 317
SP_curout (C stream) 317
SP_cut_query() (C function) 311, 1312
SP_define_c_predicate() (C function) 1313
SP_deinitialize() (C function) 334, 1315
SP_DEVSYS_NO_TRACE (system property) 348
SP_errno (C macro) 294, 1295
SP_error_message() (C function) 294, 1295, 1316
SP_ERROR (C macro) 294, 1295
SP_event() (C function) 314, 1317
SP_exception_term() (C function) 314, 1320
SP_expand_file_name() (C function) 1321
SP_fail() (C function) 314, 1323
SP_FAILURE (C macro) 294, 1295
SP_fclose() (C function) 316, 1324
SP_flush_output() (C function) 316, 1326
SP_fopen() (C function) 1328
SP_foreign_stash() (C macro) 310, 1330
SP_fprintf() (C function) 316, 1331
SP_free() (C function) 309, 1332
SP_get_address() (C function) 308, 1333
SP_get_arg() (C function) 308, 1334
SP_get_atom() (C function) 308, 1335
SP_get_byte() (C function) 1336
SP_get_byte() (C macro) 316
SP_get_code() (C function) 1337
SP_get_code() (C macro) 316
SP_get_current_dir() (C function) ... 310, 1338
SP_get_dispatch() (C function) 1339
SP_get_float() (C function) 308, 1340
SP_get_functor() (C function) 308, 1341
SP_get_integer() (C function) 308, 1342
SP_get_integer_bytes() (C function) 308, 1343
SP_get_list() (C function) 308, 1345
SP_get_list_codes() (C function) 308, 1346
SP_get_list_n_bytes() (C function) .. 308, 1347
SP_get_list_n_codes() (C function) .. 308, 1348
SP_get_number_codes() (C function) .. 308, 1349
SP_get_stream_counts() (C function) 1350
SP_get_stream_user_data() (C function) .. 1352
SP_get_string() (C function) 308, 1354
SP_getenv() (C function) 1355
SP_initialize() (C function) 334
SP_initialize() (C macro) 1356
SP_integer (C type) 18
SP_integer (definition) 18
SP_is_atom() (C function) 309, 1358
SP_is_atomic() (C function) 309, 1359
SP_is_compound() (C function) 309, 1360
SP_is_float() (C function) 309, 1361
SP_is_integer() (C function) 309, 1362
SP_is_list() (C function) 309, 1363
SP_is_number() (C function) 309, 1364
SP_is_variable() (C function) 308, 1365
SP_JIT (system property) 231
SP_JIT_CLAUSE_LIMIT (system property) 232
SP_JIT_COUNTER_LIMIT (system property) ... 232
SP_LIBRARY_DIR (system property) 229
SP_LICENSE_CODE (system property) 347, 348
SP_LICENSE_EXPIRATION (system property) 347, 348
SP_LICENSE_FILE (system property) 347, 348
SP_LICENSE_SITE (system property) 347, 348
SP_load() (C function) 335, 1366

SP_load_sicstus_run_time() (C function) ... 1367
SP_malloc() (C function) ... 309, 1368
SP_mutex_lock() (C function) ... 310, 1369
SP_mutex_unlock() (C function) ... 310, 1370
SP_MUTEX_INITIALIZER (C macro) ... 310
SP_new_term_ref() (C function) ... 306, 1371
SP_next_solution() (C function) ... 311, 1372
SP_next_stream() (C function) ... 1373
SP_on_fault() (C macro) ... 314
SP_open_query() (C function) ... 311, 1374
SP_PATH (system property) ... 230, 294
SP_pred() (C function) ... 310, 1375
SP_predicate() (C function) ... 310, 1376
SP_printf() (C function) ... 316, 1377
SP_put_address() (C function) ... 307, 1378
SP_put_atom() (C function) ... 307, 1379
SP_put_byte() (C function) ... 1380
SP_put_byte() (C macro) ... 316
SP_put_bytes() (C function) ... 316, 1381
SP_put_code() (C function) ... 1382
SP_put_code() (C macro) ... 316
SP_put_codes() (C function) ... 316, 1383
SP_put_encoded_string() (C function) ... 316, 1384
SP_put_float() (C function) ... 307, 1385
SP_put_functor() (C function) ... 307, 1386
SP_put_integer() (C function) ... 307, 1387
SP_put_integer_bytes() (C function) ... 307, 1388
SP_put_list() (C function) ... 307, 1389
SP_put_list_codes() (C function) ... 307, 1390
SP_put_list_n_bytes() (C function) ... 307, 1391
SP_put_list_n_codes() (C function) ... 307, 1392
SP_put_number_codes() (C function) ... 307, 1393
SP_put_string() (C function) ... 307, 1394
SP_put_term() (C function) ... 306, 1395
SP_put_variable() (C function) ... 307, 1396
SP_qid (C type) ... 311, 1305, 1312, 1372, 1374
SP_query() (C function) ... 311, 1397
SP_query_cut_fail() (C function) ... 311, 1398
SP_raise_exception() (C function) ... 314, 1399
SP_raise_fault() (C function) ... 314
SP_read_from_string() (C function) ... 307, 1400
SP_realloc() (C function) ... 309, 1402
SP_register_atom() (C function) ... 306, 1403
SP_restore() (C function) ... 335, 1404
SP_RT_DIR (system property) ... 229
SP_RT_PATH (system property) ... 229
SP_set_argv() (C function) ... 1405
SP_set_current_dir() (C function) ... 310, 1407
SP_set_user_stream_hook() (C function) ... 321, 1408
SP_set_user_stream_post_hook() (C function) ... 321, 1409
SP_SIG_DFL (C macro) ... 1410
SP_SIG_ERR (C macro) ... 1410
SP_SIG_IGN (C macro) ... 1410
SP_signal() (C function) ... 314, 1410
SP_SPTI_PATH (system property) ... 232
SP_STARTUP_DIR (system property) ... 230
SP_stderr (C stream) ... 316
SP_stdin (C stream) ... 316
SP_stdout (C stream) ... 316
SP_strdup() (C function) ... 309, 1412
SP_stream (C type) ... 316
SP_STREAMHOOK_STDERR (stream hook) ... 322
SP_STREAMHOOK_STDIN (stream hook) ... 322
SP_STREAMHOOK_STDOUT (stream hook) ... 322
SP_string_from_atom() (C function) ... 306, 1413
SP_SUCCESS (C macro) ... 294, 1295
SP_TEMP_DIR (system property) ... 229
SP_term_ref ... 293
SP_term_ref (definition) ... 18
SP_term_ref (C type) ... 293, 305
SP_term_type() (C function) ... 308, 1414
SP_TYPE_ATOM (C macro) ... 1414
SP_TYPE_COMPOUND (C macro) ... 1414
SP_TYPE_ERROR (C macro) ... 1414
SP_TYPE_FLOAT (C macro) ... 1414
SP_TYPE_INTEGER (C macro) ... 1414
SP_TYPE_VARIABLE (C macro) ... 1414
SP_ULIMIT_DATA_SEGMENT_SIZE (system property) ... 231
SP_unget_byte() (C function) ... 1415
SP_unget_code() (C function) ... 1416
SP_unify() (C function) ... 309, 1417
SP_unregister_atom() (C function) ... 306, 1418
SP_USE_DEVSYS (system property) ... 348
SP_USE_MALLOC (system property) ... 231
SP_WHEN_EXIT (foreign resource context) ... 302
SP_WHEN_EXPLICIT (foreign resource context) ... 301, 302
SP_WHEN_RESTORE (foreign resource context) ... 301
space reclamation ... 150
space, program ... 149
space, reclamation ... 962
spdet(1) (command line tool) ... 1434
spdet, the determinacy checker ... 367
spec, mode ... 5
specific breakpoint ... 255
specification, breakpoint ... 247
specification, directory ... 100
specification, file ... 100, 103
specification, file (definition) ... 11

specification, predicate (definition) 16
specifying streams 106
specifying streams, efficiency and 106
`speclist/1 (lmdb property)` 663
`spfz(1) (command line tool)` 1433
SPIDER 32
spld 327
`spld(1) (command line tool)` 1435
splfr 300
`splfr(1) (command line tool)` 1442
`split (Tcl command)` 820
`splm(1) (command line tool)` 1446
spxref 383
`spxref(1) (command line tool)` 1447
`spy this (debugger command)` 245
`spy this conditionally (debugger command)` 245
`spy/[1,2] (built-in)` 239, 277
`spy/[1,2] (built-in, ref page)` 1243
spypoint 235
spypoint (definition) 18
spypoint, conditional 248
spypoint, plain 239, 247
`sqrt /1, square root (evaluable)` 128
`ss_choice (statistics key)` 154
`ss_global (statistics key)` 154
`ss_local (statistics key)` 154
`ss_time (statistics key)` 154
stack, choice 148
stack, global 149
stack, local 148
stack, trail 149
`stack_shifts (statistics key)` 153
stand-alone executable 322
stand-alone executable (definition) 18
standard streams 106
standard, order on terms 134
`start/[0,1] (prologbeans)` 771
state, program 30
state, saved (definition) 17
`state/2 (automaton/9 option)` 470
static predicate (definition) 19
static procedures 181
static resource 296
statistics, displaying 150
statistics, memory 150
`statistics/[0,2] (built-in)` 150, 156
`statistics/[0,2] (built-in, ref page)` 1244
`statistics/1 (zinc option)` 933
steadfast predicate (definition) 19
`step (labeling/2 option)` 479
store, domain 429
`store_slot/2 (objects)` 728
stream (definition) 19
`stream (load context key)` 147
stream alias 113
stream alias (definition) 19
stream errors 113
stream exceptions 113
stream object 113
stream object (definition) 19
stream position 118
stream position (definition) 19
stream position information for terminal I/O 119
stream position object 119
stream property 1248
stream property (definition) 19
stream, closing 118
stream, current 117
stream, end of 988
stream, position objects 1232, 1246
`stream_code/2 (built-in)` 113, 316
`stream_code/2 (built-in, ref page)` 1245
stream_object (argument type) 940
`stream_position/2 (built-in)` 119
`stream_position/2 (built-in, ref page)` 1246
`stream_position_data/3 (built-in, ref page)` 1247
`stream_property/2 (built-in)` 118
`stream_property/2 (built-in, ref page)` 1248
streams 113
streams, current input 114, 116, 117
streams, current input and output 106
streams, current output 114, 116, 117
streams, null 115
streams, opening 114
streams, random access to 119
streams, specifying 106
streams, standard 106
`stretchmaxlen/2 (automaton/9 option)` 469
`stretchminlen/2 (automaton/9 option)` 470
`stretchocc/2 (automaton/9 option)` 469
`stretchoccmod/3 (automaton/9 option)` 469
`strict/1 (decreasing/2 option)` 446
`strict/1 (diffn/2 option)` 461
`strict/1 (increasing/2 option)` 446
string (definition) 19, 50
`string first (Tcl command)` 825
`string index (Tcl command)` 825
`string last (Tcl command)` 826
`string length (Tcl command)` 826
`string match (Tcl command)` 824
`string range (Tcl command)` 825
`string string (Tcl command)` 826
`string tolower (Tcl command)` 826
`string toupper (Tcl command)` 826
`string trim (Tcl command)` 826

`string trimright (Tcl command)` 826
string, encoded 294
string, encoded (definition) 11
strings, lists of character codes 50
`structs (library package)` 799
structure, control 68
structure, control (definition) 9
`SU_initialize() (C function)` 1419, 1439
`sub_atom/5 (built-in)` 133
`sub_atom/5 (built-in, ref page)` 1251
`sub_term/2 (terms)` 905
`subcircuit/[1,2] (clpfd)` 455
`subcircuit/1 (all_different/2 option)` 444
`subcircuit/1 (all_distinct/2 option)` 444
`subcircuit/1 (assignment/3 option)` 445
`sublist/[3,4,5] (lists)` 649
`subseq/3 (lists)` 646
`subseq0/2 (lists)` 647
`subseq1/2 (lists)` 647
`subset/2 (sets)` 788
`subsumes/2 (terms)` 902
`subsumes_term/2 (built-in)` 131
`subsumes_term/2 (built-in, ref page)` 1253
`subsumeschk/2 (terms)` 902
subterm selector 25, 254
subterm selector (definition) 19
`subtract/3 (sets)` 789
`success (labeling/2 time_out/2 option value)` 484
`suffix/2 (lists)` 649
`suffix_length/3 (lists)` 648
`sum/3 (clpfd)` 439
`sumlist/2 (lists)` 647
`sup/[2,4] (clpqr)` 516
`suppress (redefine_warnings flag value)` ... 145
`switch (Tcl command)` 822
`symdiff/3 (sets)` 790
`symmetric_all_different/1 (clpfd)` 446
`symmetric_all_distinct/1 (clpfd)` 446
`symmetric_closure/2 (ugraphs)` 914
`symmetric_closure/2 (wgraphs)` 919
synchronization 638
`synchronization/1 (disjoint2/2 option)` ... 460
synopsis, reference page field 937
syntactic rewriting 103
syntax (definition) 19
syntax error 28
syntax errors 212
syntax restrictions on operators 54
syntax, formal 56
syntax, of atoms 48
syntax, of compound terms 49
syntax, of floats 48
syntax, of integers 47
syntax, of lists 50
syntax, of sentences as terms 57
syntax, of terms as tokens 59
syntax, of tokens as character strings 60
syntax, of variables 48
syntax, rule notation 57
`syntax_error/[1,5] (error class)` 206
`syntax_errors (prolog flag)` 29, 145, 212, 1199, 1202
`syntax_errors/1 (read_term/[2,3] option)` 212, 1202
system errors 213
system properties 228
system property (definition) 20
system, development 5
system, development (definition) 10
system, extended runtime (definition) 11
system, runtime 5, 322
system, runtime (definition) 17
`system_error/[0,1] (error class)` 207
`system_type (prolog flag)` 146

T

`table/[2,3] (clpfd)` 449
tables, data 364
`tail/2 (lists)` 649
`tan /1, (evaluable)` 127
`tanh /1, (evaluable)` 128
`task_intervals/1 (cumulatives/3 option)` .. 458
`task_intervals/1 (geost/[2,3,4] option)` .. 463
`taut/2 (clpb)` 424
`tcl_delete/1 (tcltk)` 868, 899
`tcl_eval/3 (tcltk)` 870, 899
`tcl_event/3 (tcltk)` 873, 899
`tcl_new/1 (tcltk)` 867, 899
`tell/1 (built-in)` 115
`tell/1 (built-in, ref page)` 1255
`telling/1 (built-in)` 117
`telling/1 (built-in, ref page)` 1256
term (argument type) 940
term (definition) 20
term comparison, predicates for 137, 957
term conversions 305
term handling, predicates for 137, 957
term I/O, predicates for 122, 959
term input 107
term names 548, 551
term output 108
term reference 293
term, atomic (definition) 7
term, callable (definition) 8
term, compound (definition) 9

term, cyclic 1202, 1290
term, error 201
term, exception 201, 314
term, indexed 659
term, layout 1203
term, layout (definition) 13
term, mutable 136
term, mutable (definition) 15
term, simple (definition) 18
term/1 (input method) 225
term_depth/2 (terms) 906
term_expansion/6 (hook, ref page) 1259
term_expansion/6 (user, hook) 91
term_hash/[2,3,4] (terms) 902
term_order/3 (terms) 905
term_position (load context key) 147
term_size/2 (terms) 906
term_subsumer/3 (terms) 902
term_variables/2 (built-in) 131
term_variables/2 (built-in, ref page) 1267
term_variables/3 (aggregate) 392
term_variables_bag/2 (terms) 904
term_variables_set/2 (terms) 904
terminal I/O, stream position
information for 119
terminating a backtracking loop 363
Terms in C, C functions for 1300
terms, arguments of 131
terms, as sentences 56
terms, comparison of 134
terms, compound 49
terms, cyclic 82
terms, input and output of 106
terms, ordering on 134
terms, predicates for looking at 130
terse (gc_trace flag value) 143
test condition, breakpoint 281
test, breakpoint 248
test/[1,2] (plunit declaration) 748
test_sub_bag/2 (bags) 412
text (absolute_file_name/3 file type) 965
text (Tk widget) 833
thread, main 313
threads 310
threads, calling Prolog from 313
throw/1 (built-in) 201
throw/1 (built-in, ref page) 1268
throws/1 (plunit option) 751
time_out (labeling/2 time_out/2
option value) 484
time_out/2 (labeling/2 option) 483
time_out/3 (timeout) 908
timeout/1 (zinc option) 933
timestamp 574
title (prolog flag) 146
tk_all_events
(tk_do_one_event/1 option) 877
tk_destroy_window/1 (tcltk) 878, 900
tk_do_one_event/[0,1] (tcltk) 877, 899
tk_dont_wait (tk_do_one_event/1 option) .. 877
tk_file_events
(tk_do_one_event/1 option) 877
tk_idle_events
(tk_do_one_event/1 option) 877
tk_main_loop/0 (tcltk) 878, 900
tk_main_window/2 (tcltk) 878, 900
tk_make_window_exist/1 (tcltk) 878, 900
tk_new/2 (tcltk) 867, 899
tk_next_event/[2,3] (tcltk) 873, 878, 900
tk_num_main_windows/1 (tcltk) 879, 900
tk_timer_events
(tk_do_one_event/1 option) 877
tk_window_events
(tk_do_one_event/1 option) 877
tokens 56
told/0 (built-in) 118
told/0 (built-in, ref page) 1269
top level 23
top_level_events/0 (tk_new/2 option) 867
top_sort/2 (ugraphs) 915
top_sort/2 (wgraphs) 919
toplevel (Tk widget) 833
toplevel_print_options
(prolog flag) 25, 146, 217, 1167, 1290
toplevel_show_store (CHR flag) 421
total_runtime (statistics key) 152
trace (debugging flag value) 141, 1044
trace (definition) 20
trace (unknown flag value) 146, 203
trace/0 (built-in) 238
trace/0 (built-in, ref page) 1270
trace/0 (debugger mode control) 288
trail (statistics key) 152
trail stack 149
trail_free (statistics key) 154
trail_used (statistics key) 154
TRAILSTKSIZE (system property) 230
transitive_closure/2 (ugraphs) 914
transitive_closure/2 (wgraphs) 919
transitive_reduction/2 (ugraphs) 914
transpose/2 (lists) 647
transpose_ugraph/2 (ugraphs) 914
transpose_wgraph/2 (wgraphs) 919
tree, binary 394, 405
tree/1 (abolish/2 option) 962
tree_size/2 (trees) 909
tree_to_list/2 (trees) 909

trimcore/0 (built-in) 150
trimcore/0 (built-in, ref page) 1271
true/0 (built-in, ref page) 1272
true/0 (debugger condition) 285
true/0 (plunit option) 750
true/1 (debugger condition) 249, 285
true/1 (plunit option) 750
truncate /1, (evaluable) 127
try (CHR port) 419
type errors 208
type of operators 52
type tests, C functions for 1300
type tests, predicates for 130, 136, 960
type-in module 146, 169
type-in module (definition) 20
type-in module, changing 170
type/1 (open/4 option) 1154
type/1 (stream property) 1249
type_definition/[2,3] (structs) 804
type_error/[2,4] (error class) 206
typein_module (prolog flag) 146

U

ugraph_to_wgraph/2 (wgraphs) 918
ugraph_to_wgraph/3 (wgraphs) 919
unbiased_standard_deviation/2 (statistics) 797
unbiased_variance/2 (statistics) 797
unblock/0 (debugger port value) 283
unblocked goal (definition) 20
unbound (definition) 20
UNC path 104
undefine_method/3 (objects) 729
undefined predicate 29, 146, 1278
unification 79, 80
unification (definition) 20
unification, explicit 130
unifier, most general 80
unify (debugger command) 246
unify_with_occurs_check/2 (built-in) 131
unify_with_occurs_check/2 (built-in, ref page) 1274
uninherit/1 (objects) 730
uninstantiation errors 207
uninstantiation_error/[1,3] (error class) 206
union/[2,3,4] (sets) 790
unit clause 66
unit clause (definition) 20
unknown (prolog flag) ... 29, 146, 203, 1277, 1278
unknown procedures, catching 182
unknown/2 (built-in) 29, 204
unknown/2 (built-in, ref page) 1277
unknown_predicate_handler/3 (hook, ref page) 1278
unknown_predicate_handler/3 (user, hook) 29, 203
unleash/0 (debugger condition) 286
unload_foreign_resource/1 (built-in) 300
unload_foreign_resource/1 (built-in, ref page) 1279
unreachable code 383
unregister_event_listener/1 (prologbeans) 773
unregister_query/1 (prologbeans) 772
unset (Tcl command) 817
unsupported (predicate annotation) 939
up (labeling/2 option) 480
update_mutable/2 (built-in) 136
update_mutable/2 (built-in, ref page) 1280
uplevel (Tcl command) 830
upvar (Tcl command) 829
use of full stop 107, 108
use_module/[1,2,3] (built-in) 168
use_module/[1,2,3] (built-in, ref page) 1281
user 24
user (--main option value) 1436
user:breakpoint_expansion/2 (hook) ... 271, 286
user:breakpoint_expansion/2 (hook, ref page) 1004
user:debugger_command_hook/2 (hook) .. 272, 278
user:debugger_command_hook/2 (hook, ref page) 1043
user:error_exception/1 (hook) 202, 289
user:error_exception/1 (hook, ref page) 1056
user:file_search_path/2 (hook) 100
user:file_search_path/2 (hook, ref page) 1062
user:generate_message_hook/3 (hook) 219
user:generate_message_hook/3 (hook, ref page) 1085
user:library_directory/1 (hook, ref page) 1111
user:message_hook/3 (hook) 220
user:message_hook/3 (hook, ref page) 1122
user:portray/1 (hook) 110, 536
user:portray/1 (hook, ref page) 1167
user:portray_message/2 (hook) 219
user:portray_message/2 (hook, ref page) 1170
user:query_class_hook/5 (hook) 226
user:query_class_hook/5 (hook, ref page) 1192

user:query_hook/6 (hook) 226
user:query_input_hook/3 (hook) 226
user:query_input_hook/3 (hook, ref page) 1195
user:query_map_hook/4 (hook) 226
user:query_map_hook/4 (hook, ref page) ... 1197
user:runtime_entry/1 (hook) 1436
user:runtime_entry/1 (hook, ref page) 1216
user:term_expansion/6 (hook) 91
user:term_expansion/6 (hook, ref page) ... 1259
user:unknown_predicate_handler/3 (hook) 29, 203
user:unknown_predicate_handler/3 (hook, ref page) 1278
user_close() (C function) 1420
user_error (prolog flag) 113, 147, 316
user_error (stream alias) 113
user_flush_output() (C function) 1422
user_input (prolog flag) 113, 146, 316
user_input (stream alias) 113
user_main() (C function) 334
user_output (prolog flag) 113, 146, 316
user_output (stream alias) 113
user_read() (C function) 1424
user_write() (C function) 1426
username/1 (odbc_db_open/4 option) 739
UTC 574
UTF-8 encoding 294

V

val/1 (fd_global/[3,4] option) 489
value (all_different/2 consistency/1 value) 444
value (all_distinct/2 consistency/1 value) 444
value (global_cardinality/3 consistency/1 value) 443
value (scalar_product/5 consistency/1 value) 440
value/1 (labeling/2 option) 480
value_precede_chain/[2,3] (clpfd) 477
valueprec/3 (automaton/9 option) 469
var or Type (argument type) 940
var/1 (built-in, ref page) 1284
variable 543
variable (definition) 20
variable, anonymous 48
variable, anonymous (definition) 7
variable, domain 430
variable, integer 430
variable, real 431
variable/1 (labeling/2 option) 479
variable_names/1 (read_term/[2,3] option) 1202
variable_names/1 (write_term/[2,3] option) 1289
variables (fd_statistics/2 option) 487
variables, attributed 397
variables, list of 549
variables, scope of 66
variables, syntax of 48
variables, writing 108
variables/1 (read_term/[2,3] option) 1202
variables/1 (zinc option) 933
variant/2 (terms) 902
varnumbers/[2,3] (varnumbers) 916
verbose (gc_trace flag value) 143
verify_attributes/3 (Module) 398
version (prolog flag) 147
version_data (prolog flag) 147
vertices/2 (ugraphs) 913
vertices/2 (wgraphs) 918
vertices_edges_to_ugraph/3 (ugraphs) 913
vertices_edges_to_wgraph/3 (wgraphs) 919
view/0 (gauge) 577
visavis/1 (geost/[2,3,4] option) 463
visavis_floating/1 (geost/[2,3,4] option) 462
visavis_init/1 (geost/[2,3,4] option) 462
visibility rules for modules 168
visualizer 548
volatile (definition) 20
volatile (predicate property) 1171
volatile declaration 88
volatile/0 (predicate property) 140
volatile/1 (built-in, ref page) 1285
volatile/1 (declaration) 88

W

wake (CHR port) 419
walltime (statistics key) 152
WAM 1
warning (unknown flag value) 146, 204
weighted_mean/3 (statistics) 796
weighted_standard_deviation/3 (statistics) 797
weighted_variance/3 (statistics) 797
wgraph_to_ugraph/2 (wgraphs) 918
when/1 (load_files/2 option) 1115
when/2 (built-in, ref page) 1286
while (Tcl command) 821
windowed executable (definition) 21
with_output_to_codes/[2,3,4] (codesio) ... 538
wordocc/2 (automaton/9 option) 470

wordoccmod/3 (automaton/9 option) 470
wordprefix/2 (automaton/9 option) 470
wordsuffix/2 (automaton/9 option) 470
wrap/2 (disjoint1/2 option) 459
wrap/4 (disjoint2/2 option) 460
write (absolute_file_name/3 access) 967
write (debugger command) 244
write (open/[3,4] mode) 1154
write predicates 108
write predicates, distinctions among 109
write/[1,2] (built-in) 108
write/[1,2] (built-in, ref page) 1287
write/0 (debugger show control) 287
write_canonical/[1,2] (built-in) 108
write_canonical/[1,2]
(built-in, ref page) 1288
write_record/[1,2] (csv) 541
write_record_to_codes/2 (csv) 541
write_records/[1,2] (csv) 541
write_term/[2,3] (built-in) 108
write_term/[2,3] (built-in, ref page) 1289
write_term/1 (debugger show control) 287
write_term_to_codes/[3,4] (codesio) 538
write_to_codes/[2,3] (codesio) 538
writeq/[1,2] (built-in) 108
writeq/[1,2] (built-in, ref page) 1292
writing variables 108

X

X, identity for numbers 129
xml_parse/[2,3] (xml) 922
xml_pp/1 (xml) 922
xml_subterm/2 (xml) 922
xor /2, bitwise exclusive or (evaluable) .. 126

Z

zero-quote notation for character conversion 47
zip (debugger command) 242
zip (debugging flag value) 141, 1044
zip (definition) 21
zip/0 (built-in) 238
zip/0 (built-in, ref page) 1293
zip/0 (debugger mode control) 288